

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332369-935

Luminaire Tested: **S123RDIP-S1165D585U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332369-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1165D585U935-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 585 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5787.4 lumens  
Efficiency: N/A  
Efficacy: 105.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 55.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332369-935

CATALOG NUMBER: S123RDIP-S1165D585U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

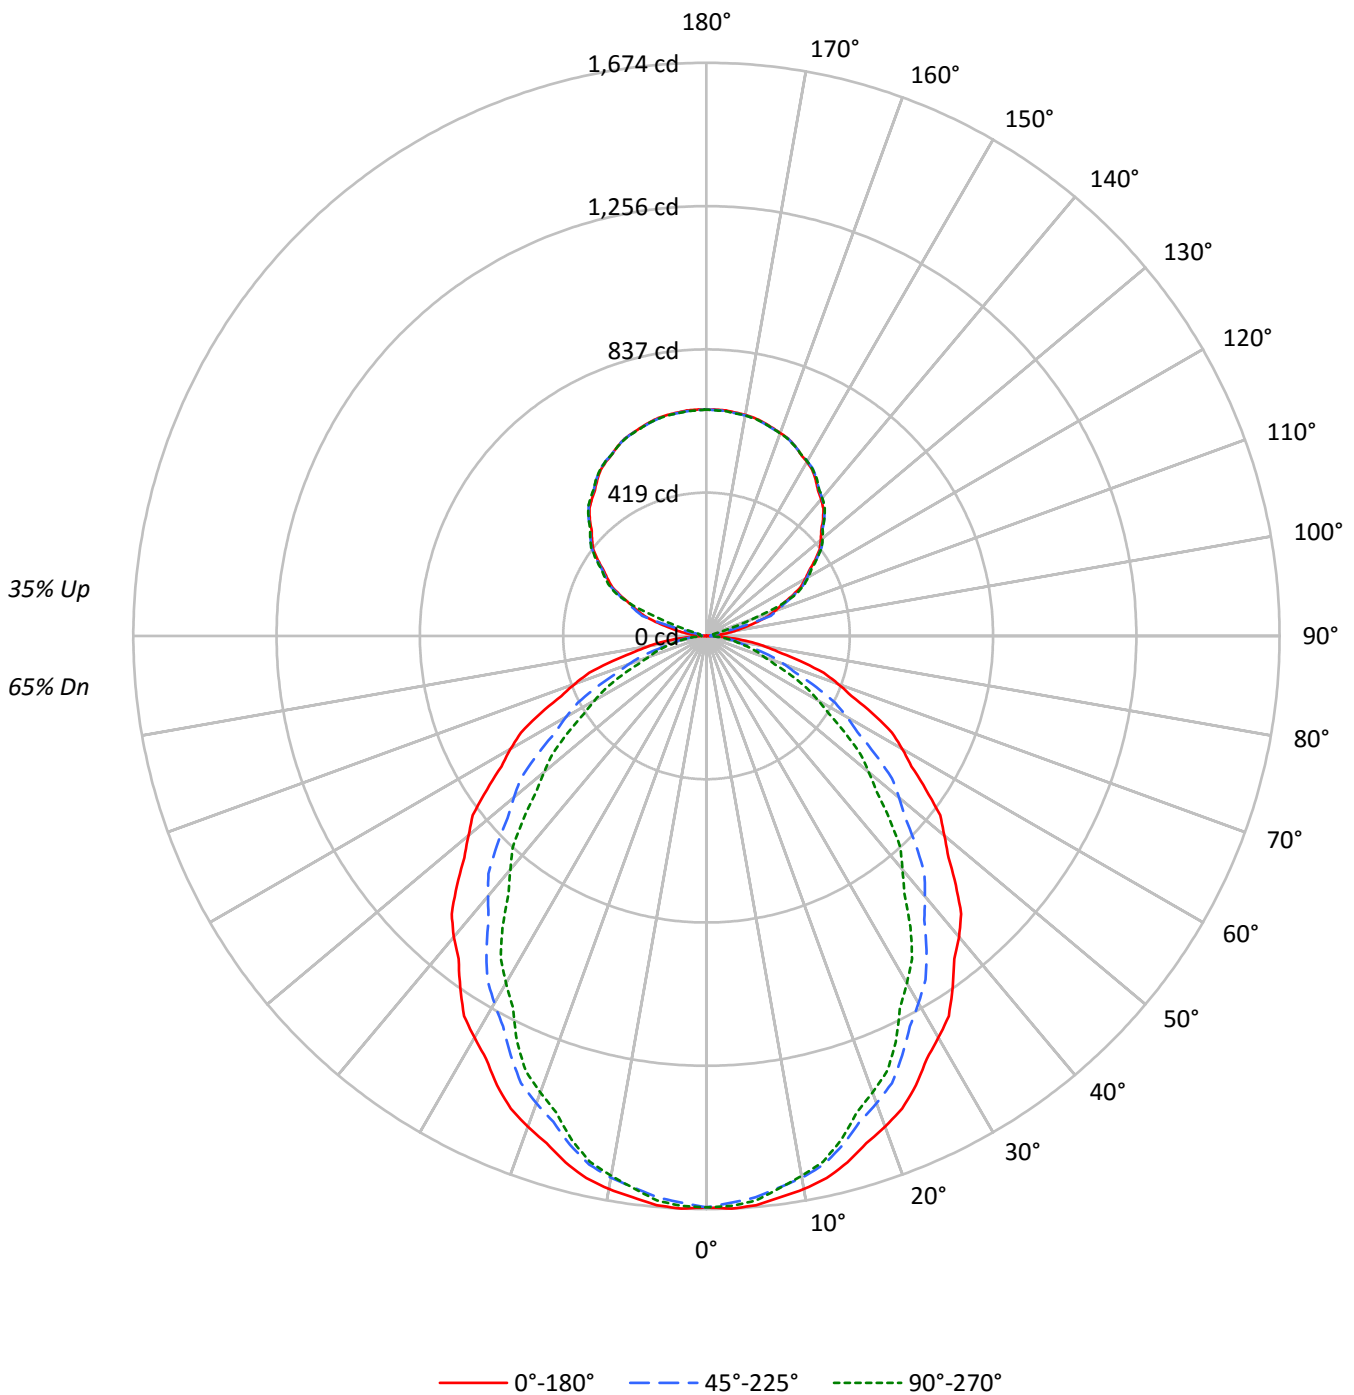



TEST NUMBER: P332369-935

CATALOG NUMBER: S123RDIP-S1165D585U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	80	80	80	70	70	70	65
1	102	97	94	90	95	92	88	85	81	79	76	72	70	68	63	61	60	56
2	93	86	79	74	87	81	75	71	72	68	64	63	60	57	56	53	51	47
3	85	76	68	62	80	71	65	60	64	58	54	56	52	49	50	47	44	41
4	78	67	59	53	73	64	57	51	57	51	47	50	46	42	45	41	38	35
5	72	60	52	46	67	57	50	44	51	45	41	46	41	37	40	37	34	31
6	66	54	46	40	62	51	44	39	46	40	36	41	36	33	37	33	30	27
7	62	49	41	36	58	47	39	34	42	36	32	38	33	29	34	30	27	24
8	57	45	37	32	54	43	35	31	39	33	28	35	30	26	31	27	24	22
9	53	41	33	28	50	39	32	27	35	30	26	32	27	24	29	25	22	20
10	50	38	31	26	47	36	29	25	33	27	23	30	25	22	27	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17963	17963	17963
5°	18031	17782	17884
10°	17930	17559	17500
15°	17736	17149	16967
20°	17472	16635	16247
25°	17199	16057	15543
30°	16839	15392	14551
35°	16469	14725	13641
40°	16127	13939	12513
45°	15678	13164	11496
50°	15185	12285	10357
55°	14681	11277	9295
60°	14219	10198	8129
65°	13616	9032	6963
70°	12862	7582	5624
75°	11761	5964	5294
80°	10488	5281	4866
85°	8855	4681	4347



TEST NUMBER: P332369-935

CATALOG NUMBER: S123RDIP-S1165D585U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	156.7	2.7
10°-20°	436.0	7.5
20°-30°	627.8	10.8
30°-40°	707.2	12.2
40°-50°	676.5	11.7
50°-60°	554.0	9.6
60°-70°	373.8	6.5
70°-80°	188.1	3.2
80°-90°	51.6	0.9
90°-100°	24.0	0.4
100°-110°	114.5	2.0
110°-120°	275.1	4.8
120°-130°	350.3	6.1
130°-140°	374.3	6.5
140°-150°	350.0	6.0
150°-160°	282.3	4.9
160°-170°	182.2	3.1
170°-180°	62.8	1.1
0°-30°	1220.5	21.1
0°-40°	1927.7	33.3
0°-60°	3158.3	54.6
0°-90°	3771.7	65.2
90°-120°	413.7	7.1
90°-150°	1488.3	25.7
90°-180°	2016.0	34.8
0°-180°	5787.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1669	1669	1669	1669	1669	
5°	1669	1662	1646	1657	1655	158
15°	1592	1575	1539	1532	1523	448
25°	1448	1413	1352	1324	1309	666
35°	1253	1203	1121	1064	1038	784
45°	1030	967	865	790	755	794
55°	782	713	601	525	495	701
65°	535	458	355	291	273	529
75°	283	217	143	131	127	302
85°	72	43	38	35	35	81
90°	0	5	12	14	15	5
95°	30	11	15	18	19	37
105°	146	149	108	26	22	155
115°	274	278	282	287	289	271
125°	387	391	393	394	395	345
135°	482	485	487	488	487	371
145°	556	559	560	561	561	348
155°	612	612	612	614	611	282
165°	646	644	644	647	644	182
175°	661	659	659	662	658	63
180°	661	661	661	661	661	



TEST NUMBER: P332369-935

CATALOG NUMBER: S123RDIP-S1165D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8
2.5°	1674.2	1673.2	1672.2	1671.3	1670.3	1668.4	1665.5	1662.6	1659.7	1656.8	1659.5
5°	1668.8	1667.2	1665.8	1664.2	1662.8	1660.2	1656.6	1652.9	1649.3	1645.7	1648.5
7.5°	1653.3	1651.7	1650.1	1648.5	1646.8	1643.6	1639.0	1634.3	1629.6	1624.9	1626.4
10°	1640.4	1638.2	1636.2	1634.0	1631.9	1628.2	1622.7	1617.3	1611.9	1606.5	1606.8
12.5°	1622.0	1619.6	1617.2	1614.9	1612.6	1608.1	1601.5	1594.8	1588.2	1581.6	1581.4
15°	1591.6	1588.3	1585.0	1581.7	1578.4	1572.5	1564.1	1555.7	1547.2	1538.9	1537.3
17.5°	1553.4	1549.6	1545.8	1541.9	1538.1	1530.8	1520.1	1509.3	1498.7	1488.0	1484.8
20°	1525.3	1520.5	1515.7	1510.9	1506.1	1498.0	1486.5	1475.1	1463.6	1452.2	1448.3
22.5°	1493.9	1488.3	1482.8	1477.3	1471.8	1462.9	1450.8	1438.6	1426.5	1414.3	1409.5
25°	1448.1	1440.6	1433.1	1425.6	1418.1	1407.4	1393.5	1379.8	1365.9	1352.0	1345.7
27.5°	1392.7	1384.4	1376.1	1367.8	1359.4	1347.6	1332.2	1316.8	1301.4	1286.0	1277.2
30°	1354.8	1345.7	1336.7	1327.7	1318.7	1305.7	1288.9	1272.0	1255.3	1238.4	1228.1
32.5°	1316.9	1306.7	1296.4	1286.2	1276.0	1262.0	1244.1	1226.3	1208.5	1190.8	1179.6
35°	1253.3	1242.4	1231.6	1220.8	1210.0	1195.2	1176.6	1158.0	1139.3	1120.6	1107.7
37.5°	1188.9	1176.8	1164.8	1152.7	1140.7	1124.7	1104.8	1084.9	1065.1	1045.1	1030.4
40°	1147.7	1134.5	1121.2	1108.0	1094.8	1077.5	1056.1	1034.7	1013.4	992.0	976.4
42.5°	1101.1	1087.9	1074.7	1061.4	1048.2	1030.5	1008.5	986.4	964.3	942.3	925.1
45°	1029.9	1016.4	1002.9	989.4	975.8	957.4	934.3	911.1	887.9	864.8	847.7
47.5°	958.7	943.9	929.0	914.2	899.3	880.3	857.1	834.0	810.8	787.7	769.0
50°	906.8	892.7	878.5	864.4	850.2	831.0	806.7	782.3	757.9	733.6	714.9
52.5°	860.2	844.9	829.6	814.2	798.8	779.1	755.0	730.9	706.8	682.7	663.3
55°	782.3	767.5	752.8	738.0	723.3	703.2	677.6	652.0	626.5	600.9	583.5
57.5°	710.2	694.2	678.1	662.1	646.0	625.2	599.5	573.8	548.1	522.5	505.9
60°	660.5	643.9	627.4	610.9	594.3	573.5	548.5	523.7	498.7	473.7	457.4
62.5°	610.6	594.1	577.6	561.0	544.5	523.7	498.8	473.8	448.8	423.9	408.6
65°	534.6	518.1	501.5	485.0	468.5	448.4	425.0	401.5	378.1	354.6	339.8
67.5°	458.6	441.8	425.1	408.4	391.7	372.0	349.6	327.0	304.5	282.1	271.0
70°	408.7	392.5	376.3	360.0	343.8	325.1	304.1	283.0	262.0	240.9	230.4
72.5°	359.0	342.9	326.9	310.9	294.9	277.3	258.2	239.1	220.0	200.9	192.3
75°	282.8	268.5	254.0	239.5	225.2	209.7	193.1	176.5	160.0	143.4	140.4
77.5°	213.5	200.5	187.4	174.4	161.4	149.5	138.9	128.2	117.5	106.9	105.3
80°	169.2	156.9	144.5	132.2	119.9	110.6	104.2	97.9	91.6	85.2	84.4
82.5°	126.9	116.3	105.6	95.0	84.4	77.6	74.6	71.6	68.7	65.8	64.8
85°	71.7	65.1	58.5	51.9	45.3	41.5	40.6	39.7	38.8	37.9	37.3
87.5°	26.1	23.7	21.3	18.8	16.4	15.3	15.6	15.8	16.2	16.4	16.3
90°	0.5	1.5	2.7	3.8	4.8	6.1	7.5	9.0	10.3	11.8	12.2
92.5°	9.1	8.9	8.5	8.2	7.9	8.3	9.4	10.4	11.5	12.6	13.3
95°	30.0	25.5	21.0	16.5	12.1	10.4	11.6	12.8	14.0	15.2	16.0
97.5°	60.2	58.2	56.2	54.2	52.2	47.3	39.3	31.5	23.7	15.8	16.7
100°	83.0	85.2	87.4	89.5	91.7	84.3	67.2	50.3	33.2	16.2	17.0
102.5°	108.9	110.5	112.1	113.7	115.2	106.7	88.1	69.5	50.9	32.3	29.6
105°	146.4	147.6	148.8	149.9	151.1	146.8	137.0	127.2	117.4	107.5	88.3
107.5°	185.8	186.8	187.8	188.7	189.7	190.9	192.4	194.0	195.5	197.1	183.0
110°	212.2	213.0	213.9	214.7	215.6	216.7	217.8	219.0	220.2	221.4	217.8



TEST NUMBER: P332369-935

CATALOG NUMBER: S123RDIP-S1165D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	237.3	238.1	238.8	239.6	240.4	241.4	242.6	243.8	245.0	246.2	246.3
115°	274.5	275.2	275.8	276.5	277.2	277.9	279.0	279.9	280.9	281.9	283.0
117.5°	310.6	311.3	312.2	313.0	313.7	314.4	315.0	315.5	316.0	316.4	317.4
120°	332.9	333.9	334.9	335.9	336.9	337.5	337.9	338.2	338.5	338.8	339.8
122.5°	355.8	356.5	357.3	358.2	359.0	359.6	360.0	360.4	360.8	361.3	361.9
125°	386.9	387.9	388.7	389.6	390.5	391.2	391.6	392.0	392.4	392.9	393.0
127.5°	417.2	418.1	419.0	419.8	420.7	421.4	421.9	422.5	423.0	423.5	423.9
130°	436.1	437.0	437.8	438.7	439.5	440.2	440.7	441.1	441.5	442.0	442.4
132.5°	454.2	455.0	455.9	456.8	457.6	458.2	458.6	458.9	459.3	459.7	460.1
135°	481.7	482.4	483.0	483.7	484.4	484.9	485.3	485.8	486.2	486.6	487.0
137.5°	505.3	506.2	507.0	507.8	508.6	509.2	509.4	509.6	509.9	510.1	510.7
140°	521.0	521.7	522.4	523.0	523.7	524.2	524.4	524.8	525.1	525.5	525.9
142.5°	535.5	536.2	536.9	537.5	538.2	538.6	539.0	539.3	539.7	540.0	540.4
145°	555.9	556.6	557.4	558.2	559.0	559.5	559.6	559.9	560.1	560.3	560.5
147.5°	575.1	575.6	576.1	576.5	577.0	577.4	577.6	577.8	578.1	578.3	578.5
150°	586.9	587.2	587.5	587.8	588.1	588.4	588.7	588.8	589.1	589.3	589.5
152.5°	597.4	597.6	597.7	597.9	598.1	598.2	598.3	598.5	598.6	598.7	599.1
155°	612.3	612.2	611.9	611.7	611.5	611.5	611.6	611.7	611.7	611.9	612.4
157.5°	624.0	624.0	623.9	623.9	623.9	623.8	623.7	623.6	623.5	623.4	624.1
160°	631.0	630.9	630.9	630.7	630.6	630.5	630.3	630.3	630.2	630.1	630.7
162.5°	637.7	637.4	637.1	636.9	636.5	636.4	636.3	636.2	636.0	635.9	636.7
165°	645.8	645.4	645.1	644.8	644.5	644.2	644.1	644.0	643.9	643.8	644.7
167.5°	652.0	651.6	651.2	650.7	650.3	650.1	650.1	650.1	650.1	650.1	651.0
170°	655.6	655.1	654.7	654.3	653.8	653.6	653.6	653.6	653.6	653.6	654.5
172.5°	658.0	657.5	656.9	656.3	655.8	655.7	655.7	655.8	655.9	656.0	656.9
175°	661.0	660.5	659.9	659.4	658.8	658.6	658.7	658.8	658.9	659.0	659.8
177.5°	661.8	661.3	660.9	660.5	660.0	659.9	660.0	660.0	660.1	660.2	660.9
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332369-935

CATALOG NUMBER: S123RDIP-S1165D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8	1668.8
2.5°	1662.2	1664.8	1667.4	1668.5	1668.0	1667.6	1667.1	1666.6
5°	1651.1	1653.9	1656.6	1657.6	1657.0	1656.4	1655.8	1655.2
7.5°	1627.9	1629.4	1630.9	1631.2	1630.1	1629.1	1628.1	1627.0
10°	1607.1	1607.4	1607.7	1607.1	1605.6	1604.1	1602.6	1601.1
12.5°	1581.2	1581.1	1580.9	1579.9	1578.2	1576.4	1574.7	1573.0
15°	1535.9	1534.3	1532.8	1531.0	1528.9	1526.8	1524.7	1522.6
17.5°	1481.6	1478.3	1475.2	1472.1	1468.9	1465.8	1462.7	1459.5
20°	1444.4	1440.5	1436.6	1432.8	1429.2	1425.6	1422.0	1418.4
22.5°	1404.5	1399.7	1394.8	1390.7	1387.3	1384.0	1380.6	1377.3
25°	1339.5	1333.1	1326.8	1322.0	1318.7	1315.3	1312.1	1308.7
27.5°	1268.4	1259.6	1250.9	1244.0	1238.9	1233.9	1228.8	1223.7
30°	1217.9	1207.7	1197.5	1190.0	1185.2	1180.3	1175.5	1170.7
32.5°	1168.4	1157.2	1146.0	1137.9	1132.8	1127.7	1122.7	1117.7
35°	1094.8	1081.8	1068.9	1059.7	1054.3	1048.9	1043.4	1038.1
37.5°	1015.7	1001.1	986.4	975.7	969.1	962.3	955.7	949.0
40°	960.8	945.1	929.5	918.3	911.3	904.4	897.5	890.5
42.5°	908.1	891.0	873.9	862.3	856.1	849.9	843.7	837.5
45°	830.5	813.4	796.3	784.1	776.9	769.6	762.4	755.2
47.5°	750.4	731.8	713.1	700.6	694.1	687.7	681.2	674.9
50°	696.3	677.6	658.9	646.2	639.3	632.3	625.4	618.5
52.5°	643.9	624.6	605.2	592.4	586.2	580.1	573.9	567.7
55°	566.0	548.5	531.2	519.4	513.4	507.4	501.4	495.3
57.5°	489.5	472.9	456.5	445.7	440.6	435.5	430.3	425.2
60°	441.2	425.0	408.7	398.0	393.0	387.8	382.7	377.6
62.5°	393.3	378.1	362.7	352.5	347.1	341.7	336.4	331.1
65°	325.1	310.4	295.7	286.6	283.4	280.0	276.7	273.4
67.5°	260.0	249.0	238.0	230.7	227.2	223.6	220.1	216.5
70°	219.8	209.3	198.8	191.9	188.6	185.3	181.9	178.7
72.5°	183.7	175.0	166.4	161.4	160.1	158.7	157.3	155.9
75°	137.4	134.4	131.4	129.7	129.1	128.5	127.9	127.3
77.5°	103.7	102.0	100.4	99.3	98.7	98.1	97.5	96.9
80°	83.4	82.6	81.6	80.9	80.3	79.7	79.1	78.5
82.5°	64.0	63.1	62.2	61.6	61.6	61.4	61.3	61.2
85°	36.7	36.1	35.5	35.2	35.2	35.2	35.2	35.2
87.5°	16.1	16.0	15.8	15.7	15.4	15.2	15.1	14.9
90°	12.7	13.1	13.5	13.9	14.1	14.3	14.6	14.7
92.5°	13.9	14.6	15.3	15.8	15.9	16.0	16.2	16.3
95°	16.8	17.5	18.3	18.7	18.7	18.7	18.7	18.7
97.5°	17.6	18.4	19.3	19.8	19.9	20.0	20.1	20.2
100°	17.9	18.9	19.7	20.1	20.3	20.4	20.5	20.7
102.5°	26.9	24.2	21.5	20.2	20.4	20.7	20.8	21.0
105°	68.9	49.6	30.3	20.8	20.9	21.2	21.4	21.6
107.5°	168.8	154.6	140.4	126.1	111.5	96.9	82.4	67.8
110°	214.3	210.7	207.1	197.4	181.8	166.3	150.7	135.0





TEST NUMBER: P332369-935

CATALOG NUMBER: S123RDIP-S1165D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	246.3	246.4	246.5	244.9	241.6	238.2	235.0	231.7
115°	284.0	285.2	286.3	287.0	287.4	287.9	288.3	288.8
117.5°	318.2	319.1	319.9	320.5	320.6	320.6	320.7	320.8
120°	340.6	341.5	342.3	342.8	342.8	342.8	342.8	342.8
122.5°	362.5	363.1	363.7	364.0	364.1	364.2	364.3	364.4
125°	393.3	393.5	393.7	394.0	394.2	394.4	394.6	394.9
127.5°	424.2	424.6	424.9	425.0	424.7	424.6	424.3	424.1
130°	442.8	443.2	443.7	443.8	443.6	443.4	443.2	443.0
132.5°	460.5	461.0	461.4	461.5	461.2	460.8	460.5	460.2
135°	487.3	487.7	487.9	487.9	487.7	487.3	487.0	486.6
137.5°	511.2	511.7	512.2	512.4	512.1	512.0	511.7	511.5
140°	526.3	526.8	527.2	527.3	527.1	526.8	526.7	526.4
142.5°	540.7	541.1	541.4	541.4	541.1	540.8	540.4	540.2
145°	560.8	560.9	561.2	561.3	561.3	561.3	561.3	561.3
147.5°	578.8	578.9	579.2	579.0	578.5	578.0	577.6	577.0
150°	589.7	590.0	590.1	590.1	589.8	589.4	589.1	588.8
152.5°	599.5	599.9	600.3	600.2	599.8	599.3	598.7	598.2
155°	612.9	613.5	614.1	614.0	613.4	612.7	612.1	611.4
157.5°	624.7	625.3	626.0	625.9	625.0	624.2	623.4	622.5
160°	631.4	632.0	632.7	632.6	631.9	631.1	630.3	629.6
162.5°	637.4	638.2	638.9	638.9	638.3	637.6	636.9	636.3
165°	645.6	646.4	647.3	647.4	646.6	645.8	645.1	644.3
167.5°	651.9	652.7	653.6	653.6	652.7	651.9	651.0	650.1
170°	655.4	656.3	657.1	657.1	656.3	655.4	654.5	653.6
172.5°	657.7	658.6	659.4	659.4	658.5	657.5	656.5	655.6
175°	660.6	661.3	662.1	662.0	661.2	660.3	659.4	658.5
177.5°	661.6	662.3	663.0	662.9	662.0	661.2	660.3	659.4
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0

(END OF REPORT)