

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332261-935

Luminaire Tested: **S123RDIP-S340D1025U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332261-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S340D1025U935-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4648.3 lumens
Efficiency: N/A
Efficacy: 124.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332261-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

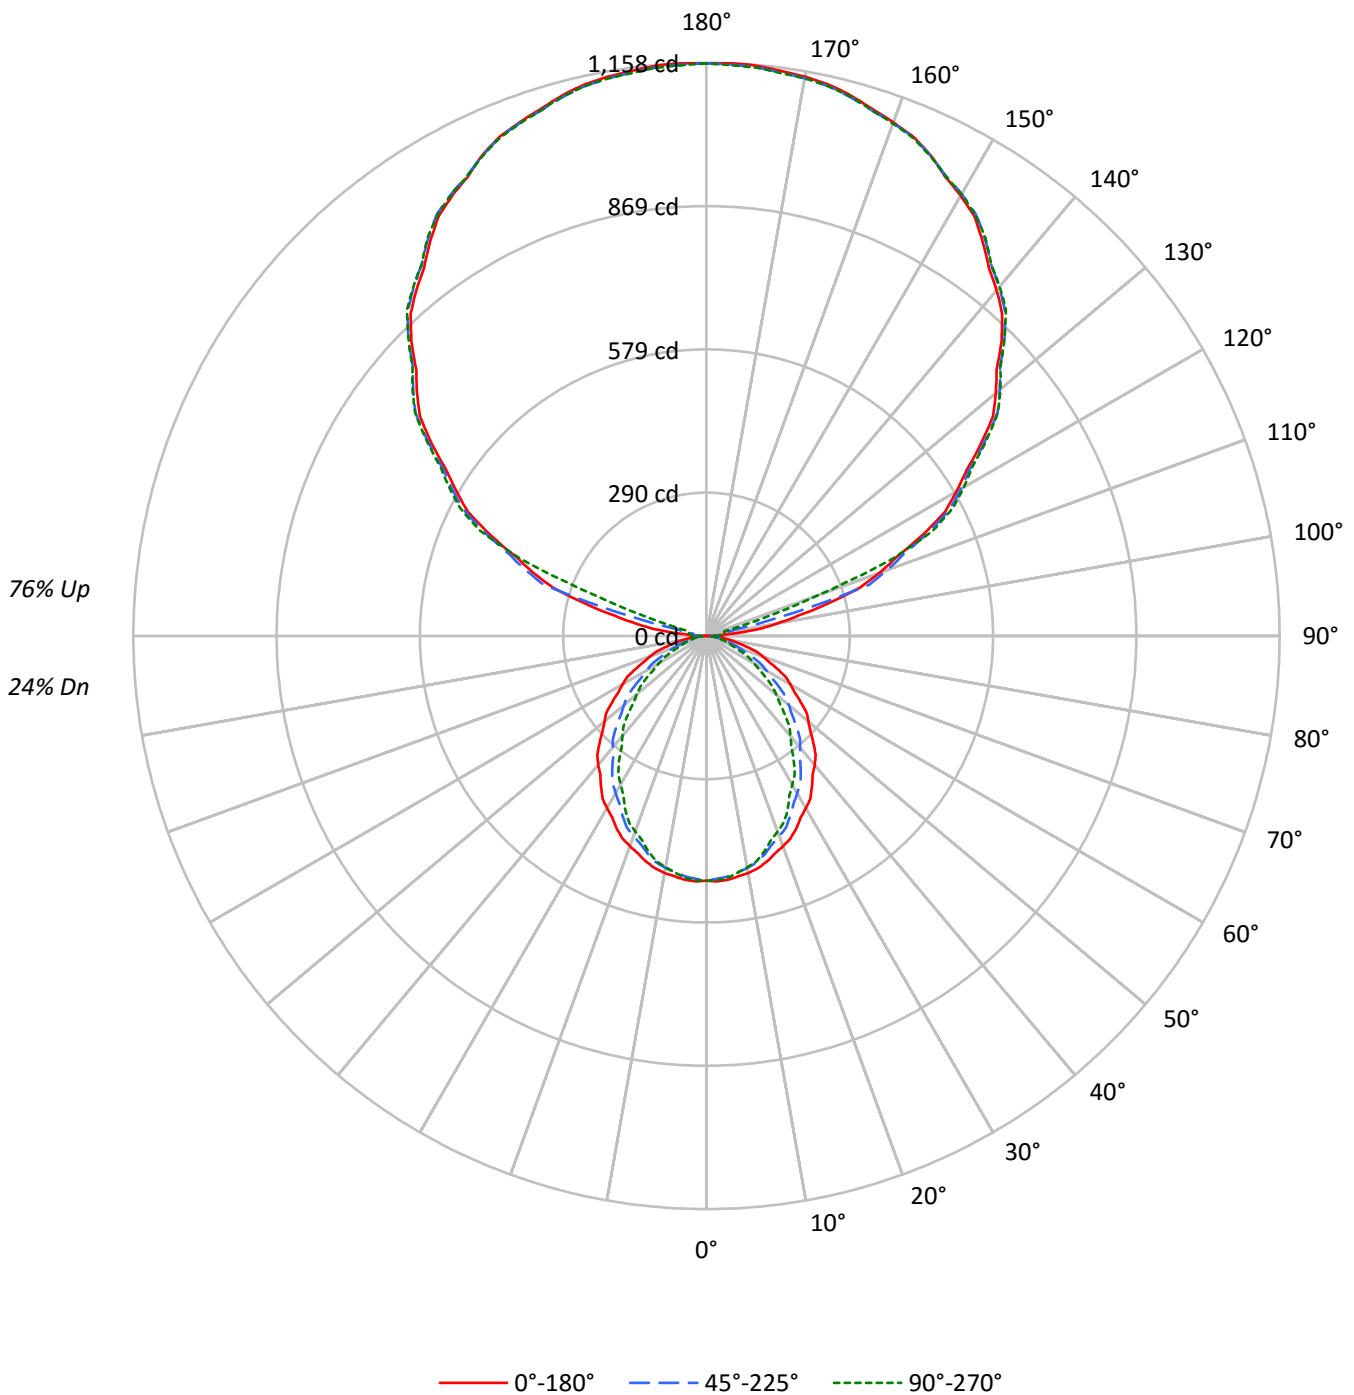



TEST NUMBER: P332261-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	28	21
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	55	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	52	47	62	54	47	42	42	37	34	31	28	25	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	27	24	22	18	17	15	11
6	59	48	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10
7	55	43	35	30	48	39	32	27	30	26	22	22	19	17	15	13	12	9
8	50	39	31	26	45	35	29	24	27	23	20	21	17	15	14	12	11	8
9	47	35	28	23	42	32	26	21	25	21	17	19	16	13	13	11	10	7
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5324	5324	5324
5°	5344	5271	5302
10°	5314	5205	5187
15°	5258	5084	5029
20°	5179	4931	4816
25°	5099	4760	4608
30°	4992	4561	4313
35°	4882	4365	4043
40°	4780	4131	3710
45°	4647	3902	3408
50°	4501	3641	3069
55°	4352	3342	2755
60°	4215	3023	2409
65°	4037	2677	2063
70°	3811	2247	1668
75°	3489	1768	1568
80°	3106	1568	1438
85°	2631	1383	1284



TEST NUMBER: P332261-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.5	1.0
10°-20°	129.2	2.8
20°-30°	186.1	4.0
30°-40°	209.6	4.5
40°-50°	200.5	4.3
50°-60°	164.2	3.5
60°-70°	110.8	2.4
70°-80°	55.7	1.2
80°-90°	18.0	0.4
90°-100°	42.1	0.9
100°-110°	200.4	4.3
110°-120°	481.5	10.4
120°-130°	613.1	13.2
130°-140°	655.1	14.1
140°-150°	612.6	13.2
150°-160°	494.1	10.6
160°-170°	318.9	6.9
170°-180°	109.9	2.4
0°-30°	361.8	7.8
0°-40°	571.4	12.3
0°-60°	936.2	20.1
0°-90°	1120.7	24.1
90°-120°	724.0	15.6
90°-150°	2604.6	56.0
90°-180°	3528.0	75.9
0°-180°	4648.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	495	495	495	495	495	
5°	495	492	488	491	491	47
15°	472	467	456	454	451	133
25°	429	419	401	393	388	197
35°	372	356	332	315	308	232
45°	305	286	256	234	224	235
55°	232	211	178	156	147	208
65°	158	136	105	86	81	157
75°	84	64	42	39	38	89
85°	21	13	11	10	10	24
90°	1	10	21	24	26	4
95°	52	20	27	32	33	65
105°	256	261	188	45	38	272
115°	480	486	493	502	505	474
125°	677	684	688	689	691	605
135°	843	848	852	854	852	649
145°	973	979	981	982	982	609
155°	1072	1070	1071	1075	1070	494
165°	1130	1128	1127	1133	1128	319
175°	1157	1153	1153	1159	1152	110
180°	1157	1157	1157	1157	1157	



TEST NUMBER: P332261-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
2.5°	496.3	495.9	495.7	495.4	495.2	494.6	493.7	492.8	492.0	491.1	491.9
5°	494.6	494.2	493.8	493.4	492.8	492.1	491.0	490.0	488.9	487.8	488.6
7.5°	490.1	489.6	489.1	488.6	488.2	487.2	485.9	484.5	483.0	481.6	482.1
10°	486.2	485.6	485.0	484.4	483.7	482.6	481.0	479.4	477.8	476.2	476.3
12.5°	480.8	480.1	479.4	478.7	478.0	476.6	474.7	472.8	470.8	468.8	468.7
15°	471.8	470.8	469.8	468.8	467.9	466.1	463.6	461.2	458.7	456.2	455.7
17.5°	460.5	459.3	458.2	457.0	455.9	453.7	450.6	447.4	444.3	441.1	440.1
20°	452.1	450.7	449.3	447.9	446.4	444.0	440.7	437.2	433.9	430.5	429.3
22.5°	442.8	441.2	439.5	437.9	436.3	433.7	430.1	426.5	422.8	419.2	417.8
25°	429.3	427.1	424.8	422.6	420.3	417.2	413.1	409.0	404.8	400.8	398.9
27.5°	412.8	410.4	407.9	405.4	402.9	399.5	394.9	390.3	385.7	381.2	378.6
30°	401.6	398.9	396.2	393.6	390.9	387.0	382.0	377.0	372.0	367.0	364.0
32.5°	390.4	387.3	384.3	381.3	378.2	374.1	368.8	363.5	358.3	352.9	349.7
35°	371.5	368.2	365.1	361.9	358.7	354.3	348.8	343.2	337.7	332.2	328.4
37.5°	352.4	348.8	345.3	341.7	338.1	333.4	327.5	321.6	315.7	309.8	305.5
40°	340.2	336.3	332.3	328.5	324.5	319.3	313.1	306.7	300.4	294.0	289.5
42.5°	326.4	322.4	318.6	314.6	310.7	305.5	298.9	292.4	285.9	279.3	274.2
45°	305.3	301.3	297.3	293.3	289.2	283.8	277.0	270.1	263.2	256.3	251.2
47.5°	284.2	279.8	275.3	271.0	266.6	261.0	254.1	247.2	240.4	233.5	228.0
50°	268.8	264.6	260.5	256.2	252.0	246.3	239.1	231.9	224.6	217.4	211.9
52.5°	255.0	250.5	245.9	241.3	236.8	230.9	223.8	216.6	209.5	202.3	196.7
55°	231.9	227.5	223.2	218.8	214.4	208.4	200.9	193.3	185.7	178.1	173.0
57.5°	210.5	205.8	201.0	196.2	191.5	185.3	177.7	170.0	162.5	154.9	150.0
60°	195.8	190.9	186.0	181.1	176.2	170.0	162.6	155.2	147.8	140.4	135.6
62.5°	181.0	176.1	171.2	166.3	161.4	155.2	147.8	140.4	133.0	125.6	121.1
65°	158.5	153.6	148.7	143.8	138.9	132.9	126.0	119.0	112.1	105.1	100.7
67.5°	136.0	131.0	126.0	121.1	116.1	110.3	103.6	96.9	90.2	83.6	80.3
70°	121.1	116.3	111.5	106.7	101.9	96.3	90.1	83.9	77.7	71.4	68.3
72.5°	106.4	101.7	96.9	92.1	87.4	82.2	76.5	70.9	65.2	59.5	57.0
75°	83.9	79.6	75.3	71.0	66.7	62.2	57.3	52.3	47.4	42.5	41.7
77.5°	63.3	59.4	55.5	51.7	47.9	44.3	41.2	38.0	34.9	31.7	31.3
80°	50.1	46.5	42.9	39.2	35.6	32.8	30.9	29.0	27.1	25.3	25.0
82.5°	37.6	34.4	31.3	28.2	25.0	23.0	22.1	21.3	20.4	19.5	19.2
85°	21.3	19.3	17.3	15.4	13.4	12.3	12.1	11.8	11.5	11.2	11.0
87.5°	7.8	7.5	7.1	6.6	6.3	6.3	6.8	7.3	7.8	8.3	8.4
90°	0.9	2.8	4.6	6.6	8.5	10.7	13.2	15.7	18.2	20.7	21.4
92.5°	16.0	15.4	14.9	14.4	13.9	14.6	16.4	18.3	20.1	22.0	23.2
95°	52.4	44.6	36.8	28.9	21.1	18.3	20.3	22.5	24.5	26.6	28.0
97.5°	105.4	101.9	98.3	94.8	91.3	82.7	69.0	55.2	41.4	27.6	29.2
100°	145.3	149.0	152.9	156.7	160.5	147.5	117.7	87.9	58.1	28.3	29.9
102.5°	190.6	193.4	196.1	198.9	201.6	186.8	154.2	121.7	89.1	56.6	51.8
105°	256.1	258.2	260.3	262.4	264.5	256.9	239.8	222.6	205.4	188.2	154.4
107.5°	325.2	326.9	328.6	330.3	331.9	334.2	336.8	339.6	342.2	345.0	320.2
110°	371.3	372.8	374.3	375.8	377.4	379.2	381.3	383.4	385.5	387.6	381.3



TEST NUMBER: P332261-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	415.3	416.6	418.0	419.4	420.8	422.5	424.6	426.7	428.8	430.9	431.0
115°	480.4	481.6	482.7	483.9	485.0	486.5	488.1	489.8	491.5	493.3	495.2
117.5°	543.5	544.9	546.3	547.8	549.1	550.3	551.1	552.1	552.9	553.8	555.3
120°	582.6	584.4	586.1	587.8	589.5	590.7	591.2	591.9	592.5	593.0	594.5
122.5°	622.6	624.0	625.3	626.8	628.2	629.3	630.0	630.8	631.5	632.1	633.3
125°	677.2	678.7	680.3	681.8	683.3	684.5	685.3	686.0	686.7	687.5	687.9
127.5°	730.1	731.7	733.2	734.7	736.2	737.4	738.4	739.3	740.2	741.1	741.8
130°	763.2	764.7	766.2	767.8	769.3	770.4	771.2	772.0	772.7	773.4	774.2
132.5°	794.8	796.3	797.8	799.4	800.9	801.9	802.5	803.1	803.8	804.4	805.2
135°	843.1	844.2	845.3	846.5	847.7	848.6	849.4	850.2	850.9	851.7	852.2
137.5°	884.3	885.8	887.3	888.7	890.1	891.0	891.5	891.9	892.3	892.8	893.6
140°	911.8	913.0	914.1	915.2	916.4	917.3	917.8	918.4	919.0	919.5	920.3
142.5°	937.3	938.4	939.5	940.7	941.8	942.7	943.3	943.8	944.4	945.0	945.6
145°	972.8	974.2	975.5	976.9	978.2	979.0	979.5	979.8	980.2	980.6	980.9
147.5°	1006.3	1007.3	1008.1	1009.0	1009.9	1010.5	1010.9	1011.2	1011.7	1012.0	1012.4
150°	1027.0	1027.6	1028.1	1028.7	1029.2	1029.8	1030.1	1030.5	1030.9	1031.3	1031.7
152.5°	1045.5	1045.9	1046.1	1046.4	1046.6	1046.9	1047.1	1047.3	1047.6	1047.8	1048.4
155°	1071.7	1071.3	1070.9	1070.6	1070.1	1070.1	1070.2	1070.4	1070.7	1070.8	1071.8
157.5°	1091.9	1091.9	1091.9	1091.8	1091.8	1091.7	1091.5	1091.3	1091.1	1090.9	1092.1
160°	1104.3	1104.1	1104.0	1103.8	1103.5	1103.4	1103.2	1103.0	1102.8	1102.6	1103.8
162.5°	1116.0	1115.5	1115.0	1114.6	1114.0	1113.7	1113.5	1113.3	1113.1	1112.9	1114.2
165°	1130.1	1129.5	1128.9	1128.4	1127.8	1127.5	1127.2	1127.0	1126.9	1126.7	1128.2
167.5°	1141.1	1140.4	1139.6	1138.8	1138.1	1137.6	1137.6	1137.6	1137.6	1137.6	1139.2
170°	1147.3	1146.5	1145.8	1145.0	1144.3	1143.8	1143.8	1143.8	1143.8	1143.8	1145.4
172.5°	1151.4	1150.6	1149.6	1148.7	1147.8	1147.4	1147.5	1147.7	1147.8	1148.0	1149.5
175°	1156.8	1155.8	1154.9	1153.9	1153.0	1152.5	1152.7	1153.0	1153.1	1153.3	1154.7
177.5°	1158.1	1157.4	1156.6	1155.8	1155.1	1154.8	1154.9	1155.1	1155.2	1155.4	1156.6
180°	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8



TEST NUMBER: P332261-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
2.5°	492.7	493.4	494.3	494.6	494.5	494.3	494.1	494.0
5°	489.5	490.3	491.0	491.4	491.2	491.0	490.9	490.7
7.5°	482.6	483.0	483.5	483.5	483.2	482.9	482.6	482.3
10°	476.4	476.5	476.6	476.4	476.0	475.5	475.0	474.6
12.5°	468.7	468.6	468.6	468.3	467.8	467.3	466.7	466.2
15°	455.2	454.8	454.3	453.8	453.2	452.5	451.9	451.3
17.5°	439.2	438.2	437.3	436.4	435.4	434.5	433.6	432.7
20°	428.2	427.0	425.9	424.7	423.6	422.6	421.5	420.4
22.5°	416.4	414.9	413.5	412.2	411.2	410.3	409.2	408.3
25°	397.0	395.2	393.3	391.8	390.9	389.9	388.9	388.0
27.5°	376.0	373.4	370.8	368.8	367.2	365.8	364.3	362.7
30°	361.0	358.0	355.0	352.8	351.3	349.9	348.4	347.0
32.5°	346.3	343.0	339.7	337.3	335.8	334.3	332.8	331.3
35°	324.5	320.6	316.8	314.1	312.5	310.9	309.3	307.7
37.5°	301.1	296.7	292.4	289.2	287.2	285.2	283.3	281.3
40°	284.8	280.2	275.5	272.2	270.1	268.1	266.0	264.0
42.5°	269.1	264.2	259.1	255.6	253.7	251.9	250.1	248.2
45°	246.2	241.1	236.0	232.4	230.3	228.2	226.0	223.9
47.5°	222.4	216.9	211.4	207.7	205.8	203.9	201.9	200.0
50°	206.4	200.9	195.4	191.6	189.5	187.4	185.4	183.3
52.5°	190.9	185.1	179.4	175.6	173.7	171.9	170.1	168.2
55°	167.8	162.6	157.5	153.9	152.2	150.4	148.6	146.8
57.5°	145.1	140.2	135.3	132.1	130.6	129.1	127.6	126.1
60°	130.8	126.0	121.1	118.0	116.5	114.9	113.5	111.9
62.5°	116.6	112.1	107.5	104.4	102.9	101.3	99.7	98.2
65°	96.3	92.0	87.6	85.0	83.9	83.0	82.1	81.0
67.5°	77.1	73.8	70.5	68.4	67.3	66.3	65.3	64.2
70°	65.2	62.1	58.9	56.9	55.9	54.9	53.9	53.0
72.5°	54.4	51.9	49.3	47.9	47.4	47.0	46.7	46.2
75°	40.7	39.9	38.9	38.4	38.2	38.1	37.9	37.7
77.5°	30.7	30.2	29.8	29.4	29.3	29.1	28.9	28.8
80°	24.7	24.5	24.2	24.0	23.8	23.6	23.4	23.2
82.5°	18.9	18.7	18.4	18.3	18.3	18.2	18.2	18.2
85°	10.8	10.7	10.5	10.4	10.4	10.4	10.4	10.4
87.5°	8.4	8.5	8.6	8.7	8.7	8.7	8.7	8.7
90°	22.1	22.9	23.7	24.3	24.6	25.1	25.4	25.7
92.5°	24.5	25.7	26.9	27.6	27.8	28.1	28.3	28.5
95°	29.3	30.7	32.0	32.6	32.6	32.6	32.6	32.6
97.5°	30.7	32.3	33.8	34.6	34.9	35.0	35.2	35.4
100°	31.4	33.0	34.4	35.3	35.6	35.7	35.9	36.1
102.5°	47.1	42.4	37.6	35.4	35.7	36.1	36.4	36.8
105°	120.6	86.8	53.0	36.2	36.7	37.0	37.5	37.8
107.5°	295.4	270.6	245.8	220.7	195.2	169.7	144.2	118.7
110°	375.0	368.7	362.4	345.6	318.2	290.9	263.6	236.3



TEST NUMBER: P332261-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	431.1	431.3	431.4	428.5	422.8	417.0	411.2	405.4
115°	497.1	499.0	500.9	502.3	503.0	503.8	504.5	505.3
117.5°	556.9	558.4	559.9	560.8	560.9	561.0	561.2	561.4
120°	596.1	597.5	599.1	599.9	599.9	599.9	599.9	599.9
122.5°	634.3	635.4	636.5	637.1	637.2	637.4	637.5	637.7
125°	688.3	688.6	689.1	689.4	689.8	690.2	690.6	691.0
127.5°	742.4	743.0	743.6	743.7	743.3	743.0	742.5	742.2
130°	775.0	775.8	776.5	776.7	776.4	775.9	775.6	775.2
132.5°	805.9	806.7	807.4	807.5	807.0	806.5	806.0	805.5
135°	852.8	853.4	853.9	853.9	853.4	852.8	852.2	851.7
137.5°	894.6	895.5	896.4	896.6	896.3	896.0	895.5	895.2
140°	921.1	921.9	922.6	922.8	922.4	922.0	921.7	921.3
142.5°	946.2	946.8	947.4	947.4	946.9	946.4	945.9	945.4
145°	981.4	981.7	982.1	982.3	982.3	982.3	982.3	982.3
147.5°	1012.8	1013.1	1013.6	1013.3	1012.4	1011.6	1010.6	1009.8
150°	1032.1	1032.4	1032.9	1032.7	1032.2	1031.6	1031.0	1030.4
152.5°	1049.1	1049.8	1050.5	1050.4	1049.6	1048.7	1047.8	1046.9
155°	1072.7	1073.7	1074.6	1074.5	1073.4	1072.3	1071.1	1070.0
157.5°	1093.2	1094.3	1095.5	1095.4	1093.8	1092.4	1090.9	1089.4
160°	1104.9	1106.0	1107.2	1107.1	1105.8	1104.4	1103.1	1101.7
162.5°	1115.5	1116.8	1118.1	1118.2	1117.0	1115.8	1114.7	1113.4
165°	1129.7	1131.3	1132.8	1132.9	1131.5	1130.2	1128.9	1127.6
167.5°	1140.7	1142.3	1143.8	1143.8	1142.3	1140.7	1139.2	1137.6
170°	1146.9	1148.5	1150.0	1150.0	1148.5	1146.9	1145.4	1143.8
172.5°	1151.1	1152.5	1154.1	1154.0	1152.4	1150.6	1149.0	1147.3
175°	1156.0	1157.4	1158.6	1158.6	1157.0	1155.5	1154.0	1152.4
177.5°	1157.8	1159.1	1160.3	1160.1	1158.6	1157.1	1155.5	1154.0
180°	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8	1156.8

(END OF REPORT)