

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332263-935

Luminaire Tested: **S123RDIP-S340D1025U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332263-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S340D1025U935-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4314.9 lumens
Efficiency: N/A
Efficacy: 115.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332263-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

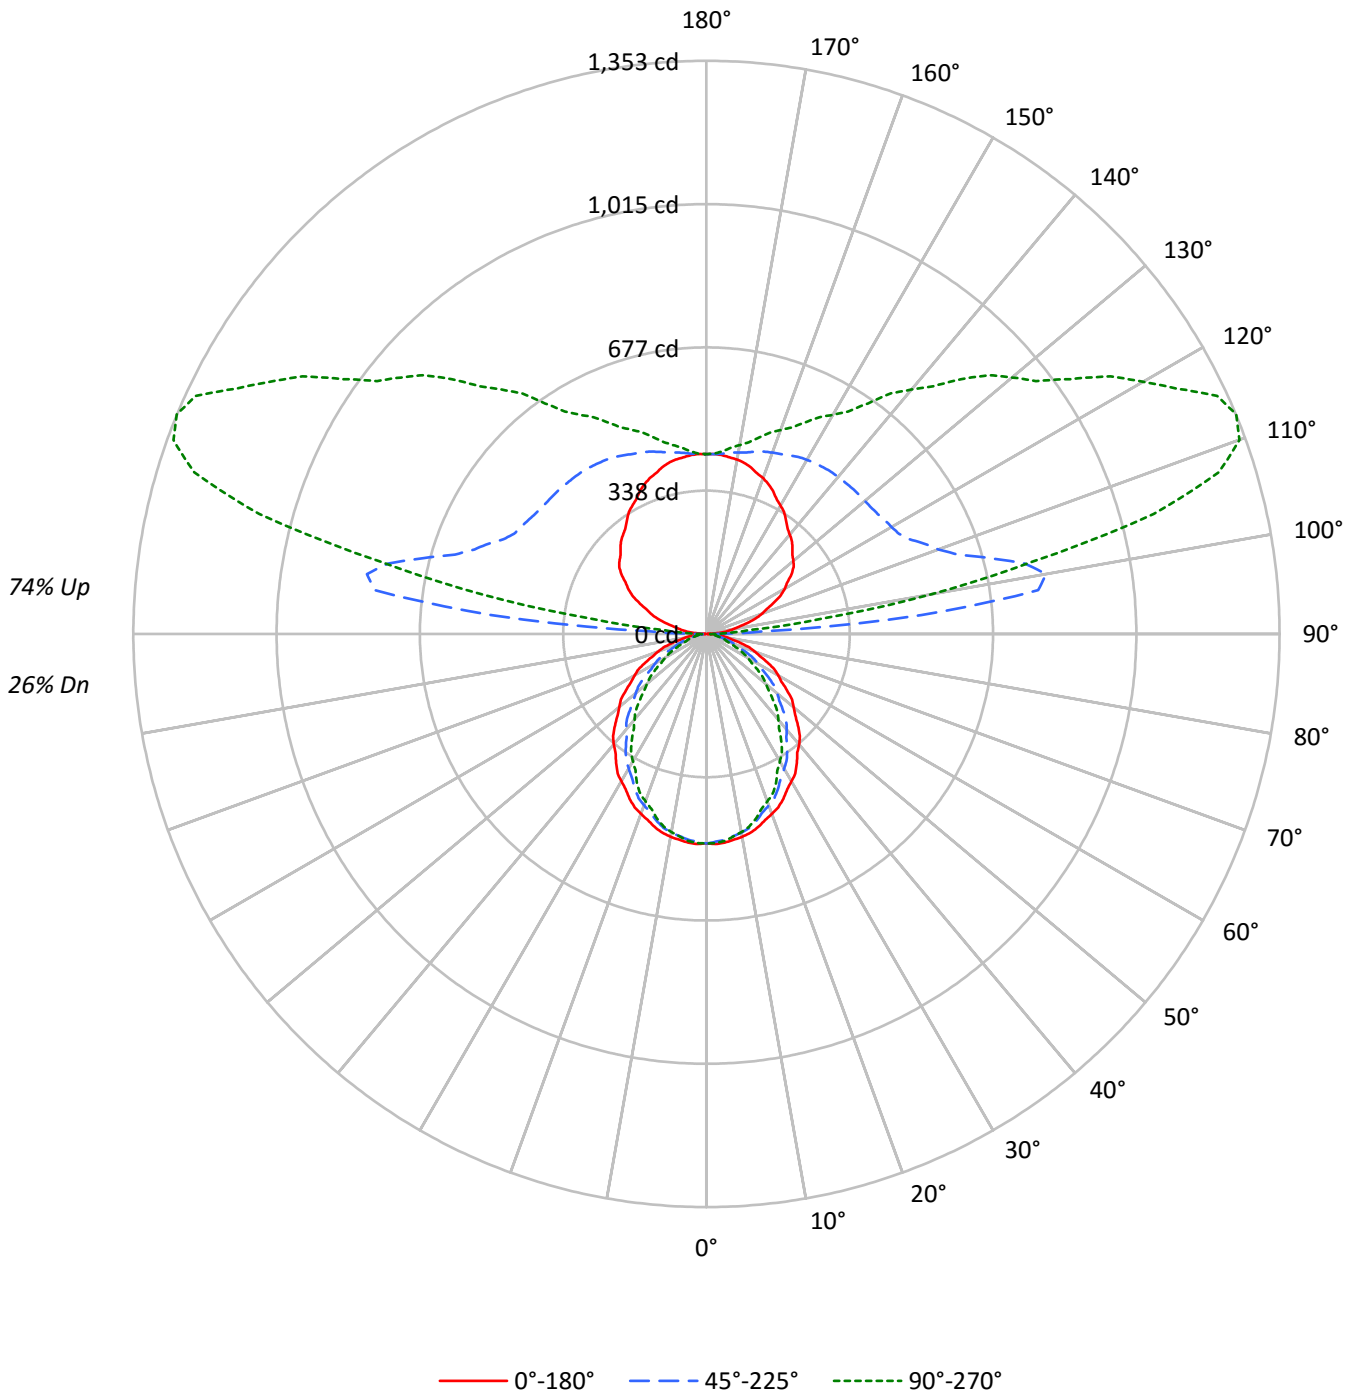



TEST NUMBER: P332263-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34	26
1	93	88	85	81	82	79	76	73	61	59	58	45	44	43	30	30	29	22
2	84	77	72	67	75	69	64	60	54	51	48	40	38	36	27	26	25	19
3	77	68	61	56	68	61	55	50	48	44	40	35	33	31	24	22	21	16
4	70	60	53	47	63	54	48	43	42	38	34	32	29	26	21	20	18	14
5	65	54	46	40	57	48	42	37	38	33	30	28	25	23	19	17	16	12
6	59	48	40	35	53	43	37	32	34	29	26	26	22	20	18	16	14	11
7	55	43	36	30	49	39	32	28	31	26	23	23	20	18	16	14	13	10
8	51	39	32	27	45	35	29	24	28	23	20	21	18	16	15	13	11	9
9	47	36	28	24	42	32	26	22	26	21	18	19	16	14	14	12	10	8
10	44	32	26	21	39	29	23	19	23	19	16	18	15	13	13	11	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5324	5324	5324
5°	5344	5271	5302
10°	5314	5205	5187
15°	5258	5084	5029
20°	5179	4931	4816
25°	5099	4760	4608
30°	4992	4561	4313
35°	4882	4365	4043
40°	4780	4131	3710
45°	4647	3902	3408
50°	4501	3641	3069
55°	4352	3342	2755
60°	4215	3023	2409
65°	4037	2677	2063
70°	3811	2247	1668
75°	3489	1768	1568
80°	3106	1568	1438
85°	2631	1383	1284



TEST NUMBER: P332263-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	46.5	1.1
10°-20°	129.2	3.0
20°-30°	186.1	4.3
30°-40°	209.6	4.9
40°-50°	200.5	4.6
50°-60°	164.2	3.8
60°-70°	110.8	2.6
70°-80°	55.7	1.3
80°-90°	18.0	0.4
90°-100°	236.3	5.5
100°-110°	669.0	15.5
110°-120°	658.1	15.3
120°-130°	525.0	12.2
130°-140°	413.9	9.6
140°-150°	308.9	7.2
150°-160°	215.3	5.0
160°-170°	126.5	2.9
170°-180°	41.2	1.0
0°-30°	361.8	8.4
0°-40°	571.4	13.2
0°-60°	936.2	21.7
0°-90°	1120.7	26.0
90°-120°	1563.5	36.2
90°-150°	2811.2	65.2
90°-180°	3194.0	74.0
0°-180°	4314.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	495	495	495	495	495	
5°	495	492	488	491	491	47
15°	472	467	456	454	451	133
25°	429	419	401	393	388	197
35°	372	356	332	315	308	232
45°	305	286	256	234	224	235
55°	232	211	178	156	147	208
65°	158	136	105	86	81	157
75°	84	64	42	39	38	89
85°	21	13	11	10	10	24
90°	2	10	22	24	25	3
95°	29	95	510	149	100	32
105°	100	147	691	1208	1093	106
115°	176	220	529	1159	1330	174
125°	245	289	493	894	1048	217
135°	287	342	486	736	850	222
145°	327	375	480	604	664	205
155°	372	401	465	529	551	171
165°	406	418	445	472	480	115
175°	424	424	427	433	432	40
180°	425	425	425	425	425	



TEST NUMBER: P332263-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
2.5°	496.3	495.9	495.7	495.4	495.2	494.6	493.7	492.8	492.0	491.1	491.9
5°	494.6	494.2	493.8	493.4	492.8	492.1	491.0	490.0	488.9	487.8	488.6
7.5°	490.1	489.6	489.1	488.6	488.2	487.2	485.9	484.5	483.0	481.6	482.1
10°	486.2	485.6	485.0	484.4	483.7	482.6	481.0	479.4	477.8	476.2	476.3
12.5°	480.8	480.1	479.4	478.7	478.0	476.6	474.7	472.8	470.8	468.8	468.7
15°	471.8	470.8	469.8	468.8	467.9	466.1	463.6	461.2	458.7	456.2	455.7
17.5°	460.5	459.3	458.2	457.0	455.9	453.7	450.6	447.4	444.3	441.1	440.1
20°	452.1	450.7	449.3	447.9	446.4	444.0	440.7	437.2	433.9	430.5	429.3
22.5°	442.8	441.2	439.5	437.9	436.3	433.7	430.1	426.5	422.8	419.2	417.8
25°	429.3	427.1	424.8	422.6	420.3	417.2	413.1	409.0	404.8	400.8	398.9
27.5°	412.8	410.4	407.9	405.4	402.9	399.5	394.9	390.3	385.7	381.2	378.6
30°	401.6	398.9	396.2	393.6	390.9	387.0	382.0	377.0	372.0	367.0	364.0
32.5°	390.4	387.3	384.3	381.3	378.2	374.1	368.8	363.5	358.3	352.9	349.7
35°	371.5	368.2	365.1	361.9	358.7	354.3	348.8	343.2	337.7	332.2	328.4
37.5°	352.4	348.8	345.3	341.7	338.1	333.4	327.5	321.6	315.7	309.8	305.5
40°	340.2	336.3	332.3	328.5	324.5	319.3	313.1	306.7	300.4	294.0	289.5
42.5°	326.4	322.4	318.6	314.6	310.7	305.5	298.9	292.4	285.9	279.3	274.2
45°	305.3	301.3	297.3	293.3	289.2	283.8	277.0	270.1	263.2	256.3	251.2
47.5°	284.2	279.8	275.3	271.0	266.6	261.0	254.1	247.2	240.4	233.5	228.0
50°	268.8	264.6	260.5	256.2	252.0	246.3	239.1	231.9	224.6	217.4	211.9
52.5°	255.0	250.5	245.9	241.3	236.8	230.9	223.8	216.6	209.5	202.3	196.7
55°	231.9	227.5	223.2	218.8	214.4	208.4	200.9	193.3	185.7	178.1	173.0
57.5°	210.5	205.8	201.0	196.2	191.5	185.3	177.7	170.0	162.5	154.9	150.0
60°	195.8	190.9	186.0	181.1	176.2	170.0	162.6	155.2	147.8	140.4	135.6
62.5°	181.0	176.1	171.2	166.3	161.4	155.2	147.8	140.4	133.0	125.6	121.1
65°	158.5	153.6	148.7	143.8	138.9	132.9	126.0	119.0	112.1	105.1	100.7
67.5°	136.0	131.0	126.0	121.1	116.1	110.3	103.6	96.9	90.2	83.6	80.3
70°	121.1	116.3	111.5	106.7	101.9	96.3	90.1	83.9	77.7	71.4	68.3
72.5°	106.4	101.7	96.9	92.1	87.4	82.2	76.5	70.9	65.2	59.5	57.0
75°	83.9	79.6	75.3	71.0	66.7	62.2	57.3	52.3	47.4	42.5	41.7
77.5°	63.3	59.4	55.5	51.7	47.9	44.3	41.2	38.0	34.9	31.7	31.3
80°	50.1	46.5	42.9	39.2	35.6	32.8	30.9	29.0	27.1	25.3	25.0
82.5°	37.6	34.4	31.3	28.2	25.0	23.0	22.1	21.3	20.4	19.5	19.2
85°	21.3	19.3	17.3	15.4	13.4	12.3	12.1	11.8	11.5	11.2	11.0
87.5°	8.0	7.6	7.1	6.9	6.5	6.4	6.9	7.4	7.9	8.4	8.3
90°	1.7	3.4	5.2	7.7	9.5	11.2	13.8	16.4	18.9	21.5	20.7
92.5°	10.7	15.8	23.1	29.7	36.9	49.7	72.2	109.2	145.4	132.2	99.7
95°	29.2	31.8	41.2	55.9	78.2	111.8	184.8	312.8	453.7	509.6	413.4
97.5°	49.9	50.7	58.1	70.8	92.8	129.1	198.9	343.3	578.2	789.8	845.0
100°	63.6	64.5	70.5	82.5	103.1	136.6	196.8	324.0	550.0	813.9	983.2
102.5°	78.0	79.6	84.9	96.3	114.9	145.6	199.6	307.5	508.8	769.2	990.1
105°	99.7	102.3	107.5	117.8	134.1	160.7	207.2	295.7	458.1	691.0	937.6
107.5°	122.7	125.3	130.3	140.4	155.8	180.5	221.2	294.8	425.8	621.9	845.8
110°	139.2	141.8	146.1	155.6	170.1	194.2	232.9	298.3	413.4	582.7	788.1



TEST NUMBER: P332263-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	154.4	157.0	161.3	170.7	185.3	208.7	244.6	305.1	406.5	556.6	737.9
115°	176.2	179.6	184.8	193.4	208.0	231.2	263.8	316.2	403.9	528.6	677.3
117.5°	198.0	202.0	206.3	214.1	230.5	252.0	284.3	331.1	405.4	512.0	640.6
120°	213.1	215.7	220.0	228.6	245.0	266.4	297.4	342.1	408.2	504.5	621.4
122.5°	226.2	228.8	233.1	242.4	258.0	280.9	311.1	352.4	413.0	499.6	605.5
125°	245.0	246.7	251.8	261.2	277.6	300.8	330.9	368.7	420.3	493.4	585.3
127.5°	259.2	261.7	268.1	277.8	295.8	319.0	348.1	382.1	428.5	490.3	567.4
130°	268.1	270.7	278.4	288.8	306.8	330.0	358.3	391.1	434.0	488.2	557.8
132.5°	275.0	278.3	286.7	299.1	317.1	339.7	367.3	399.3	438.2	487.5	548.8
135°	287.1	290.5	300.0	312.8	330.9	354.0	380.7	409.9	444.4	486.5	537.2
137.5°	298.4	302.0	311.3	325.0	342.9	364.4	390.0	417.8	448.4	484.6	527.0
140°	306.0	310.2	318.8	332.6	349.8	371.3	396.2	422.0	451.2	483.9	520.8
142.5°	314.2	317.8	327.1	339.5	356.6	376.8	401.1	426.1	453.2	482.5	515.3
145°	327.4	330.0	337.8	350.7	365.2	385.0	407.3	430.6	454.6	480.4	507.9
147.5°	340.9	342.4	350.0	361.1	375.2	392.1	412.5	433.3	454.6	477.2	500.7
150°	349.8	350.7	357.5	368.7	380.7	396.2	415.9	434.0	454.6	474.4	495.8
152.5°	358.7	358.9	365.8	375.6	386.2	401.1	418.0	435.4	452.5	471.0	490.4
155°	372.1	372.1	377.3	385.9	395.4	407.3	422.0	435.8	450.3	464.9	482.2
157.5°	382.8	383.5	387.6	395.2	403.2	412.5	424.2	436.6	447.5	459.6	472.9
160°	391.1	391.1	394.5	401.3	407.3	415.9	426.3	436.6	446.1	455.5	466.7
162.5°	397.3	397.3	400.0	405.4	410.8	418.0	427.0	435.9	443.3	451.3	460.5
165°	406.5	405.6	407.3	411.6	415.1	421.1	428.0	434.0	439.2	445.2	452.0
167.5°	413.5	412.5	413.4	416.6	419.0	422.8	427.8	432.7	435.1	439.0	444.0
170°	417.7	415.9	416.8	419.4	421.1	422.8	427.1	430.6	432.3	434.9	439.2
172.5°	420.4	419.4	419.6	421.5	422.5	423.5	427.1	429.9	430.2	431.4	434.4
175°	423.7	422.8	422.0	423.7	423.7	424.6	426.3	428.0	427.1	427.1	428.9
177.5°	425.2	424.6	423.9	424.6	424.6	424.6	425.2	426.6	425.2	424.6	425.2
180°	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6



TEST NUMBER: P332263-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	494.6	494.6	494.6	494.6	494.6	494.6	494.6	494.6
2.5°	492.7	493.4	494.3	494.6	494.5	494.3	494.1	494.0
5°	489.5	490.3	491.0	491.4	491.2	491.0	490.9	490.7
7.5°	482.6	483.0	483.5	483.5	483.2	482.9	482.6	482.3
10°	476.4	476.5	476.6	476.4	476.0	475.5	475.0	474.6
12.5°	468.7	468.6	468.6	468.3	467.8	467.3	466.7	466.2
15°	455.2	454.8	454.3	453.8	453.2	452.5	451.9	451.3
17.5°	439.2	438.2	437.3	436.4	435.4	434.5	433.6	432.7
20°	428.2	427.0	425.9	424.7	423.6	422.6	421.5	420.4
22.5°	416.4	414.9	413.5	412.2	411.2	410.3	409.2	408.3
25°	397.0	395.2	393.3	391.8	390.9	389.9	388.9	388.0
27.5°	376.0	373.4	370.8	368.8	367.2	365.8	364.3	362.7
30°	361.0	358.0	355.0	352.8	351.3	349.9	348.4	347.0
32.5°	346.3	343.0	339.7	337.3	335.8	334.3	332.8	331.3
35°	324.5	320.6	316.8	314.1	312.5	310.9	309.3	307.7
37.5°	301.1	296.7	292.4	289.2	287.2	285.2	283.3	281.3
40°	284.8	280.2	275.5	272.2	270.1	268.1	266.0	264.0
42.5°	269.1	264.2	259.1	255.6	253.7	251.9	250.1	248.2
45°	246.2	241.1	236.0	232.4	230.3	228.2	226.0	223.9
47.5°	222.4	216.9	211.4	207.7	205.8	203.9	201.9	200.0
50°	206.4	200.9	195.4	191.6	189.5	187.4	185.4	183.3
52.5°	190.9	185.1	179.4	175.6	173.7	171.9	170.1	168.2
55°	167.8	162.6	157.5	153.9	152.2	150.4	148.6	146.8
57.5°	145.1	140.2	135.3	132.1	130.6	129.1	127.6	126.1
60°	130.8	126.0	121.1	118.0	116.5	114.9	113.5	111.9
62.5°	116.6	112.1	107.5	104.4	102.9	101.3	99.7	98.2
65°	96.3	92.0	87.6	85.0	83.9	83.0	82.1	81.0
67.5°	77.1	73.8	70.5	68.4	67.3	66.3	65.3	64.2
70°	65.2	62.1	58.9	56.9	55.9	54.9	53.9	53.0
72.5°	54.4	51.9	49.3	47.9	47.4	47.0	46.7	46.2
75°	40.7	39.9	38.9	38.4	38.2	38.1	37.9	37.7
77.5°	30.7	30.2	29.8	29.4	29.3	29.1	28.9	28.8
80°	24.7	24.5	24.2	24.0	23.8	23.6	23.4	23.2
82.5°	18.9	18.7	18.4	18.3	18.3	18.2	18.2	18.2
85°	10.8	10.7	10.5	10.4	10.4	10.4	10.4	10.4
87.5°	8.4	8.4	8.5	8.8	8.5	8.7	8.8	8.5
90°	21.5	22.4	23.2	24.9	24.0	24.9	25.7	24.9
92.5°	72.3	57.4	50.7	46.2	44.7	42.1	43.0	41.4
95°	309.4	209.7	164.2	133.2	116.9	109.2	103.1	99.7
97.5°	771.3	617.8	506.9	404.1	340.7	302.0	278.8	271.4
100°	1013.3	943.7	843.1	721.1	634.3	571.5	538.0	538.9
102.5°	1093.7	1091.5	1032.9	955.5	887.9	838.3	810.3	790.5
105°	1117.2	1203.2	1219.5	1197.2	1157.6	1125.0	1097.5	1093.2
107.5°	1049.6	1189.1	1264.4	1295.0	1295.7	1284.7	1275.4	1267.5
110°	984.9	1143.1	1251.3	1311.5	1335.6	1342.5	1340.7	1339.0



TEST NUMBER: P332263-935

CATALOG NUMBER: S123RDIP-S340D1025U935-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	920.9	1082.5	1203.9	1281.3	1325.3	1346.5	1353.1	1353.4
115°	836.2	985.8	1112.1	1205.7	1270.2	1308.0	1325.3	1329.6
117.5°	774.9	904.0	1017.4	1112.4	1179.7	1223.0	1247.8	1253.5
120°	742.5	858.6	961.7	1048.5	1116.4	1164.5	1185.2	1190.3
122.5°	717.1	822.2	917.7	998.3	1058.7	1102.0	1124.6	1131.2
125°	683.3	777.0	859.5	928.2	983.2	1021.0	1042.5	1048.5
127.5°	653.7	737.2	811.7	874.2	923.2	955.5	974.9	980.4
130°	635.2	712.5	782.0	840.5	886.1	917.1	935.0	941.9
132.5°	617.9	689.1	753.9	809.6	852.4	883.3	899.3	904.1
135°	594.7	655.7	711.6	760.6	802.7	828.5	844.0	850.0
137.5°	573.6	623.6	671.8	714.2	749.6	775.8	788.8	792.7
140°	561.2	605.0	646.3	683.3	715.9	739.9	753.7	752.9
142.5°	549.5	587.2	622.9	655.0	682.9	704.2	716.6	715.7
145°	535.5	563.8	591.2	616.2	637.7	655.7	662.6	664.3
147.5°	523.9	546.4	568.6	586.3	602.6	614.8	621.4	622.1
150°	515.7	535.5	553.5	569.8	582.7	592.1	597.3	597.3
152.5°	508.1	525.1	541.1	554.7	564.8	573.6	576.7	576.7
155°	496.7	510.5	523.4	533.7	541.5	548.3	550.0	550.9
157.5°	484.7	496.2	506.2	514.3	521.0	526.2	527.5	527.4
160°	477.9	487.3	495.8	501.9	507.9	513.1	513.1	512.2
162.5°	469.6	477.7	485.6	490.9	494.9	499.3	499.3	498.4
165°	458.9	464.1	470.1	474.4	477.9	481.3	480.4	480.4
167.5°	449.6	453.6	457.0	460.1	461.7	464.1	463.2	463.2
170°	443.5	446.1	449.4	451.2	452.0	453.7	452.9	452.9
172.5°	438.0	439.9	442.6	443.7	443.8	445.6	444.0	443.3
175°	430.6	431.4	433.2	433.2	433.2	434.0	433.2	432.3
177.5°	425.9	426.6	427.3	427.3	426.6	427.3	425.9	425.9
180°	424.6	424.6	424.6	424.6	424.6	424.6	424.6	424.6

(END OF REPORT)