

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332292-935

Luminaire Tested: **S123RDIP-S560D1025U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332292-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S560D1025U935-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4871.7 lumens  
Efficiency: N/A  
Efficacy: 109.5 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.23  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332292-935

CATALOG NUMBER: S123RDIP-S560D1025U935-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

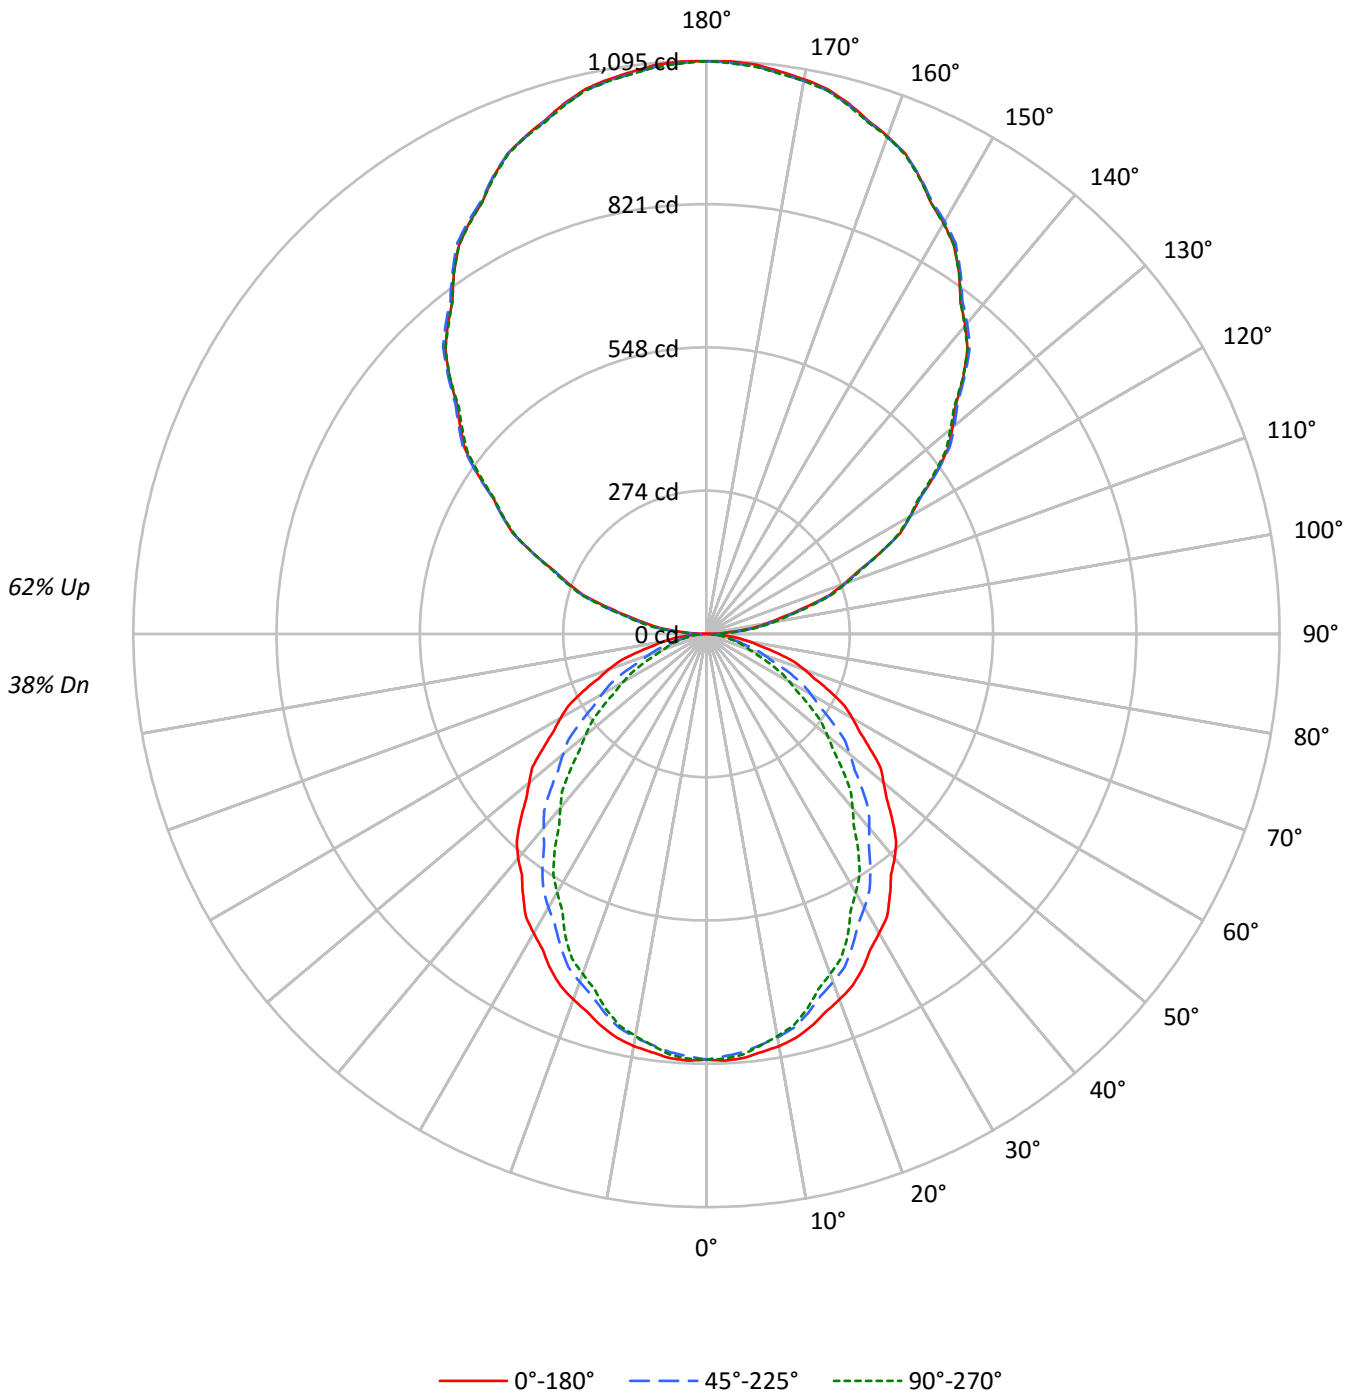



TEST NUMBER: P332292-935

CATALOG NUMBER: S123RDIP-S560D1025U935-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	60	60	60	45	45	45	38
1	95	91	87	84	86	83	80	77	67	65	63	53	52	50	40	39	38	32
2	87	80	74	69	79	73	68	63	59	56	53	47	45	42	35	34	33	27
3	79	70	63	58	72	64	58	53	52	48	45	42	39	36	32	30	28	23
4	73	62	55	49	66	57	50	45	47	42	38	37	34	31	28	26	24	20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	26	23	21	18
6	61	50	42	36	56	46	39	34	38	33	29	30	27	24	23	21	19	16
7	57	45	37	32	51	41	34	30	34	29	25	28	24	21	21	19	17	14
8	53	41	33	28	48	37	31	26	31	26	22	25	21	19	20	17	15	13
9	49	37	30	25	45	34	28	23	29	24	20	23	20	17	18	16	14	11
10	46	34	27	22	42	31	25	21	26	21	18	21	18	15	17	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8753	8753	8753
5°	8787	8666	8715
10°	8737	8557	8528
15°	8643	8357	8269
20°	8514	8107	7918
25°	8381	7826	7574
30°	8206	7501	7091
35°	8025	7176	6646
40°	7859	6794	6097
45°	7640	6416	5602
50°	7400	5987	5047
55°	7156	5495	4530
60°	6928	4969	3961
65°	6635	4401	3393
70°	6266	3695	2738
75°	5731	2907	2578
80°	5114	2579	2368
85°	4323	2272	2112



TEST NUMBER: P332292-935

CATALOG NUMBER: S123RDIP-S560D1025U935-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	76.4	1.6
10°-20°	212.5	4.4
20°-30°	305.9	6.3
30°-40°	344.6	7.1
40°-50°	329.7	6.8
50°-60°	270.0	5.5
60°-70°	182.2	3.7
70°-80°	91.6	1.9
80°-90°	27.5	0.6
90°-100°	71.3	1.5
100°-110°	213.3	4.4
110°-120°	362.8	7.4
120°-130°	477.3	9.8
130°-140°	536.4	11.0
140°-150°	527.3	10.8
150°-160°	443.9	9.1
160°-170°	295.5	6.1
170°-180°	103.5	2.1
0°-30°	594.8	12.2
0°-40°	939.4	19.3
0°-60°	1539.1	31.6
0°-90°	1840.4	37.8
90°-120°	647.5	13.3
90°-150°	2188.5	44.9
90°-180°	3031.0	62.2
0°-180°	4871.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	813	813	813	813	813	
5°	813	810	802	808	807	77
15°	776	768	750	747	742	218
25°	706	688	659	645	638	324
35°	611	586	546	519	506	382
45°	502	471	422	385	368	387
55°	381	348	293	256	241	342
65°	260	223	173	142	133	258
75°	138	106	70	64	62	147
85°	35	21	18	17	17	39
90°	1	10	21	24	26	5
95°	51	57	64	67	67	57
105°	193	195	203	203	205	207
115°	365	368	366	367	366	361
125°	535	537	536	532	529	477
135°	694	698	698	694	693	534
145°	841	843	846	845	841	525
155°	964	964	964	967	962	443
165°	1049	1047	1047	1051	1046	296
175°	1092	1088	1088	1093	1087	104
180°	1094	1094	1094	1094	1094	



TEST NUMBER: P332292-935

CATALOG NUMBER: S123RDIP-S560D1025U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	815.9	815.4	814.9	814.4	814.0	813.0	811.7	810.2	808.8	807.4	808.7
5°	813.2	812.5	811.8	811.1	810.3	809.1	807.3	805.6	803.7	802.0	803.3
7.5°	805.7	804.9	804.1	803.3	802.5	801.0	798.7	796.4	794.1	791.9	792.6
10°	799.4	798.3	797.3	796.3	795.3	793.4	790.8	788.2	785.5	782.9	783.0
12.5°	790.4	789.3	788.1	787.0	785.8	783.7	780.4	777.2	774.0	770.8	770.7
15°	775.6	774.0	772.4	770.8	769.2	766.3	762.2	758.1	754.0	749.9	749.2
17.5°	757.0	755.2	753.3	751.4	749.5	746.0	740.7	735.6	730.3	725.1	723.6
20°	743.3	741.0	738.7	736.2	733.9	730.0	724.4	718.8	713.3	707.7	705.8
22.5°	728.0	725.3	722.6	719.9	717.2	712.9	707.0	701.0	695.2	689.2	686.8
25°	705.7	702.1	698.4	694.7	691.0	685.9	679.1	672.4	665.6	658.9	655.8
27.5°	678.6	674.6	670.5	666.5	662.5	656.7	649.2	641.7	634.2	626.7	622.4
30°	660.2	655.8	651.4	647.0	642.7	636.3	628.1	619.9	611.7	603.5	598.5
32.5°	641.7	636.8	631.8	626.8	621.8	615.0	606.3	597.6	588.9	580.2	574.8
35°	610.7	605.5	600.2	595.0	589.6	582.5	573.3	564.3	555.2	546.1	539.8
37.5°	579.4	573.5	567.7	561.7	555.9	548.1	538.4	528.7	519.0	509.3	502.1
40°	559.3	552.8	546.4	539.9	533.5	525.0	514.7	504.3	493.9	483.5	475.8
42.5°	536.6	530.1	523.7	517.3	510.8	502.2	491.5	480.7	469.9	459.2	450.8
45°	501.9	495.3	488.7	482.2	475.5	466.6	455.3	444.0	432.7	421.5	413.1
47.5°	467.2	459.9	452.7	445.5	438.2	429.0	417.7	406.4	395.1	383.8	374.8
50°	441.9	435.0	428.1	421.2	414.3	404.9	393.0	381.3	369.4	357.5	348.4
52.5°	419.2	411.7	404.2	396.7	389.3	379.7	367.9	356.2	344.4	332.7	323.2
55°	381.3	374.0	366.9	359.6	352.5	342.7	330.2	317.8	305.3	292.8	284.3
57.5°	346.1	338.3	330.5	322.6	314.8	304.6	292.1	279.7	267.1	254.6	246.6
60°	321.8	313.8	305.7	297.6	289.6	279.5	267.3	255.2	243.0	230.8	222.9
62.5°	297.6	289.6	281.5	273.4	265.4	255.2	243.1	230.9	218.7	206.6	199.1
65°	260.5	252.4	244.4	236.3	228.3	218.5	207.1	195.7	184.3	172.8	165.7
67.5°	223.4	215.3	207.2	199.0	190.9	181.3	170.3	159.4	148.4	137.4	132.1
70°	199.1	191.2	183.4	175.5	167.6	158.4	148.2	137.9	127.7	117.4	112.3
72.5°	174.9	167.1	159.3	151.5	143.7	135.2	125.9	116.5	107.2	97.9	93.7
75°	137.8	130.8	123.8	116.8	109.7	102.1	94.1	86.0	78.0	69.9	68.4
77.5°	104.1	97.7	91.4	85.0	78.6	72.8	67.7	62.5	57.3	52.1	51.3
80°	82.5	76.5	70.4	64.4	58.4	53.9	50.8	47.7	44.6	41.6	41.1
82.5°	61.9	56.7	51.5	46.3	41.1	37.8	36.3	35.0	33.5	32.0	31.6
85°	35.0	31.8	28.5	25.3	22.0	20.2	19.8	19.4	18.9	18.4	18.2
87.5°	12.8	12.0	11.0	10.1	9.2	9.0	9.5	10.0	10.5	11.0	11.0
90°	0.9	2.8	4.6	6.6	8.5	10.7	13.2	15.7	18.2	20.7	21.4
92.5°	20.8	22.1	23.4	24.7	26.0	27.4	28.8	30.1	31.6	33.0	33.6
95°	50.7	52.0	53.4	54.8	56.1	57.5	59.0	60.5	62.1	63.6	64.4
97.5°	90.1	91.1	92.0	93.1	94.0	95.1	96.2	97.3	98.4	99.5	100.4
100°	116.9	118.0	119.2	120.3	121.5	122.5	123.5	124.4	125.4	126.3	126.9
102.5°	147.8	148.5	149.2	149.9	150.6	151.5	152.8	154.0	155.3	156.6	157.1
105°	193.4	193.7	194.2	194.5	194.9	196.0	197.7	199.4	201.1	202.9	202.9
107.5°	246.3	246.6	246.8	247.0	247.3	247.7	248.4	249.1	249.8	250.5	251.1
110°	279.3	279.7	280.1	280.4	280.9	281.2	281.6	282.0	282.4	282.8	283.5



TEST NUMBER: P332292-935

CATALOG NUMBER: S123RDIP-S560D1025U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	313.7	313.9	314.2	314.4	314.6	314.8	314.9	315.0	315.0	315.0	316.0
115°	365.2	365.8	366.4	367.0	367.6	367.6	367.3	366.9	366.5	366.1	366.4
117.5°	417.2	417.6	417.9	418.4	418.7	418.6	418.2	417.7	417.2	416.6	416.6
120°	449.5	450.6	451.8	453.0	454.1	454.2	453.2	452.3	451.3	450.4	450.1
122.5°	483.2	484.1	484.8	485.7	486.6	486.7	486.2	485.7	485.3	484.7	484.2
125°	534.6	535.2	535.7	536.3	536.8	537.0	536.6	536.2	535.8	535.5	534.7
127.5°	582.0	583.2	584.4	585.7	586.9	587.3	586.9	586.5	586.1	585.7	584.5
130°	613.6	615.2	616.7	618.2	619.7	620.3	619.7	619.1	618.5	617.9	617.2
132.5°	645.3	646.8	648.3	649.9	651.4	651.9	651.5	651.1	650.7	650.2	649.4
135°	693.6	694.7	695.9	697.0	698.2	698.6	698.4	698.3	698.1	697.8	697.2
137.5°	738.3	739.3	740.2	741.1	742.1	742.8	743.3	743.8	744.3	744.8	744.0
140°	769.2	770.2	771.1	772.1	773.0	773.6	773.8	774.0	774.2	774.4	774.2
142.5°	797.4	798.3	799.4	800.3	801.2	801.8	802.2	802.5	802.9	803.2	803.1
145°	841.4	841.8	842.1	842.6	842.9	843.4	844.0	844.6	845.2	845.7	845.5
147.5°	879.9	880.6	881.3	882.0	882.7	883.3	883.8	884.3	884.8	885.5	885.5
150°	906.7	907.1	907.5	907.8	908.3	908.6	909.0	909.4	909.8	910.2	910.2
152.5°	928.8	929.3	929.8	930.3	930.8	931.3	931.5	931.7	931.9	932.2	932.5
155°	963.5	963.5	963.5	963.5	963.5	963.5	963.7	963.9	964.1	964.3	965.1
157.5°	993.0	992.8	992.6	992.3	992.1	992.0	992.2	992.4	992.6	992.6	993.5
160°	1011.6	1011.2	1010.8	1010.5	1010.0	1009.9	1009.9	1009.9	1009.9	1009.9	1010.8
162.5°	1028.1	1027.5	1027.0	1026.5	1026.0	1025.8	1025.9	1026.1	1026.2	1026.4	1027.3
165°	1049.4	1048.8	1048.3	1047.7	1047.1	1046.8	1046.8	1046.8	1046.8	1046.8	1047.9
167.5°	1066.4	1065.7	1064.9	1064.1	1063.3	1063.1	1063.2	1063.3	1063.5	1063.7	1064.9
170°	1076.1	1075.3	1074.5	1073.8	1073.0	1072.6	1072.6	1072.6	1072.6	1072.6	1073.9
172.5°	1083.6	1082.9	1082.1	1081.3	1080.6	1080.1	1080.1	1080.1	1080.1	1080.1	1081.3
175°	1091.5	1090.7	1089.9	1089.3	1088.5	1088.0	1088.0	1088.0	1088.0	1088.0	1089.3
177.5°	1094.8	1094.2	1093.6	1093.0	1092.4	1092.0	1092.0	1092.0	1092.0	1092.0	1093.0
180°	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1



TEST NUMBER: P332292-935

CATALOG NUMBER: S123RDIP-S560D1025U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	810.0	811.3	812.6	813.1	812.9	812.6	812.4	812.2
5°	804.6	806.0	807.3	807.8	807.5	807.2	806.9	806.6
7.5°	793.3	794.0	794.8	794.9	794.4	793.9	793.4	792.9
10°	783.2	783.3	783.4	783.2	782.5	781.7	781.0	780.2
12.5°	770.6	770.5	770.4	769.9	769.0	768.2	767.4	766.5
15°	748.5	747.7	747.0	746.1	745.0	744.1	743.0	742.0
17.5°	722.0	720.5	718.8	717.4	715.8	714.3	712.7	711.3
20°	703.9	702.0	700.1	698.3	696.5	694.7	692.9	691.2
22.5°	684.5	682.1	679.8	677.7	676.1	674.4	672.8	671.1
25°	652.7	649.6	646.6	644.2	642.7	641.0	639.4	637.7
27.5°	618.1	613.9	609.6	606.2	603.7	601.3	598.8	596.3
30°	593.5	588.5	583.6	579.9	577.6	575.2	572.8	570.5
32.5°	569.4	563.9	558.4	554.5	552.1	549.6	547.1	544.7
35°	533.5	527.2	520.9	516.4	513.8	511.2	508.5	505.8
37.5°	495.0	487.8	480.7	475.5	472.3	469.0	465.7	462.4
40°	468.2	460.5	453.0	447.5	444.1	440.7	437.4	433.9
42.5°	442.6	434.2	425.9	420.2	417.2	414.1	411.1	408.1
45°	404.8	396.4	388.1	382.1	378.6	375.1	371.5	368.0
47.5°	365.7	356.6	347.5	341.4	338.3	335.1	332.0	328.8
50°	339.3	330.2	321.2	314.9	311.5	308.2	304.8	301.4
52.5°	313.8	304.4	294.9	288.7	285.7	282.7	279.7	276.6
55°	275.9	267.3	258.8	253.1	250.2	247.3	244.4	241.4
57.5°	238.5	230.5	222.5	217.2	214.7	212.2	209.7	207.2
60°	215.0	207.1	199.1	194.0	191.5	189.0	186.5	184.0
62.5°	191.7	184.3	176.8	171.8	169.2	166.5	163.9	161.4
65°	158.4	151.3	144.0	139.7	138.1	136.5	134.8	133.2
67.5°	126.7	121.3	116.0	112.4	110.7	109.0	107.3	105.6
70°	107.1	102.0	96.9	93.5	91.9	90.3	88.7	87.0
72.5°	89.5	85.3	81.1	78.7	78.0	77.3	76.6	75.9
75°	67.0	65.5	64.1	63.2	62.9	62.6	62.3	62.0
77.5°	50.5	49.8	48.9	48.4	48.1	47.8	47.5	47.2
80°	40.6	40.2	39.8	39.4	39.2	38.8	38.6	38.2
82.5°	31.2	30.7	30.3	30.0	30.0	30.0	29.9	29.8
85°	17.9	17.6	17.3	17.1	17.1	17.1	17.1	17.1
87.5°	11.0	11.1	11.1	11.1	11.1	11.0	11.0	10.9
90°	22.1	22.9	23.7	24.3	24.6	25.1	25.4	25.7
92.5°	34.3	34.9	35.5	35.6	35.4	35.2	35.0	34.7
95°	65.1	65.9	66.6	67.1	67.1	67.1	67.1	67.1
97.5°	101.3	102.2	103.1	103.4	103.4	103.3	103.2	103.1
100°	127.5	128.0	128.6	129.2	129.5	129.8	130.3	130.6
102.5°	157.7	158.3	158.9	159.1	159.0	158.9	158.9	158.9
105°	202.9	202.9	202.9	203.0	203.4	203.8	204.1	204.6
107.5°	251.7	252.3	252.9	253.0	252.9	252.6	252.4	252.2
110°	284.3	285.1	285.9	286.0	285.6	285.2	284.9	284.5





TEST NUMBER: P332292-935

CATALOG NUMBER: S123RDIP-S560D1025U935-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	316.9	317.8	318.7	319.2	319.1	319.0	318.9	318.8
115°	366.5	366.7	366.9	366.9	366.7	366.5	366.4	366.1
117.5°	416.6	416.6	416.6	416.2	415.7	415.2	414.7	414.1
120°	450.0	449.8	449.6	449.3	448.9	448.6	448.2	447.8
122.5°	483.7	483.3	482.8	482.2	481.7	481.1	480.6	480.1
125°	533.9	533.1	532.4	531.6	530.9	530.1	529.3	528.6
127.5°	583.5	582.5	581.3	580.4	579.5	578.6	577.7	576.9
130°	616.4	615.6	614.9	613.8	612.5	611.1	609.8	608.5
132.5°	648.4	647.6	646.6	645.7	644.6	643.6	642.6	641.5
135°	696.4	695.6	694.8	694.2	693.9	693.4	693.1	692.8
137.5°	743.2	742.4	741.6	740.8	740.1	739.3	738.7	738.0
140°	774.0	773.8	773.6	772.8	771.5	770.2	768.9	767.5
142.5°	802.9	802.7	802.5	801.8	800.8	799.8	798.7	797.7
145°	845.3	845.2	844.9	844.5	843.7	842.9	842.1	841.4
147.5°	885.5	885.5	885.5	884.8	883.7	882.5	881.4	880.3
150°	910.2	910.2	910.2	909.6	908.4	907.3	906.1	905.0
152.5°	932.8	933.1	933.4	933.1	932.0	931.1	930.1	929.1
155°	965.9	966.6	967.3	967.1	965.8	964.4	963.0	961.7
157.5°	994.3	995.1	995.9	995.7	994.7	993.6	992.6	991.4
160°	1011.8	1012.7	1013.7	1013.7	1013.1	1012.3	1011.5	1010.7
162.5°	1028.3	1029.2	1030.2	1030.0	1028.8	1027.6	1026.4	1025.2
165°	1049.1	1050.2	1051.4	1051.3	1050.0	1048.6	1047.3	1045.9
167.5°	1066.0	1067.2	1068.4	1068.4	1067.2	1066.0	1064.9	1063.7
170°	1075.3	1076.6	1078.0	1078.0	1076.6	1075.3	1073.9	1072.6
172.5°	1082.5	1083.7	1084.9	1084.9	1083.5	1082.2	1080.8	1079.4
175°	1090.4	1091.5	1092.7	1092.5	1091.2	1089.9	1088.6	1087.2
177.5°	1093.9	1094.8	1095.7	1095.6	1094.6	1093.5	1092.4	1091.3
180°	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1

(END OF REPORT)