

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332297-935

Luminaire Tested: **S123RDIP-S560D1195U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332297-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D1195U935-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5946.9 lumens
Efficiency: N/A
Efficacy: 120.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.23
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 49.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332297-935

CATALOG NUMBER: S123RDIP-S560D1195U935-4F0-1E-UDD-F

Luminous Intensity Polar Plot

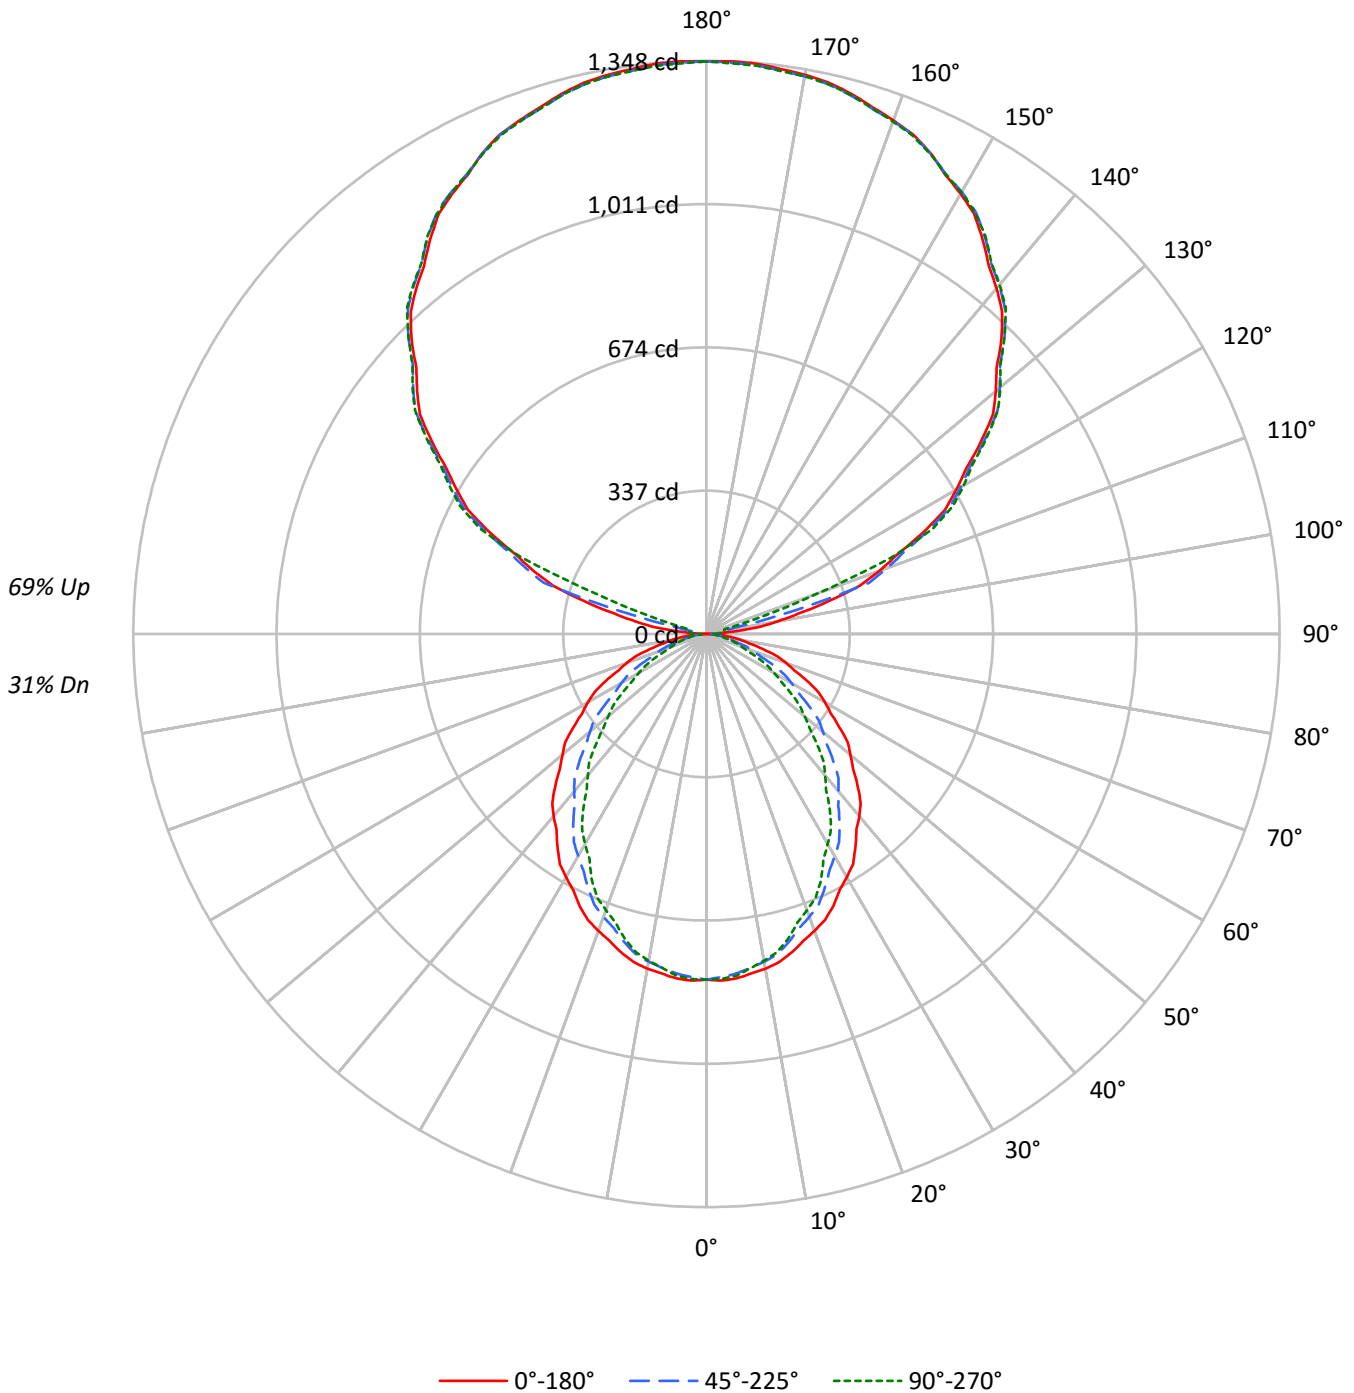



TEST NUMBER: P332297-935

CATALOG NUMBER: S123RDIP-S560D1195U935-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39	31
1	94	90	86	83	84	81	78	75	64	62	60	49	47	46	34	34	33	26
2	85	78	73	68	77	71	66	62	56	53	50	43	41	39	30	29	28	22
3	78	69	62	57	70	62	56	52	50	46	42	38	35	33	27	25	24	19
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21	17
5	65	54	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18	15
6	60	49	41	35	54	44	37	33	36	31	27	28	24	21	20	18	16	13
7	56	44	36	31	50	40	33	29	32	27	24	25	22	19	18	16	14	12
8	52	40	32	27	46	36	30	25	29	24	21	23	19	17	17	15	13	10
9	48	36	29	24	43	33	27	22	27	22	19	21	18	15	16	13	12	9
10	45	33	26	22	40	30	24	20	25	20	17	19	16	14	14	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	8753	8753	8753
5°	8787	8666	8715
10°	8737	8557	8528
15°	8643	8357	8269
20°	8514	8107	7918
25°	8381	7826	7574
30°	8206	7501	7091
35°	8025	7176	6646
40°	7859	6794	6097
45°	7640	6416	5602
50°	7400	5987	5047
55°	7156	5495	4530
60°	6928	4969	3961
65°	6635	4401	3393
70°	6266	3695	2738
75°	5731	2907	2578
80°	5114	2579	2368
85°	4323	2272	2112



TEST NUMBER: P332297-935

CATALOG NUMBER: S123RDIP-S560D1195U935-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	76.4	1.3
10°-20°	212.5	3.6
20°-30°	305.9	5.1
30°-40°	344.6	5.8
40°-50°	329.7	5.5
50°-60°	270.0	4.5
60°-70°	182.2	3.1
70°-80°	91.6	1.5
80°-90°	28.0	0.5
90°-100°	48.9	0.8
100°-110°	233.3	3.9
110°-120°	560.4	9.4
120°-130°	713.6	12.0
130°-140°	762.5	12.8
140°-150°	713.0	12.0
150°-160°	575.1	9.7
160°-170°	371.2	6.2
170°-180°	127.9	2.2
0°-30°	594.8	10.0
0°-40°	939.4	15.8
0°-60°	1539.1	25.9
0°-90°	1840.9	31.0
90°-120°	842.6	14.2
90°-150°	3031.7	51.0
90°-180°	4106.0	69.0
0°-180°	5946.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	813	813	813	813	813	
5°	813	810	802	808	807	77
15°	776	768	750	747	742	218
25°	706	688	659	645	638	324
35°	611	586	546	519	506	382
45°	502	471	422	385	368	387
55°	381	348	293	256	241	342
65°	260	223	173	142	133	258
75°	138	106	70	64	62	147
85°	35	21	18	17	17	39
90°	1	11	24	28	30	5
95°	61	23	31	38	38	75
105°	298	304	219	52	44	316
115°	559	565	574	584	588	552
125°	788	796	800	802	804	704
135°	981	987	991	994	991	755
145°	1132	1139	1141	1143	1143	709
155°	1247	1246	1246	1251	1245	574
165°	1315	1313	1311	1319	1312	371
175°	1346	1342	1342	1349	1341	128
180°	1346	1346	1346	1346	1346	



TEST NUMBER: P332297-935

CATALOG NUMBER: S123RDIP-S560D1195U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	815.9	815.4	814.9	814.4	814.0	813.0	811.7	810.2	808.8	807.4	808.7
5°	813.2	812.5	811.8	811.1	810.3	809.1	807.3	805.6	803.7	802.0	803.3
7.5°	805.7	804.9	804.1	803.3	802.5	801.0	798.7	796.4	794.1	791.9	792.6
10°	799.4	798.3	797.3	796.3	795.3	793.4	790.8	788.2	785.5	782.9	783.0
12.5°	790.4	789.3	788.1	787.0	785.8	783.7	780.4	777.2	774.0	770.8	770.7
15°	775.6	774.0	772.4	770.8	769.2	766.3	762.2	758.1	754.0	749.9	749.2
17.5°	757.0	755.2	753.3	751.4	749.5	746.0	740.7	735.6	730.3	725.1	723.6
20°	743.3	741.0	738.7	736.2	733.9	730.0	724.4	718.8	713.3	707.7	705.8
22.5°	728.0	725.3	722.6	719.9	717.2	712.9	707.0	701.0	695.2	689.2	686.8
25°	705.7	702.1	698.4	694.7	691.0	685.9	679.1	672.4	665.6	658.9	655.8
27.5°	678.6	674.6	670.5	666.5	662.5	656.7	649.2	641.7	634.2	626.7	622.4
30°	660.2	655.8	651.4	647.0	642.7	636.3	628.1	619.9	611.7	603.5	598.5
32.5°	641.7	636.8	631.8	626.8	621.8	615.0	606.3	597.6	588.9	580.2	574.8
35°	610.7	605.5	600.2	595.0	589.6	582.5	573.3	564.3	555.2	546.1	539.8
37.5°	579.4	573.5	567.7	561.7	555.9	548.1	538.4	528.7	519.0	509.3	502.1
40°	559.3	552.8	546.4	539.9	533.5	525.0	514.7	504.3	493.9	483.5	475.8
42.5°	536.6	530.1	523.7	517.3	510.8	502.2	491.5	480.7	469.9	459.2	450.8
45°	501.9	495.3	488.7	482.2	475.5	466.6	455.3	444.0	432.7	421.5	413.1
47.5°	467.2	459.9	452.7	445.5	438.2	429.0	417.7	406.4	395.1	383.8	374.8
50°	441.9	435.0	428.1	421.2	414.3	404.9	393.0	381.3	369.4	357.5	348.4
52.5°	419.2	411.7	404.2	396.7	389.3	379.7	367.9	356.2	344.4	332.7	323.2
55°	381.3	374.0	366.9	359.6	352.5	342.7	330.2	317.8	305.3	292.8	284.3
57.5°	346.1	338.3	330.5	322.6	314.8	304.6	292.1	279.7	267.1	254.6	246.6
60°	321.8	313.8	305.7	297.6	289.6	279.5	267.3	255.2	243.0	230.8	222.9
62.5°	297.6	289.6	281.5	273.4	265.4	255.2	243.1	230.9	218.7	206.6	199.1
65°	260.5	252.4	244.4	236.3	228.3	218.5	207.1	195.7	184.3	172.8	165.7
67.5°	223.4	215.3	207.2	199.0	190.9	181.3	170.3	159.4	148.4	137.4	132.1
70°	199.1	191.2	183.4	175.5	167.6	158.4	148.2	137.9	127.7	117.4	112.3
72.5°	174.9	167.1	159.3	151.5	143.7	135.2	125.9	116.5	107.2	97.9	93.7
75°	137.8	130.8	123.8	116.8	109.7	102.1	94.1	86.0	78.0	69.9	68.4
77.5°	104.1	97.7	91.4	85.0	78.6	72.8	67.7	62.5	57.3	52.1	51.3
80°	82.5	76.5	70.4	64.4	58.4	53.9	50.8	47.7	44.6	41.6	41.1
82.5°	61.9	56.7	51.5	46.3	41.1	37.8	36.3	35.0	33.5	32.0	31.6
85°	35.0	31.8	28.5	25.3	22.0	20.2	19.8	19.4	18.9	18.4	18.2
87.5°	12.8	12.1	11.2	10.3	9.5	9.4	9.9	10.5	11.1	11.6	11.7
90°	1.0	3.2	5.4	7.7	9.9	12.5	15.3	18.3	21.1	24.0	24.9
92.5°	18.6	18.0	17.4	16.7	16.1	16.9	19.1	21.3	23.4	25.6	27.0
95°	61.0	51.9	42.8	33.7	24.5	21.3	23.7	26.1	28.6	31.0	32.5
97.5°	122.6	118.6	114.4	110.4	106.2	96.3	80.2	64.2	48.2	32.2	34.0
100°	169.0	173.5	178.0	182.4	186.8	171.7	137.1	102.4	67.7	33.0	34.8
102.5°	221.9	225.1	228.3	231.4	234.7	217.3	179.4	141.5	103.7	65.8	60.3
105°	298.1	300.6	303.0	305.4	307.9	299.1	279.1	259.1	239.1	219.0	179.7
107.5°	378.5	380.5	382.5	384.4	386.3	388.9	392.1	395.2	398.4	401.6	372.6
110°	432.1	433.9	435.7	437.5	439.3	441.3	443.8	446.3	448.7	451.2	443.8



TEST NUMBER: P332297-935

CATALOG NUMBER: S123RDIP-S560D1195U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	483.4	484.9	486.6	488.2	489.7	491.8	494.2	496.7	499.1	501.5	501.7
115°	559.2	560.5	561.8	563.2	564.5	566.2	568.2	570.2	572.2	574.2	576.4
117.5°	632.6	634.2	635.8	637.6	639.2	640.5	641.5	642.6	643.6	644.6	646.4
120°	678.2	680.2	682.3	684.2	686.2	687.6	688.2	688.9	689.6	690.2	692.0
122.5°	724.6	726.3	727.9	729.5	731.2	732.5	733.3	734.2	734.9	735.8	737.1
125°	788.2	790.1	791.8	793.6	795.4	796.7	797.5	798.5	799.4	800.2	800.7
127.5°	849.9	851.6	853.4	855.2	857.0	858.4	859.5	860.6	861.6	862.6	863.4
130°	888.3	890.1	891.8	893.6	895.4	896.7	897.6	898.5	899.4	900.3	901.2
132.5°	925.1	926.9	928.7	930.4	932.2	933.4	934.2	934.9	935.6	936.3	937.2
135°	981.3	982.7	984.0	985.3	986.6	987.7	988.7	989.5	990.4	991.4	992.0
137.5°	1029.3	1031.0	1032.7	1034.4	1036.1	1037.2	1037.7	1038.2	1038.6	1039.1	1040.2
140°	1061.4	1062.6	1064.0	1065.3	1066.7	1067.6	1068.3	1069.0	1069.7	1070.3	1071.3
142.5°	1091.0	1092.3	1093.6	1094.9	1096.3	1097.3	1097.9	1098.6	1099.3	1099.9	1100.7
145°	1132.4	1133.9	1135.5	1137.0	1138.6	1139.6	1140.1	1140.5	1140.9	1141.3	1141.8
147.5°	1171.4	1172.4	1173.5	1174.4	1175.4	1176.2	1176.6	1177.1	1177.5	1177.9	1178.5
150°	1195.4	1196.0	1196.7	1197.4	1198.1	1198.6	1199.0	1199.5	1200.0	1200.4	1200.8
152.5°	1217.0	1217.3	1217.6	1217.9	1218.2	1218.5	1218.7	1219.1	1219.3	1219.6	1220.4
155°	1247.4	1247.0	1246.5	1246.0	1245.6	1245.5	1245.7	1246.0	1246.2	1246.4	1247.5
157.5°	1271.0	1270.9	1270.9	1270.8	1270.8	1270.7	1270.5	1270.2	1270.1	1269.8	1271.2
160°	1285.4	1285.2	1285.0	1284.8	1284.5	1284.3	1284.1	1283.8	1283.7	1283.4	1284.8
162.5°	1299.0	1298.5	1297.9	1297.3	1296.7	1296.3	1296.1	1295.9	1295.6	1295.4	1296.9
165°	1315.4	1314.7	1314.1	1313.5	1312.8	1312.3	1312.1	1311.8	1311.6	1311.4	1313.2
167.5°	1328.3	1327.3	1326.5	1325.6	1324.6	1324.2	1324.2	1324.2	1324.2	1324.2	1326.0
170°	1335.4	1334.6	1333.7	1332.7	1331.9	1331.5	1331.5	1331.5	1331.5	1331.5	1333.2
172.5°	1340.2	1339.2	1338.1	1337.0	1335.9	1335.5	1335.7	1335.8	1336.0	1336.2	1338.0
175°	1346.4	1345.3	1344.2	1343.1	1342.0	1341.5	1341.8	1342.0	1342.2	1342.4	1344.0
177.5°	1348.1	1347.1	1346.3	1345.4	1344.5	1344.1	1344.3	1344.5	1344.6	1344.8	1346.3
180°	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4



TEST NUMBER: P332297-935

CATALOG NUMBER: S123RDIP-S560D1195U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	813.2	813.2	813.2	813.2	813.2	813.2	813.2	813.2
2.5°	810.0	811.3	812.6	813.1	812.9	812.6	812.4	812.2
5°	804.6	806.0	807.3	807.8	807.5	807.2	806.9	806.6
7.5°	793.3	794.0	794.8	794.9	794.4	793.9	793.4	792.9
10°	783.2	783.3	783.4	783.2	782.5	781.7	781.0	780.2
12.5°	770.6	770.5	770.4	769.9	769.0	768.2	767.4	766.5
15°	748.5	747.7	747.0	746.1	745.0	744.1	743.0	742.0
17.5°	722.0	720.5	718.8	717.4	715.8	714.3	712.7	711.3
20°	703.9	702.0	700.1	698.3	696.5	694.7	692.9	691.2
22.5°	684.5	682.1	679.8	677.7	676.1	674.4	672.8	671.1
25°	652.7	649.6	646.6	644.2	642.7	641.0	639.4	637.7
27.5°	618.1	613.9	609.6	606.2	603.7	601.3	598.8	596.3
30°	593.5	588.5	583.6	579.9	577.6	575.2	572.8	570.5
32.5°	569.4	563.9	558.4	554.5	552.1	549.6	547.1	544.7
35°	533.5	527.2	520.9	516.4	513.8	511.2	508.5	505.8
37.5°	495.0	487.8	480.7	475.5	472.3	469.0	465.7	462.4
40°	468.2	460.5	453.0	447.5	444.1	440.7	437.4	433.9
42.5°	442.6	434.2	425.9	420.2	417.2	414.1	411.1	408.1
45°	404.8	396.4	388.1	382.1	378.6	375.1	371.5	368.0
47.5°	365.7	356.6	347.5	341.4	338.3	335.1	332.0	328.8
50°	339.3	330.2	321.2	314.9	311.5	308.2	304.8	301.4
52.5°	313.8	304.4	294.9	288.7	285.7	282.7	279.7	276.6
55°	275.9	267.3	258.8	253.1	250.2	247.3	244.4	241.4
57.5°	238.5	230.5	222.5	217.2	214.7	212.2	209.7	207.2
60°	215.0	207.1	199.1	194.0	191.5	189.0	186.5	184.0
62.5°	191.7	184.3	176.8	171.8	169.2	166.5	163.9	161.4
65°	158.4	151.3	144.0	139.7	138.1	136.5	134.8	133.2
67.5°	126.7	121.3	116.0	112.4	110.7	109.0	107.3	105.6
70°	107.1	102.0	96.9	93.5	91.9	90.3	88.7	87.0
72.5°	89.5	85.3	81.1	78.7	78.0	77.3	76.6	75.9
75°	67.0	65.5	64.1	63.2	62.9	62.6	62.3	62.0
77.5°	50.5	49.8	48.9	48.4	48.1	47.8	47.5	47.2
80°	40.6	40.2	39.8	39.4	39.2	38.8	38.6	38.2
82.5°	31.2	30.7	30.3	30.0	30.0	30.0	29.9	29.8
85°	17.9	17.6	17.3	17.1	17.1	17.1	17.1	17.1
87.5°	11.8	11.9	11.9	11.9	11.9	11.9	11.8	11.8
90°	25.7	26.7	27.6	28.2	28.7	29.1	29.5	30.0
92.5°	28.4	29.9	31.3	32.1	32.4	32.7	33.0	33.2
95°	34.1	35.6	37.2	38.0	38.0	38.0	38.0	38.0
97.5°	35.7	37.5	39.3	40.3	40.6	40.8	41.0	41.2
100°	36.6	38.3	40.1	41.2	41.3	41.6	41.8	42.0
102.5°	54.8	49.2	43.7	41.2	41.6	42.0	42.4	42.8
105°	140.3	101.0	61.6	42.3	42.7	43.1	43.6	44.0
107.5°	343.8	315.0	286.1	256.8	227.2	197.5	167.9	138.3
110°	436.4	429.1	421.8	402.3	370.5	338.6	306.9	275.1



TEST NUMBER: P332297-935

CATALOG NUMBER: S123RDIP-S560D1195U935-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	501.8	502.0	502.1	498.8	492.1	485.3	478.6	471.9
115°	578.6	580.8	583.1	584.6	585.5	586.4	587.3	588.1
117.5°	648.2	650.0	651.7	652.7	652.9	653.1	653.2	653.4
120°	693.8	695.5	697.3	698.2	698.2	698.2	698.2	698.2
122.5°	738.3	739.6	740.8	741.5	741.7	741.8	742.1	742.3
125°	801.2	801.6	802.0	802.5	802.9	803.4	803.8	804.3
127.5°	864.1	864.8	865.5	865.6	865.2	864.8	864.4	863.8
130°	902.1	902.9	903.9	904.0	903.6	903.2	902.8	902.3
132.5°	938.1	939.0	939.9	940.0	939.4	938.7	938.1	937.5
135°	992.6	993.3	994.0	994.0	993.3	992.6	992.0	991.4
137.5°	1041.3	1042.3	1043.4	1043.7	1043.3	1042.8	1042.4	1041.9
140°	1072.1	1073.0	1073.9	1074.1	1073.7	1073.2	1072.8	1072.4
142.5°	1101.4	1102.1	1102.8	1102.9	1102.3	1101.6	1101.0	1100.4
145°	1142.3	1142.7	1143.1	1143.3	1143.3	1143.3	1143.3	1143.3
147.5°	1178.9	1179.3	1179.7	1179.5	1178.5	1177.4	1176.4	1175.4
150°	1201.3	1201.7	1202.1	1202.0	1201.4	1200.8	1200.1	1199.4
152.5°	1221.2	1222.0	1222.8	1222.7	1221.7	1220.6	1219.6	1218.6
155°	1248.6	1249.7	1250.9	1250.7	1249.4	1248.1	1246.7	1245.4
157.5°	1272.5	1273.8	1275.1	1275.0	1273.2	1271.4	1269.7	1268.0
160°	1286.1	1287.4	1288.7	1288.7	1287.1	1285.6	1283.9	1282.4
162.5°	1298.5	1299.9	1301.5	1301.5	1300.1	1298.7	1297.4	1296.0
165°	1315.0	1316.7	1318.5	1318.6	1317.1	1315.5	1314.0	1312.4
167.5°	1327.7	1329.6	1331.4	1331.4	1329.6	1327.7	1326.0	1324.2
170°	1335.0	1336.8	1338.5	1338.5	1336.8	1335.0	1333.2	1331.5
172.5°	1339.8	1341.5	1343.3	1343.2	1341.3	1339.4	1337.4	1335.4
175°	1345.6	1347.1	1348.7	1348.5	1346.8	1345.0	1343.2	1341.4
177.5°	1347.6	1349.1	1350.5	1350.3	1348.6	1346.8	1345.0	1343.2
180°	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4	1346.4

(END OF REPORT)