

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332283-935

Luminaire Tested: **S123RDIP-S560D805U935-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332283-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D805U935-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4294.9 lumens
Efficiency: N/A
Efficacy: 111.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

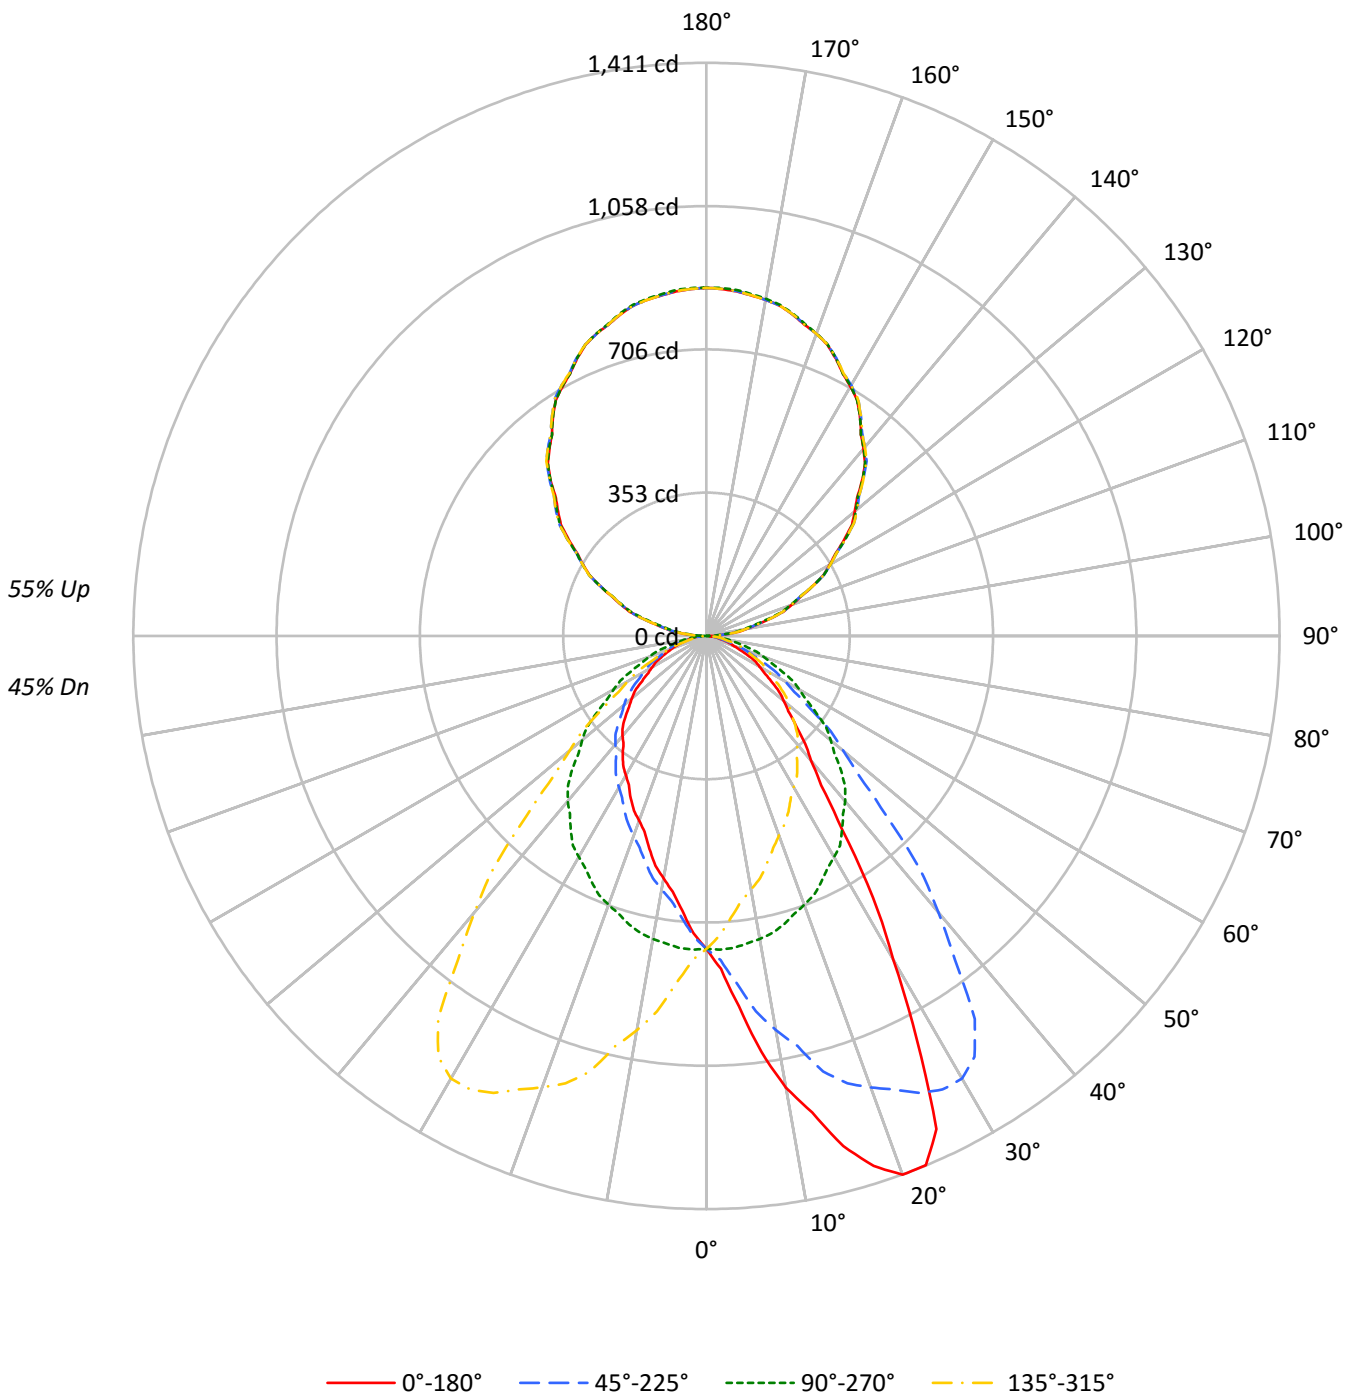



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	40	38	33
3	81	72	65	60	74	67	61	56	56	52	48	46	43	40	37	35	33	29
4	75	64	57	51	68	59	53	48	50	45	41	41	38	35	33	31	29	25
5	69	58	50	44	63	53	46	41	45	40	36	37	34	31	30	28	25	22
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20
7	59	47	39	34	54	43	37	32	37	32	28	31	27	24	25	22	20	18
8	54	43	35	30	50	40	33	28	34	29	25	28	24	22	23	20	18	16
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	22	19	17	14
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8291	8291	8291	8291
5°	9884	8327	7333	8327
10°	12342	8279	6625	8279
15°	14487	8195	6042	8195
20°	16167	8069	5545	8069
25°	15909	7935	5241	7935
30°	11436	7812	4927	7812
35°	7636	7653	4724	7653
40°	5626	7461	4513	7461
45°	4719	7124	4306	7124
50°	4165	6683	4019	6683
55°	3652	6178	3626	6178
60°	3251	5694	3324	5694
65°	2855	5173	3092	5173
70°	2241	4711	2823	4711
75°	1975	4113	2578	4113
80°	1717	3496	2535	3496
85°	1383	2803	2692	2803



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	75.8	1.8
10°-20°	236.7	5.5
20°-30°	371.8	8.7
30°-40°	387.9	9.0
40°-50°	332.0	7.7
50°-60°	253.0	5.9
60°-70°	162.2	3.8
70°-80°	78.0	1.8
80°-90°	23.2	0.5
90°-100°	55.8	1.3
100°-110°	167.1	3.9
110°-120°	284.2	6.6
120°-130°	373.8	8.7
130°-140°	420.2	9.8
140°-150°	413.0	9.6
150°-160°	347.7	8.1
160°-170°	231.4	5.4
170°-180°	81.0	1.9
0°-30°	684.3	15.9
0°-40°	1072.2	25.0
0°-60°	1657.2	38.6
0°-90°	1920.6	44.7
90°-120°	507.1	11.8
90°-150°	1714.1	39.9
90°-180°	2374.0	55.3
0°-180°	4294.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	770	770	770	770	770	
5°	915	771	679	771	915	94
15°	1300	735	542	735	1300	369
25°	1340	668	441	668	1340	576
35°	581	582	360	582	581	381
45°	310	468	283	468	310	244
55°	195	329	193	329	195	176
65°	112	203	121	203	112	110
75°	48	99	62	99	48	51
85°	11	23	22	23	11	13
90°	20	1	20	1	20	10
95°	52	40	52	40	52	54
105°	160	151	160	151	160	170
115°	287	286	287	286	287	284
125°	414	419	414	419	414	370
135°	543	543	543	543	543	417
145°	659	659	659	659	659	411
155°	753	755	753	755	753	347
165°	819	822	819	822	819	231
175°	852	855	852	855	852	81
180°	857	857	857	857	857	



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3
2.5°	820.4	821.6	818.1	817.6	813.6	812.6	812.6	807.0	803.6	799.1	796.5
5°	914.8	920.1	917.5	911.5	901.6	899.3	893.0	883.1	871.9	858.1	851.5
7.5°	1032.6	1039.8	1037.0	1027.9	1017.5	1009.1	991.4	975.0	952.0	931.9	914.6
10°	1129.2	1121.5	1115.7	1106.7	1097.2	1081.7	1063.2	1037.8	1008.5	985.4	959.7
12.5°	1201.4	1200.2	1192.7	1183.5	1170.0	1155.3	1132.6	1101.6	1067.6	1034.1	1004.8
15°	1300.0	1302.0	1297.0	1287.5	1268.3	1242.3	1208.0	1195.2	1146.3	1110.0	1073.8
17.5°	1368.2	1367.8	1367.1	1353.8	1334.4	1315.8	1284.0	1250.2	1206.0	1154.9	1106.0
20°	1411.4	1408.2	1408.9	1394.0	1379.5	1358.1	1327.1	1277.9	1241.6	1182.6	1132.1
22.5°	1410.4	1409.7	1412.2	1407.1	1396.6	1380.2	1355.8	1314.3	1268.0	1208.4	1151.7
25°	1339.5	1337.0	1352.5	1356.7	1373.6	1376.5	1369.2	1346.5	1302.6	1241.3	1171.0
27.5°	1121.1	1119.6	1148.4	1184.4	1230.1	1265.6	1299.9	1316.4	1302.6	1258.7	1188.4
30°	920.1	951.1	965.6	1017.7	1075.7	1145.0	1205.7	1263.3	1277.6	1258.4	1200.8
32.5°	763.9	790.9	803.1	847.8	901.9	983.0	1074.0	1155.7	1213.5	1228.1	1193.3
35°	581.1	581.4	609.1	628.9	679.0	762.4	850.8	960.3	1069.1	1151.6	1160.2
37.5°	463.6	465.3	482.1	501.8	539.4	583.5	661.3	752.3	878.0	1004.6	1078.8
40°	400.4	403.3	415.9	435.3	462.4	495.7	556.4	642.0	746.9	887.8	1002.9
42.5°	359.7	364.5	371.0	386.0	402.7	433.9	483.0	549.2	644.5	777.7	910.5
45°	310.0	312.6	317.5	324.5	339.7	361.4	394.4	438.9	518.1	625.3	758.2
47.5°	273.5	272.1	277.2	282.9	293.0	307.8	329.9	366.3	422.8	508.7	621.5
50°	248.7	248.3	251.9	256.2	265.8	276.7	294.8	322.2	367.0	438.2	541.5
52.5°	225.4	226.7	229.3	234.6	241.5	250.3	266.6	286.3	324.9	386.3	472.3
55°	194.6	195.5	199.1	202.2	207.1	216.0	226.3	242.7	269.1	311.9	382.9
57.5°	168.4	168.0	171.5	172.2	177.8	185.0	193.0	205.8	224.9	256.8	304.5
60°	151.0	150.1	153.0	155.3	158.3	164.2	170.8	183.4	198.5	222.0	262.9
62.5°	135.2	134.7	136.9	139.2	141.6	147.1	152.7	162.2	174.3	194.0	226.4
65°	112.1	113.1	114.1	115.1	116.4	119.7	125.0	131.6	139.8	153.7	177.1
67.5°	88.1	89.1	89.5	91.4	94.3	96.3	99.6	105.5	111.2	122.9	136.2
70°	71.2	70.9	71.2	72.2	75.9	79.5	83.8	88.1	91.7	100.0	111.2
72.5°	61.2	60.6	61.5	61.6	63.5	64.4	67.2	71.2	75.9	81.5	89.5
75°	47.5	47.5	47.5	47.5	48.8	49.5	50.5	51.5	53.1	55.7	61.6
77.5°	35.1	35.1	35.6	35.9	36.2	36.6	37.2	38.2	38.7	40.2	42.7
80°	27.7	28.1	27.7	28.1	28.1	28.7	29.0	30.0	30.3	32.0	33.0
82.5°	20.8	20.7	20.8	21.2	21.2	21.9	21.9	22.6	22.7	23.5	24.5
85°	11.2	10.6	11.2	10.8	11.5	10.8	11.2	11.9	11.9	12.2	13.5
87.5°	6.7	7.1	6.5	6.8	6.7	6.9	6.7	6.6	7.1	6.6	6.5
90°	20.2	19.9	19.6	19.3	19.0	18.5	17.9	17.4	16.8	16.2	14.2
92.5°	27.2	27.4	27.6	27.7	27.9	27.7	27.3	26.8	26.3	25.8	24.7
95°	52.5	52.5	52.5	52.5	52.5	52.2	51.6	51.0	50.5	49.9	48.6
97.5°	80.8	80.8	80.9	80.9	81.0	80.7	80.0	79.3	78.6	77.9	77.1
100°	102.3	102.0	101.7	101.4	101.2	100.7	100.3	99.9	99.4	98.9	98.2
102.5°	124.4	124.5	124.5	124.6	124.7	124.4	124.0	123.6	123.1	122.7	121.7
105°	160.2	159.9	159.6	159.3	159.0	158.9	158.9	158.9	158.9	158.9	157.6
107.5°	197.5	197.7	197.9	198.0	198.2	198.1	197.6	197.1	196.7	196.1	195.6
110°	222.8	223.1	223.4	223.7	224.0	223.9	223.3	222.7	222.1	221.4	221.2



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	249.8	249.8	249.9	249.9	249.9	249.7	248.9	248.2	247.5	246.8	246.8
115°	286.8	286.9	287.1	287.2	287.4	287.4	287.2	287.1	286.9	286.8	287.1
117.5°	324.3	324.8	325.2	325.6	326.0	326.2	326.2	326.3	326.3	326.3	326.7
120°	350.7	351.0	351.3	351.6	351.9	352.1	352.3	352.4	352.6	352.8	353.5
122.5°	376.0	376.4	376.9	377.3	377.7	378.2	378.5	378.9	379.3	379.7	380.0
125°	414.0	414.6	415.2	415.8	416.4	417.0	417.6	418.2	418.8	419.4	419.7
127.5°	451.9	452.5	453.2	453.9	454.6	455.4	456.2	457.0	457.9	458.7	459.0
130°	476.6	477.7	478.7	479.7	480.8	481.6	482.2	482.8	483.4	484.0	484.5
132.5°	502.5	503.3	504.0	504.9	505.7	506.4	507.1	507.9	508.6	509.3	509.6
135°	542.6	542.9	543.2	543.5	543.8	544.2	544.8	545.4	546.0	546.6	546.7
137.5°	578.0	578.6	579.1	579.7	580.2	580.8	581.5	582.1	582.7	583.3	583.0
140°	601.2	602.2	603.2	604.2	605.4	605.9	606.1	606.2	606.4	606.5	606.4
142.5°	624.8	625.6	626.5	627.2	628.1	628.5	628.7	628.9	629.0	629.1	628.9
145°	659.0	659.6	660.2	660.8	661.4	661.8	661.9	662.1	662.3	662.4	661.9
147.5°	689.5	690.3	691.2	692.2	693.0	693.5	693.5	693.5	693.5	693.5	693.1
150°	708.9	709.7	710.7	711.5	712.5	712.9	712.9	712.9	712.9	712.9	712.6
152.5°	727.7	728.5	729.3	730.0	730.8	731.1	730.8	730.6	730.4	730.1	730.0
155°	753.3	754.3	755.4	756.4	757.4	757.7	757.1	756.5	755.9	755.3	755.2
157.5°	776.5	777.4	778.3	779.1	779.9	780.0	779.4	778.8	778.2	777.5	777.4
160°	791.6	792.2	792.8	793.4	794.0	793.9	793.2	792.5	791.7	791.0	791.0
162.5°	803.0	803.9	804.9	805.8	806.8	806.9	806.2	805.4	804.6	803.9	803.7
165°	819.2	820.3	821.3	822.4	823.5	823.5	822.6	821.7	820.8	819.9	819.9
167.5°	833.1	834.1	835.0	835.9	836.8	836.8	835.9	835.0	834.1	833.1	833.0
170°	840.1	841.2	842.2	843.3	844.3	844.3	843.3	842.2	841.2	840.1	840.1
172.5°	845.5	846.5	847.6	848.6	849.7	849.7	848.9	847.9	847.0	846.0	846.0
175°	851.5	852.6	853.7	854.7	855.7	855.8	854.9	854.0	853.2	852.2	852.2
177.5°	854.8	855.7	856.4	857.3	858.2	858.2	857.5	856.8	856.0	855.3	855.3
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3
2.5°	795.4	794.6	790.9	786.7	781.2	777.5	774.6	773.0	768.3	762.4	758.5
5°	844.6	834.7	824.1	811.2	799.4	787.2	779.6	770.7	759.8	747.6	739.0
7.5°	897.2	877.8	856.9	835.3	814.0	794.9	778.0	763.5	746.2	728.8	716.4
10°	937.5	909.2	879.9	849.8	822.4	796.8	777.0	757.5	736.8	716.6	701.5
12.5°	974.2	936.9	903.1	866.2	831.2	800.5	772.0	749.1	724.1	702.7	685.4
15°	1020.6	982.4	941.5	885.5	839.0	800.0	765.4	735.4	705.1	678.7	661.9
17.5°	1064.0	1006.5	951.6	904.7	844.4	795.7	753.5	717.6	684.3	656.3	635.6
20°	1082.0	1026.3	966.6	906.9	847.6	793.2	744.0	704.4	669.8	638.1	619.0
22.5°	1092.8	1029.7	966.8	902.7	839.6	783.1	734.5	691.0	653.4	623.4	599.8
25°	1105.4	1030.2	961.0	897.7	833.4	772.0	714.3	668.1	627.6	595.6	570.5
27.5°	1113.7	1025.3	943.4	873.1	807.8	746.7	693.9	644.9	603.7	569.9	543.0
30°	1115.3	1021.3	930.0	853.8	787.5	731.4	675.4	628.5	585.0	549.1	524.0
32.5°	1117.4	1011.6	911.8	830.9	763.0	707.5	656.7	611.9	567.3	531.9	506.4
35°	1108.7	1006.2	884.2	791.2	723.2	669.4	623.6	582.4	538.6	504.2	478.2
37.5°	1071.3	984.7	855.5	746.4	675.4	625.6	588.2	552.3	512.1	475.1	450.6
40°	1033.5	963.6	833.4	719.3	645.1	593.9	560.3	531.0	492.1	457.4	431.0
42.5°	977.3	934.9	812.3	690.8	610.7	561.5	533.1	505.6	471.5	436.3	411.5
45°	874.3	879.9	769.0	645.4	563.3	513.8	487.1	468.0	437.6	408.6	383.2
47.5°	744.9	797.4	718.3	597.0	513.2	466.7	443.4	426.7	406.3	377.8	354.6
50°	660.6	735.4	677.7	564.6	481.8	435.7	412.6	399.1	381.3	358.8	336.7
52.5°	582.7	663.1	628.6	528.4	447.8	405.5	383.0	371.9	357.7	336.7	316.7
55°	475.2	556.6	548.7	473.9	396.7	358.8	341.6	329.2	319.5	303.8	287.9
57.5°	384.4	461.6	465.7	413.2	351.7	314.3	299.5	290.1	283.8	271.9	257.3
60°	327.2	398.0	411.9	372.3	319.5	286.5	272.1	264.5	259.5	249.9	238.8
62.5°	279.7	340.0	355.7	327.2	288.7	257.8	246.5	239.2	235.8	227.6	217.7
65°	214.0	264.2	279.3	263.5	243.4	218.6	209.4	203.1	200.2	195.5	188.3
67.5°	160.9	197.5	214.1	202.9	195.7	180.0	174.2	170.8	168.2	165.1	158.9
70°	129.2	156.4	173.5	170.5	164.5	156.4	152.1	149.7	147.1	144.5	139.1
72.5°	103.9	122.5	138.6	140.2	135.3	133.6	129.8	128.9	127.3	124.2	121.2
75°	69.0	81.8	93.0	97.3	99.3	100.9	99.3	98.9	98.6	96.0	94.3
77.5°	45.2	52.1	59.2	66.5	69.6	71.8	72.3	73.5	72.7	71.3	70.5
80°	34.6	36.2	41.2	47.5	52.4	54.4	55.7	56.4	56.1	55.7	54.4
82.5°	25.1	26.5	28.8	33.2	37.4	40.7	41.5	41.3	42.1	42.3	41.2
85°	13.5	13.9	14.6	15.2	17.5	21.1	22.1	22.7	23.4	23.4	21.4
87.5°	6.7	6.0	6.2	5.9	6.3	6.3	7.6	8.6	9.1	8.4	8.7
90°	12.2	10.3	8.4	6.6	5.2	3.7	2.2	0.7	2.2	3.7	5.2
92.5°	23.7	22.6	21.4	20.3	19.4	18.3	17.3	16.3	17.3	18.3	19.4
95°	47.4	46.2	45.0	43.9	42.9	41.8	40.7	39.7	40.7	41.8	42.9
97.5°	76.2	75.3	74.5	73.7	72.8	72.1	71.3	70.5	71.3	72.1	72.8
100°	97.5	96.7	96.0	95.1	94.3	93.3	92.5	91.5	92.5	93.3	94.3
102.5°	120.7	119.7	118.7	118.0	117.4	116.8	116.3	115.8	116.3	116.8	117.4
105°	156.2	154.8	153.5	152.7	152.4	152.1	151.8	151.4	151.8	152.1	152.4
107.5°	195.1	194.6	194.0	193.6	193.5	193.3	193.1	193.0	193.1	193.3	193.5
110°	220.8	220.6	220.2	220.0	219.6	219.4	219.0	218.8	219.0	219.4	219.6



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	246.7	246.6	246.5	246.4	246.2	246.1	245.9	245.7	245.9	246.1	246.2
115°	287.4	287.7	288.0	287.9	287.4	287.0	286.5	286.1	286.5	287.0	287.4
117.5°	327.1	327.5	327.9	328.0	327.6	327.4	327.1	326.7	327.1	327.4	327.6
120°	354.2	355.0	355.8	355.7	354.7	353.9	352.9	352.1	352.9	353.9	354.7
122.5°	380.5	380.8	381.3	381.1	380.4	379.8	379.1	378.5	379.1	379.8	380.4
125°	420.0	420.3	420.6	420.5	420.1	419.6	419.1	418.7	419.1	419.6	420.1
127.5°	459.3	459.7	460.0	459.7	458.7	457.8	456.8	455.9	456.8	457.8	458.7
130°	484.9	485.3	485.8	485.4	484.2	483.0	481.8	480.6	481.8	483.0	484.2
132.5°	510.0	510.3	510.7	510.2	509.0	507.8	506.6	505.4	506.6	507.8	509.0
135°	546.9	547.1	547.3	546.8	546.0	545.0	544.2	543.2	544.2	545.0	546.0
137.5°	582.6	582.2	581.8	581.3	580.5	579.7	579.0	578.2	579.0	579.7	580.5
140°	606.2	606.1	605.9	605.5	604.8	604.0	603.2	602.4	603.2	604.0	604.8
142.5°	628.6	628.4	628.1	627.6	626.8	626.0	625.3	624.6	625.3	626.0	626.8
145°	661.5	661.1	660.6	660.2	660.0	659.6	659.4	659.0	659.4	659.6	660.0
147.5°	692.7	692.2	691.8	691.4	690.8	690.3	689.7	689.2	689.7	690.3	690.8
150°	712.3	712.0	711.7	711.4	711.1	710.8	710.5	710.2	710.5	710.8	711.1
152.5°	729.8	729.6	729.4	729.1	728.7	728.2	727.8	727.5	727.8	728.2	728.7
155°	755.0	754.8	754.7	754.6	754.6	754.6	754.6	754.6	754.6	754.6	754.6
157.5°	777.3	777.1	777.1	777.1	777.2	777.4	777.6	777.7	777.6	777.4	777.2
160°	791.0	791.0	791.0	791.1	791.4	791.7	792.0	792.3	792.0	791.7	791.4
162.5°	803.7	803.6	803.4	803.6	804.0	804.4	804.9	805.2	804.9	804.4	804.0
165°	819.9	819.9	819.9	820.1	820.6	821.0	821.5	821.9	821.5	821.0	820.6
167.5°	832.8	832.8	832.7	832.8	833.4	834.1	834.7	835.3	834.7	834.1	833.4
170°	840.1	840.1	840.1	840.4	841.0	841.6	842.2	842.8	842.2	841.6	841.0
172.5°	846.0	846.0	846.0	846.4	847.0	847.6	848.2	848.7	848.2	847.6	847.0
175°	852.2	852.2	852.2	852.6	853.2	853.8	854.3	854.9	854.3	853.8	853.2
177.5°	855.3	855.3	855.3	855.6	856.0	856.5	857.0	857.5	857.0	856.5	856.0
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3
2.5°	757.2	753.7	751.4	746.1	742.7	739.0	735.3	737.6	737.4	737.1	737.1
5°	731.8	724.2	717.3	708.3	702.7	695.9	690.5	689.9	691.2	686.6	684.0
7.5°	706.6	696.2	686.4	676.6	666.2	657.8	652.6	650.2	646.9	644.0	641.0
10°	688.9	676.7	667.1	655.0	643.8	633.9	627.6	623.3	621.0	618.6	614.4
12.5°	670.7	658.8	646.5	632.7	622.1	610.6	606.0	601.2	596.7	594.1	588.2
15°	644.0	628.5	615.7	601.2	589.4	578.1	571.5	562.0	560.6	557.3	551.4
17.5°	617.3	600.5	582.8	572.0	558.6	547.0	536.9	533.7	524.3	520.7	515.6
20°	596.2	580.7	567.2	553.0	533.6	522.7	514.8	510.5	502.9	498.3	495.0
22.5°	578.1	562.2	546.6	530.1	514.0	501.9	496.0	489.4	485.3	478.8	475.2
25°	552.1	534.9	516.1	498.3	486.7	477.5	468.3	462.4	456.4	453.4	446.9
27.5°	521.9	503.9	486.4	472.9	458.7	449.5	441.2	435.9	428.8	423.8	420.2
30°	505.2	484.1	469.0	456.8	438.6	430.1	423.8	417.2	411.9	406.7	402.9
32.5°	485.9	466.7	452.3	437.2	423.3	414.0	405.8	400.0	395.5	390.5	386.9
35°	455.7	439.6	424.7	409.6	399.3	389.8	380.2	375.3	371.0	366.4	363.1
37.5°	428.4	413.4	399.2	384.9	372.2	364.4	356.7	352.9	347.2	344.1	340.7
40°	411.6	396.7	381.6	367.7	354.5	348.6	341.6	336.0	330.8	328.5	324.9
42.5°	393.1	378.2	365.5	350.5	339.8	331.7	325.3	319.2	315.2	311.9	309.8
45°	365.8	352.5	340.0	325.2	315.0	308.0	300.7	295.2	291.5	289.2	285.6
47.5°	339.1	326.0	313.2	300.3	290.4	282.5	275.3	271.3	266.6	263.7	261.2
50°	319.9	308.0	294.5	282.6	272.8	264.8	258.9	253.9	249.6	246.0	244.4
52.5°	302.2	289.6	277.8	266.8	256.4	247.4	242.0	236.8	233.6	229.4	227.5
55°	273.0	260.9	251.0	240.0	229.9	222.3	215.7	211.0	207.8	203.1	200.5
57.5°	245.6	234.7	222.9	213.5	202.9	196.6	191.1	184.8	180.8	177.2	174.6
60°	227.2	214.6	204.5	195.5	186.3	178.1	173.1	168.2	163.9	160.2	158.0
62.5°	207.9	197.0	187.4	177.6	169.2	162.0	156.3	152.1	148.4	146.0	143.7
65°	178.4	169.9	160.0	152.1	144.1	138.9	134.2	130.6	127.9	126.3	124.3
67.5°	151.3	142.9	134.3	126.5	121.2	117.2	114.2	111.1	109.8	107.6	106.3
70°	133.5	125.0	117.4	111.5	106.2	103.2	101.3	98.9	97.6	95.0	93.7
72.5°	114.3	108.1	102.6	97.7	93.5	90.8	88.3	85.5	83.3	80.5	79.1
75°	90.1	84.5	80.2	76.8	74.2	70.6	67.0	64.0	63.0	62.0	61.6
77.5°	66.6	63.1	60.0	57.3	54.0	51.3	50.5	49.9	49.7	49.2	49.2
80°	52.4	49.2	46.8	43.6	41.6	41.6	41.6	40.9	41.2	41.2	41.2
82.5°	39.0	35.9	34.7	33.5	33.1	33.4	33.4	33.5	33.3	33.8	33.6
85°	20.1	20.4	21.1	20.8	21.1	21.1	21.8	21.4	21.8	21.1	21.8
87.5°	8.7	9.8	10.5	11.2	11.8	12.0	12.3	12.4	12.8	12.9	13.0
90°	6.6	8.4	10.3	12.2	14.2	16.2	16.8	17.4	17.9	18.5	19.0
92.5°	20.3	21.4	22.6	23.7	24.7	25.8	26.3	26.8	27.3	27.7	27.9
95°	43.9	45.0	46.2	47.4	48.6	49.9	50.5	51.0	51.6	52.2	52.5
97.5°	73.7	74.5	75.3	76.2	77.1	77.9	78.6	79.3	80.0	80.7	81.0
100°	95.1	96.0	96.7	97.5	98.2	98.9	99.4	99.9	100.3	100.7	101.2
102.5°	118.0	118.7	119.7	120.7	121.7	122.7	123.1	123.6	124.0	124.4	124.7
105°	152.7	153.5	154.8	156.2	157.6	158.9	158.9	158.9	158.9	158.9	159.0
107.5°	193.6	194.0	194.6	195.1	195.6	196.1	196.7	197.1	197.6	198.1	198.2
110°	220.0	220.2	220.6	220.8	221.2	221.4	222.1	222.7	223.3	223.9	224.0



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	246.4	246.5	246.6	246.7	246.8	246.8	247.5	248.2	248.9	249.7	249.9
115°	287.9	288.0	287.7	287.4	287.1	286.8	286.9	287.1	287.2	287.4	287.4
117.5°	328.0	327.9	327.5	327.1	326.7	326.3	326.3	326.3	326.2	326.2	326.0
120°	355.7	355.8	355.0	354.2	353.5	352.8	352.6	352.4	352.3	352.1	351.9
122.5°	381.1	381.3	380.8	380.5	380.0	379.7	379.3	378.9	378.5	378.2	377.7
125°	420.5	420.6	420.3	420.0	419.7	419.4	418.8	418.2	417.6	417.0	416.4
127.5°	459.7	460.0	459.7	459.3	459.0	458.7	457.9	457.0	456.2	455.4	454.6
130°	485.4	485.8	485.3	484.9	484.5	484.0	483.4	482.8	482.2	481.6	480.8
132.5°	510.2	510.7	510.3	510.0	509.6	509.3	508.6	507.9	507.1	506.4	505.7
135°	546.8	547.3	547.1	546.9	546.7	546.6	546.0	545.4	544.8	544.2	543.8
137.5°	581.3	581.8	582.2	582.6	583.0	583.3	582.7	582.1	581.5	580.8	580.2
140°	605.5	605.9	606.1	606.2	606.4	606.5	606.4	606.2	606.1	605.9	605.4
142.5°	627.6	628.1	628.4	628.6	628.9	629.1	629.0	628.9	628.7	628.5	628.1
145°	660.2	660.6	661.1	661.5	661.9	662.4	662.3	662.1	661.9	661.8	661.4
147.5°	691.4	691.8	692.2	692.7	693.1	693.5	693.5	693.5	693.5	693.5	693.0
150°	711.4	711.7	712.0	712.3	712.6	712.9	712.9	712.9	712.9	712.9	712.5
152.5°	729.1	729.4	729.6	729.8	730.0	730.1	730.4	730.6	730.8	731.1	730.8
155°	754.6	754.7	754.8	755.0	755.2	755.3	755.9	756.5	757.1	757.7	757.4
157.5°	777.1	777.1	777.1	777.3	777.4	777.5	778.2	778.8	779.4	780.0	779.9
160°	791.1	791.0	791.0	791.0	791.0	791.0	791.7	792.5	793.2	793.9	794.0
162.5°	803.6	803.4	803.6	803.7	803.7	803.9	804.6	805.4	806.2	806.9	806.8
165°	820.1	819.9	819.9	819.9	819.9	819.9	820.8	821.7	822.6	823.5	823.5
167.5°	832.8	832.7	832.8	832.8	833.0	833.1	834.1	835.0	835.9	836.8	836.8
170°	840.4	840.1	840.1	840.1	840.1	840.1	841.2	842.2	843.3	844.3	844.3
172.5°	846.4	846.0	846.0	846.0	846.0	846.0	847.0	847.9	848.9	849.7	849.7
175°	852.6	852.2	852.2	852.2	852.2	852.2	853.2	854.0	854.9	855.8	855.7
177.5°	855.6	855.3	855.3	855.3	855.3	855.3	856.0	856.8	857.5	858.2	858.2
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3
2.5°	733.9	733.7	733.9	732.9	733.9	733.7	733.9	737.1	737.1	737.4	737.6
5°	682.9	682.6	681.7	678.7	681.7	682.6	682.9	684.0	686.6	691.2	689.9
7.5°	638.4	638.0	635.1	635.2	635.1	638.0	638.4	641.0	644.0	646.9	650.2
10°	612.1	612.4	608.5	606.1	608.5	612.4	612.1	614.4	618.6	621.0	623.3
12.5°	586.5	585.0	581.8	579.2	581.8	585.0	586.5	588.2	594.1	596.7	601.2
15°	552.7	549.4	541.5	542.2	541.5	549.4	552.7	551.4	557.3	560.6	562.0
17.5°	512.9	510.5	510.4	505.8	510.4	510.5	512.9	515.6	520.7	524.3	533.7
20°	489.7	488.1	488.7	484.1	488.7	488.1	489.7	495.0	498.3	502.9	510.5
22.5°	471.5	469.8	467.1	465.6	467.1	469.8	471.5	475.2	478.8	485.3	489.4
25°	444.9	442.2	439.6	441.3	439.6	442.2	444.9	446.9	453.4	456.4	462.4
27.5°	418.2	416.2	413.6	413.3	413.6	416.2	418.2	420.2	423.8	428.8	435.9
30°	401.3	399.3	398.0	396.4	398.0	399.3	401.3	402.9	406.7	411.9	417.2
32.5°	384.2	383.8	381.4	381.1	381.4	383.8	384.2	386.9	390.5	395.5	400.0
35°	361.8	359.8	359.1	359.5	359.1	359.8	361.8	363.1	366.4	371.0	375.3
37.5°	340.4	337.9	336.7	335.4	336.7	337.9	340.4	340.7	344.1	347.2	352.9
40°	325.2	322.5	321.8	321.2	321.8	322.5	325.2	324.9	328.5	330.8	336.0
42.5°	308.0	306.9	306.6	305.4	306.6	306.9	308.0	309.8	311.9	315.2	319.2
45°	284.6	284.3	282.3	282.9	282.3	284.3	284.6	285.6	289.2	291.5	295.2
47.5°	259.9	258.5	257.1	258.0	257.1	258.5	259.9	261.2	263.7	266.6	271.3
50°	243.1	242.4	239.4	240.0	239.4	242.4	243.1	244.4	246.0	249.6	253.9
52.5°	226.2	223.7	222.6	222.1	222.6	223.7	226.2	227.5	229.4	233.6	236.8
55°	198.2	195.2	193.9	193.2	193.9	195.2	198.2	200.5	203.1	207.8	211.0
57.5°	170.7	170.0	168.9	169.6	168.9	170.0	170.7	174.6	177.2	180.8	184.8
60°	154.6	154.6	154.6	154.4	154.6	154.6	154.6	158.0	160.2	163.9	168.2
62.5°	142.2	141.5	141.2	141.6	141.2	141.5	142.2	143.7	146.0	148.4	152.1
65°	123.3	123.0	121.7	121.4	121.7	123.0	123.3	124.3	126.3	127.9	130.6
67.5°	105.5	104.3	103.9	103.4	103.9	104.3	105.5	106.3	107.6	109.8	111.1
70°	92.0	91.4	89.4	89.7	89.4	91.4	92.0	93.7	95.0	97.6	98.9
72.5°	77.5	76.8	76.5	75.9	76.5	76.8	77.5	79.1	80.5	83.3	85.5
75°	61.3	61.0	60.7	62.0	60.7	61.0	61.3	61.6	62.0	63.0	64.0
77.5°	49.2	49.2	49.3	48.8	49.3	49.2	49.2	49.2	49.2	49.7	49.9
80°	41.2	41.2	40.9	40.9	40.9	41.2	41.2	41.2	41.2	41.2	40.9
82.5°	33.1	33.3	33.5	33.0	33.5	33.3	33.1	33.6	33.8	33.3	33.5
85°	21.8	21.4	22.1	21.8	22.1	21.4	21.8	21.8	21.1	21.8	21.4
87.5°	13.6	13.2	13.2	13.5	13.2	13.2	13.6	13.0	12.9	12.8	12.4
90°	19.3	19.6	19.9	20.2	19.9	19.6	19.3	19.0	18.5	17.9	17.4
92.5°	27.7	27.6	27.4	27.2	27.4	27.6	27.7	27.9	27.7	27.3	26.8
95°	52.5	52.5	52.5	52.5	52.5	52.5	52.5	52.5	52.2	51.6	51.0
97.5°	80.9	80.9	80.8	80.8	80.8	80.9	80.9	81.0	80.7	80.0	79.3
100°	101.4	101.7	102.0	102.3	102.0	101.7	101.4	101.2	100.7	100.3	99.9
102.5°	124.6	124.5	124.5	124.4	124.5	124.5	124.6	124.7	124.4	124.0	123.6
105°	159.3	159.6	159.9	160.2	159.9	159.6	159.3	159.0	158.9	158.9	158.9
107.5°	198.0	197.9	197.7	197.5	197.7	197.9	198.0	198.2	198.1	197.6	197.1
110°	223.7	223.4	223.1	222.8	223.1	223.4	223.7	224.0	223.9	223.3	222.7



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	249.9	249.9	249.8	249.8	249.8	249.9	249.9	249.9	249.7	248.9	248.2
115°	287.2	287.1	286.9	286.8	286.9	287.1	287.2	287.4	287.4	287.2	287.1
117.5°	325.6	325.2	324.8	324.3	324.8	325.2	325.6	326.0	326.2	326.2	326.3
120°	351.6	351.3	351.0	350.7	351.0	351.3	351.6	351.9	352.1	352.3	352.4
122.5°	377.3	376.9	376.4	376.0	376.4	376.9	377.3	377.7	378.2	378.5	378.9
125°	415.8	415.2	414.6	414.0	414.6	415.2	415.8	416.4	417.0	417.6	418.2
127.5°	453.9	453.2	452.5	451.9	452.5	453.2	453.9	454.6	455.4	456.2	457.0
130°	479.7	478.7	477.7	476.6	477.7	478.7	479.7	480.8	481.6	482.2	482.8
132.5°	504.9	504.0	503.3	502.5	503.3	504.0	504.9	505.7	506.4	507.1	507.9
135°	543.5	543.2	542.9	542.6	542.9	543.2	543.5	543.8	544.2	544.8	545.4
137.5°	579.7	579.1	578.6	578.0	578.6	579.1	579.7	580.2	580.8	581.5	582.1
140°	604.2	603.2	602.2	601.2	602.2	603.2	604.2	605.4	605.9	606.1	606.2
142.5°	627.2	626.5	625.6	624.8	625.6	626.5	627.2	628.1	628.5	628.7	628.9
145°	660.8	660.2	659.6	659.0	659.6	660.2	660.8	661.4	661.8	661.9	662.1
147.5°	692.2	691.2	690.3	689.5	690.3	691.2	692.2	693.0	693.5	693.5	693.5
150°	711.5	710.7	709.7	708.9	709.7	710.7	711.5	712.5	712.9	712.9	712.9
152.5°	730.0	729.3	728.5	727.7	728.5	729.3	730.0	730.8	731.1	730.8	730.6
155°	756.4	755.4	754.3	753.3	754.3	755.4	756.4	757.4	757.7	757.1	756.5
157.5°	779.1	778.3	777.4	776.5	777.4	778.3	779.1	779.9	780.0	779.4	778.8
160°	793.4	792.8	792.2	791.6	792.2	792.8	793.4	794.0	793.9	793.2	792.5
162.5°	805.8	804.9	803.9	803.0	803.9	804.9	805.8	806.8	806.9	806.2	805.4
165°	822.4	821.3	820.3	819.2	820.3	821.3	822.4	823.5	823.5	822.6	821.7
167.5°	835.9	835.0	834.1	833.1	834.1	835.0	835.9	836.8	836.8	835.9	835.0
170°	843.3	842.2	841.2	840.1	841.2	842.2	843.3	844.3	844.3	843.3	842.2
172.5°	848.6	847.6	846.5	845.5	846.5	847.6	848.6	849.7	849.7	848.9	847.9
175°	854.7	853.7	852.6	851.5	852.6	853.7	854.7	855.7	855.8	854.9	854.0
177.5°	857.3	856.4	855.7	854.8	855.7	856.4	857.3	858.2	858.2	857.5	856.8
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3
2.5°	735.3	739.0	742.7	746.1	751.4	753.7	757.2	758.5	762.4	768.3	773.0
5°	690.5	695.9	702.7	708.3	717.3	724.2	731.8	739.0	747.6	759.8	770.7
7.5°	652.6	657.8	666.2	676.6	686.4	696.2	706.6	716.4	728.8	746.2	763.5
10°	627.6	633.9	643.8	655.0	667.1	676.7	688.9	701.5	716.6	736.8	757.5
12.5°	606.0	610.6	622.1	632.7	646.5	658.8	670.7	685.4	702.7	724.1	749.1
15°	571.5	578.1	589.4	601.2	615.7	628.5	644.0	661.9	678.7	705.1	735.4
17.5°	536.9	547.0	558.6	572.0	582.8	600.5	617.3	635.6	656.3	684.3	717.6
20°	514.8	522.7	533.6	553.0	567.2	580.7	596.2	619.0	638.1	669.8	704.4
22.5°	496.0	501.9	514.0	530.1	546.6	562.2	578.1	599.8	623.4	653.4	691.0
25°	468.3	477.5	486.7	498.3	516.1	534.9	552.1	570.5	595.6	627.6	668.1
27.5°	441.2	449.5	458.7	472.9	486.4	503.9	521.9	543.0	569.9	603.7	644.9
30°	423.8	430.1	438.6	456.8	469.0	484.1	505.2	524.0	549.1	585.0	628.5
32.5°	405.8	414.0	423.3	437.2	452.3	466.7	485.9	506.4	531.9	567.3	611.9
35°	380.2	389.8	399.3	409.6	424.7	439.6	455.7	478.2	504.2	538.6	582.4
37.5°	356.7	364.4	372.2	384.9	399.2	413.4	428.4	450.6	475.1	512.1	552.3
40°	341.6	348.6	354.5	367.7	381.6	396.7	411.6	431.0	457.4	492.1	531.0
42.5°	325.3	331.7	339.8	350.5	365.5	378.2	393.1	411.5	436.3	471.5	505.6
45°	300.7	308.0	315.0	325.2	340.0	352.5	365.8	383.2	408.6	437.6	468.0
47.5°	275.3	282.5	290.4	300.3	313.2	326.0	339.1	354.6	377.8	406.3	426.7
50°	258.9	264.8	272.8	282.6	294.5	308.0	319.9	336.7	358.8	381.3	399.1
52.5°	242.0	247.4	256.4	266.8	277.8	289.6	302.2	316.7	336.7	357.7	371.9
55°	215.7	222.3	229.9	240.0	251.0	260.9	273.0	287.9	303.8	319.5	329.2
57.5°	191.1	196.6	202.9	213.5	222.9	234.7	245.6	257.3	271.9	283.8	290.1
60°	173.1	178.1	186.3	195.5	204.5	214.6	227.2	238.8	249.9	259.5	264.5
62.5°	156.3	162.0	169.2	177.6	187.4	197.0	207.9	217.7	227.6	235.8	239.2
65°	134.2	138.9	144.1	152.1	160.0	169.9	178.4	188.3	195.5	200.2	203.1
67.5°	114.2	117.2	121.2	126.5	134.3	142.9	151.3	158.9	165.1	168.2	170.8
70°	101.3	103.2	106.2	111.5	117.4	125.0	133.5	139.1	144.5	147.1	149.7
72.5°	88.3	90.8	93.5	97.7	102.6	108.1	114.3	121.2	124.2	127.3	128.9
75°	67.0	70.6	74.2	76.8	80.2	84.5	90.1	94.3	96.0	98.6	98.9
77.5°	50.5	51.3	54.0	57.3	60.0	63.1	66.6	70.5	71.3	72.7	73.5
80°	41.6	41.6	41.6	43.6	46.8	49.2	52.4	54.4	55.7	56.1	56.4
82.5°	33.4	33.4	33.1	33.5	34.7	35.9	39.0	41.2	42.3	42.1	41.3
85°	21.8	21.1	21.1	20.8	21.1	20.4	20.1	21.4	23.4	23.4	22.7
87.5°	12.3	12.0	11.8	11.2	10.5	9.8	8.7	8.7	8.4	9.1	8.6
90°	16.8	16.2	14.2	12.2	10.3	8.4	6.6	5.2	3.7	2.2	0.7
92.5°	26.3	25.8	24.7	23.7	22.6	21.4	20.3	19.4	18.3	17.3	16.3
95°	50.5	49.9	48.6	47.4	46.2	45.0	43.9	42.9	41.8	40.7	39.7
97.5°	78.6	77.9	77.1	76.2	75.3	74.5	73.7	72.8	72.1	71.3	70.5
100°	99.4	98.9	98.2	97.5	96.7	96.0	95.1	94.3	93.3	92.5	91.5
102.5°	123.1	122.7	121.7	120.7	119.7	118.7	118.0	117.4	116.8	116.3	115.8
105°	158.9	158.9	157.6	156.2	154.8	153.5	152.7	152.4	152.1	151.8	151.4
107.5°	196.7	196.1	195.6	195.1	194.6	194.0	193.6	193.5	193.3	193.1	193.0
110°	222.1	221.4	221.2	220.8	220.6	220.2	220.0	219.6	219.4	219.0	218.8



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	247.5	246.8	246.8	246.7	246.6	246.5	246.4	246.2	246.1	245.9	245.7
115°	286.9	286.8	287.1	287.4	287.7	288.0	287.9	287.4	287.0	286.5	286.1
117.5°	326.3	326.3	326.7	327.1	327.5	327.9	328.0	327.6	327.4	327.1	326.7
120°	352.6	352.8	353.5	354.2	355.0	355.8	355.7	354.7	353.9	352.9	352.1
122.5°	379.3	379.7	380.0	380.5	380.8	381.3	381.1	380.4	379.8	379.1	378.5
125°	418.8	419.4	419.7	420.0	420.3	420.6	420.5	420.1	419.6	419.1	418.7
127.5°	457.9	458.7	459.0	459.3	459.7	460.0	459.7	458.7	457.8	456.8	455.9
130°	483.4	484.0	484.5	484.9	485.3	485.8	485.4	484.2	483.0	481.8	480.6
132.5°	508.6	509.3	509.6	510.0	510.3	510.7	510.2	509.0	507.8	506.6	505.4
135°	546.0	546.6	546.7	546.9	547.1	547.3	546.8	546.0	545.0	544.2	543.2
137.5°	582.7	583.3	583.0	582.6	582.2	581.8	581.3	580.5	579.7	579.0	578.2
140°	606.4	606.5	606.4	606.2	606.1	605.9	605.5	604.8	604.0	603.2	602.4
142.5°	629.0	629.1	628.9	628.6	628.4	628.1	627.6	626.8	626.0	625.3	624.6
145°	662.3	662.4	661.9	661.5	661.1	660.6	660.2	660.0	659.6	659.4	659.0
147.5°	693.5	693.5	693.1	692.7	692.2	691.8	691.4	690.8	690.3	689.7	689.2
150°	712.9	712.9	712.6	712.3	712.0	711.7	711.4	711.1	710.8	710.5	710.2
152.5°	730.4	730.1	730.0	729.8	729.6	729.4	729.1	728.7	728.2	727.8	727.5
155°	755.9	755.3	755.2	755.0	754.8	754.7	754.6	754.6	754.6	754.6	754.6
157.5°	778.2	777.5	777.4	777.3	777.1	777.1	777.1	777.2	777.4	777.6	777.7
160°	791.7	791.0	791.0	791.0	791.0	791.0	791.1	791.4	791.7	792.0	792.3
162.5°	804.6	803.9	803.7	803.7	803.6	803.4	803.6	804.0	804.4	804.9	805.2
165°	820.8	819.9	819.9	819.9	819.9	819.9	820.1	820.6	821.0	821.5	821.9
167.5°	834.1	833.1	833.0	832.8	832.8	832.7	832.8	833.4	834.1	834.7	835.3
170°	841.2	840.1	840.1	840.1	840.1	840.1	840.4	841.0	841.6	842.2	842.8
172.5°	847.0	846.0	846.0	846.0	846.0	846.0	846.4	847.0	847.6	848.2	848.7
175°	853.2	852.2	852.2	852.2	852.2	852.2	852.6	853.2	853.8	854.3	854.9
177.5°	856.0	855.3	855.3	855.3	855.3	855.3	855.6	856.0	856.5	857.0	857.5
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3	770.3
2.5°	774.6	777.5	781.2	786.7	790.9	794.6	795.4	796.5	799.1	803.6	807.0
5°	779.6	787.2	799.4	811.2	824.1	834.7	844.6	851.5	858.1	871.9	883.1
7.5°	778.0	794.9	814.0	835.3	856.9	877.8	897.2	914.6	931.9	952.0	975.0
10°	777.0	796.8	822.4	849.8	879.9	909.2	937.5	959.7	985.4	1008.5	1037.8
12.5°	772.0	800.5	831.2	866.2	903.1	936.9	974.2	1004.8	1034.1	1067.6	1101.6
15°	765.4	800.0	839.0	885.5	941.5	982.4	1020.6	1073.8	1110.0	1146.3	1195.2
17.5°	753.5	795.7	844.4	904.7	951.6	1006.5	1064.0	1106.0	1154.9	1206.0	1250.2
20°	744.0	793.2	847.6	906.9	966.6	1026.3	1082.0	1132.1	1182.6	1241.6	1277.9
22.5°	734.5	783.1	839.6	902.7	966.8	1029.7	1092.8	1151.7	1208.4	1268.0	1314.3
25°	714.3	772.0	833.4	897.7	961.0	1030.2	1105.4	1171.0	1241.3	1302.6	1346.5
27.5°	693.9	746.7	807.8	873.1	943.4	1025.3	1113.7	1188.4	1258.7	1302.6	1316.4
30°	675.4	731.4	787.5	853.8	930.0	1021.3	1115.3	1200.8	1258.4	1277.6	1263.3
32.5°	656.7	707.5	763.0	830.9	911.8	1011.6	1117.4	1193.3	1228.1	1213.5	1155.7
35°	623.6	669.4	723.2	791.2	884.2	1006.2	1108.7	1160.2	1151.6	1069.1	960.3
37.5°	588.2	625.6	675.4	746.4	855.5	984.7	1071.3	1078.8	1004.6	878.0	752.3
40°	560.3	593.9	645.1	719.3	833.4	963.6	1033.5	1002.9	887.8	746.9	642.0
42.5°	533.1	561.5	610.7	690.8	812.3	934.9	977.3	910.5	777.7	644.5	549.2
45°	487.1	513.8	563.3	645.4	769.0	879.9	874.3	758.2	625.3	518.1	438.9
47.5°	443.4	466.7	513.2	597.0	718.3	797.4	744.9	621.5	508.7	422.8	366.3
50°	412.6	435.7	481.8	564.6	677.7	735.4	660.6	541.5	438.2	367.0	322.2
52.5°	383.0	405.5	447.8	528.4	628.6	663.1	582.7	472.3	386.3	324.9	286.3
55°	341.6	358.8	396.7	473.9	548.7	556.6	475.2	382.9	311.9	269.1	242.7
57.5°	299.5	314.3	351.7	413.2	465.7	461.6	384.4	304.5	256.8	224.9	205.8
60°	272.1	286.5	319.5	372.3	411.9	398.0	327.2	262.9	222.0	198.5	183.4
62.5°	246.5	257.8	288.7	327.2	355.7	340.0	279.7	226.4	194.0	174.3	162.2
65°	209.4	218.6	243.4	263.5	279.3	264.2	214.0	177.1	153.7	139.8	131.6
67.5°	174.2	180.0	195.7	202.9	214.1	197.5	160.9	136.2	122.9	111.2	105.5
70°	152.1	156.4	164.5	170.5	173.5	156.4	129.2	111.2	100.0	91.7	88.1
72.5°	129.8	133.6	135.3	140.2	138.6	122.5	103.9	89.5	81.5	75.9	71.2
75°	99.3	100.9	99.3	97.3	93.0	81.8	69.0	61.6	55.7	53.1	51.5
77.5°	72.3	71.8	69.6	66.5	59.2	52.1	45.2	42.7	40.2	38.7	38.2
80°	55.7	54.4	52.4	47.5	41.2	36.2	34.6	33.0	32.0	30.3	30.0
82.5°	41.5	40.7	37.4	33.2	28.8	26.5	25.1	24.5	23.5	22.7	22.6
85°	22.1	21.1	17.5	15.2	14.6	13.9	13.5	13.5	12.2	11.9	11.9
87.5°	7.6	6.3	6.3	5.9	6.2	6.0	6.7	6.5	6.6	7.1	6.6
90°	2.2	3.7	5.2	6.6	8.4	10.3	12.2	14.2	16.2	16.8	17.4
92.5°	17.3	18.3	19.4	20.3	21.4	22.6	23.7	24.7	25.8	26.3	26.8
95°	40.7	41.8	42.9	43.9	45.0	46.2	47.4	48.6	49.9	50.5	51.0
97.5°	71.3	72.1	72.8	73.7	74.5	75.3	76.2	77.1	77.9	78.6	79.3
100°	92.5	93.3	94.3	95.1	96.0	96.7	97.5	98.2	98.9	99.4	99.9
102.5°	116.3	116.8	117.4	118.0	118.7	119.7	120.7	121.7	122.7	123.1	123.6
105°	151.8	152.1	152.4	152.7	153.5	154.8	156.2	157.6	158.9	158.9	158.9
107.5°	193.1	193.3	193.5	193.6	194.0	194.6	195.1	195.6	196.1	196.7	197.1
110°	219.0	219.4	219.6	220.0	220.2	220.6	220.8	221.2	221.4	222.1	222.7



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	245.9	246.1	246.2	246.4	246.5	246.6	246.7	246.8	246.8	247.5	248.2
115°	286.5	287.0	287.4	287.9	288.0	287.7	287.4	287.1	286.8	286.9	287.1
117.5°	327.1	327.4	327.6	328.0	327.9	327.5	327.1	326.7	326.3	326.3	326.3
120°	352.9	353.9	354.7	355.7	355.8	355.0	354.2	353.5	352.8	352.6	352.4
122.5°	379.1	379.8	380.4	381.1	381.3	380.8	380.5	380.0	379.7	379.3	378.9
125°	419.1	419.6	420.1	420.5	420.6	420.3	420.0	419.7	419.4	418.8	418.2
127.5°	456.8	457.8	458.7	459.7	460.0	459.7	459.3	459.0	458.7	457.9	457.0
130°	481.8	483.0	484.2	485.4	485.8	485.3	484.9	484.5	484.0	483.4	482.8
132.5°	506.6	507.8	509.0	510.2	510.7	510.3	510.0	509.6	509.3	508.6	507.9
135°	544.2	545.0	546.0	546.8	547.3	547.1	546.9	546.7	546.6	546.0	545.4
137.5°	579.0	579.7	580.5	581.3	581.8	582.2	582.6	583.0	583.3	582.7	582.1
140°	603.2	604.0	604.8	605.5	605.9	606.1	606.2	606.4	606.5	606.4	606.2
142.5°	625.3	626.0	626.8	627.6	628.1	628.4	628.6	628.9	629.1	629.0	628.9
145°	659.4	659.6	660.0	660.2	660.6	661.1	661.5	661.9	662.4	662.3	662.1
147.5°	689.7	690.3	690.8	691.4	691.8	692.2	692.7	693.1	693.5	693.5	693.5
150°	710.5	710.8	711.1	711.4	711.7	712.0	712.3	712.6	712.9	712.9	712.9
152.5°	727.8	728.2	728.7	729.1	729.4	729.6	729.8	730.0	730.1	730.4	730.6
155°	754.6	754.6	754.6	754.6	754.7	754.8	755.0	755.2	755.3	755.9	756.5
157.5°	777.6	777.4	777.2	777.1	777.1	777.1	777.3	777.4	777.5	778.2	778.8
160°	792.0	791.7	791.4	791.1	791.0	791.0	791.0	791.0	791.0	791.7	792.5
162.5°	804.9	804.4	804.0	803.6	803.4	803.6	803.7	803.7	803.9	804.6	805.4
165°	821.5	821.0	820.6	820.1	819.9	819.9	819.9	819.9	819.9	820.8	821.7
167.5°	834.7	834.1	833.4	832.8	832.7	832.8	832.8	833.0	833.1	834.1	835.0
170°	842.2	841.6	841.0	840.4	840.1	840.1	840.1	840.1	840.1	841.2	842.2
172.5°	848.2	847.6	847.0	846.4	846.0	846.0	846.0	846.0	846.0	847.0	847.9
175°	854.3	853.8	853.2	852.6	852.2	852.2	852.2	852.2	852.2	853.2	854.0
177.5°	857.0	856.5	856.0	855.6	855.3	855.3	855.3	855.3	855.3	856.0	856.8
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0	857.0



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	770.3	770.3	770.3	770.3	770.3	770.3	770.3
2.5°	812.6	812.6	813.6	817.6	818.1	821.6	820.4
5°	893.0	899.3	901.6	911.5	917.5	920.1	914.8
7.5°	991.4	1009.1	1017.5	1027.9	1037.0	1039.8	1032.6
10°	1063.2	1081.7	1097.2	1106.7	1115.7	1121.5	1129.2
12.5°	1132.6	1155.3	1170.0	1183.5	1192.7	1200.2	1201.4
15°	1208.0	1242.3	1268.3	1287.5	1297.0	1302.0	1300.0
17.5°	1284.0	1315.8	1334.4	1353.8	1367.1	1367.8	1368.2
20°	1327.1	1358.1	1379.5	1394.0	1408.9	1408.2	1411.4
22.5°	1355.8	1380.2	1396.6	1407.1	1412.2	1409.7	1410.4
25°	1369.2	1376.5	1373.6	1356.7	1352.5	1337.0	1339.5
27.5°	1299.9	1265.6	1230.1	1184.4	1148.4	1119.6	1121.1
30°	1205.7	1145.0	1075.7	1017.7	965.6	951.1	920.1
32.5°	1074.0	983.0	901.9	847.8	803.1	790.9	763.9
35°	850.8	762.4	679.0	628.9	609.1	581.4	581.1
37.5°	661.3	583.5	539.4	501.8	482.1	465.3	463.6
40°	556.4	495.7	462.4	435.3	415.9	403.3	400.4
42.5°	483.0	433.9	402.7	386.0	371.0	364.5	359.7
45°	394.4	361.4	339.7	324.5	317.5	312.6	310.0
47.5°	329.9	307.8	293.0	282.9	277.2	272.1	273.5
50°	294.8	276.7	265.8	256.2	251.9	248.3	248.7
52.5°	266.6	250.3	241.5	234.6	229.3	226.7	225.4
55°	226.3	216.0	207.1	202.2	199.1	195.5	194.6
57.5°	193.0	185.0	177.8	172.2	171.5	168.0	168.4
60°	170.8	164.2	158.3	155.3	153.0	150.1	151.0
62.5°	152.7	147.1	141.6	139.2	136.9	134.7	135.2
65°	125.0	119.7	116.4	115.1	114.1	113.1	112.1
67.5°	99.6	96.3	94.3	91.4	89.5	89.1	88.1
70°	83.8	79.5	75.9	72.2	71.2	70.9	71.2
72.5°	67.2	64.4	63.5	61.6	61.5	60.6	61.2
75°	50.5	49.5	48.8	47.5	47.5	47.5	47.5
77.5°	37.2	36.6	36.2	35.9	35.6	35.1	35.1
80°	29.0	28.7	28.1	28.1	27.7	28.1	27.7
82.5°	21.9	21.9	21.2	21.2	20.8	20.7	20.8
85°	11.2	10.8	11.5	10.8	11.2	10.6	11.2
87.5°	6.7	6.9	6.7	6.8	6.5	7.1	6.7
90°	17.9	18.5	19.0	19.3	19.6	19.9	20.2
92.5°	27.3	27.7	27.9	27.7	27.6	27.4	27.2
95°	51.6	52.2	52.5	52.5	52.5	52.5	52.5
97.5°	80.0	80.7	81.0	80.9	80.9	80.8	80.8
100°	100.3	100.7	101.2	101.4	101.7	102.0	102.3
102.5°	124.0	124.4	124.7	124.6	124.5	124.5	124.4
105°	158.9	158.9	159.0	159.3	159.6	159.9	160.2
107.5°	197.6	198.1	198.2	198.0	197.9	197.7	197.5
110°	223.3	223.9	224.0	223.7	223.4	223.1	222.8



TEST NUMBER: P332283-935

CATALOG NUMBER: S123RDIP-S560D805U935-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	248.9	249.7	249.9	249.9	249.9	249.8	249.8
115°	287.2	287.4	287.4	287.2	287.1	286.9	286.8
117.5°	326.2	326.2	326.0	325.6	325.2	324.8	324.3
120°	352.3	352.1	351.9	351.6	351.3	351.0	350.7
122.5°	378.5	378.2	377.7	377.3	376.9	376.4	376.0
125°	417.6	417.0	416.4	415.8	415.2	414.6	414.0
127.5°	456.2	455.4	454.6	453.9	453.2	452.5	451.9
130°	482.2	481.6	480.8	479.7	478.7	477.7	476.6
132.5°	507.1	506.4	505.7	504.9	504.0	503.3	502.5
135°	544.8	544.2	543.8	543.5	543.2	542.9	542.6
137.5°	581.5	580.8	580.2	579.7	579.1	578.6	578.0
140°	606.1	605.9	605.4	604.2	603.2	602.2	601.2
142.5°	628.7	628.5	628.1	627.2	626.5	625.6	624.8
145°	661.9	661.8	661.4	660.8	660.2	659.6	659.0
147.5°	693.5	693.5	693.0	692.2	691.2	690.3	689.5
150°	712.9	712.9	712.5	711.5	710.7	709.7	708.9
152.5°	730.8	731.1	730.8	730.0	729.3	728.5	727.7
155°	757.1	757.7	757.4	756.4	755.4	754.3	753.3
157.5°	779.4	780.0	779.9	779.1	778.3	777.4	776.5
160°	793.2	793.9	794.0	793.4	792.8	792.2	791.6
162.5°	806.2	806.9	806.8	805.8	804.9	803.9	803.0
165°	822.6	823.5	823.5	822.4	821.3	820.3	819.2
167.5°	835.9	836.8	836.8	835.9	835.0	834.1	833.1
170°	843.3	844.3	844.3	843.3	842.2	841.2	840.1
172.5°	848.9	849.7	849.7	848.6	847.6	846.5	845.5
175°	854.9	855.8	855.7	854.7	853.7	852.6	851.5
177.5°	857.5	858.2	858.2	857.3	856.4	855.7	854.8
180°	857.0	857.0	857.0	857.0	857.0	857.0	857.0

(END OF REPORT)