

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332322-935

Luminaire Tested: **S123RDIP-S775D1025U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332322-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S775D1025U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5545.8 lumens
Efficiency: N/A
Efficacy: 106.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 52
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332322-935

CATALOG NUMBER: S123RDIP-S775D1025U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

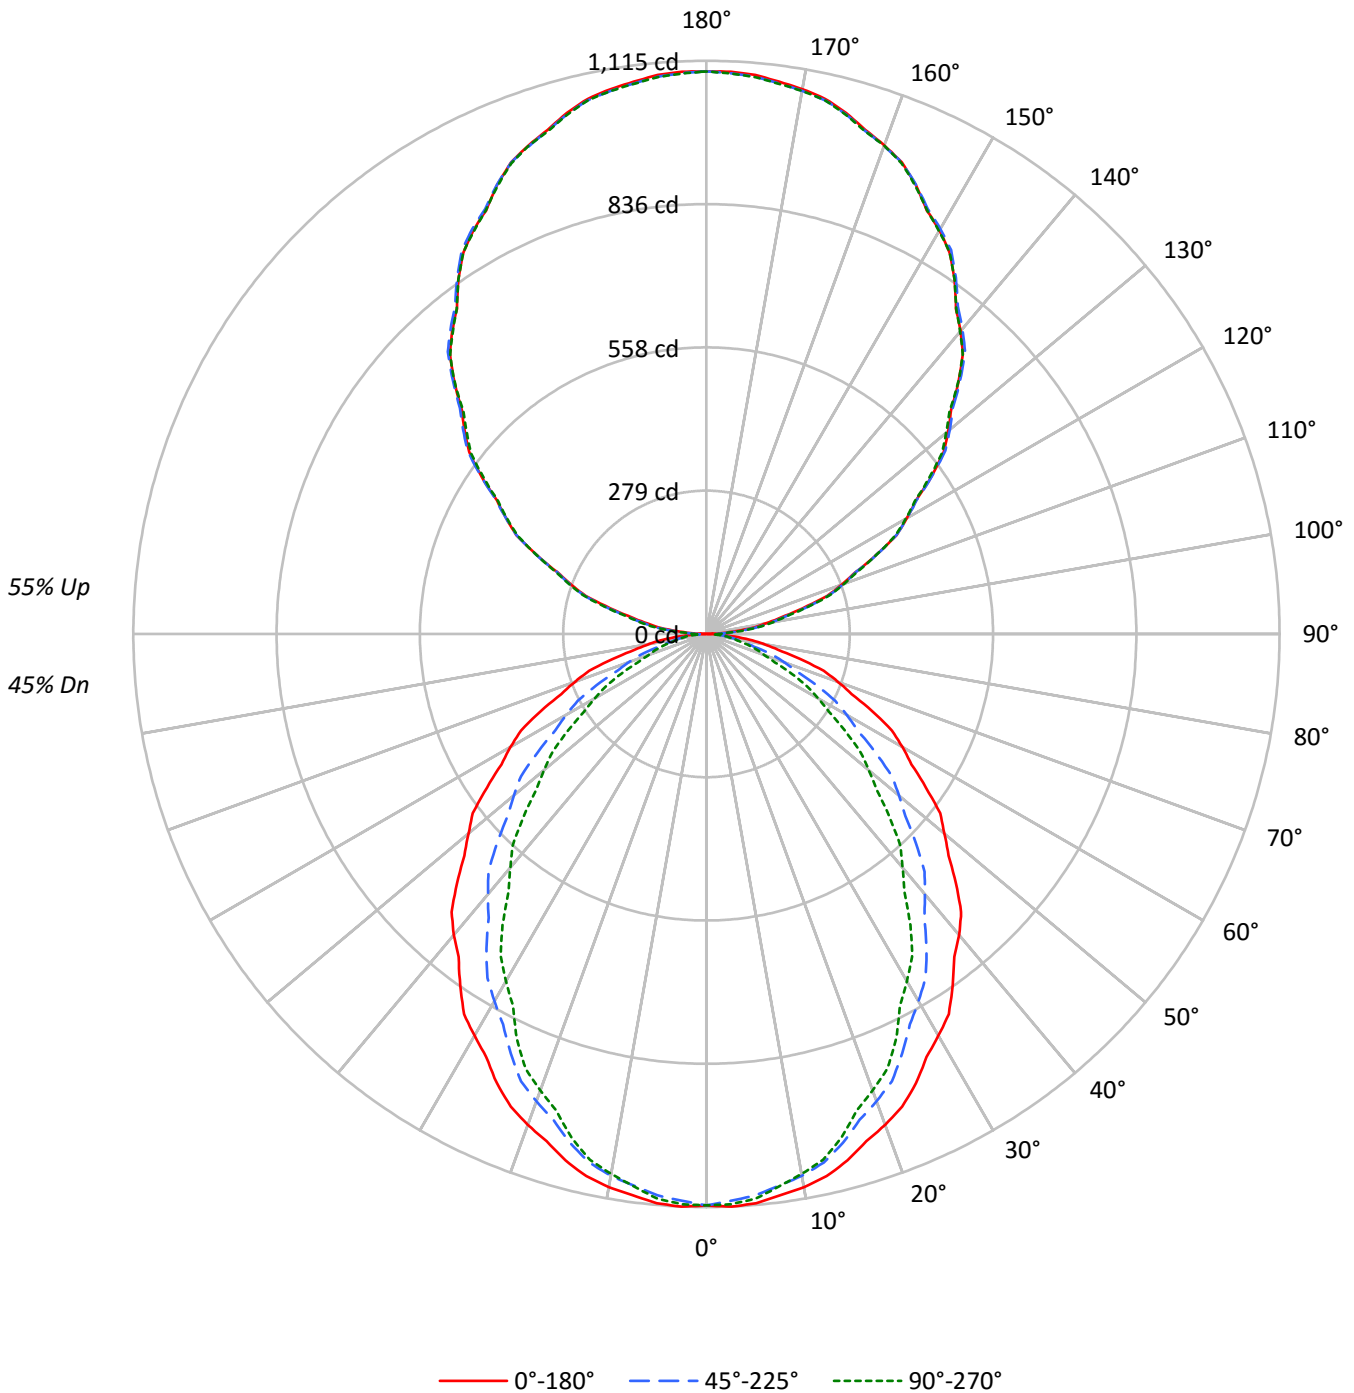



TEST NUMBER: P332322-935

CATALOG NUMBER: S123RDIP-S775D1025U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52	45
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44	39
2	89	81	75	70	81	75	70	65	63	59	56	51	49	47	41	39	38	33
3	81	72	65	59	74	66	60	55	56	51	47	46	42	40	37	34	32	28
4	74	64	56	50	68	59	52	47	49	44	40	41	37	34	33	30	28	24
5	68	57	49	43	62	53	46	40	44	39	35	37	33	30	30	27	25	21
6	63	51	43	37	57	47	40	35	40	35	31	33	29	26	27	24	22	19
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	25	22	20	17
8	54	42	34	29	49	39	32	27	33	28	24	28	24	21	23	20	18	15
9	50	38	31	26	46	36	29	24	30	25	22	26	22	19	21	18	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	14	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11965	11965	11965
5°	12011	11846	11914
10°	11943	11696	11657
15°	11814	11422	11303
20°	11639	11080	10822
25°	11457	10696	10354
30°	11216	10253	9692
35°	10970	9809	9087
40°	10742	9285	8335
45°	10443	8770	7658
50°	10114	8182	6899
55°	9779	7512	6191
60°	9472	6794	5414
65°	9070	6016	4638
70°	8567	5051	3745
75°	7835	3976	3523
80°	6986	3521	3242
85°	5903	3112	2890



TEST NUMBER: P332322-935

CATALOG NUMBER: S123RDIP-S775D1025U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.4	1.9
10°-20°	290.4	5.2
20°-30°	418.2	7.5
30°-40°	471.1	8.5
40°-50°	450.7	8.1
50°-60°	369.0	6.7
60°-70°	249.0	4.5
70°-80°	125.3	2.3
80°-90°	36.4	0.7
90°-100°	71.3	1.3
100°-110°	213.3	3.8
110°-120°	362.8	6.5
120°-130°	477.3	8.6
130°-140°	536.4	9.7
140°-150°	527.3	9.5
150°-160°	443.9	8.0
160°-170°	295.5	5.3
170°-180°	103.5	1.9
0°-30°	813.0	14.7
0°-40°	1284.1	23.2
0°-60°	2103.8	37.9
0°-90°	2514.4	45.3
90°-120°	647.5	11.7
90°-150°	2188.5	39.5
90°-180°	3031.0	54.7
0°-180°	5545.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1112	1112	1112	1112	1112	
5°	1112	1107	1096	1104	1103	105
15°	1060	1049	1025	1020	1014	299
25°	965	941	901	882	872	443
35°	835	801	746	709	692	522
45°	686	644	576	526	503	529
55°	521	475	400	350	330	467
65°	356	305	236	194	182	352
75°	188	145	96	87	85	201
85°	48	29	25	24	23	54
90°	1	10	21	24	26	5
95°	51	57	64	67	67	57
105°	193	195	203	203	205	207
115°	365	368	366	367	366	361
125°	535	537	536	532	529	477
135°	694	698	698	694	693	534
145°	841	843	846	845	841	525
155°	964	964	964	967	962	443
165°	1049	1047	1047	1051	1046	296
175°	1092	1088	1088	1093	1087	104
180°	1094	1094	1094	1094	1094	



TEST NUMBER: P332322-935

CATALOG NUMBER: S123RDIP-S775D1025U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1115.2	1114.6	1113.9	1113.3	1112.7	1111.4	1109.4	1107.5	1105.6	1103.6	1105.4
5°	1111.6	1110.6	1109.6	1108.6	1107.6	1105.9	1103.5	1101.0	1098.6	1096.3	1098.0
7.5°	1101.3	1100.3	1099.2	1098.0	1097.0	1094.8	1091.7	1088.6	1085.5	1082.4	1083.4
10°	1092.7	1091.2	1089.9	1088.5	1087.0	1084.5	1080.9	1077.4	1073.8	1070.1	1070.3
12.5°	1080.4	1078.8	1077.3	1075.7	1074.2	1071.2	1066.8	1062.4	1057.9	1053.5	1053.4
15°	1060.2	1058.0	1055.8	1053.6	1051.4	1047.5	1041.9	1036.3	1030.6	1025.0	1024.1
17.5°	1034.7	1032.3	1029.7	1027.1	1024.5	1019.7	1012.5	1005.4	998.2	991.2	989.0
20°	1016.1	1012.8	1009.6	1006.4	1003.2	997.8	990.2	982.6	975.0	967.3	964.8
22.5°	995.1	991.4	987.7	984.0	980.3	974.5	966.4	958.3	950.2	942.1	938.8
25°	964.7	959.7	954.6	949.6	944.6	937.5	928.2	919.0	909.8	900.6	896.4
27.5°	927.6	922.1	916.6	911.1	905.6	897.7	887.4	877.2	866.9	856.6	850.8
30°	902.4	896.4	890.4	884.4	878.4	869.8	858.6	847.3	836.1	824.9	818.1
32.5°	877.2	870.4	863.6	856.8	850.0	840.6	828.7	816.9	805.0	793.2	785.7
35°	834.8	827.6	820.4	813.2	806.0	796.2	783.8	771.3	758.9	746.5	737.9
37.5°	791.9	783.9	775.8	767.8	759.8	749.2	736.0	722.7	709.5	696.2	686.4
40°	764.5	755.7	746.8	738.0	729.3	717.7	703.5	689.3	675.0	660.8	650.4
42.5°	733.5	724.7	715.8	707.1	698.3	686.5	671.8	657.0	642.4	627.7	616.3
45°	686.0	677.1	668.0	659.0	650.0	637.8	622.3	606.9	591.5	576.1	564.6
47.5°	638.7	628.8	618.9	609.0	599.1	586.4	571.0	555.5	540.1	524.7	512.3
50°	604.0	594.6	585.2	575.8	566.4	553.5	537.4	521.1	504.9	488.6	476.2
52.5°	573.0	562.8	552.6	542.3	532.2	519.0	502.9	486.9	470.8	454.7	441.9
55°	521.1	511.3	501.4	491.6	481.8	468.4	451.3	434.4	417.3	400.3	388.7
57.5°	473.1	462.4	451.8	441.0	430.3	416.5	399.3	382.2	365.1	348.0	337.0
60°	440.0	429.0	417.9	406.9	395.9	382.0	365.4	348.8	332.2	315.6	304.7
62.5°	406.7	395.7	384.7	373.7	362.7	348.9	332.3	315.6	299.0	282.3	272.2
65°	356.1	345.1	334.1	323.0	312.0	298.7	283.1	267.4	251.8	236.2	226.4
67.5°	305.5	294.3	283.2	272.0	260.9	247.8	232.8	217.8	202.9	187.9	180.6
70°	272.2	261.5	250.6	239.8	229.0	216.5	202.5	188.6	174.5	160.5	153.4
72.5°	239.1	228.4	217.7	207.1	196.5	184.8	172.0	159.3	146.5	133.8	128.0
75°	188.4	178.8	169.2	159.5	150.0	139.7	128.6	117.6	106.6	95.6	93.6
77.5°	142.2	133.5	124.8	116.1	107.5	99.6	92.5	85.4	78.4	71.2	70.2
80°	112.7	104.4	96.3	88.1	79.8	73.6	69.4	65.2	61.0	56.8	56.2
82.5°	84.6	77.5	70.3	63.3	56.2	51.7	49.7	47.7	45.8	43.8	43.2
85°	47.8	43.4	39.0	34.5	30.1	27.6	27.0	26.4	25.8	25.2	24.9
87.5°	17.5	16.1	14.7	13.3	12.0	11.5	12.1	12.5	13.0	13.5	13.5
90°	0.9	2.8	4.6	6.6	8.5	10.7	13.2	15.7	18.2	20.7	21.4
92.5°	20.8	22.1	23.4	24.7	26.0	27.4	28.8	30.1	31.6	33.0	33.6
95°	50.7	52.0	53.4	54.8	56.1	57.5	59.0	60.5	62.1	63.6	64.4
97.5°	90.1	91.1	92.0	93.1	94.0	95.1	96.2	97.3	98.4	99.5	100.4
100°	116.9	118.0	119.2	120.3	121.5	122.5	123.5	124.4	125.4	126.3	126.9
102.5°	147.8	148.5	149.2	149.9	150.6	151.5	152.8	154.0	155.3	156.6	157.1
105°	193.4	193.7	194.2	194.5	194.9	196.0	197.7	199.4	201.1	202.9	202.9
107.5°	246.3	246.6	246.8	247.0	247.3	247.7	248.4	249.1	249.8	250.5	251.1
110°	279.3	279.7	280.1	280.4	280.9	281.2	281.6	282.0	282.4	282.8	283.5



TEST NUMBER: P332322-935

CATALOG NUMBER: S123RDIP-S775D1025U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	313.7	313.9	314.2	314.4	314.6	314.8	314.9	315.0	315.0	315.0	316.0
115°	365.2	365.8	366.4	367.0	367.6	367.6	367.3	366.9	366.5	366.1	366.4
117.5°	417.2	417.6	417.9	418.4	418.7	418.6	418.2	417.7	417.2	416.6	416.6
120°	449.5	450.6	451.8	453.0	454.1	454.2	453.2	452.3	451.3	450.4	450.1
122.5°	483.2	484.1	484.8	485.7	486.6	486.7	486.2	485.7	485.3	484.7	484.2
125°	534.6	535.2	535.7	536.3	536.8	537.0	536.6	536.2	535.8	535.5	534.7
127.5°	582.0	583.2	584.4	585.7	586.9	587.3	586.9	586.5	586.1	585.7	584.5
130°	613.6	615.2	616.7	618.2	619.7	620.3	619.7	619.1	618.5	617.9	617.2
132.5°	645.3	646.8	648.3	649.9	651.4	651.9	651.5	651.1	650.7	650.2	649.4
135°	693.6	694.7	695.9	697.0	698.2	698.6	698.4	698.3	698.1	697.8	697.2
137.5°	738.3	739.3	740.2	741.1	742.1	742.8	743.3	743.8	744.3	744.8	744.0
140°	769.2	770.2	771.1	772.1	773.0	773.6	773.8	774.0	774.2	774.4	774.2
142.5°	797.4	798.3	799.4	800.3	801.2	801.8	802.2	802.5	802.9	803.2	803.1
145°	841.4	841.8	842.1	842.6	842.9	843.4	844.0	844.6	845.2	845.7	845.5
147.5°	879.9	880.6	881.3	882.0	882.7	883.3	883.8	884.3	884.8	885.5	885.5
150°	906.7	907.1	907.5	907.8	908.3	908.6	909.0	909.4	909.8	910.2	910.2
152.5°	928.8	929.3	929.8	930.3	930.8	931.3	931.5	931.7	931.9	932.2	932.5
155°	963.5	963.5	963.5	963.5	963.5	963.5	963.7	963.9	964.1	964.3	965.1
157.5°	993.0	992.8	992.6	992.3	992.1	992.0	992.2	992.4	992.6	992.6	993.5
160°	1011.6	1011.2	1010.8	1010.5	1010.0	1009.9	1009.9	1009.9	1009.9	1009.9	1010.8
162.5°	1028.1	1027.5	1027.0	1026.5	1026.0	1025.8	1025.9	1026.1	1026.2	1026.4	1027.3
165°	1049.4	1048.8	1048.3	1047.7	1047.1	1046.8	1046.8	1046.8	1046.8	1046.8	1047.9
167.5°	1066.4	1065.7	1064.9	1064.1	1063.3	1063.1	1063.2	1063.3	1063.5	1063.7	1064.9
170°	1076.1	1075.3	1074.5	1073.8	1073.0	1072.6	1072.6	1072.6	1072.6	1072.6	1073.9
172.5°	1083.6	1082.9	1082.1	1081.3	1080.6	1080.1	1080.1	1080.1	1080.1	1080.1	1081.3
175°	1091.5	1090.7	1089.9	1089.3	1088.5	1088.0	1088.0	1088.0	1088.0	1088.0	1089.3
177.5°	1094.8	1094.2	1093.6	1093.0	1092.4	1092.0	1092.0	1092.0	1092.0	1092.0	1093.0
180°	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1



TEST NUMBER: P332322-935

CATALOG NUMBER: S123RDIP-S775D1025U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1107.2	1109.0	1110.7	1111.5	1111.1	1110.8	1110.4	1110.2
5°	1099.8	1101.6	1103.5	1104.1	1103.8	1103.4	1102.9	1102.6
7.5°	1084.4	1085.4	1086.4	1086.6	1085.9	1085.2	1084.5	1083.8
10°	1070.6	1070.7	1070.9	1070.6	1069.5	1068.5	1067.6	1066.5
12.5°	1053.3	1053.2	1053.1	1052.4	1051.3	1050.1	1049.0	1047.8
15°	1023.0	1022.0	1021.1	1019.9	1018.5	1017.0	1015.6	1014.3
17.5°	986.9	984.8	982.7	980.6	978.4	976.4	974.3	972.2
20°	962.2	959.5	956.9	954.4	952.0	949.6	947.2	944.8
22.5°	935.6	932.4	929.1	926.3	924.1	921.9	919.6	917.4
25°	892.3	888.0	883.8	880.6	878.4	876.2	874.0	871.8
27.5°	844.9	839.1	833.3	828.6	825.3	821.9	818.6	815.2
30°	811.3	804.4	797.6	792.6	789.5	786.3	783.0	779.8
32.5°	778.3	770.9	763.4	757.9	754.6	751.2	747.9	744.5
35°	729.3	720.7	712.0	705.9	702.3	698.7	695.1	691.5
37.5°	676.6	666.8	657.0	650.0	645.5	641.0	636.6	632.1
40°	640.0	629.6	619.1	611.7	607.0	602.4	597.8	593.2
42.5°	604.9	593.5	582.1	574.4	570.2	566.1	562.0	557.8
45°	553.3	541.8	530.4	522.3	517.5	512.6	507.9	503.1
47.5°	499.8	487.4	475.0	466.7	462.4	458.1	453.8	449.5
50°	463.8	451.3	438.9	430.4	425.9	421.2	416.6	412.0
52.5°	429.0	416.0	403.1	394.6	390.5	386.3	382.2	378.1
55°	377.0	365.4	353.8	345.9	342.0	337.9	334.0	329.9
57.5°	326.1	315.0	304.1	296.9	293.5	290.1	286.6	283.3
60°	293.9	283.1	272.2	265.2	261.7	258.3	254.9	251.5
62.5°	262.0	251.8	241.7	234.8	231.2	227.6	224.1	220.5
65°	216.5	206.7	196.9	190.9	188.7	186.5	184.3	182.1
67.5°	173.2	165.9	158.5	153.7	151.4	149.0	146.6	144.2
70°	146.5	139.4	132.4	127.9	125.6	123.4	121.2	119.0
72.5°	122.3	116.6	110.9	107.5	106.6	105.7	104.8	103.8
75°	91.5	89.5	87.6	86.4	85.9	85.6	85.2	84.7
77.5°	69.1	67.9	66.9	66.1	65.8	65.3	64.9	64.6
80°	55.6	55.0	54.4	53.9	53.5	53.1	52.7	52.3
82.5°	42.6	42.0	41.4	41.1	41.0	40.9	40.8	40.7
85°	24.5	24.0	23.7	23.4	23.4	23.4	23.4	23.4
87.5°	13.5	13.5	13.4	13.4	13.3	13.3	13.2	13.1
90°	22.1	22.9	23.7	24.3	24.6	25.1	25.4	25.7
92.5°	34.3	34.9	35.5	35.6	35.4	35.2	35.0	34.7
95°	65.1	65.9	66.6	67.1	67.1	67.1	67.1	67.1
97.5°	101.3	102.2	103.1	103.4	103.4	103.3	103.2	103.1
100°	127.5	128.0	128.6	129.2	129.5	129.8	130.3	130.6
102.5°	157.7	158.3	158.9	159.1	159.0	158.9	158.9	158.9
105°	202.9	202.9	202.9	203.0	203.4	203.8	204.1	204.6
107.5°	251.7	252.3	252.9	253.0	252.9	252.6	252.4	252.2
110°	284.3	285.1	285.9	286.0	285.6	285.2	284.9	284.5



TEST NUMBER: P332322-935

CATALOG NUMBER: S123RDIP-S775D1025U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	316.9	317.8	318.7	319.2	319.1	319.0	318.9	318.8
115°	366.5	366.7	366.9	366.9	366.7	366.5	366.4	366.1
117.5°	416.6	416.6	416.6	416.2	415.7	415.2	414.7	414.1
120°	450.0	449.8	449.6	449.3	448.9	448.6	448.2	447.8
122.5°	483.7	483.3	482.8	482.2	481.7	481.1	480.6	480.1
125°	533.9	533.1	532.4	531.6	530.9	530.1	529.3	528.6
127.5°	583.5	582.5	581.3	580.4	579.5	578.6	577.7	576.9
130°	616.4	615.6	614.9	613.8	612.5	611.1	609.8	608.5
132.5°	648.4	647.6	646.6	645.7	644.6	643.6	642.6	641.5
135°	696.4	695.6	694.8	694.2	693.9	693.4	693.1	692.8
137.5°	743.2	742.4	741.6	740.8	740.1	739.3	738.7	738.0
140°	774.0	773.8	773.6	772.8	771.5	770.2	768.9	767.5
142.5°	802.9	802.7	802.5	801.8	800.8	799.8	798.7	797.7
145°	845.3	845.2	844.9	844.5	843.7	842.9	842.1	841.4
147.5°	885.5	885.5	885.5	884.8	883.7	882.5	881.4	880.3
150°	910.2	910.2	910.2	909.6	908.4	907.3	906.1	905.0
152.5°	932.8	933.1	933.4	933.1	932.0	931.1	930.1	929.1
155°	965.9	966.6	967.3	967.1	965.8	964.4	963.0	961.7
157.5°	994.3	995.1	995.9	995.7	994.7	993.6	992.6	991.4
160°	1011.8	1012.7	1013.7	1013.7	1013.1	1012.3	1011.5	1010.7
162.5°	1028.3	1029.2	1030.2	1030.0	1028.8	1027.6	1026.4	1025.2
165°	1049.1	1050.2	1051.4	1051.3	1050.0	1048.6	1047.3	1045.9
167.5°	1066.0	1067.2	1068.4	1068.4	1067.2	1066.0	1064.9	1063.7
170°	1075.3	1076.6	1078.0	1078.0	1076.6	1075.3	1073.9	1072.6
172.5°	1082.5	1083.7	1084.9	1084.9	1083.5	1082.2	1080.8	1079.4
175°	1090.4	1091.5	1092.7	1092.5	1091.2	1089.9	1088.6	1087.2
177.5°	1093.9	1094.8	1095.7	1095.6	1094.6	1093.5	1092.4	1091.3
180°	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1	1094.1

(END OF REPORT)