

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332329-935

Luminaire Tested: **S123RDIP-S775D1195U935-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332329-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S775D1195U935-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6232.9 lumens  
Efficiency: N/A  
Efficacy: 109.5 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332329-935

CATALOG NUMBER: S123RDIP-S775D1195U935-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

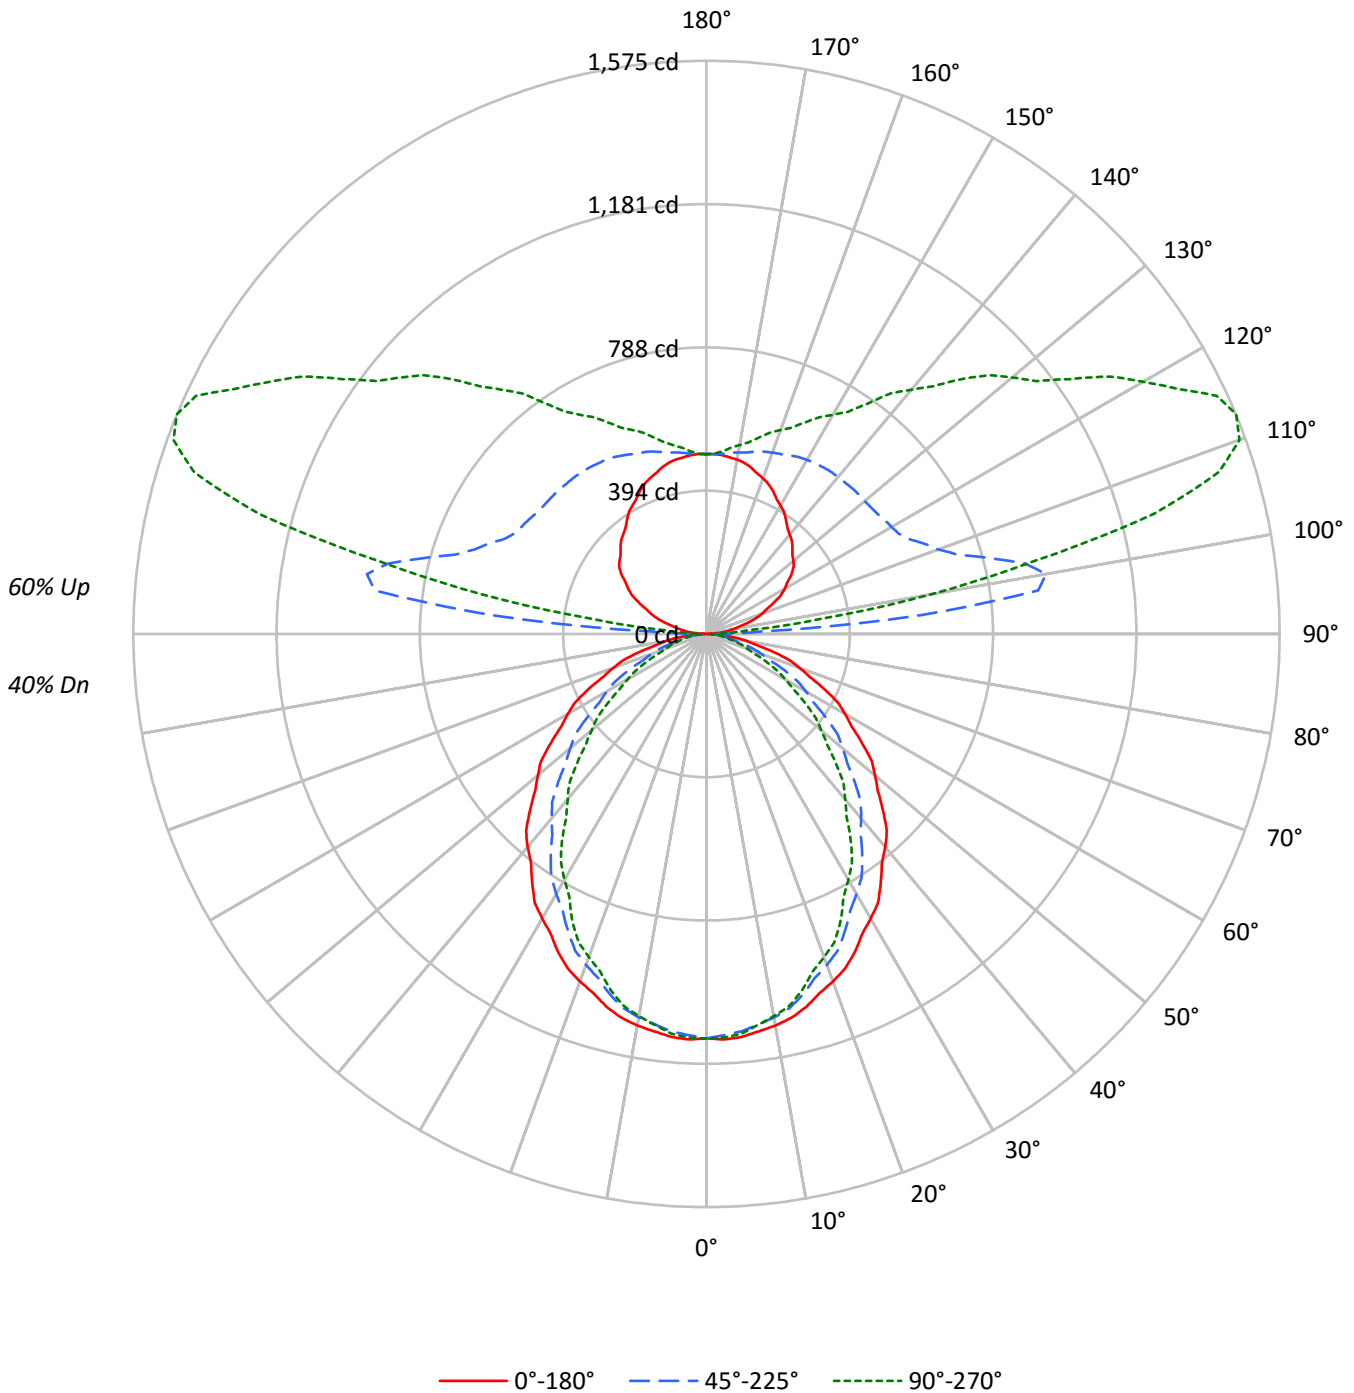



TEST NUMBER: P332329-935

CATALOG NUMBER: S123RDIP-S775D1195U935-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	105	105	105	105	95	95	95	95	78	78	78	62	62	62	47	47	47	40
1	96	92	88	85	87	84	81	78	69	66	64	55	53	52	42	41	40	34
2	87	80	74	69	79	73	68	64	60	57	54	48	46	44	37	36	34	29
3	80	71	64	58	73	65	59	54	54	49	45	43	40	37	33	31	30	25
4	73	63	55	49	66	58	51	46	48	43	39	38	35	32	30	28	26	22
5	67	56	48	42	61	51	45	39	43	38	34	35	31	28	27	25	22	19
6	62	50	42	37	56	46	39	34	39	33	29	31	27	25	25	22	20	17
7	57	45	38	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15
8	53	41	34	28	48	38	31	27	32	27	23	26	22	19	21	18	16	13
9	49	38	30	25	45	35	28	24	29	24	21	24	20	17	19	16	14	12
10	46	34	27	23	42	32	26	21	27	22	19	22	18	16	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11965	11965	11965
5°	12011	11846	11914
10°	11943	11696	11657
15°	11814	11422	11303
20°	11639	11080	10822
25°	11457	10696	10354
30°	11216	10253	9692
35°	10970	9809	9087
40°	10742	9285	8335
45°	10443	8770	7658
50°	10114	8182	6899
55°	9779	7512	6191
60°	9472	6794	5414
65°	9070	6016	4638
70°	8567	5051	3745
75°	7835	3976	3523
80°	6986	3521	3242
85°	5903	3112	2890



TEST NUMBER: P332329-935

CATALOG NUMBER: S123RDIP-S775D1195U935-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	104.4	1.7
10°-20°	290.4	4.7
20°-30°	418.2	6.7
30°-40°	471.1	7.6
40°-50°	450.7	7.2
50°-60°	369.0	5.9
60°-70°	249.0	4.0
70°-80°	125.3	2.0
80°-90°	37.0	0.6
90°-100°	275.0	4.4
100°-110°	778.7	12.5
110°-120°	766.1	12.3
120°-130°	611.0	9.8
130°-140°	481.8	7.7
140°-150°	359.6	5.8
150°-160°	250.6	4.0
160°-170°	147.2	2.4
170°-180°	47.9	0.8
0°-30°	813.0	13.0
0°-40°	1284.1	20.6
0°-60°	2103.8	33.8
0°-90°	2515.0	40.4
90°-120°	1819.8	29.2
90°-150°	3272.2	52.5
90°-180°	3718.0	59.7
0°-180°	6232.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1112	1112	1112	1112	1112	
5°	1112	1107	1096	1104	1103	105
15°	1060	1049	1025	1020	1014	299
25°	965	941	901	882	872	443
35°	835	801	746	709	692	522
45°	686	644	576	526	503	529
55°	521	475	400	350	330	467
65°	356	305	236	194	182	352
75°	188	145	96	87	85	201
85°	48	29	25	24	23	54
90°	2	12	25	28	29	5
95°	34	110	593	173	116	37
105°	116	172	804	1406	1272	123
115°	205	256	615	1349	1548	203
125°	285	337	574	1040	1220	253
135°	334	399	566	857	989	258
145°	381	437	559	703	773	239
155°	433	467	541	615	641	199
165°	473	487	518	550	559	133
175°	493	494	497	504	503	47
180°	494	494	494	494	494	



TEST NUMBER: P332329-935

CATALOG NUMBER: S123RDIP-S775D1195U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1115.2	1114.6	1113.9	1113.3	1112.7	1111.4	1109.4	1107.5	1105.6	1103.6	1105.4
5°	1111.6	1110.6	1109.6	1108.6	1107.6	1105.9	1103.5	1101.0	1098.6	1096.3	1098.0
7.5°	1101.3	1100.3	1099.2	1098.0	1097.0	1094.8	1091.7	1088.6	1085.5	1082.4	1083.4
10°	1092.7	1091.2	1089.9	1088.5	1087.0	1084.5	1080.9	1077.4	1073.8	1070.1	1070.3
12.5°	1080.4	1078.8	1077.3	1075.7	1074.2	1071.2	1066.8	1062.4	1057.9	1053.5	1053.4
15°	1060.2	1058.0	1055.8	1053.6	1051.4	1047.5	1041.9	1036.3	1030.6	1025.0	1024.1
17.5°	1034.7	1032.3	1029.7	1027.1	1024.5	1019.7	1012.5	1005.4	998.2	991.2	989.0
20°	1016.1	1012.8	1009.6	1006.4	1003.2	997.8	990.2	982.6	975.0	967.3	964.8
22.5°	995.1	991.4	987.7	984.0	980.3	974.5	966.4	958.3	950.2	942.1	938.8
25°	964.7	959.7	954.6	949.6	944.6	937.5	928.2	919.0	909.8	900.6	896.4
27.5°	927.6	922.1	916.6	911.1	905.6	897.7	887.4	877.2	866.9	856.6	850.8
30°	902.4	896.4	890.4	884.4	878.4	869.8	858.6	847.3	836.1	824.9	818.1
32.5°	877.2	870.4	863.6	856.8	850.0	840.6	828.7	816.9	805.0	793.2	785.7
35°	834.8	827.6	820.4	813.2	806.0	796.2	783.8	771.3	758.9	746.5	737.9
37.5°	791.9	783.9	775.8	767.8	759.8	749.2	736.0	722.7	709.5	696.2	686.4
40°	764.5	755.7	746.8	738.0	729.3	717.7	703.5	689.3	675.0	660.8	650.4
42.5°	733.5	724.7	715.8	707.1	698.3	686.5	671.8	657.0	642.4	627.7	616.3
45°	686.0	677.1	668.0	659.0	650.0	637.8	622.3	606.9	591.5	576.1	564.6
47.5°	638.7	628.8	618.9	609.0	599.1	586.4	571.0	555.5	540.1	524.7	512.3
50°	604.0	594.6	585.2	575.8	566.4	553.5	537.4	521.1	504.9	488.6	476.2
52.5°	573.0	562.8	552.6	542.3	532.2	519.0	502.9	486.9	470.8	454.7	441.9
55°	521.1	511.3	501.4	491.6	481.8	468.4	451.3	434.4	417.3	400.3	388.7
57.5°	473.1	462.4	451.8	441.0	430.3	416.5	399.3	382.2	365.1	348.0	337.0
60°	440.0	429.0	417.9	406.9	395.9	382.0	365.4	348.8	332.2	315.6	304.7
62.5°	406.7	395.7	384.7	373.7	362.7	348.9	332.3	315.6	299.0	282.3	272.2
65°	356.1	345.1	334.1	323.0	312.0	298.7	283.1	267.4	251.8	236.2	226.4
67.5°	305.5	294.3	283.2	272.0	260.9	247.8	232.8	217.8	202.9	187.9	180.6
70°	272.2	261.5	250.6	239.8	229.0	216.5	202.5	188.6	174.5	160.5	153.4
72.5°	239.1	228.4	217.7	207.1	196.5	184.8	172.0	159.3	146.5	133.8	128.0
75°	188.4	178.8	169.2	159.5	150.0	139.7	128.6	117.6	106.6	95.6	93.6
77.5°	142.2	133.5	124.8	116.1	107.5	99.6	92.5	85.4	78.4	71.2	70.2
80°	112.7	104.4	96.3	88.1	79.8	73.6	69.4	65.2	61.0	56.8	56.2
82.5°	84.6	77.5	70.3	63.3	56.2	51.7	49.7	47.7	45.8	43.8	43.2
85°	47.8	43.4	39.0	34.5	30.1	27.6	27.0	26.4	25.8	25.2	24.9
87.5°	17.7	16.4	15.0	13.9	12.5	12.0	12.6	13.2	13.8	14.4	14.0
90°	2.0	4.0	6.0	9.0	11.0	13.0	16.0	19.0	22.0	25.0	24.0
92.5°	12.4	18.4	26.8	34.6	43.0	57.9	84.0	127.1	169.3	153.9	116.1
95°	34.0	37.0	48.0	65.0	91.0	130.0	215.1	364.1	528.2	593.2	481.1
97.5°	58.0	59.0	67.6	82.4	108.1	150.2	231.5	399.5	673.0	919.3	983.5
100°	74.0	75.0	82.1	96.0	120.0	159.0	229.1	377.1	640.2	947.4	1144.4
102.5°	90.8	92.6	98.8	112.0	133.6	169.4	232.3	357.9	592.2	895.4	1152.4
105°	116.1	119.1	125.0	137.1	156.0	187.1	241.1	344.1	533.2	804.3	1091.4
107.5°	142.8	145.9	151.6	163.4	181.2	210.1	257.5	343.1	495.6	723.8	984.6
110°	162.0	165.1	170.0	181.1	198.0	226.1	271.1	347.2	481.1	678.2	917.3



TEST NUMBER: P332329-935

CATALOG NUMBER: S123RDIP-S775D1195U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	179.7	182.7	187.7	198.6	215.7	242.9	284.7	355.2	473.2	647.8	858.9
115°	205.1	209.1	215.1	225.1	242.1	269.1	307.1	368.2	470.2	615.2	788.2
117.5°	230.5	235.1	240.0	249.3	268.3	293.3	330.9	385.3	472.0	596.0	745.6
120°	248.1	251.1	256.1	266.1	285.1	310.1	346.1	398.1	475.2	587.2	723.2
122.5°	263.3	266.3	271.3	282.1	300.3	326.9	362.1	410.2	480.8	581.6	704.8
125°	285.1	287.1	293.1	304.1	323.1	350.1	385.1	429.1	489.1	574.2	681.2
127.5°	301.7	304.7	312.1	323.3	344.3	371.3	405.1	444.8	498.8	570.6	660.5
130°	312.1	315.1	324.1	336.1	357.1	384.1	417.2	455.1	505.1	568.2	649.2
132.5°	320.1	323.9	333.7	348.1	369.1	395.4	427.6	464.8	510.0	567.4	638.9
135°	334.2	338.1	349.1	364.1	385.1	412.2	443.2	477.2	517.2	566.2	625.3
137.5°	347.3	351.5	362.3	378.3	399.2	424.1	453.9	486.4	522.0	564.0	613.4
140°	356.1	361.1	371.1	387.1	407.2	432.1	461.2	491.2	525.2	563.2	606.2
142.5°	365.8	370.0	380.7	395.1	415.2	438.6	466.7	495.9	527.6	561.6	599.8
145°	381.2	384.1	393.1	408.1	425.2	448.2	474.2	501.2	529.2	559.2	591.2
147.5°	396.7	398.6	407.3	420.3	436.8	456.3	480.2	504.4	529.2	555.4	582.8
150°	407.2	408.1	416.1	429.1	443.2	461.2	484.1	505.1	529.2	552.2	577.2
152.5°	417.6	417.8	425.8	437.1	449.5	466.7	486.6	506.8	526.8	548.2	570.8
155°	433.2	433.2	439.2	449.2	460.1	474.2	491.2	507.2	524.2	541.2	561.2
157.5°	445.6	446.3	451.2	459.9	469.3	480.2	493.8	508.2	520.8	535.0	550.4
160°	455.1	455.1	459.2	467.2	474.2	484.1	496.2	508.2	519.2	530.2	543.2
162.5°	462.4	462.4	465.5	472.0	478.2	486.6	497.0	507.4	516.0	525.4	536.0
165°	473.2	472.2	474.2	479.1	483.2	490.2	498.2	505.1	511.2	518.1	526.2
167.5°	481.4	480.2	481.1	485.0	487.8	492.1	498.0	503.6	506.4	511.0	516.8
170°	486.2	484.1	485.2	488.2	490.2	492.1	497.1	501.2	503.2	506.2	511.2
172.5°	489.4	488.2	488.4	490.6	491.8	493.0	497.1	500.4	500.8	502.1	505.6
175°	493.2	492.1	491.2	493.2	493.2	494.2	496.2	498.2	497.1	497.1	499.2
177.5°	495.0	494.2	493.4	494.2	494.2	494.2	495.0	496.5	495.0	494.2	495.0
180°	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2



TEST NUMBER: P332329-935

CATALOG NUMBER: S123RDIP-S775D1195U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1107.2	1109.0	1110.7	1111.5	1111.1	1110.8	1110.4	1110.2
5°	1099.8	1101.6	1103.5	1104.1	1103.8	1103.4	1102.9	1102.6
7.5°	1084.4	1085.4	1086.4	1086.6	1085.9	1085.2	1084.5	1083.8
10°	1070.6	1070.7	1070.9	1070.6	1069.5	1068.5	1067.6	1066.5
12.5°	1053.3	1053.2	1053.1	1052.4	1051.3	1050.1	1049.0	1047.8
15°	1023.0	1022.0	1021.1	1019.9	1018.5	1017.0	1015.6	1014.3
17.5°	986.9	984.8	982.7	980.6	978.4	976.4	974.3	972.2
20°	962.2	959.5	956.9	954.4	952.0	949.6	947.2	944.8
22.5°	935.6	932.4	929.1	926.3	924.1	921.9	919.6	917.4
25°	892.3	888.0	883.8	880.6	878.4	876.2	874.0	871.8
27.5°	844.9	839.1	833.3	828.6	825.3	821.9	818.6	815.2
30°	811.3	804.4	797.6	792.6	789.5	786.3	783.0	779.8
32.5°	778.3	770.9	763.4	757.9	754.6	751.2	747.9	744.5
35°	729.3	720.7	712.0	705.9	702.3	698.7	695.1	691.5
37.5°	676.6	666.8	657.0	650.0	645.5	641.0	636.6	632.1
40°	640.0	629.6	619.1	611.7	607.0	602.4	597.8	593.2
42.5°	604.9	593.5	582.1	574.4	570.2	566.1	562.0	557.8
45°	553.3	541.8	530.4	522.3	517.5	512.6	507.9	503.1
47.5°	499.8	487.4	475.0	466.7	462.4	458.1	453.8	449.5
50°	463.8	451.3	438.9	430.4	425.9	421.2	416.6	412.0
52.5°	429.0	416.0	403.1	394.6	390.5	386.3	382.2	378.1
55°	377.0	365.4	353.8	345.9	342.0	337.9	334.0	329.9
57.5°	326.1	315.0	304.1	296.9	293.5	290.1	286.6	283.3
60°	293.9	283.1	272.2	265.2	261.7	258.3	254.9	251.5
62.5°	262.0	251.8	241.7	234.8	231.2	227.6	224.1	220.5
65°	216.5	206.7	196.9	190.9	188.7	186.5	184.3	182.1
67.5°	173.2	165.9	158.5	153.7	151.4	149.0	146.6	144.2
70°	146.5	139.4	132.4	127.9	125.6	123.4	121.2	119.0
72.5°	122.3	116.6	110.9	107.5	106.6	105.7	104.8	103.8
75°	91.5	89.5	87.6	86.4	85.9	85.6	85.2	84.7
77.5°	69.1	67.9	66.9	66.1	65.8	65.3	64.9	64.6
80°	55.6	55.0	54.4	53.9	53.5	53.1	52.7	52.3
82.5°	42.6	42.0	41.4	41.1	41.0	40.9	40.8	40.7
85°	24.5	24.0	23.7	23.4	23.4	23.4	23.4	23.4
87.5°	14.0	14.1	14.1	14.4	14.0	14.0	14.1	13.8
90°	25.0	26.0	27.0	29.0	28.0	29.0	30.0	29.0
92.5°	84.2	66.8	59.0	53.8	52.0	49.0	50.0	48.2
95°	360.2	244.1	191.1	155.1	136.0	127.1	120.0	116.1
97.5°	897.7	719.0	590.0	470.4	396.6	351.5	324.5	315.9
100°	1179.4	1098.4	981.4	839.3	738.2	665.2	626.2	627.2
102.5°	1273.1	1270.4	1202.2	1112.2	1033.5	975.8	943.1	920.2
105°	1300.5	1400.5	1419.5	1393.5	1347.5	1309.5	1277.5	1272.5
107.5°	1221.6	1384.1	1471.7	1507.4	1508.1	1495.3	1484.5	1475.3
110°	1146.4	1330.5	1456.6	1526.6	1554.5	1562.5	1560.6	1558.6





TEST NUMBER: P332329-935

CATALOG NUMBER: S123RDIP-S775D1195U935-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1071.9	1260.1	1401.3	1491.3	1542.6	1567.4	1574.9	1575.4
115°	973.4	1147.4	1294.4	1403.5	1478.5	1522.5	1542.6	1547.6
117.5°	901.9	1052.1	1184.2	1294.9	1373.1	1423.5	1452.3	1459.1
120°	864.3	999.4	1119.4	1220.5	1299.4	1355.5	1379.5	1385.5
122.5°	834.7	956.9	1068.2	1162.0	1232.3	1282.6	1309.1	1316.6
125°	795.3	904.3	1000.3	1080.4	1144.4	1188.4	1213.4	1220.5
127.5°	760.9	858.1	944.7	1017.5	1074.6	1112.2	1134.8	1141.2
130°	739.3	829.3	910.3	978.4	1031.4	1067.4	1088.4	1096.4
132.5°	719.3	802.1	877.5	942.4	992.1	1028.1	1046.8	1052.4
135°	692.2	763.3	828.3	885.3	934.4	964.3	982.3	989.4
137.5°	667.6	725.8	781.9	831.3	872.5	902.9	918.1	922.7
140°	653.2	704.2	752.3	795.3	833.3	861.3	877.3	876.3
142.5°	639.6	683.5	725.0	762.5	794.9	819.7	834.1	833.1
145°	623.2	656.3	688.3	717.2	742.3	763.3	771.3	773.3
147.5°	609.8	636.0	661.9	682.4	701.5	715.7	723.2	724.0
150°	600.2	623.2	644.2	663.2	678.2	689.2	695.3	695.3
152.5°	591.4	611.2	629.8	645.7	657.5	667.6	671.2	671.2
155°	578.2	594.2	609.2	621.2	630.3	638.3	640.2	641.2
157.5°	564.2	577.6	589.2	598.6	606.4	612.4	614.0	613.8
160°	556.2	567.2	577.2	584.2	591.2	597.2	597.2	596.2
162.5°	546.6	556.0	565.2	571.4	576.0	581.2	581.2	580.2
165°	534.2	540.2	547.2	552.2	556.2	560.2	559.2	559.2
167.5°	523.4	528.0	532.0	535.6	537.4	540.2	539.2	539.2
170°	516.2	519.2	523.1	525.2	526.2	528.2	527.2	527.2
172.5°	509.8	512.0	515.2	516.3	516.6	518.6	516.8	516.0
175°	501.2	502.1	504.2	504.2	504.2	505.1	504.2	503.2
177.5°	495.8	496.5	497.4	497.4	496.5	497.4	495.8	495.8
180°	494.2	494.2	494.2	494.2	494.2	494.2	494.2	494.2

(END OF REPORT)