

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332304-935

Luminaire Tested: **S123RDIP-S775D365U935-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332304-935
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S775D365U935-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3585.5 lumens
Efficiency: N/A
Efficacy: 102.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332304-935

CATALOG NUMBER: S123RDIP-S775D365U935-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

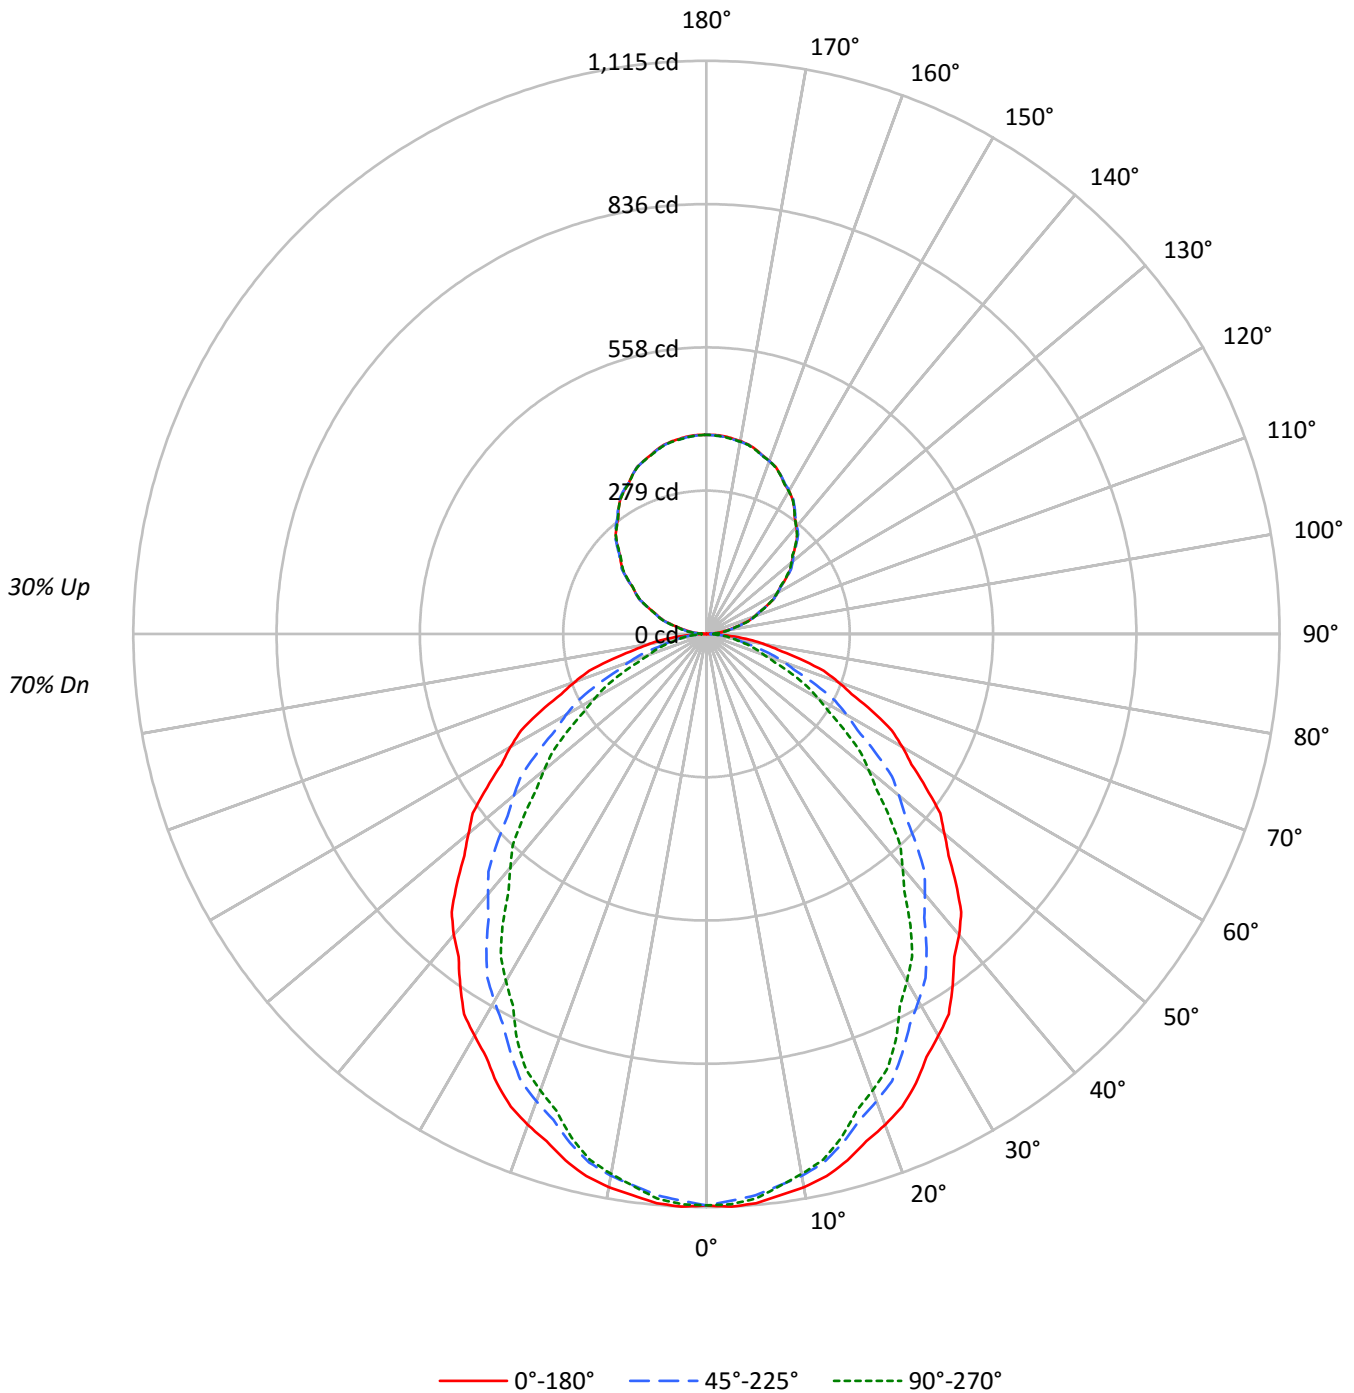



TEST NUMBER: P332304-935

CATALOG NUMBER: S123RDIP-S775D365U935-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	94	94	94	84	84	84	75	75	75	70
1	103	98	95	91	97	93	90	87	84	81	79	75	73	71	67	65	64	60
2	94	87	80	75	89	82	77	72	74	70	66	66	63	60	59	57	55	51
3	86	77	69	63	81	73	66	61	66	60	56	59	55	51	53	50	47	44
4	79	68	60	54	74	65	58	52	59	53	48	53	48	44	48	44	41	38
5	73	61	53	47	69	58	51	45	53	47	42	48	43	39	43	39	36	33
6	67	55	47	41	63	52	45	40	48	42	37	43	38	34	39	35	32	29
7	62	50	42	36	59	48	40	35	44	37	33	40	34	31	36	32	28	26
8	58	46	38	32	55	44	36	31	40	34	29	36	31	27	33	29	26	23
9	54	42	34	29	51	40	33	28	37	31	26	34	28	25	31	26	23	21
10	51	38	31	26	48	37	30	26	34	28	24	31	26	23	28	24	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11965	11965	11965
5°	12011	11846	11914
10°	11943	11696	11657
15°	11814	11422	11303
20°	11639	11080	10822
25°	11457	10696	10354
30°	11216	10253	9692
35°	10970	9809	9087
40°	10742	9285	8335
45°	10443	8770	7658
50°	10114	8182	6899
55°	9779	7512	6191
60°	9472	6794	5414
65°	9070	6016	4638
70°	8567	5051	3745
75°	7835	3976	3523
80°	6986	3521	3242
85°	5903	3112	2890



TEST NUMBER: P332304-935

CATALOG NUMBER: S123RDIP-S775D365U935-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	104.4	2.9
10°-20°	290.4	8.1
20°-30°	418.2	11.7
30°-40°	471.1	13.1
40°-50°	450.7	12.6
50°-60°	369.0	10.3
60°-70°	249.0	6.9
70°-80°	125.3	3.5
80°-90°	34.3	1.0
90°-100°	25.2	0.7
100°-110°	75.5	2.1
110°-120°	128.5	3.6
120°-130°	169.0	4.7
130°-140°	189.9	5.3
140°-150°	186.7	5.2
150°-160°	157.2	4.4
160°-170°	104.6	2.9
170°-180°	36.6	1.0
0°-30°	813.0	22.7
0°-40°	1284.1	35.8
0°-60°	2103.8	58.7
0°-90°	2512.3	70.1
90°-120°	229.2	6.4
90°-150°	774.8	21.6
90°-180°	1073.0	29.9
0°-180°	3585.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1112	1112	1112	1112	1112	
5°	1112	1107	1096	1104	1103	105
15°	1060	1049	1025	1020	1014	299
25°	965	941	901	882	872	443
35°	835	801	746	709	692	522
45°	686	644	576	526	503	529
55°	521	475	400	350	330	467
65°	356	305	236	194	182	352
75°	188	145	96	87	85	201
85°	48	29	25	24	23	54
90°	0	3	7	8	9	3
95°	18	20	23	24	24	20
105°	68	69	72	72	72	73
115°	129	130	130	130	130	128
125°	189	190	190	188	187	169
135°	246	247	247	246	245	189
145°	298	298	299	299	298	186
155°	341	341	341	342	340	157
165°	372	371	371	372	370	105
175°	386	385	385	387	385	37
180°	387	387	387	387	387	



TEST NUMBER: P332304-935

CATALOG NUMBER: S123RDIP-S775D365U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1115.2	1114.6	1113.9	1113.3	1112.7	1111.4	1109.4	1107.5	1105.6	1103.6	1105.4
5°	1111.6	1110.6	1109.6	1108.6	1107.6	1105.9	1103.5	1101.0	1098.6	1096.3	1098.0
7.5°	1101.3	1100.3	1099.2	1098.0	1097.0	1094.8	1091.7	1088.6	1085.5	1082.4	1083.4
10°	1092.7	1091.2	1089.9	1088.5	1087.0	1084.5	1080.9	1077.4	1073.8	1070.1	1070.3
12.5°	1080.4	1078.8	1077.3	1075.7	1074.2	1071.2	1066.8	1062.4	1057.9	1053.5	1053.4
15°	1060.2	1058.0	1055.8	1053.6	1051.4	1047.5	1041.9	1036.3	1030.6	1025.0	1024.1
17.5°	1034.7	1032.3	1029.7	1027.1	1024.5	1019.7	1012.5	1005.4	998.2	991.2	989.0
20°	1016.1	1012.8	1009.6	1006.4	1003.2	997.8	990.2	982.6	975.0	967.3	964.8
22.5°	995.1	991.4	987.7	984.0	980.3	974.5	966.4	958.3	950.2	942.1	938.8
25°	964.7	959.7	954.6	949.6	944.6	937.5	928.2	919.0	909.8	900.6	896.4
27.5°	927.6	922.1	916.6	911.1	905.6	897.7	887.4	877.2	866.9	856.6	850.8
30°	902.4	896.4	890.4	884.4	878.4	869.8	858.6	847.3	836.1	824.9	818.1
32.5°	877.2	870.4	863.6	856.8	850.0	840.6	828.7	816.9	805.0	793.2	785.7
35°	834.8	827.6	820.4	813.2	806.0	796.2	783.8	771.3	758.9	746.5	737.9
37.5°	791.9	783.9	775.8	767.8	759.8	749.2	736.0	722.7	709.5	696.2	686.4
40°	764.5	755.7	746.8	738.0	729.3	717.7	703.5	689.3	675.0	660.8	650.4
42.5°	733.5	724.7	715.8	707.1	698.3	686.5	671.8	657.0	642.4	627.7	616.3
45°	686.0	677.1	668.0	659.0	650.0	637.8	622.3	606.9	591.5	576.1	564.6
47.5°	638.7	628.8	618.9	609.0	599.1	586.4	571.0	555.5	540.1	524.7	512.3
50°	604.0	594.6	585.2	575.8	566.4	553.5	537.4	521.1	504.9	488.6	476.2
52.5°	573.0	562.8	552.6	542.3	532.2	519.0	502.9	486.9	470.8	454.7	441.9
55°	521.1	511.3	501.4	491.6	481.8	468.4	451.3	434.4	417.3	400.3	388.7
57.5°	473.1	462.4	451.8	441.0	430.3	416.5	399.3	382.2	365.1	348.0	337.0
60°	440.0	429.0	417.9	406.9	395.9	382.0	365.4	348.8	332.2	315.6	304.7
62.5°	406.7	395.7	384.7	373.7	362.7	348.9	332.3	315.6	299.0	282.3	272.2
65°	356.1	345.1	334.1	323.0	312.0	298.7	283.1	267.4	251.8	236.2	226.4
67.5°	305.5	294.3	283.2	272.0	260.9	247.8	232.8	217.8	202.9	187.9	180.6
70°	272.2	261.5	250.6	239.8	229.0	216.5	202.5	188.6	174.5	160.5	153.4
72.5°	239.1	228.4	217.7	207.1	196.5	184.8	172.0	159.3	146.5	133.8	128.0
75°	188.4	178.8	169.2	159.5	150.0	139.7	128.6	117.6	106.6	95.6	93.6
77.5°	142.2	133.5	124.8	116.1	107.5	99.6	92.5	85.4	78.4	71.2	70.2
80°	112.7	104.4	96.3	88.1	79.8	73.6	69.4	65.2	61.0	56.8	56.2
82.5°	84.6	77.5	70.3	63.3	56.2	51.7	49.7	47.7	45.8	43.8	43.2
85°	47.8	43.4	39.0	34.5	30.1	27.6	27.0	26.4	25.8	25.2	24.9
87.5°	17.4	15.8	14.1	12.5	10.8	10.2	10.3	10.5	10.7	10.8	10.8
90°	0.3	0.9	1.6	2.3	3.0	3.8	4.6	5.5	6.5	7.3	7.6
92.5°	7.4	7.8	8.3	8.8	9.2	9.6	10.2	10.7	11.2	11.7	11.9
95°	18.0	18.4	18.9	19.4	19.8	20.3	20.9	21.4	22.0	22.6	22.8
97.5°	31.9	32.2	32.6	33.0	33.3	33.7	34.1	34.4	34.9	35.2	35.6
100°	41.4	41.8	42.2	42.6	43.0	43.4	43.7	44.1	44.4	44.7	44.9
102.5°	52.3	52.6	52.8	53.0	53.3	53.6	54.1	54.6	55.0	55.4	55.6
105°	68.4	68.6	68.7	68.9	69.0	69.4	70.0	70.6	71.2	71.8	71.8
107.5°	87.2	87.3	87.4	87.5	87.6	87.6	87.9	88.2	88.4	88.7	88.9
110°	98.9	99.0	99.2	99.3	99.4	99.5	99.7	99.9	100.0	100.1	100.4



TEST NUMBER: P332304-935

CATALOG NUMBER: S123RDIP-S775D365U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	111.1	111.2	111.2	111.3	111.4	111.4	111.5	111.5	111.5	111.6	111.8
115°	129.3	129.5	129.8	129.9	130.1	130.2	130.0	129.9	129.8	129.6	129.7
117.5°	147.7	147.8	148.0	148.1	148.3	148.2	148.0	147.8	147.7	147.5	147.5
120°	159.1	159.5	160.0	160.3	160.7	160.7	160.5	160.1	159.8	159.5	159.4
122.5°	171.1	171.3	171.7	171.9	172.3	172.3	172.1	171.9	171.8	171.6	171.4
125°	189.2	189.4	189.7	189.9	190.1	190.1	189.9	189.9	189.7	189.6	189.2
127.5°	206.0	206.5	206.9	207.3	207.8	207.9	207.8	207.6	207.5	207.3	207.0
130°	217.2	217.7	218.3	218.9	219.4	219.6	219.4	219.2	219.0	218.8	218.5
132.5°	228.4	229.0	229.5	230.1	230.6	230.8	230.7	230.5	230.3	230.2	229.9
135°	245.6	246.0	246.3	246.8	247.2	247.4	247.3	247.2	247.1	247.1	246.8
137.5°	261.4	261.7	262.0	262.3	262.7	262.9	263.1	263.3	263.5	263.6	263.4
140°	272.3	272.7	273.0	273.4	273.7	273.9	274.0	274.0	274.1	274.1	274.1
142.5°	282.3	282.7	283.0	283.4	283.6	283.9	284.0	284.1	284.2	284.4	284.3
145°	297.9	298.0	298.2	298.3	298.4	298.6	298.8	299.0	299.2	299.4	299.4
147.5°	311.5	311.8	312.0	312.3	312.5	312.7	312.9	313.1	313.2	313.5	313.5
150°	321.0	321.2	321.2	321.4	321.6	321.7	321.8	321.9	322.1	322.2	322.2
152.5°	328.8	329.0	329.2	329.3	329.6	329.7	329.8	329.8	329.9	330.0	330.1
155°	341.1	341.1	341.1	341.1	341.1	341.1	341.2	341.2	341.3	341.4	341.6
157.5°	351.5	351.5	351.4	351.3	351.2	351.2	351.3	351.3	351.4	351.5	351.7
160°	358.1	358.0	357.8	357.7	357.6	357.5	357.5	357.5	357.5	357.5	357.8
162.5°	363.9	363.8	363.6	363.4	363.2	363.2	363.2	363.3	363.3	363.3	363.7
165°	371.5	371.3	371.1	370.9	370.7	370.6	370.6	370.6	370.6	370.6	371.0
167.5°	377.5	377.3	377.0	376.7	376.4	376.3	376.4	376.4	376.5	376.6	376.9
170°	380.9	380.6	380.4	380.1	379.9	379.7	379.7	379.7	379.7	379.7	380.2
172.5°	383.7	383.3	383.1	382.8	382.5	382.4	382.4	382.4	382.4	382.4	382.8
175°	386.4	386.2	385.9	385.6	385.4	385.2	385.2	385.2	385.2	385.2	385.6
177.5°	387.5	387.4	387.1	386.9	386.7	386.6	386.6	386.6	386.6	386.6	386.9
180°	387.4	387.4	387.4	387.4	387.4	387.4	387.4	387.4	387.4	387.4	387.4



TEST NUMBER: P332304-935

CATALOG NUMBER: S123RDIP-S775D365U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1107.2	1109.0	1110.7	1111.5	1111.1	1110.8	1110.4	1110.2
5°	1099.8	1101.6	1103.5	1104.1	1103.8	1103.4	1102.9	1102.6
7.5°	1084.4	1085.4	1086.4	1086.6	1085.9	1085.2	1084.5	1083.8
10°	1070.6	1070.7	1070.9	1070.6	1069.5	1068.5	1067.6	1066.5
12.5°	1053.3	1053.2	1053.1	1052.4	1051.3	1050.1	1049.0	1047.8
15°	1023.0	1022.0	1021.1	1019.9	1018.5	1017.0	1015.6	1014.3
17.5°	986.9	984.8	982.7	980.6	978.4	976.4	974.3	972.2
20°	962.2	959.5	956.9	954.4	952.0	949.6	947.2	944.8
22.5°	935.6	932.4	929.1	926.3	924.1	921.9	919.6	917.4
25°	892.3	888.0	883.8	880.6	878.4	876.2	874.0	871.8
27.5°	844.9	839.1	833.3	828.6	825.3	821.9	818.6	815.2
30°	811.3	804.4	797.6	792.6	789.5	786.3	783.0	779.8
32.5°	778.3	770.9	763.4	757.9	754.6	751.2	747.9	744.5
35°	729.3	720.7	712.0	705.9	702.3	698.7	695.1	691.5
37.5°	676.6	666.8	657.0	650.0	645.5	641.0	636.6	632.1
40°	640.0	629.6	619.1	611.7	607.0	602.4	597.8	593.2
42.5°	604.9	593.5	582.1	574.4	570.2	566.1	562.0	557.8
45°	553.3	541.8	530.4	522.3	517.5	512.6	507.9	503.1
47.5°	499.8	487.4	475.0	466.7	462.4	458.1	453.8	449.5
50°	463.8	451.3	438.9	430.4	425.9	421.2	416.6	412.0
52.5°	429.0	416.0	403.1	394.6	390.5	386.3	382.2	378.1
55°	377.0	365.4	353.8	345.9	342.0	337.9	334.0	329.9
57.5°	326.1	315.0	304.1	296.9	293.5	290.1	286.6	283.3
60°	293.9	283.1	272.2	265.2	261.7	258.3	254.9	251.5
62.5°	262.0	251.8	241.7	234.8	231.2	227.6	224.1	220.5
65°	216.5	206.7	196.9	190.9	188.7	186.5	184.3	182.1
67.5°	173.2	165.9	158.5	153.7	151.4	149.0	146.6	144.2
70°	146.5	139.4	132.4	127.9	125.6	123.4	121.2	119.0
72.5°	122.3	116.6	110.9	107.5	106.6	105.7	104.8	103.8
75°	91.5	89.5	87.6	86.4	85.9	85.6	85.2	84.7
77.5°	69.1	67.9	66.9	66.1	65.8	65.3	64.9	64.6
80°	55.6	55.0	54.4	53.9	53.5	53.1	52.7	52.3
82.5°	42.6	42.0	41.4	41.1	41.0	40.9	40.8	40.7
85°	24.5	24.0	23.7	23.4	23.4	23.4	23.4	23.4
87.5°	10.6	10.5	10.4	10.3	10.2	10.0	9.9	9.7
90°	7.8	8.1	8.4	8.6	8.7	8.9	9.0	9.1
92.5°	12.1	12.3	12.6	12.7	12.6	12.5	12.4	12.3
95°	23.1	23.3	23.6	23.8	23.8	23.8	23.8	23.8
97.5°	35.8	36.2	36.5	36.6	36.6	36.6	36.5	36.5
100°	45.1	45.4	45.5	45.7	45.8	46.0	46.1	46.2
102.5°	55.9	56.1	56.2	56.3	56.3	56.3	56.2	56.2
105°	71.8	71.8	71.8	71.9	72.0	72.2	72.3	72.4
107.5°	89.1	89.3	89.5	89.6	89.5	89.5	89.4	89.3
110°	100.7	100.9	101.2	101.3	101.1	101.0	100.8	100.7



TEST NUMBER: P332304-935

CATALOG NUMBER: S123RDIP-S775D365U935-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	112.2	112.5	112.9	113.0	113.0	113.0	112.9	112.9
115°	129.8	129.8	129.9	129.9	129.8	129.8	129.7	129.6
117.5°	147.5	147.5	147.5	147.3	147.1	147.0	146.8	146.6
120°	159.3	159.2	159.2	159.0	158.9	158.8	158.7	158.5
122.5°	171.3	171.1	170.9	170.7	170.6	170.3	170.1	170.0
125°	189.0	188.7	188.5	188.2	188.0	187.7	187.4	187.1
127.5°	206.6	206.2	205.8	205.4	205.2	204.8	204.6	204.2
130°	218.3	217.9	217.7	217.3	216.9	216.4	215.9	215.4
132.5°	229.5	229.2	228.9	228.6	228.2	227.8	227.5	227.1
135°	246.5	246.2	246.0	245.8	245.6	245.5	245.4	245.2
137.5°	263.1	262.9	262.5	262.3	262.0	261.7	261.5	261.2
140°	274.0	274.0	273.9	273.6	273.1	272.7	272.2	271.7
142.5°	284.2	284.1	284.1	283.9	283.5	283.2	282.8	282.4
145°	299.3	299.2	299.1	298.9	298.7	298.4	298.2	297.9
147.5°	313.5	313.5	313.5	313.2	312.9	312.5	312.0	311.6
150°	322.2	322.2	322.2	322.0	321.6	321.2	320.8	320.4
152.5°	330.2	330.4	330.5	330.3	329.9	329.6	329.2	328.9
155°	341.9	342.2	342.5	342.3	341.9	341.4	341.0	340.4
157.5°	352.0	352.3	352.6	352.5	352.1	351.8	351.4	351.0
160°	358.2	358.5	358.9	358.9	358.6	358.3	358.1	357.8
162.5°	364.0	364.4	364.7	364.6	364.2	363.8	363.3	362.9
165°	371.4	371.8	372.2	372.2	371.7	371.3	370.7	370.3
167.5°	377.4	377.8	378.2	378.2	377.8	377.4	376.9	376.6
170°	380.6	381.2	381.6	381.6	381.2	380.6	380.2	379.7
172.5°	383.2	383.7	384.1	384.1	383.6	383.1	382.6	382.2
175°	386.0	386.4	386.8	386.8	386.3	385.8	385.4	384.9
177.5°	387.3	387.5	387.9	387.9	387.5	387.1	386.8	386.3
180°	387.4	387.4	387.4	387.4	387.4	387.4	387.4	387.4

(END OF REPORT)