

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332309-935

Luminaire Tested: **S123RDIP-S775D585U935-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332309-935  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S775D585U935-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 585 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4528.7 lumens  
Efficiency: N/A  
Efficacy: 112.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 40.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332309-935

CATALOG NUMBER: S123RDIP-S775D585U935-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

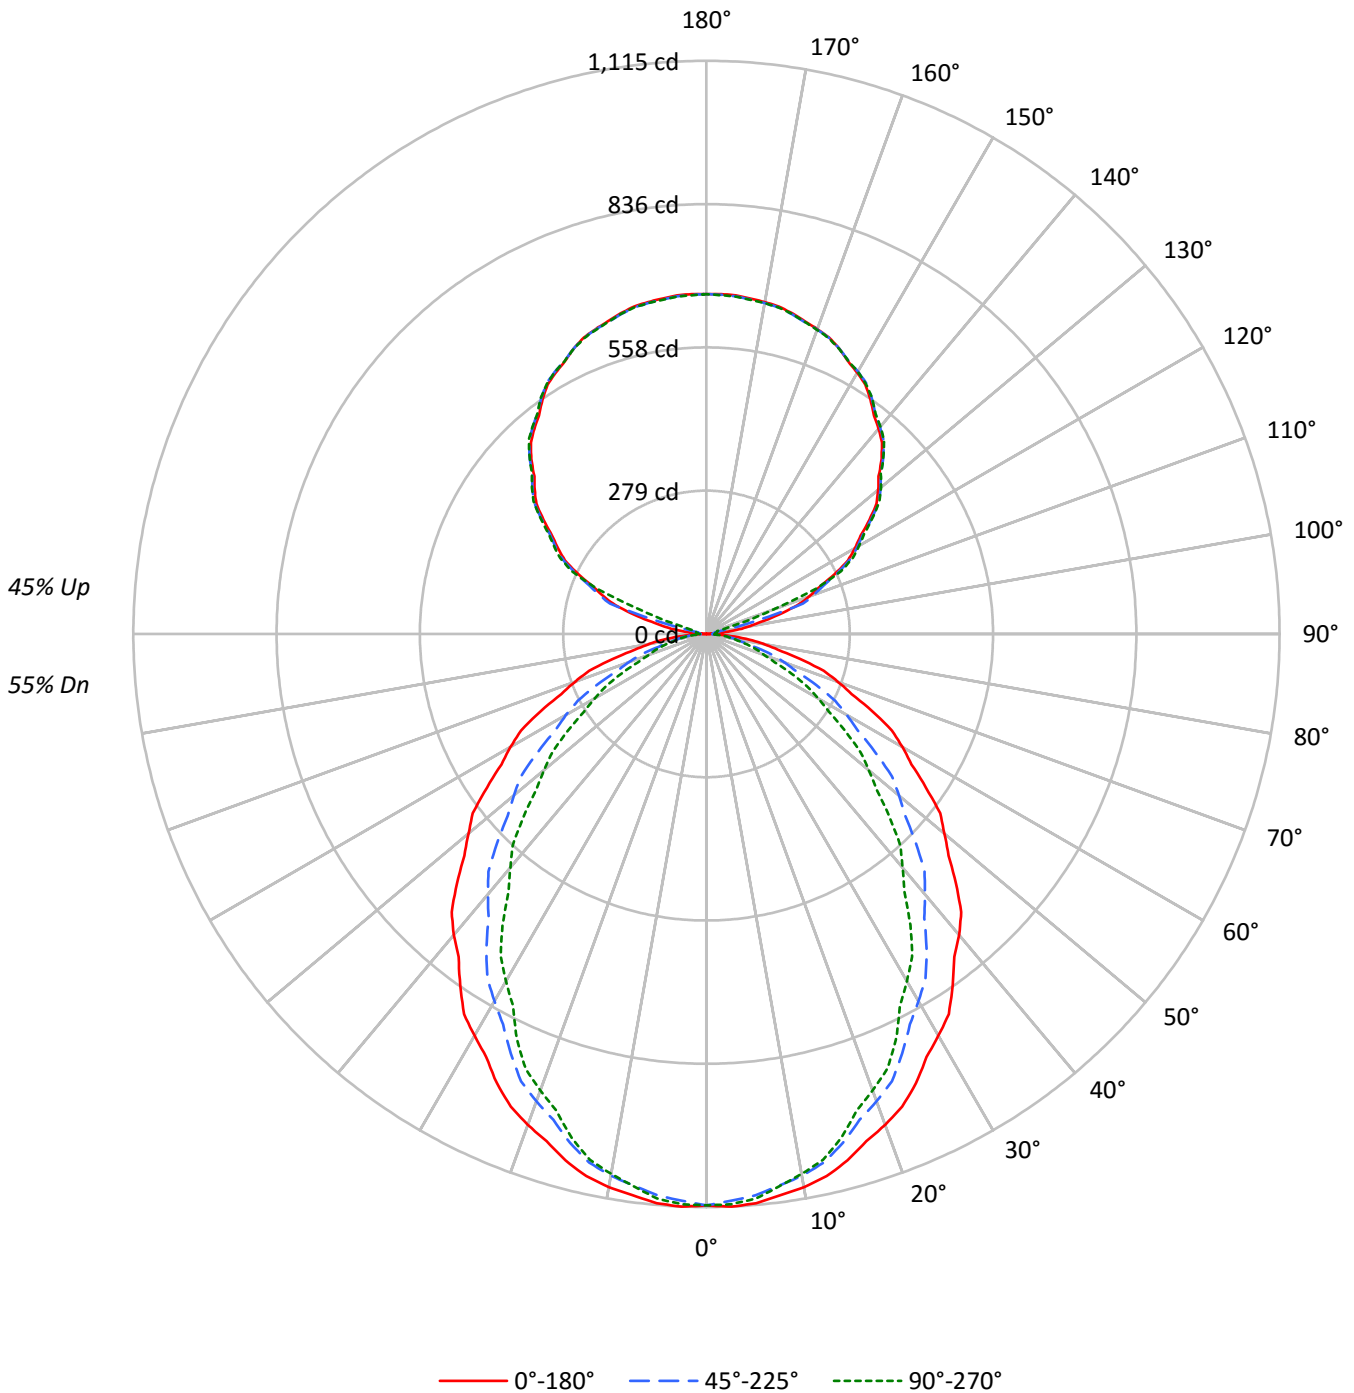



TEST NUMBER: P332309-935

CATALOG NUMBER: S123RDIP-S775D585U935-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61	55
1	99	95	91	88	92	89	85	82	76	74	72	65	63	62	55	53	52	47
2	91	84	77	72	84	78	73	68	67	63	60	58	55	52	49	46	45	40
3	83	74	67	61	77	69	62	57	60	55	51	51	48	44	43	41	38	35
4	76	65	58	52	71	61	54	49	53	48	44	46	42	38	39	36	33	30
5	70	59	50	45	65	55	48	42	48	42	38	41	37	34	35	32	29	26
6	65	53	45	39	60	49	42	37	43	37	33	37	33	30	32	29	26	23
7	60	48	40	34	56	45	38	33	39	34	29	34	30	26	29	26	23	21
8	56	43	36	30	52	41	34	29	36	30	26	31	27	24	27	23	21	19
9	52	40	32	27	48	37	31	26	33	27	24	29	24	21	25	21	19	17
10	49	36	29	25	45	34	28	23	30	25	21	27	22	19	23	20	17	15

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11965	11965	11965
5°	12011	11846	11914
10°	11943	11696	11657
15°	11814	11422	11303
20°	11639	11080	10822
25°	11457	10696	10354
30°	11216	10253	9692
35°	10970	9809	9087
40°	10742	9285	8335
45°	10443	8770	7658
50°	10114	8182	6899
55°	9779	7512	6191
60°	9472	6794	5414
65°	9070	6016	4638
70°	8567	5051	3745
75°	7835	3976	3523
80°	6986	3521	3242
85°	5903	3112	2890



TEST NUMBER: P332309-935

CATALOG NUMBER: S123RDIP-S775D585U935-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	104.4	2.3
10°-20°	290.4	6.4
20°-30°	418.2	9.2
30°-40°	471.1	10.4
40°-50°	450.7	10.0
50°-60°	369.0	8.1
60°-70°	249.0	5.5
70°-80°	125.3	2.8
80°-90°	35.0	0.8
90°-100°	24.0	0.5
100°-110°	114.5	2.5
110°-120°	275.1	6.1
120°-130°	350.3	7.7
130°-140°	374.3	8.3
140°-150°	350.0	7.7
150°-160°	282.3	6.2
160°-170°	182.2	4.0
170°-180°	62.8	1.4
0°-30°	813.0	18.0
0°-40°	1284.1	28.4
0°-60°	2103.8	46.5
0°-90°	2513.0	55.5
90°-120°	413.7	9.1
90°-150°	1488.3	32.9
90°-180°	2016.0	44.5
0°-180°	4528.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1112	1112	1112	1112	1112	
5°	1112	1107	1096	1104	1103	105
15°	1060	1049	1025	1020	1014	299
25°	965	941	901	882	872	443
35°	835	801	746	709	692	522
45°	686	644	576	526	503	529
55°	521	475	400	350	330	467
65°	356	305	236	194	182	352
75°	188	145	96	87	85	201
85°	48	29	25	24	23	54
90°	0	5	12	14	15	4
95°	30	11	15	18	19	37
105°	146	149	108	26	22	155
115°	274	278	282	287	289	271
125°	387	391	393	394	395	345
135°	482	485	487	488	487	371
145°	556	559	560	561	561	348
155°	612	612	612	614	611	282
165°	646	644	644	647	644	182
175°	661	659	659	662	658	63
180°	661	661	661	661	661	



TEST NUMBER: P332309-935

CATALOG NUMBER: S123RDIP-S775D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1115.2	1114.6	1113.9	1113.3	1112.7	1111.4	1109.4	1107.5	1105.6	1103.6	1105.4
5°	1111.6	1110.6	1109.6	1108.6	1107.6	1105.9	1103.5	1101.0	1098.6	1096.3	1098.0
7.5°	1101.3	1100.3	1099.2	1098.0	1097.0	1094.8	1091.7	1088.6	1085.5	1082.4	1083.4
10°	1092.7	1091.2	1089.9	1088.5	1087.0	1084.5	1080.9	1077.4	1073.8	1070.1	1070.3
12.5°	1080.4	1078.8	1077.3	1075.7	1074.2	1071.2	1066.8	1062.4	1057.9	1053.5	1053.4
15°	1060.2	1058.0	1055.8	1053.6	1051.4	1047.5	1041.9	1036.3	1030.6	1025.0	1024.1
17.5°	1034.7	1032.3	1029.7	1027.1	1024.5	1019.7	1012.5	1005.4	998.2	991.2	989.0
20°	1016.1	1012.8	1009.6	1006.4	1003.2	997.8	990.2	982.6	975.0	967.3	964.8
22.5°	995.1	991.4	987.7	984.0	980.3	974.5	966.4	958.3	950.2	942.1	938.8
25°	964.7	959.7	954.6	949.6	944.6	937.5	928.2	919.0	909.8	900.6	896.4
27.5°	927.6	922.1	916.6	911.1	905.6	897.7	887.4	877.2	866.9	856.6	850.8
30°	902.4	896.4	890.4	884.4	878.4	869.8	858.6	847.3	836.1	824.9	818.1
32.5°	877.2	870.4	863.6	856.8	850.0	840.6	828.7	816.9	805.0	793.2	785.7
35°	834.8	827.6	820.4	813.2	806.0	796.2	783.8	771.3	758.9	746.5	737.9
37.5°	791.9	783.9	775.8	767.8	759.8	749.2	736.0	722.7	709.5	696.2	686.4
40°	764.5	755.7	746.8	738.0	729.3	717.7	703.5	689.3	675.0	660.8	650.4
42.5°	733.5	724.7	715.8	707.1	698.3	686.5	671.8	657.0	642.4	627.7	616.3
45°	686.0	677.1	668.0	659.0	650.0	637.8	622.3	606.9	591.5	576.1	564.6
47.5°	638.7	628.8	618.9	609.0	599.1	586.4	571.0	555.5	540.1	524.7	512.3
50°	604.0	594.6	585.2	575.8	566.4	553.5	537.4	521.1	504.9	488.6	476.2
52.5°	573.0	562.8	552.6	542.3	532.2	519.0	502.9	486.9	470.8	454.7	441.9
55°	521.1	511.3	501.4	491.6	481.8	468.4	451.3	434.4	417.3	400.3	388.7
57.5°	473.1	462.4	451.8	441.0	430.3	416.5	399.3	382.2	365.1	348.0	337.0
60°	440.0	429.0	417.9	406.9	395.9	382.0	365.4	348.8	332.2	315.6	304.7
62.5°	406.7	395.7	384.7	373.7	362.7	348.9	332.3	315.6	299.0	282.3	272.2
65°	356.1	345.1	334.1	323.0	312.0	298.7	283.1	267.4	251.8	236.2	226.4
67.5°	305.5	294.3	283.2	272.0	260.9	247.8	232.8	217.8	202.9	187.9	180.6
70°	272.2	261.5	250.6	239.8	229.0	216.5	202.5	188.6	174.5	160.5	153.4
72.5°	239.1	228.4	217.7	207.1	196.5	184.8	172.0	159.3	146.5	133.8	128.0
75°	188.4	178.8	169.2	159.5	150.0	139.7	128.6	117.6	106.6	95.6	93.6
77.5°	142.2	133.5	124.8	116.1	107.5	99.6	92.5	85.4	78.4	71.2	70.2
80°	112.7	104.4	96.3	88.1	79.8	73.6	69.4	65.2	61.0	56.8	56.2
82.5°	84.6	77.5	70.3	63.3	56.2	51.7	49.7	47.7	45.8	43.8	43.2
85°	47.8	43.4	39.0	34.5	30.1	27.6	27.0	26.4	25.8	25.2	24.9
87.5°	17.4	15.8	14.3	12.7	11.2	10.6	10.8	11.2	11.5	11.7	11.6
90°	0.5	1.5	2.7	3.8	4.8	6.1	7.5	9.0	10.3	11.8	12.2
92.5°	9.1	8.9	8.5	8.2	7.9	8.3	9.4	10.4	11.5	12.6	13.3
95°	30.0	25.5	21.0	16.5	12.1	10.4	11.6	12.8	14.0	15.2	16.0
97.5°	60.2	58.2	56.2	54.2	52.2	47.3	39.3	31.5	23.7	15.8	16.7
100°	83.0	85.2	87.4	89.5	91.7	84.3	67.2	50.3	33.2	16.2	17.0
102.5°	108.9	110.5	112.1	113.7	115.2	106.7	88.1	69.5	50.9	32.3	29.6
105°	146.4	147.6	148.8	149.9	151.1	146.8	137.0	127.2	117.4	107.5	88.3
107.5°	185.8	186.8	187.8	188.7	189.7	190.9	192.4	194.0	195.5	197.1	183.0
110°	212.2	213.0	213.9	214.7	215.6	216.7	217.8	219.0	220.2	221.4	217.8



TEST NUMBER: P332309-935

CATALOG NUMBER: S123RDIP-S775D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	237.3	238.1	238.8	239.6	240.4	241.4	242.6	243.8	245.0	246.2	246.3
115°	274.5	275.2	275.8	276.5	277.2	277.9	279.0	279.9	280.9	281.9	283.0
117.5°	310.6	311.3	312.2	313.0	313.7	314.4	315.0	315.5	316.0	316.4	317.4
120°	332.9	333.9	334.9	335.9	336.9	337.5	337.9	338.2	338.5	338.8	339.8
122.5°	355.8	356.5	357.3	358.2	359.0	359.6	360.0	360.4	360.8	361.3	361.9
125°	386.9	387.9	388.7	389.6	390.5	391.2	391.6	392.0	392.4	392.9	393.0
127.5°	417.2	418.1	419.0	419.8	420.7	421.4	421.9	422.5	423.0	423.5	423.9
130°	436.1	437.0	437.8	438.7	439.5	440.2	440.7	441.1	441.5	442.0	442.4
132.5°	454.2	455.0	455.9	456.8	457.6	458.2	458.6	458.9	459.3	459.7	460.1
135°	481.7	482.4	483.0	483.7	484.4	484.9	485.3	485.8	486.2	486.6	487.0
137.5°	505.3	506.2	507.0	507.8	508.6	509.2	509.4	509.6	509.9	510.1	510.7
140°	521.0	521.7	522.4	523.0	523.7	524.2	524.4	524.8	525.1	525.5	525.9
142.5°	535.5	536.2	536.9	537.5	538.2	538.6	539.0	539.3	539.7	540.0	540.4
145°	555.9	556.6	557.4	558.2	559.0	559.5	559.6	559.9	560.1	560.3	560.5
147.5°	575.1	575.6	576.1	576.5	577.0	577.4	577.6	577.8	578.1	578.3	578.5
150°	586.9	587.2	587.5	587.8	588.1	588.4	588.7	588.8	589.1	589.3	589.5
152.5°	597.4	597.6	597.7	597.9	598.1	598.2	598.3	598.5	598.6	598.7	599.1
155°	612.3	612.2	611.9	611.7	611.5	611.5	611.6	611.7	611.7	611.9	612.4
157.5°	624.0	624.0	623.9	623.9	623.9	623.8	623.7	623.6	623.5	623.4	624.1
160°	631.0	630.9	630.9	630.7	630.6	630.5	630.3	630.3	630.2	630.1	630.7
162.5°	637.7	637.4	637.1	636.9	636.5	636.4	636.3	636.2	636.0	635.9	636.7
165°	645.8	645.4	645.1	644.8	644.5	644.2	644.1	644.0	643.9	643.8	644.7
167.5°	652.0	651.6	651.2	650.7	650.3	650.1	650.1	650.1	650.1	650.1	651.0
170°	655.6	655.1	654.7	654.3	653.8	653.6	653.6	653.6	653.6	653.6	654.5
172.5°	658.0	657.5	656.9	656.3	655.8	655.7	655.7	655.8	655.9	656.0	656.9
175°	661.0	660.5	659.9	659.4	658.8	658.6	658.7	658.8	658.9	659.0	659.8
177.5°	661.8	661.3	660.9	660.5	660.0	659.9	660.0	660.0	660.1	660.2	660.9
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0



TEST NUMBER: P332309-935

CATALOG NUMBER: S123RDIP-S775D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6	1111.6
2.5°	1107.2	1109.0	1110.7	1111.5	1111.1	1110.8	1110.4	1110.2
5°	1099.8	1101.6	1103.5	1104.1	1103.8	1103.4	1102.9	1102.6
7.5°	1084.4	1085.4	1086.4	1086.6	1085.9	1085.2	1084.5	1083.8
10°	1070.6	1070.7	1070.9	1070.6	1069.5	1068.5	1067.6	1066.5
12.5°	1053.3	1053.2	1053.1	1052.4	1051.3	1050.1	1049.0	1047.8
15°	1023.0	1022.0	1021.1	1019.9	1018.5	1017.0	1015.6	1014.3
17.5°	986.9	984.8	982.7	980.6	978.4	976.4	974.3	972.2
20°	962.2	959.5	956.9	954.4	952.0	949.6	947.2	944.8
22.5°	935.6	932.4	929.1	926.3	924.1	921.9	919.6	917.4
25°	892.3	888.0	883.8	880.6	878.4	876.2	874.0	871.8
27.5°	844.9	839.1	833.3	828.6	825.3	821.9	818.6	815.2
30°	811.3	804.4	797.6	792.6	789.5	786.3	783.0	779.8
32.5°	778.3	770.9	763.4	757.9	754.6	751.2	747.9	744.5
35°	729.3	720.7	712.0	705.9	702.3	698.7	695.1	691.5
37.5°	676.6	666.8	657.0	650.0	645.5	641.0	636.6	632.1
40°	640.0	629.6	619.1	611.7	607.0	602.4	597.8	593.2
42.5°	604.9	593.5	582.1	574.4	570.2	566.1	562.0	557.8
45°	553.3	541.8	530.4	522.3	517.5	512.6	507.9	503.1
47.5°	499.8	487.4	475.0	466.7	462.4	458.1	453.8	449.5
50°	463.8	451.3	438.9	430.4	425.9	421.2	416.6	412.0
52.5°	429.0	416.0	403.1	394.6	390.5	386.3	382.2	378.1
55°	377.0	365.4	353.8	345.9	342.0	337.9	334.0	329.9
57.5°	326.1	315.0	304.1	296.9	293.5	290.1	286.6	283.3
60°	293.9	283.1	272.2	265.2	261.7	258.3	254.9	251.5
62.5°	262.0	251.8	241.7	234.8	231.2	227.6	224.1	220.5
65°	216.5	206.7	196.9	190.9	188.7	186.5	184.3	182.1
67.5°	173.2	165.9	158.5	153.7	151.4	149.0	146.6	144.2
70°	146.5	139.4	132.4	127.9	125.6	123.4	121.2	119.0
72.5°	122.3	116.6	110.9	107.5	106.6	105.7	104.8	103.8
75°	91.5	89.5	87.6	86.4	85.9	85.6	85.2	84.7
77.5°	69.1	67.9	66.9	66.1	65.8	65.3	64.9	64.6
80°	55.6	55.0	54.4	53.9	53.5	53.1	52.7	52.3
82.5°	42.6	42.0	41.4	41.1	41.0	40.9	40.8	40.7
85°	24.5	24.0	23.7	23.4	23.4	23.4	23.4	23.4
87.5°	11.6	11.5	11.5	11.4	11.2	11.1	11.0	10.8
90°	12.7	13.1	13.5	13.9	14.1	14.3	14.6	14.7
92.5°	13.9	14.6	15.3	15.8	15.9	16.0	16.2	16.3
95°	16.8	17.5	18.3	18.7	18.7	18.7	18.7	18.7
97.5°	17.6	18.4	19.3	19.8	19.9	20.0	20.1	20.2
100°	17.9	18.9	19.7	20.1	20.3	20.4	20.5	20.7
102.5°	26.9	24.2	21.5	20.2	20.4	20.7	20.8	21.0
105°	68.9	49.6	30.3	20.8	20.9	21.2	21.4	21.6
107.5°	168.8	154.6	140.4	126.1	111.5	96.9	82.4	67.8
110°	214.3	210.7	207.1	197.4	181.8	166.3	150.7	135.0





TEST NUMBER: P332309-935

CATALOG NUMBER: S123RDIP-S775D585U935-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	246.3	246.4	246.5	244.9	241.6	238.2	235.0	231.7
115°	284.0	285.2	286.3	287.0	287.4	287.9	288.3	288.8
117.5°	318.2	319.1	319.9	320.5	320.6	320.6	320.7	320.8
120°	340.6	341.5	342.3	342.8	342.8	342.8	342.8	342.8
122.5°	362.5	363.1	363.7	364.0	364.1	364.2	364.3	364.4
125°	393.3	393.5	393.7	394.0	394.2	394.4	394.6	394.9
127.5°	424.2	424.6	424.9	425.0	424.7	424.6	424.3	424.1
130°	442.8	443.2	443.7	443.8	443.6	443.4	443.2	443.0
132.5°	460.5	461.0	461.4	461.5	461.2	460.8	460.5	460.2
135°	487.3	487.7	487.9	487.9	487.7	487.3	487.0	486.6
137.5°	511.2	511.7	512.2	512.4	512.1	512.0	511.7	511.5
140°	526.3	526.8	527.2	527.3	527.1	526.8	526.7	526.4
142.5°	540.7	541.1	541.4	541.4	541.1	540.8	540.4	540.2
145°	560.8	560.9	561.2	561.3	561.3	561.3	561.3	561.3
147.5°	578.8	578.9	579.2	579.0	578.5	578.0	577.6	577.0
150°	589.7	590.0	590.1	590.1	589.8	589.4	589.1	588.8
152.5°	599.5	599.9	600.3	600.2	599.8	599.3	598.7	598.2
155°	612.9	613.5	614.1	614.0	613.4	612.7	612.1	611.4
157.5°	624.7	625.3	626.0	625.9	625.0	624.2	623.4	622.5
160°	631.4	632.0	632.7	632.6	631.9	631.1	630.3	629.6
162.5°	637.4	638.2	638.9	638.9	638.3	637.6	636.9	636.3
165°	645.6	646.4	647.3	647.4	646.6	645.8	645.1	644.3
167.5°	651.9	652.7	653.6	653.6	652.7	651.9	651.0	650.1
170°	655.4	656.3	657.1	657.1	656.3	655.4	654.5	653.6
172.5°	657.7	658.6	659.4	659.4	658.5	657.5	656.5	655.6
175°	660.6	661.3	662.1	662.0	661.2	660.3	659.4	658.5
177.5°	661.6	662.3	663.0	662.9	662.0	661.2	660.3	659.4
180°	661.0	661.0	661.0	661.0	661.0	661.0	661.0	661.0

(END OF REPORT)