

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332034-840

Luminaire Tested: **S123DIP-S1000D1025U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332034-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1000D1025U840-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 7718.7 lumens  
Efficiency: N/A  
Efficacy: 127.6 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 60.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332034-840

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

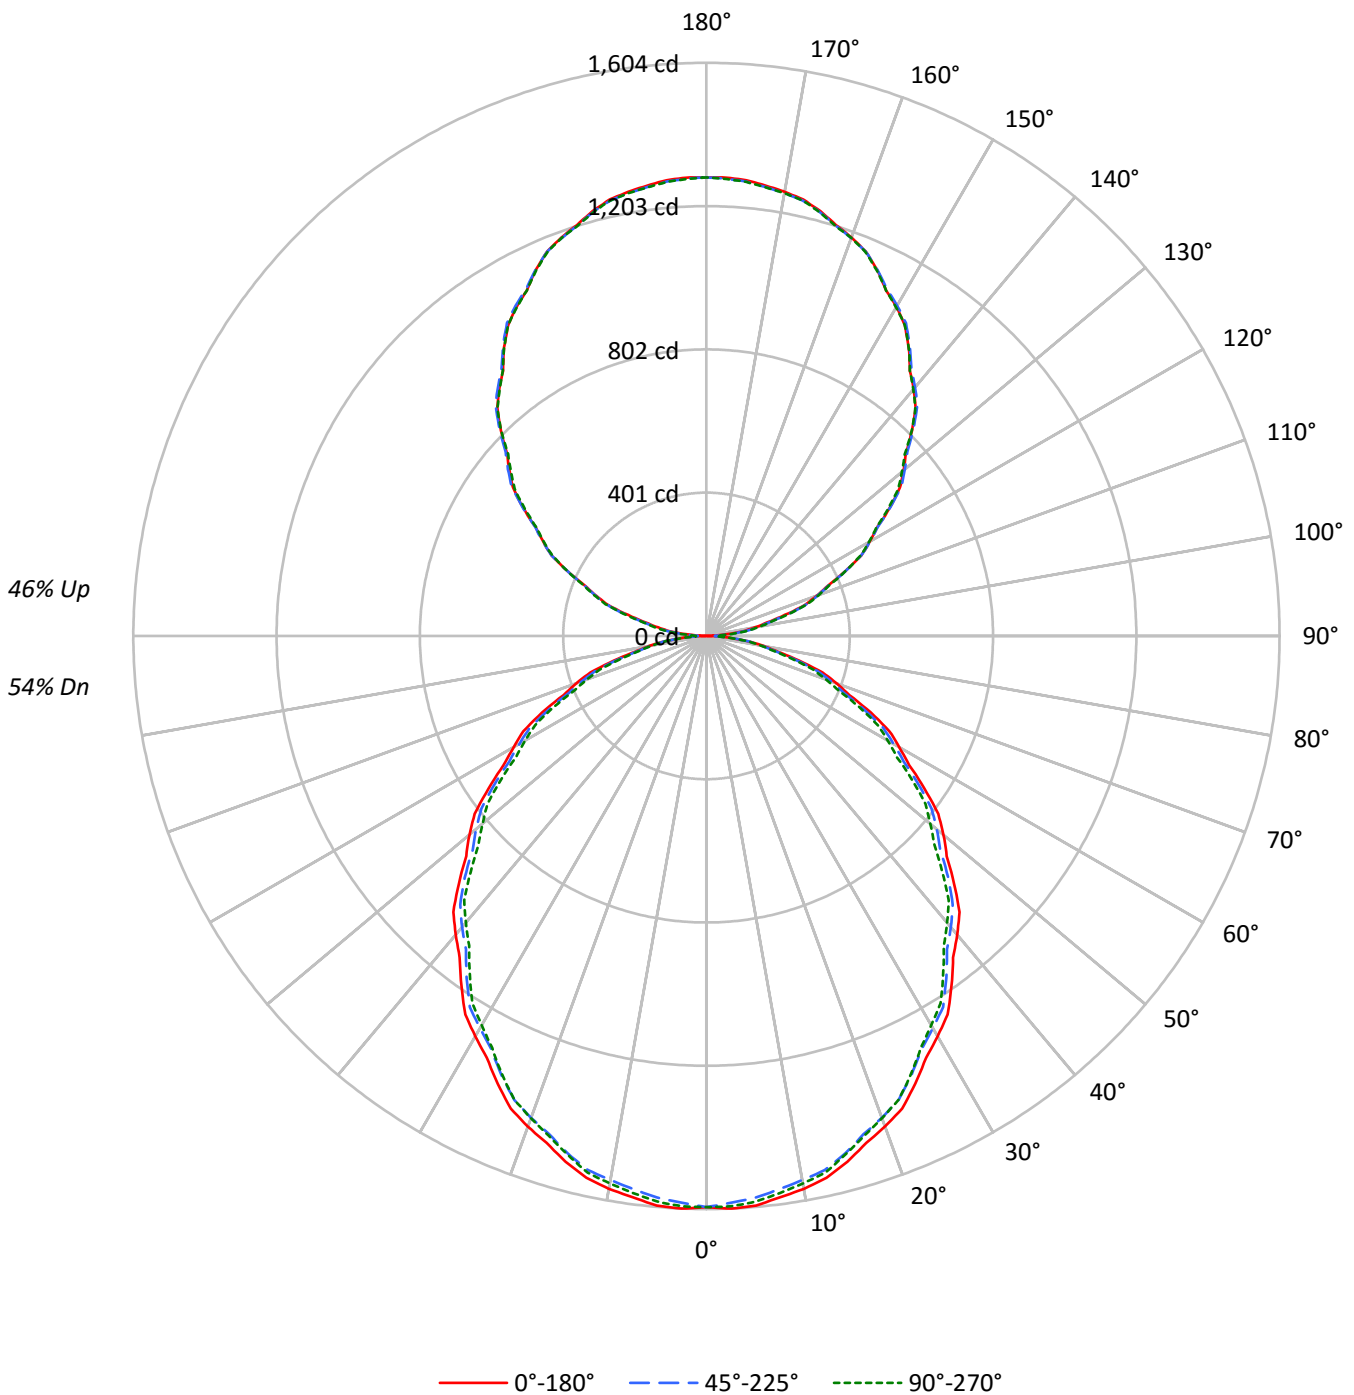



TEST NUMBER: P332034-840

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54				
1	99	94	90	87	91	87	84	81	75	72	70	63	62	60	53	51	50	45				
2	90	82	76	71	83	76	71	66	66	62	58	56	53	50	46	44	42	38				
3	82	72	65	59	76	67	61	55	58	53	49	49	45	42	41	38	36	32				
4	75	64	56	50	69	60	53	47	51	46	42	44	40	36	37	34	31	27				
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	30	27	24				
6	63	51	43	37	59	48	40	35	41	36	31	36	31	27	30	26	24	21				
7	59	46	38	33	54	43	36	31	38	32	28	32	28	24	27	24	21	19				
8	54	42	34	29	50	39	32	27	34	29	24	30	25	22	25	22	19	17				
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15				
10	47	35	28	23	44	33	26	22	29	24	20	25	21	18	22	18	16	14				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17206	17206	17206
5°	17286	17049	17168
10°	17171	16901	17006
15°	16971	16710	16741
20°	16736	16436	16452
25°	16422	16112	16079
30°	16075	15751	15631
35°	15713	15369	15172
40°	15336	14948	14716
45°	14918	14562	14206
50°	14502	14086	13695
55°	13955	13594	13181
60°	13403	13020	12605
65°	12918	12394	12006
70°	12198	11679	11160
75°	11146	10746	10289
80°	10054	9627	9540
85°	8830	8497	8139



TEST NUMBER: P332034-840

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	150.6	2.0
10°-20°	425.2	5.5
20°-30°	628.0	8.1
30°-40°	733.6	9.5
40°-50°	737.6	9.6
50°-60°	647.9	8.4
60°-70°	482.7	6.3
70°-80°	275.0	3.6
80°-90°	82.7	1.1
90°-100°	83.6	1.1
100°-110°	250.2	3.2
110°-120°	425.6	5.5
120°-130°	559.8	7.3
130°-140°	629.2	8.2
140°-150°	618.5	8.0
150°-160°	520.7	6.7
160°-170°	346.6	4.5
170°-180°	121.4	1.6
0°-30°	1203.8	15.6
0°-40°	1937.4	25.1
0°-60°	3322.8	43.0
0°-90°	4163.3	53.9
90°-120°	759.4	9.8
90°-150°	2566.9	33.3
90°-180°	3555.0	46.1
0°-180°	7718.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1598	1598	1598	1598	1598	
5°	1600	1593	1578	1591	1589	152
15°	1523	1517	1500	1509	1502	429
25°	1383	1374	1357	1358	1354	637
35°	1196	1187	1170	1162	1155	748
45°	980	974	957	941	933	756
55°	744	741	724	710	702	666
65°	507	500	487	476	471	500
75°	268	263	258	252	247	287
85°	72	69	69	66	66	78
90°	1	11	24	28	30	8
95°	60	67	75	78	79	67
105°	227	229	238	238	240	243
115°	428	431	429	430	429	424
125°	627	630	628	624	620	559
135°	814	819	818	815	812	627
145°	987	989	992	991	987	616
155°	1130	1130	1131	1134	1128	520
165°	1231	1228	1228	1233	1227	347
175°	1280	1276	1276	1282	1275	122
180°	1283	1283	1283	1283	1283	



TEST NUMBER: P332034-840

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5
2.5°	1604.0	1603.1	1602.0	1601.0	1600.1	1598.2	1595.6	1592.9	1590.2	1587.5	1589.9
5°	1599.8	1598.3	1596.8	1595.3	1593.8	1591.3	1588.0	1584.6	1581.2	1577.9	1580.9
7.5°	1584.2	1582.7	1581.1	1579.6	1578.1	1575.6	1572.2	1568.6	1565.2	1561.7	1564.4
10°	1571.0	1569.5	1567.9	1566.4	1564.9	1562.2	1558.2	1554.2	1550.2	1546.3	1549.0
12.5°	1553.4	1552.2	1550.8	1549.5	1548.3	1545.8	1542.1	1538.3	1534.6	1530.9	1532.9
15°	1522.9	1521.7	1520.5	1519.2	1518.0	1515.4	1511.5	1507.5	1503.5	1499.5	1502.0
17.5°	1487.4	1485.8	1484.3	1482.7	1481.1	1478.3	1474.3	1470.4	1466.4	1462.4	1464.1
20°	1461.1	1459.3	1457.4	1455.5	1453.7	1450.8	1446.8	1442.9	1439.0	1434.9	1436.1
22.5°	1431.4	1429.6	1427.7	1425.8	1424.0	1421.2	1417.1	1413.2	1409.3	1405.2	1406.2
25°	1382.7	1380.9	1379.1	1377.3	1375.3	1372.5	1368.5	1364.5	1360.6	1356.6	1356.9
27.5°	1330.8	1329.0	1327.2	1325.4	1323.6	1320.6	1316.4	1312.1	1307.8	1303.5	1303.7
30°	1293.3	1291.8	1290.3	1288.8	1287.3	1284.3	1280.1	1275.8	1271.5	1267.3	1267.3
32.5°	1256.0	1253.9	1251.9	1249.9	1247.9	1245.3	1241.9	1238.7	1235.4	1232.0	1230.3
35°	1195.8	1194.0	1192.1	1190.3	1188.4	1185.6	1181.5	1177.6	1173.7	1169.6	1167.8
37.5°	1134.2	1131.9	1129.5	1127.2	1124.9	1121.8	1117.7	1113.7	1109.6	1105.6	1103.4
40°	1091.4	1089.4	1087.6	1085.8	1084.0	1081.0	1076.6	1072.4	1068.1	1063.8	1061.4
42.5°	1048.4	1046.3	1044.3	1042.2	1040.2	1036.9	1032.7	1028.4	1024.1	1019.9	1017.4
45°	980.0	978.8	977.5	976.3	975.1	972.5	968.6	964.5	960.6	956.6	953.0
47.5°	912.1	910.3	908.6	906.8	905.0	902.2	898.6	894.8	891.1	887.4	883.7
50°	866.0	864.3	862.8	861.3	859.8	857.1	853.0	849.1	845.2	841.2	837.8
52.5°	817.5	816.5	815.5	814.5	813.3	810.7	806.6	802.3	798.1	793.9	791.0
55°	743.6	743.3	743.0	742.7	742.4	740.2	736.3	732.3	728.3	724.4	720.9
57.5°	673.2	672.2	671.2	670.1	669.0	666.9	663.8	660.6	657.4	654.3	651.3
60°	622.6	622.3	622.0	621.7	621.4	619.5	615.7	612.1	608.4	604.8	602.0
62.5°	577.5	576.7	575.9	575.1	574.4	572.2	568.5	564.8	561.2	557.4	554.7
65°	507.2	505.6	504.1	502.6	501.1	498.8	495.7	492.7	489.6	486.6	484.1
67.5°	432.7	431.3	430.0	428.7	427.3	425.5	423.1	420.8	418.5	416.2	414.0
70°	387.6	385.8	384.0	382.1	380.3	378.4	376.6	374.8	372.9	371.1	369.0
72.5°	340.3	339.0	337.6	336.3	335.0	333.3	331.1	329.1	327.0	324.9	323.1
75°	268.0	266.8	265.6	264.4	263.2	262.1	261.2	260.2	259.3	258.4	256.9
77.5°	204.0	203.3	202.6	202.0	201.3	200.4	199.3	198.2	197.1	196.0	195.0
80°	162.2	161.3	160.4	159.5	158.5	157.7	157.1	156.5	155.9	155.3	155.0
82.5°	121.5	121.3	121.2	121.0	120.8	120.6	120.5	120.4	120.3	120.2	119.6
85°	71.5	70.9	70.3	69.7	69.1	68.8	68.8	68.8	68.8	68.8	68.1
87.5°	28.8	28.5	28.2	28.0	27.7	27.7	28.0	28.4	28.7	29.0	29.0
90°	1.0	3.2	5.5	7.8	10.0	12.5	15.5	18.4	21.3	24.2	25.0
92.5°	24.4	26.0	27.5	29.0	30.5	32.1	33.7	35.3	37.1	38.7	39.4
95°	59.5	61.0	62.6	64.2	65.7	67.5	69.2	71.0	72.8	74.6	75.5
97.5°	105.6	106.8	108.0	109.2	110.3	111.5	112.8	114.1	115.4	116.7	117.8
100°	137.1	138.5	139.8	141.1	142.5	143.7	144.8	145.9	147.0	148.1	148.9
102.5°	173.4	174.2	175.0	175.8	176.6	177.7	179.3	180.7	182.2	183.7	184.3
105°	226.8	227.2	227.7	228.1	228.6	229.8	231.9	233.9	235.9	237.9	237.9
107.5°	288.9	289.2	289.4	289.7	290.0	290.5	291.3	292.2	293.0	293.8	294.5
110°	327.6	328.1	328.5	328.9	329.4	329.8	330.3	330.7	331.2	331.6	332.5



TEST NUMBER: P332034-840

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	367.9	368.2	368.5	368.7	369.0	369.2	369.3	369.4	369.5	369.5	370.6
115°	428.4	429.1	429.8	430.4	431.1	431.2	430.8	430.3	429.9	429.4	429.7
117.5°	489.3	489.8	490.2	490.7	491.1	491.0	490.5	489.9	489.3	488.7	488.7
120°	527.3	528.6	529.9	531.3	532.6	532.7	531.6	530.5	529.4	528.3	528.0
122.5°	566.7	567.7	568.7	569.7	570.7	570.9	570.3	569.7	569.2	568.6	567.9
125°	627.0	627.7	628.3	629.0	629.7	629.9	629.3	628.9	628.4	628.0	627.1
127.5°	682.7	684.1	685.5	686.9	688.4	688.8	688.3	687.9	687.4	686.9	685.6
130°	719.7	721.5	723.4	725.1	726.9	727.5	726.8	726.1	725.5	724.8	723.9
132.5°	756.9	758.6	760.4	762.2	764.1	764.7	764.2	763.7	763.2	762.7	761.6
135°	813.5	814.9	816.2	817.5	818.9	819.4	819.2	819.0	818.8	818.5	817.7
137.5°	866.0	867.1	868.2	869.3	870.4	871.2	871.8	872.4	873.0	873.5	872.6
140°	902.2	903.3	904.4	905.5	906.7	907.4	907.6	907.8	908.1	908.3	908.1
142.5°	935.2	936.3	937.6	938.7	939.8	940.5	940.9	941.3	941.7	942.1	941.9
145°	986.8	987.3	987.7	988.3	988.7	989.3	989.9	990.6	991.3	991.9	991.7
147.5°	1032.1	1032.9	1033.7	1034.5	1035.3	1036.0	1036.6	1037.2	1037.8	1038.5	1038.5
150°	1063.5	1064.0	1064.4	1064.8	1065.3	1065.7	1066.2	1066.6	1067.1	1067.5	1067.5
152.5°	1089.3	1089.9	1090.6	1091.2	1091.8	1092.3	1092.6	1092.8	1093.1	1093.4	1093.7
155°	1130.0	1130.0	1130.0	1130.0	1130.0	1130.1	1130.3	1130.5	1130.8	1131.0	1132.0
157.5°	1164.7	1164.5	1164.2	1163.9	1163.7	1163.6	1163.8	1164.0	1164.2	1164.3	1165.3
160°	1186.5	1186.0	1185.6	1185.2	1184.7	1184.5	1184.5	1184.5	1184.5	1184.5	1185.6
162.5°	1205.9	1205.2	1204.6	1204.0	1203.4	1203.2	1203.3	1203.5	1203.7	1203.9	1205.0
165°	1230.8	1230.1	1229.5	1228.8	1228.2	1227.8	1227.8	1227.8	1227.8	1227.8	1229.1
167.5°	1250.8	1249.9	1249.0	1248.1	1247.2	1246.9	1247.1	1247.2	1247.4	1247.6	1249.0
170°	1262.1	1261.2	1260.3	1259.4	1258.5	1258.1	1258.1	1258.1	1258.1	1258.1	1259.6
172.5°	1270.9	1270.1	1269.2	1268.3	1267.4	1266.9	1266.9	1266.9	1266.9	1266.9	1268.3
175°	1280.2	1279.3	1278.4	1277.6	1276.7	1276.2	1276.2	1276.2	1276.2	1276.2	1277.6
177.5°	1284.0	1283.3	1282.6	1281.9	1281.2	1280.8	1280.8	1280.8	1280.8	1280.8	1281.9
180°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2



TEST NUMBER: P332034-840

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5	1598.5
2.5°	1592.4	1594.9	1597.3	1598.4	1598.1	1597.9	1597.6	1597.4
5°	1584.0	1587.0	1590.1	1591.3	1590.7	1590.1	1589.5	1588.9
7.5°	1567.2	1569.9	1572.7	1573.9	1573.5	1573.2	1572.8	1572.4
10°	1551.8	1554.5	1557.3	1558.3	1557.7	1557.1	1556.5	1555.9
12.5°	1534.9	1536.9	1538.9	1539.7	1539.4	1539.0	1538.6	1538.3
15°	1504.4	1506.8	1509.3	1509.6	1507.8	1505.9	1504.1	1502.3
17.5°	1465.8	1467.5	1469.3	1469.8	1469.2	1468.4	1467.7	1467.1
20°	1437.3	1438.7	1439.9	1440.0	1439.1	1438.1	1437.2	1436.3
22.5°	1407.2	1408.2	1409.2	1409.1	1408.0	1406.7	1405.6	1404.4
25°	1357.2	1357.6	1357.9	1357.6	1356.6	1355.6	1354.7	1353.8
27.5°	1304.0	1304.2	1304.5	1304.0	1302.9	1301.7	1300.6	1299.4
30°	1267.3	1267.3	1267.3	1266.2	1264.0	1261.9	1259.8	1257.6
32.5°	1228.6	1227.0	1225.3	1223.8	1222.6	1221.4	1220.3	1219.1
35°	1166.0	1164.2	1162.4	1160.6	1159.1	1157.6	1156.1	1154.6
37.5°	1101.3	1099.0	1096.8	1095.2	1094.3	1093.3	1092.3	1091.4
40°	1058.9	1056.5	1054.1	1052.2	1051.0	1049.8	1048.5	1047.3
42.5°	1014.9	1012.5	1010.1	1008.2	1007.0	1005.8	1004.6	1003.4
45°	949.3	945.6	942.0	939.4	937.9	936.3	934.8	933.2
47.5°	880.1	876.6	872.9	870.5	869.1	867.8	866.5	865.1
50°	834.5	831.1	827.7	825.2	823.3	821.4	819.6	817.8
52.5°	788.1	785.3	782.4	780.0	778.2	776.4	774.6	772.7
55°	717.6	714.3	710.9	708.4	706.9	705.4	703.9	702.4
57.5°	648.2	645.3	642.3	639.9	638.1	636.3	634.6	632.8
60°	599.3	596.5	593.8	591.7	590.1	588.5	587.0	585.5
62.5°	552.0	549.3	546.4	544.6	543.5	542.5	541.5	540.5
65°	481.7	479.2	476.8	475.1	474.2	473.3	472.3	471.4
67.5°	411.9	409.8	407.7	406.0	404.7	403.3	402.0	400.8
70°	366.8	364.7	362.5	360.7	359.2	357.7	356.2	354.6
72.5°	321.1	319.2	317.3	316.0	315.2	314.4	313.7	312.9
75°	255.4	253.8	252.3	251.1	250.1	249.2	248.3	247.4
77.5°	193.9	192.9	191.9	191.4	191.4	191.4	191.4	191.4
80°	154.7	154.4	154.1	153.9	153.9	153.9	153.9	153.9
82.5°	119.1	118.5	118.0	117.5	117.2	117.0	116.8	116.5
85°	67.5	66.9	66.2	65.9	65.9	65.9	65.9	65.9
87.5°	28.9	28.9	28.8	28.8	28.9	29.0	29.1	29.2
90°	26.0	26.9	27.8	28.5	28.9	29.4	29.8	30.2
92.5°	40.2	40.9	41.6	41.8	41.5	41.3	41.0	40.7
95°	76.3	77.3	78.2	78.7	78.7	78.7	78.7	78.7
97.5°	118.8	119.9	120.9	121.3	121.3	121.2	121.1	121.0
100°	149.6	150.2	150.9	151.5	151.9	152.3	152.8	153.2
102.5°	185.0	185.7	186.3	186.6	186.5	186.4	186.4	186.3
105°	237.9	237.9	237.9	238.1	238.5	239.0	239.4	239.9
107.5°	295.2	295.9	296.6	296.8	296.6	296.3	296.0	295.8
110°	333.5	334.4	335.3	335.5	335.0	334.6	334.2	333.7





TEST NUMBER: P332034-840

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	371.7	372.7	373.9	374.4	374.3	374.2	374.1	374.0
115°	429.9	430.1	430.3	430.3	430.1	429.9	429.7	429.4
117.5°	488.6	488.6	488.6	488.2	487.6	487.0	486.4	485.6
120°	527.8	527.6	527.4	526.9	526.5	526.1	525.6	525.2
122.5°	567.3	566.8	566.2	565.6	565.0	564.3	563.7	563.1
125°	626.2	625.3	624.4	623.5	622.7	621.8	620.9	620.0
127.5°	684.4	683.2	681.9	680.8	679.7	678.6	677.6	676.6
130°	723.0	722.1	721.2	719.9	718.4	716.8	715.3	713.7
132.5°	760.5	759.5	758.4	757.3	756.1	754.9	753.7	752.5
135°	816.8	815.9	815.0	814.3	813.9	813.3	812.9	812.5
137.5°	871.7	870.8	869.8	868.9	868.1	867.2	866.4	865.6
140°	907.8	907.6	907.4	906.5	904.9	903.3	901.8	900.2
142.5°	941.7	941.5	941.2	940.5	939.3	938.1	936.9	935.6
145°	991.5	991.3	991.0	990.5	989.6	988.7	987.7	986.8
147.5°	1038.5	1038.5	1038.5	1037.8	1036.5	1035.1	1033.8	1032.5
150°	1067.5	1067.5	1067.5	1066.8	1065.5	1064.2	1062.8	1061.5
152.5°	1094.1	1094.4	1094.8	1094.4	1093.2	1092.1	1090.9	1089.7
155°	1132.9	1133.8	1134.6	1134.3	1132.8	1131.1	1129.5	1128.0
157.5°	1166.2	1167.1	1168.1	1167.9	1166.7	1165.4	1164.2	1162.9
160°	1186.7	1187.8	1188.9	1189.0	1188.2	1187.3	1186.4	1185.5
162.5°	1206.1	1207.2	1208.3	1208.1	1206.7	1205.3	1203.9	1202.4
165°	1230.5	1231.8	1233.1	1233.0	1231.5	1229.9	1228.4	1226.8
167.5°	1250.3	1251.7	1253.1	1253.1	1251.7	1250.3	1249.0	1247.6
170°	1261.2	1262.7	1264.4	1264.4	1262.7	1261.2	1259.6	1258.1
172.5°	1269.7	1271.1	1272.4	1272.4	1270.8	1269.3	1267.7	1266.1
175°	1278.9	1280.2	1281.6	1281.4	1279.9	1278.3	1276.8	1275.2
177.5°	1283.0	1284.0	1285.2	1285.1	1283.8	1282.5	1281.3	1280.0
180°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2

(END OF REPORT)