

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831052

Luminaire Tested: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831052  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1000D1025U840-4F0-1E-UDD-G1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 8214.0 lumens  
Efficiency: N/A  
Efficacy: 134.7 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse

Input Watts (W): 61  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

### Luminous Intensity Polar Plot

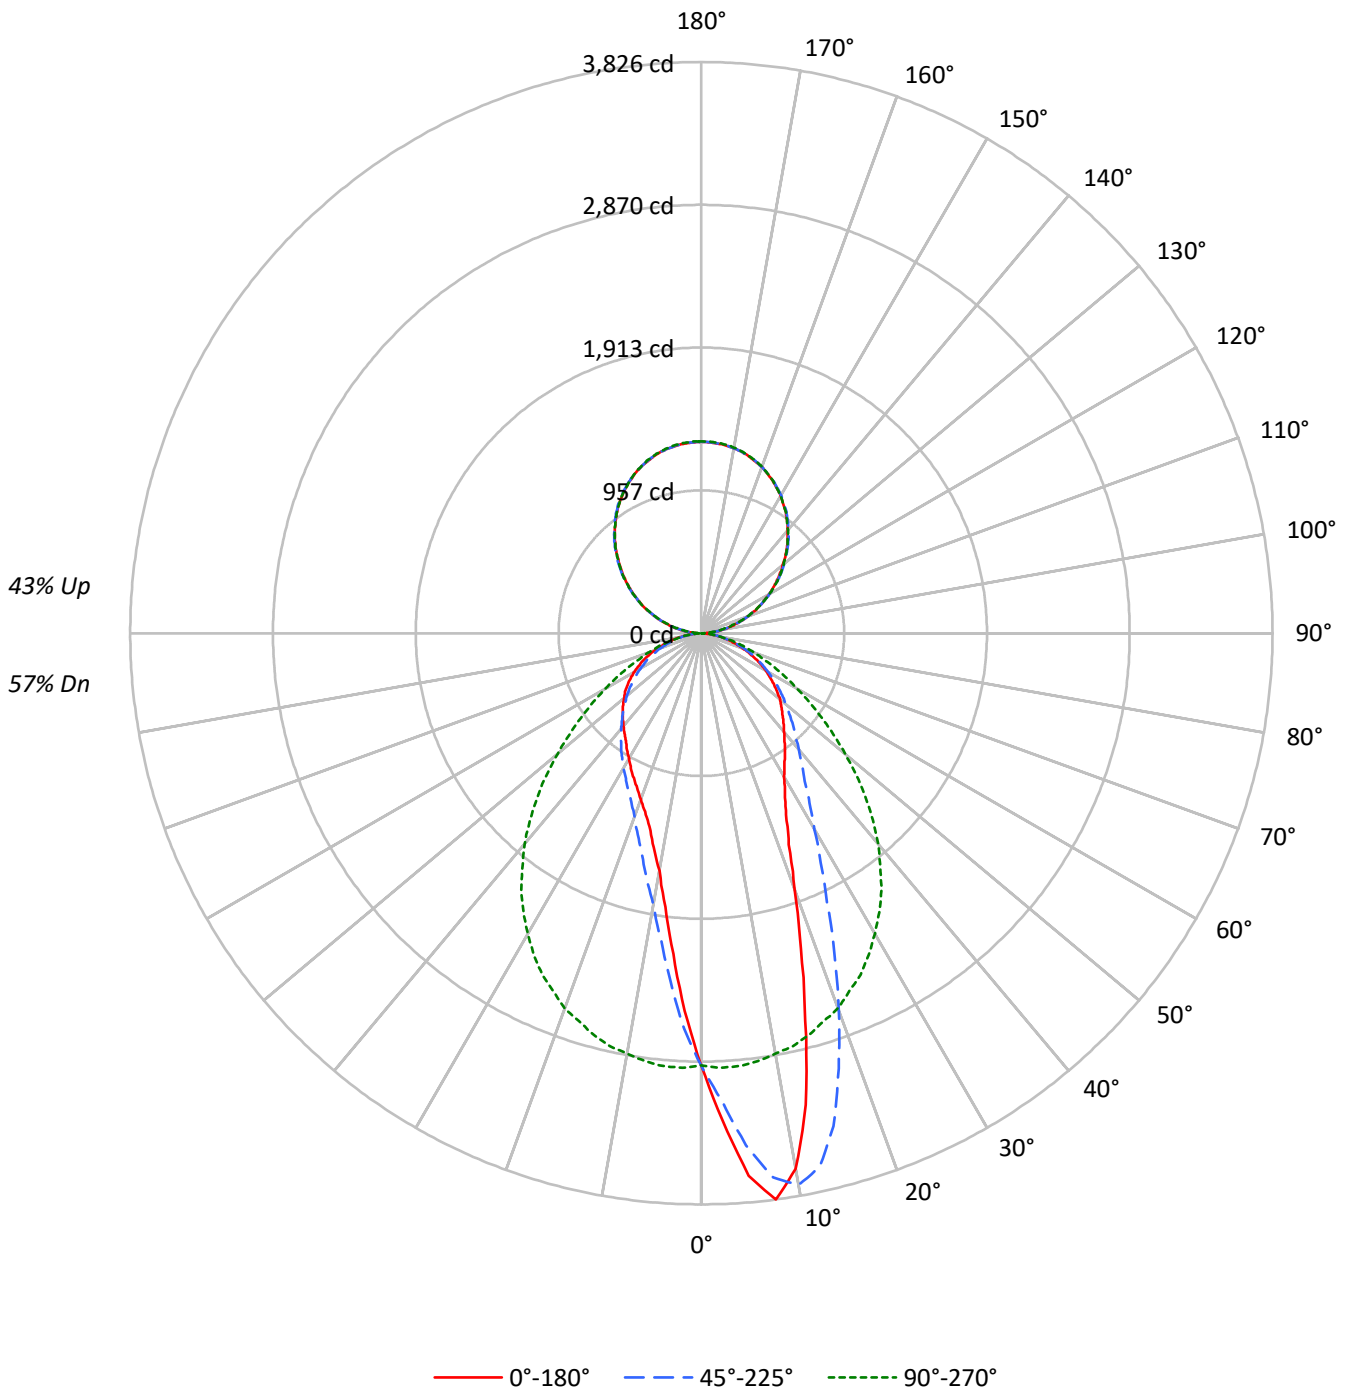



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	57				
1	100	96	92	89	93	89	86	83	77	75	73	66	64	63	56	55	54	49				
2	91	84	78	73	85	79	74	69	68	65	61	59	56	54	50	48	46	42				
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	42	40	36				
4	77	67	59	53	72	63	56	51	55	50	45	47	43	40	41	38	35	32				
5	71	60	52	46	66	56	49	44	49	44	40	43	39	35	37	34	31	28				
6	66	54	46	41	61	51	44	39	45	39	35	39	35	32	34	31	28	25				
7	61	49	42	36	57	46	40	35	41	36	31	36	32	28	31	28	25	23				
8	57	45	38	32	53	43	36	31	38	32	28	33	29	26	29	26	23	21				
9	53	41	34	29	50	39	33	28	35	30	26	31	27	23	27	24	21	19				
10	50	38	31	27	47	36	30	26	32	27	23	29	25	21	25	22	19	18				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	31174	31174	31174	31174	31174
5°	39425	37211	31453	25348	23292
10°	39808	41013	31244	20205	17656
15°	29983	38078	31032	17111	14931
20°	20890	30812	30636	14963	13562
25°	15930	23695	29960	13767	12721
30°	13781	18825	28881	12920	12044
35°	12786	15895	27638	12309	11567
40°	12105	14258	25891	11727	11405
45°	11702	13195	23669	11272	11333
50°	11501	12355	21043	10860	11275
55°	11072	11740	18462	10466	11324
60°	10676	11080	15913	10097	11138
65°	10030	10458	13726	9704	10919
70°	9262	9665	11673	9051	10279
75°	8384	8663	10006	8413	9391
80°	6912	7581	7916	7333	7916
85°	5483	6138	5805	6225	6311

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 27026 cd/sqm



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	273.8	3.3
10°-20°	681.2	8.3
20°-30°	806.5	9.8
30°-40°	811.0	9.9
40°-50°	744.0	9.1
50°-60°	614.1	7.5
60°-70°	434.4	5.3
70°-80°	231.9	2.8
80°-90°	61.5	0.7
90°-100°	82.6	1.0
100°-110°	250.0	3.0
110°-120°	425.6	5.2
120°-130°	559.9	6.8
130°-140°	629.4	7.7
140°-150°	618.8	7.5
150°-160°	520.9	6.3
160°-170°	346.8	4.2
170°-180°	121.4	1.5
0°-30°	1761.5	21.4
0°-40°	2572.5	31.3
0°-60°	3930.6	47.9
0°-90°	4658.4	56.7
90°-120°	758.3	9.2
90°-150°	2566.4	31.2
90°-180°	3556.0	43.3
0°-180°	8214.0	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2896	2896	2896	2896	2896	
5°	3649	3444	2911	2346	2156	348
15°	2691	3417	2785	1536	1340	743
25°	1341	1995	2523	1159	1071	633
35°	973	1210	2103	937	880	611
45°	769	867	1555	740	744	595
55°	590	626	984	558	603	528
65°	394	411	539	381	429	391
75°	202	208	241	202	226	212
85°	44	50	47	50	51	50
90°	30	24	1	24	30	17
95°	79	75	60	75	79	79
105°	240	238	227	238	240	254
115°	429	429	428	429	429	425
125°	620	628	627	628	620	554
135°	812	818	814	818	812	625
145°	987	992	987	992	987	616
155°	1128	1131	1130	1131	1128	520
165°	1227	1228	1231	1228	1227	346
175°	1275	1276	1280	1276	1275	121
180°	1283	1283	1283	1283	1283	



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2
2.5°	3264.4	3261.1	3257.7	3240.9	3224.1	3216.1	3208.0	3183.8	3159.6	3132.7	3105.9
5°	3648.8	3658.2	3667.6	3656.9	3646.1	3613.2	3580.3	3536.6	3492.9	3443.9	3394.8
7.5°	3826.2	3831.6	3837.0	3830.2	3823.5	3814.8	3806.1	3767.1	3728.1	3677.7	3627.3
10°	3642.1	3654.2	3666.3	3692.5	3718.7	3748.3	3777.8	3772.5	3767.1	3752.3	3737.5
12.5°	3237.6	3252.4	3267.1	3319.5	3372.0	3439.2	3506.4	3564.1	3621.9	3662.3	3702.6
15°	2690.6	2731.6	2772.6	2820.3	2868.0	2966.8	3065.5	3187.2	3308.8	3417.0	3525.2
17.5°	2216.2	2231.6	2247.1	2298.1	2349.2	2473.5	2597.8	2738.3	2878.7	3058.2	3237.6
20°	1823.7	1837.8	1852.0	1919.2	1986.4	2083.8	2181.2	2339.1	2497.1	2689.9	2882.8
22.5°	1532.1	1554.3	1576.4	1614.1	1651.7	1745.1	1838.5	1979.0	2119.4	2332.4	2545.4
25°	1341.3	1357.4	1373.5	1396.4	1419.2	1493.8	1568.4	1684.0	1799.5	1995.1	2190.6
27.5°	1210.9	1217.6	1224.3	1247.2	1270.0	1318.4	1366.8	1466.2	1565.7	1731.7	1897.7
30°	1108.8	1113.5	1118.2	1138.3	1158.5	1191.4	1224.3	1296.2	1368.1	1514.6	1661.1
32.5°	1037.5	1040.9	1044.2	1059.7	1075.2	1098.7	1122.2	1174.6	1227.0	1348.0	1468.9
35°	973.0	975.0	977.0	988.5	999.9	1017.4	1034.8	1074.5	1114.1	1209.6	1305.0
37.5°	916.6	919.3	921.9	928.7	935.4	950.8	966.3	997.9	1029.5	1102.7	1176.0
40°	861.5	866.2	870.9	875.6	880.3	893.1	905.8	930.0	954.2	1014.7	1075.2
42.5°	814.4	819.1	823.8	825.9	827.9	835.3	842.7	864.8	887.0	932.0	977.0
45°	768.7	770.8	772.8	774.8	776.8	782.8	788.9	808.4	827.9	866.8	905.8
47.5°	727.1	727.1	727.1	728.4	729.8	735.1	740.5	754.6	768.7	799.0	829.2
50°	686.8	686.8	686.8	684.7	682.7	686.1	689.4	700.2	710.9	737.8	764.7
52.5°	638.4	638.4	638.4	639.0	639.7	639.7	639.7	649.1	658.5	682.7	706.9
55°	590.0	592.7	595.4	593.4	591.3	592.7	594.0	600.1	606.1	625.6	645.1
57.5°	541.6	543.0	544.3	543.6	543.0	543.6	544.3	549.7	555.0	569.8	584.6
60°	495.9	495.9	495.9	494.6	493.2	494.6	495.9	498.6	501.3	514.7	528.2
62.5°	444.8	445.5	446.2	446.9	447.5	446.2	444.8	448.2	451.6	461.6	471.7
65°	393.8	394.4	395.1	397.1	399.2	397.8	396.5	399.8	403.2	410.6	418.0
67.5°	348.1	346.7	345.4	346.1	346.7	348.8	350.8	351.4	352.1	360.2	368.2
70°	294.3	295.7	297.0	296.3	295.7	296.3	297.0	299.0	301.0	307.1	313.1
72.5°	245.9	246.6	247.3	247.3	247.3	248.6	250.0	252.0	254.0	257.4	260.7
75°	201.6	201.6	201.6	202.9	204.3	205.0	205.6	205.6	205.6	208.3	211.0
77.5°	153.2	156.6	159.9	159.3	158.6	159.9	161.3	163.3	165.3	166.6	168.0
80°	111.5	111.5	111.5	112.2	112.9	114.9	116.9	118.3	119.6	122.3	125.0
82.5°	71.2	71.9	72.6	74.6	76.6	77.9	79.3	81.3	83.3	83.3	83.3
85°	44.4	43.0	41.7	43.0	44.4	45.7	47.0	47.7	48.4	49.7	51.1
87.5°	21.5	21.5	21.5	21.5	21.5	22.2	22.8	22.8	22.8	22.8	22.8
90°	30.2	29.8	29.3	28.9	28.4	27.8	26.9	26.0	25.1	24.2	21.3
92.5°	43.3	43.8	44.2	44.7	45.1	45.0	44.4	43.7	43.0	42.3	41.0
95°	78.6	78.6	78.6	78.6	78.6	78.2	77.3	76.4	75.5	74.6	72.8
97.5°	112.9	113.1	113.4	113.6	113.8	113.4	112.2	111.1	110.0	108.9	107.5
100°	153.2	152.8	152.3	151.9	151.4	150.9	150.2	149.5	148.9	148.2	147.1
102.5°	194.6	194.8	195.0	195.2	195.5	195.2	194.6	193.9	193.2	192.5	191.0
105°	239.9	239.5	239.0	238.6	238.1	237.9	237.9	237.9	237.9	237.9	235.9
107.5°	286.3	286.5	286.7	287.0	287.2	287.0	286.3	285.6	284.9	284.3	283.4
110°	333.7	334.1	334.6	335.0	335.5	335.2	334.3	333.4	332.5	331.7	331.2



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	384.1	384.1	384.1	384.1	384.1	383.5	382.4	381.3	380.1	379.0	379.0
115°	429.4	429.7	429.9	430.1	430.3	430.3	430.1	429.9	429.7	429.4	429.9
117.5°	475.8	476.5	477.1	477.8	478.5	478.8	478.8	478.8	478.8	478.8	479.3
120°	525.2	525.6	526.1	526.5	527.0	527.3	527.5	527.8	528.0	528.2	529.3
122.5°	572.6	573.2	573.9	574.6	575.3	575.9	576.6	577.3	578.0	578.6	579.1
125°	620.0	620.9	621.7	622.6	623.5	624.4	625.3	626.2	627.1	628.0	628.5
127.5°	667.3	668.2	669.1	670.0	670.9	672.0	673.4	674.7	676.1	677.4	677.9
130°	713.7	715.3	716.8	718.4	720.0	721.2	722.1	723.0	723.9	724.8	725.5
132.5°	762.1	763.2	764.3	765.5	766.6	767.7	768.8	769.9	771.1	772.2	772.6
135°	812.5	812.9	813.4	813.8	814.3	815.0	815.9	816.7	817.6	818.5	818.8
137.5°	856.8	857.5	858.2	858.9	859.5	860.4	861.6	862.7	863.8	864.9	864.2
140°	900.2	901.8	903.3	904.9	906.5	907.4	907.6	907.8	908.0	908.3	908.0
142.5°	944.5	945.7	946.8	947.9	949.0	949.7	949.9	950.1	950.4	950.6	950.1
145°	986.9	987.8	988.7	989.6	990.5	991.0	991.3	991.5	991.7	991.9	991.3
147.5°	1025.2	1026.5	1027.9	1029.2	1030.6	1031.2	1031.2	1031.2	1031.2	1031.2	1030.6
150°	1061.5	1062.8	1064.2	1065.5	1066.9	1067.5	1067.5	1067.5	1067.5	1067.5	1067.1
152.5°	1096.8	1097.9	1099.0	1100.1	1101.2	1101.6	1101.1	1100.7	1100.2	1099.8	1099.6
155°	1128.0	1129.6	1131.2	1132.7	1134.3	1134.6	1133.7	1132.8	1131.9	1131.0	1130.8
157.5°	1157.2	1158.6	1159.9	1161.3	1162.6	1162.8	1162.0	1161.1	1160.2	1159.3	1159.0
160°	1185.5	1186.4	1187.3	1188.2	1189.1	1188.9	1187.8	1186.7	1185.6	1184.5	1184.5
162.5°	1206.6	1208.2	1209.8	1211.3	1212.9	1213.1	1212.0	1210.9	1209.8	1208.7	1208.4
165°	1226.8	1228.4	1229.9	1231.5	1233.1	1233.2	1231.8	1230.5	1229.2	1227.8	1227.8
167.5°	1244.9	1246.3	1247.6	1249.0	1250.3	1250.3	1249.0	1247.6	1246.3	1244.9	1244.7
170°	1258.1	1259.6	1261.2	1262.8	1264.3	1264.3	1262.8	1261.2	1259.6	1258.1	1258.1
172.5°	1268.1	1269.7	1271.3	1272.8	1274.4	1274.5	1273.2	1271.8	1270.5	1269.1	1269.1
175°	1275.2	1276.8	1278.3	1279.9	1281.5	1281.6	1280.2	1278.9	1277.5	1276.2	1276.2
177.5°	1279.2	1280.8	1282.4	1283.9	1285.5	1285.6	1284.3	1282.9	1281.6	1280.2	1280.2
180°	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2
2.5°	3097.8	3089.7	3060.2	3030.6	2997.0	2963.4	2938.5	2913.7	2876.7	2839.8	2809.5
5°	3357.2	3319.5	3257.1	3194.6	3109.9	3025.2	2968.1	2911.0	2834.4	2757.8	2696.6
7.5°	3562.8	3498.3	3410.9	3323.6	3212.7	3101.8	2997.0	2892.2	2775.2	2658.3	2562.9
10°	3693.8	3650.2	3549.4	3448.6	3300.1	3151.6	3005.1	2858.6	2708.1	2557.5	2431.2
12.5°	3706.6	3710.6	3617.9	3525.2	3357.2	3189.2	3011.1	2833.0	2643.5	2454.0	2306.9
15°	3594.4	3663.6	3612.5	3561.5	3392.1	3222.8	3003.7	2784.7	2566.3	2347.9	2177.9
17.5°	3386.1	3534.6	3542.0	3549.4	3380.0	3210.7	2968.1	2725.5	2478.2	2231.0	2052.2
20°	3101.8	3320.9	3396.2	3471.4	3333.7	3195.9	2935.2	2674.5	2397.6	2120.7	1933.3
22.5°	2811.5	3077.6	3215.4	3353.1	3251.0	3148.9	2871.3	2593.8	2301.5	2009.2	1819.0
25°	2480.9	2771.2	2982.9	3194.6	3132.1	3069.6	2796.1	2522.6	2211.5	1900.3	1706.1
27.5°	2192.6	2487.6	2743.0	2998.3	2984.9	2971.5	2700.0	2428.5	2110.0	1791.5	1604.0
30°	1936.0	2210.8	2496.4	2782.0	2814.9	2847.8	2585.8	2323.7	2004.5	1685.3	1504.5
32.5°	1708.8	1948.7	2255.1	2561.6	2626.1	2690.6	2454.0	2217.5	1901.7	1585.9	1411.8
35°	1522.7	1740.4	2046.8	2353.3	2433.9	2514.5	2308.9	2103.3	1795.5	1487.7	1321.8
37.5°	1358.1	1540.2	1839.2	2138.2	2237.0	2335.8	2151.7	1967.5	1679.3	1391.0	1238.4
40°	1221.6	1368.1	1643.0	1917.8	2032.0	2146.3	1994.4	1842.6	1569.1	1295.6	1155.1
42.5°	1107.4	1237.8	1487.1	1736.4	1845.9	1955.4	1827.1	1698.7	1455.5	1212.2	1083.9
45°	1010.0	1114.1	1340.6	1567.0	1671.2	1775.4	1665.1	1554.9	1340.6	1126.2	1006.6
47.5°	918.6	1008.0	1201.5	1395.0	1487.7	1580.5	1494.5	1408.5	1227.0	1045.6	937.4
50°	836.6	908.5	1077.8	1247.2	1327.8	1408.5	1332.5	1256.6	1107.4	958.2	864.2
52.5°	765.4	823.8	965.6	1107.4	1176.6	1245.8	1180.7	1115.5	997.2	878.9	797.0
55°	694.8	744.5	867.5	990.5	1037.5	1084.6	1034.2	983.8	888.3	792.9	723.7
57.5°	629.0	673.3	774.1	874.9	911.2	947.5	901.8	856.1	784.2	712.3	654.5
60°	564.5	600.7	684.7	768.7	790.9	813.1	776.1	739.2	688.8	638.4	586.6
62.5°	504.7	537.6	600.1	662.6	677.3	692.1	663.9	635.7	597.4	559.1	518.8
65°	442.8	467.7	518.8	569.8	579.2	588.6	563.8	538.9	510.0	481.1	451.6
67.5°	385.7	403.2	444.8	486.5	487.2	487.9	467.7	447.5	431.4	415.3	391.8
70°	329.9	346.7	374.3	401.8	402.5	403.2	387.1	370.9	358.8	346.7	329.3
72.5°	272.8	284.9	305.7	326.6	325.2	323.9	313.8	303.7	294.3	284.9	272.1
75°	221.1	231.2	245.3	259.4	255.3	251.3	245.9	240.6	232.5	224.4	216.4
77.5°	174.0	180.1	188.2	196.2	193.5	190.8	186.1	181.4	175.4	169.3	166.0
80°	127.7	130.4	135.7	141.1	139.8	138.4	133.1	127.7	126.3	125.0	120.3
82.5°	86.7	90.0	91.4	92.7	92.1	91.4	87.4	83.3	82.0	80.6	80.0
85°	51.7	52.4	53.1	53.8	51.7	49.7	48.4	47.0	47.0	47.0	46.4
87.5°	23.5	24.2	24.2	24.2	23.5	22.8	21.5	20.2	20.8	21.5	21.5
90°	18.4	15.5	12.5	10.0	7.7	5.5	3.2	1.0	3.2	5.5	7.7
92.5°	39.7	38.3	37.0	35.6	34.3	32.9	31.6	30.2	31.6	32.9	34.3
95°	71.0	69.2	67.4	65.7	64.2	62.6	61.0	59.5	61.0	62.6	64.2
97.5°	106.2	104.8	103.5	102.3	101.1	100.0	98.9	97.8	98.9	100.0	101.1
100°	145.9	144.8	143.7	142.5	141.1	139.8	138.4	137.1	138.4	139.8	141.1
102.5°	189.4	187.8	186.3	185.1	184.5	183.8	183.1	182.5	183.1	183.8	184.5
105°	233.9	231.9	229.8	228.6	228.2	227.7	227.3	226.8	227.3	227.7	228.2
107.5°	282.5	281.6	280.7	280.1	279.9	279.7	279.5	279.2	279.5	279.7	279.9
110°	330.8	330.3	329.9	329.4	329.0	328.5	328.1	327.6	328.1	328.5	329.0





TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	379.0	379.0	379.0	378.9	378.7	378.5	378.2	378.0	378.2	378.5	378.7
115°	430.3	430.8	431.2	431.1	430.4	429.8	429.1	428.4	429.1	429.8	430.4
117.5°	479.7	480.2	480.6	480.7	480.5	480.3	480.1	479.8	480.1	480.3	480.5
120°	530.5	531.6	532.7	532.6	531.2	529.9	528.6	527.2	528.6	529.9	531.2
122.5°	579.5	580.0	580.4	580.2	579.3	578.4	577.5	576.6	577.5	578.4	579.3
125°	628.9	629.4	629.8	629.7	629.0	628.4	627.7	627.0	627.7	628.4	629.0
127.5°	678.3	678.8	679.2	678.8	677.4	676.1	674.7	673.4	674.7	676.1	677.4
130°	726.1	726.8	727.5	726.9	725.1	723.3	721.5	719.8	721.5	723.3	725.1
132.5°	773.1	773.5	774.0	773.3	771.5	769.7	767.9	766.1	767.9	769.7	771.5
135°	819.0	819.2	819.4	818.9	817.5	816.2	814.8	813.5	814.8	816.2	817.5
137.5°	863.6	862.9	862.2	861.3	860.2	859.1	858.0	856.8	858.0	859.1	860.2
140°	907.8	907.6	907.4	906.7	905.6	904.5	903.3	902.2	903.3	904.5	905.6
142.5°	949.7	949.3	948.8	948.0	946.9	945.8	944.7	943.5	944.7	945.8	946.9
145°	990.6	989.9	989.2	988.7	988.2	987.8	987.3	986.9	987.3	987.8	988.2
147.5°	1029.9	1029.2	1028.6	1027.8	1026.9	1026.0	1025.1	1024.2	1025.1	1026.0	1026.9
150°	1066.6	1066.2	1065.7	1065.3	1064.8	1064.4	1063.9	1063.5	1063.9	1064.4	1064.8
152.5°	1099.3	1099.1	1098.9	1098.4	1097.8	1097.1	1096.4	1095.8	1096.4	1097.1	1097.8
155°	1130.6	1130.4	1130.1	1130.0	1130.0	1130.0	1130.0	1130.0	1130.0	1130.0	1130.0
157.5°	1158.8	1158.6	1158.4	1158.4	1158.6	1158.8	1159.0	1159.3	1159.0	1158.8	1158.6
160°	1184.5	1184.5	1184.5	1184.7	1185.1	1185.6	1186.0	1186.5	1186.0	1185.6	1185.1
162.5°	1208.2	1208.0	1207.8	1208.0	1208.7	1209.3	1210.0	1210.7	1210.0	1209.3	1208.7
165°	1227.8	1227.8	1227.8	1228.1	1228.8	1229.5	1230.2	1230.8	1230.2	1229.5	1228.8
167.5°	1244.5	1244.3	1244.1	1244.4	1245.3	1246.2	1247.1	1248.0	1247.1	1246.2	1245.3
170°	1258.1	1258.1	1258.1	1258.5	1259.4	1260.3	1261.2	1262.1	1261.2	1260.3	1259.4
172.5°	1269.1	1269.1	1269.1	1269.6	1270.5	1271.4	1272.3	1273.2	1272.3	1271.4	1270.5
175°	1276.2	1276.2	1276.2	1276.6	1277.5	1278.4	1279.3	1280.2	1279.3	1278.4	1277.5
177.5°	1280.2	1280.2	1280.2	1280.7	1281.6	1282.5	1283.4	1284.3	1283.4	1282.5	1281.6
180°	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2	2896.2
2.5°	2779.3	2753.1	2726.9	2706.7	2686.5	2652.3	2618.0	2609.9	2601.9	2590.5	2579.0
5°	2635.5	2571.0	2506.5	2448.7	2390.9	2345.9	2300.8	2271.3	2241.7	2220.2	2198.7
7.5°	2467.5	2370.7	2274.0	2205.4	2136.9	2071.7	2006.5	1985.7	1964.8	1936.6	1908.4
10°	2304.9	2198.0	2091.2	2001.8	1912.4	1848.6	1784.8	1759.2	1733.7	1698.1	1662.5
12.5°	2159.7	2042.8	1925.9	1835.8	1745.8	1684.0	1622.1	1585.2	1548.2	1528.1	1507.9
15°	2007.9	1882.9	1757.9	1674.6	1591.2	1535.5	1479.7	1447.4	1415.2	1395.7	1376.2
17.5°	1873.5	1749.8	1626.2	1546.2	1466.2	1415.2	1364.1	1335.9	1307.7	1292.9	1278.1
20°	1745.8	1624.8	1503.9	1425.9	1348.0	1306.3	1264.7	1246.5	1228.4	1216.3	1204.2
22.5°	1628.9	1509.9	1391.0	1324.5	1257.9	1224.3	1190.7	1178.0	1165.2	1155.1	1145.0
25°	1511.9	1405.8	1299.6	1243.2	1186.7	1159.2	1131.6	1118.8	1106.1	1096.0	1085.9
27.5°	1416.5	1315.1	1213.6	1165.2	1116.8	1095.3	1073.8	1063.7	1053.7	1044.2	1034.8
30°	1323.8	1233.1	1142.4	1100.7	1059.0	1039.5	1020.1	1010.0	999.9	991.2	982.4
32.5°	1237.8	1159.8	1081.9	1043.6	1005.3	989.1	973.0	960.9	948.8	942.1	935.4
35°	1155.8	1085.9	1016.0	984.4	952.9	936.7	920.6	910.5	900.4	895.1	889.7
37.5°	1085.9	1023.4	960.9	930.7	900.4	885.0	869.5	860.8	852.1	850.0	848.0
40°	1014.7	960.9	907.2	877.6	848.0	834.6	821.2	815.8	810.4	809.1	807.7
42.5°	955.5	903.1	850.7	823.8	797.0	785.5	774.1	771.4	768.7	770.8	772.8
45°	887.0	843.3	799.6	774.8	749.9	740.5	731.1	729.1	727.1	731.1	735.1
47.5°	829.2	788.9	748.6	725.1	701.5	694.8	688.1	687.4	686.8	692.1	697.5
50°	770.1	731.1	692.1	673.3	654.5	648.5	642.4	644.4	646.4	655.2	663.9
52.5°	715.0	678.7	642.4	624.9	607.5	603.4	599.4	604.1	608.8	618.2	627.6
55°	654.5	621.6	588.6	575.2	561.8	557.7	553.7	563.1	572.5	581.3	590.0
57.5°	596.7	567.8	538.9	526.8	514.7	514.1	513.4	522.1	530.9	540.3	549.7
60°	534.9	510.7	486.5	477.1	467.7	469.0	470.4	480.5	490.5	497.9	505.3
62.5°	478.4	458.3	438.1	429.4	420.7	424.0	427.4	437.5	447.5	456.3	465.0
65°	422.0	405.2	388.4	382.4	376.3	381.0	385.7	394.4	403.2	409.2	415.3
67.5°	368.2	354.1	340.0	335.3	330.6	335.3	340.0	348.8	357.5	363.5	369.6
70°	311.8	300.4	288.9	285.6	282.2	287.6	293.0	300.4	307.8	313.8	319.9
72.5°	259.4	250.6	241.9	241.2	240.6	245.3	250.0	257.4	264.8	268.8	272.8
75°	208.3	203.6	198.9	198.2	197.6	202.3	207.0	211.0	215.0	218.4	221.8
77.5°	162.6	158.6	154.6	155.2	155.9	159.3	162.6	166.6	170.7	172.7	174.7
80°	115.6	114.2	112.9	114.2	115.6	118.3	121.0	123.6	126.3	127.7	129.0
82.5°	79.3	77.9	76.6	78.6	80.6	82.7	84.7	86.7	88.7	89.4	90.0
85°	45.7	47.7	49.7	49.7	49.7	50.4	51.1	51.7	52.4	51.7	51.1
87.5°	21.5	22.2	22.8	22.8	22.8	23.5	24.2	24.2	24.2	23.5	22.8
90°	10.0	12.5	15.5	18.4	21.3	24.2	25.1	26.0	26.9	27.8	28.4
92.5°	35.6	37.0	38.3	39.7	41.0	42.3	43.0	43.7	44.4	45.0	45.1
95°	65.7	67.4	69.2	71.0	72.8	74.6	75.5	76.4	77.3	78.2	78.6
97.5°	102.3	103.5	104.8	106.2	107.5	108.9	110.0	111.1	112.2	113.4	113.8
100°	142.5	143.7	144.8	145.9	147.1	148.2	148.9	149.5	150.2	150.9	151.4
102.5°	185.1	186.3	187.8	189.4	191.0	192.5	193.2	193.9	194.6	195.2	195.5
105°	228.6	229.8	231.9	233.9	235.9	237.9	237.9	237.9	237.9	237.9	238.1
107.5°	280.1	280.7	281.6	282.5	283.4	284.3	284.9	285.6	286.3	287.0	287.2
110°	329.4	329.9	330.3	330.8	331.2	331.7	332.5	333.4	334.3	335.2	335.5



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	378.9	379.0	379.0	379.0	379.0	379.0	380.1	381.3	382.4	383.5	384.1
115°	431.1	431.2	430.8	430.3	429.9	429.4	429.7	429.9	430.1	430.3	430.3
117.5°	480.7	480.6	480.2	479.7	479.3	478.8	478.8	478.8	478.8	478.8	478.5
120°	532.6	532.7	531.6	530.5	529.3	528.2	528.0	527.8	527.5	527.3	527.0
122.5°	580.2	580.4	580.0	579.5	579.1	578.6	578.0	577.3	576.6	575.9	575.3
125°	629.7	629.8	629.4	628.9	628.5	628.0	627.1	626.2	625.3	624.4	623.5
127.5°	678.8	679.2	678.8	678.3	677.9	677.4	676.1	674.7	673.4	672.0	670.9
130°	726.9	727.5	726.8	726.1	725.5	724.8	723.9	723.0	722.1	721.2	720.0
132.5°	773.3	774.0	773.5	773.1	772.6	772.2	771.1	769.9	768.8	767.7	766.6
135°	818.9	819.4	819.2	819.0	818.8	818.5	817.6	816.7	815.9	815.0	814.3
137.5°	861.3	862.2	862.9	863.6	864.2	864.9	863.8	862.7	861.6	860.4	859.5
140°	906.7	907.4	907.6	907.8	908.0	908.3	908.0	907.8	907.6	907.4	906.5
142.5°	948.0	948.8	949.3	949.7	950.1	950.6	950.4	950.1	949.9	949.7	949.0
145°	988.7	989.2	989.9	990.6	991.3	991.9	991.7	991.5	991.3	991.0	990.5
147.5°	1027.8	1028.6	1029.2	1029.9	1030.6	1031.2	1031.2	1031.2	1031.2	1031.2	1030.6
150°	1065.3	1065.7	1066.2	1066.6	1067.1	1067.5	1067.5	1067.5	1067.5	1067.5	1066.9
152.5°	1098.4	1098.9	1099.1	1099.3	1099.6	1099.8	1100.2	1100.7	1101.1	1101.6	1101.2
155°	1130.0	1130.1	1130.4	1130.6	1130.8	1131.0	1131.9	1132.8	1133.7	1134.6	1134.3
157.5°	1158.4	1158.4	1158.6	1158.8	1159.0	1159.3	1160.2	1161.1	1162.0	1162.8	1162.6
160°	1184.7	1184.5	1184.5	1184.5	1184.5	1184.5	1185.6	1186.7	1187.8	1188.9	1189.1
162.5°	1208.0	1207.8	1208.0	1208.2	1208.4	1208.7	1209.8	1210.9	1212.0	1213.1	1212.9
165°	1228.1	1227.8	1227.8	1227.8	1227.8	1227.8	1229.2	1230.5	1231.8	1233.2	1233.1
167.5°	1244.4	1244.1	1244.3	1244.5	1244.7	1244.9	1246.3	1247.6	1249.0	1250.3	1250.3
170°	1258.5	1258.1	1258.1	1258.1	1258.1	1258.1	1259.6	1261.2	1262.8	1264.3	1264.3
172.5°	1269.6	1269.1	1269.1	1269.1	1269.1	1269.1	1270.5	1271.8	1273.2	1274.5	1274.4
175°	1276.6	1276.2	1276.2	1276.2	1276.2	1276.2	1277.5	1278.9	1280.2	1281.6	1281.5
177.5°	1280.7	1280.2	1280.2	1280.2	1280.2	1280.2	1281.6	1282.9	1284.3	1285.6	1285.5
180°	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	2896.2	2896.2	2896.2	2896.2
2.5°	2574.3	2569.6	2550.8	2532.0
5°	2182.6	2166.4	2161.1	2155.7
7.5°	1907.1	1905.7	1877.5	1849.3
10°	1664.5	1666.5	1641.0	1615.4
12.5°	1491.1	1474.3	1472.3	1470.3
15°	1360.7	1345.3	1342.6	1339.9
17.5°	1268.7	1259.3	1256.6	1253.9
20°	1198.8	1193.4	1188.7	1184.0
22.5°	1138.3	1131.6	1127.6	1123.5
25°	1079.9	1073.8	1072.5	1071.1
27.5°	1027.4	1020.1	1020.1	1020.1
30°	977.7	973.0	971.0	969.0
32.5°	931.4	927.3	927.3	927.3
35°	887.7	885.7	883.0	880.3
37.5°	848.0	848.0	846.7	845.3
40°	809.7	811.7	811.7	811.7
42.5°	774.8	776.8	776.8	776.8
45°	738.5	741.9	743.2	744.5
47.5°	702.9	708.3	709.6	710.9
50°	667.9	672.0	672.6	673.3
52.5°	632.3	637.0	640.4	643.8
55°	594.7	599.4	601.4	603.4
57.5°	554.4	559.1	559.8	560.4
60°	510.0	514.7	516.1	517.4
62.5°	467.7	470.4	471.7	473.1
65°	419.3	423.3	426.0	428.7
67.5°	372.9	376.3	376.3	376.3
70°	321.2	322.5	324.6	326.6
72.5°	273.5	274.2	274.2	274.2
75°	223.1	224.4	225.1	225.8
77.5°	175.4	176.1	176.1	176.1
80°	128.3	127.7	127.7	127.7
82.5°	88.0	86.0	86.0	86.0
85°	50.4	49.7	50.4	51.1
87.5°	22.8	22.8	22.8	22.8
90°	28.9	29.3	29.8	30.2
92.5°	44.7	44.2	43.8	43.3
95°	78.6	78.6	78.6	78.6
97.5°	113.6	113.4	113.1	112.9
100°	151.9	152.3	152.8	153.2
102.5°	195.2	195.0	194.8	194.6
105°	238.6	239.0	239.5	239.9
107.5°	287.0	286.7	286.5	286.3
110°	335.0	334.6	334.1	333.7



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	384.1	384.1	384.1	384.1
115°	430.1	429.9	429.7	429.4
117.5°	477.8	477.1	476.5	475.8
120°	526.5	526.1	525.6	525.2
122.5°	574.6	573.9	573.2	572.6
125°	622.6	621.7	620.9	620.0
127.5°	670.0	669.1	668.2	667.3
130°	718.4	716.8	715.3	713.7
132.5°	765.5	764.3	763.2	762.1
135°	813.8	813.4	812.9	812.5
137.5°	858.9	858.2	857.5	856.8
140°	904.9	903.3	901.8	900.2
142.5°	947.9	946.8	945.7	944.5
145°	989.6	988.7	987.8	986.9
147.5°	1029.2	1027.9	1026.5	1025.2
150°	1065.5	1064.2	1062.8	1061.5
152.5°	1100.1	1099.0	1097.9	1096.8
155°	1132.7	1131.2	1129.6	1128.0
157.5°	1161.3	1159.9	1158.6	1157.2
160°	1188.2	1187.3	1186.4	1185.5
162.5°	1211.3	1209.8	1208.2	1206.6
165°	1231.5	1229.9	1228.4	1226.8
167.5°	1249.0	1247.6	1246.3	1244.9
170°	1262.8	1261.2	1259.6	1258.1
172.5°	1272.8	1271.3	1269.7	1268.1
175°	1279.9	1278.3	1276.8	1275.2
177.5°	1283.9	1282.4	1280.8	1279.2
180°	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831052

CATALOG NUMBER: S123DIP-S1000D1025U840-4F0-1E-UDD-G1

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	16.12	17.01	17.03	17.93	19.10	18.36	19.24	19.27	20.16	21.34
	3H	17.77	18.56	18.69	19.49	20.69	19.79	20.58	20.70	21.51	22.71
	4H	18.35	19.10	19.28	20.03	21.24	20.24	20.98	21.17	21.92	23.13
	6H	18.72	19.41	19.67	20.35	21.57	20.51	21.20	21.46	22.14	23.36
	8H	18.82	19.47	19.77	20.43	21.65	20.58	21.23	21.53	22.19	23.41
	12H	18.87	19.49	19.82	20.44	21.68	20.60	21.22	21.55	22.17	23.41
4H	2H	16.70	17.45	17.64	18.38	19.59	18.53	19.27	19.46	20.21	21.42
	3H	18.53	19.15	19.48	20.12	21.34	20.15	20.77	21.09	21.73	22.96
	4H	19.23	19.80	20.19	20.76	22.00	20.73	21.30	21.69	22.26	23.51
	6H	19.71	20.19	20.68	21.18	22.43	21.14	21.63	22.11	22.61	23.86
	8H	19.84	20.30	20.82	21.28	22.54	21.25	21.71	22.22	22.68	23.94
	12H	19.91	20.32	20.90	21.32	22.58	21.30	21.71	22.29	22.70	23.97
8H	4H	19.50	19.95	20.47	20.93	22.19	20.84	21.29	21.81	22.27	23.53
	6H	20.09	20.46	21.08	21.48	22.74	21.34	21.72	22.34	22.74	24.00
	8H	20.30	20.63	21.30	21.63	22.91	21.52	21.85	22.53	22.86	24.14
	12H	20.42	20.71	21.43	21.71	23.04	21.63	21.92	22.63	22.92	24.24
12H	4H	19.50	19.91	20.49	20.90	22.17	20.82	21.23	21.80	22.22	23.48
	6H	20.14	20.47	21.14	21.48	22.75	21.36	21.69	22.36	22.69	23.97
	8H	20.37	20.67	21.38	21.66	22.99	21.56	21.85	22.57	22.85	24.17