

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331889-840

Luminaire Tested: **S123DIP-S340D805U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331889-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D805U840-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4667.6 lumens
Efficiency: N/A
Efficacy: 149.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331889-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

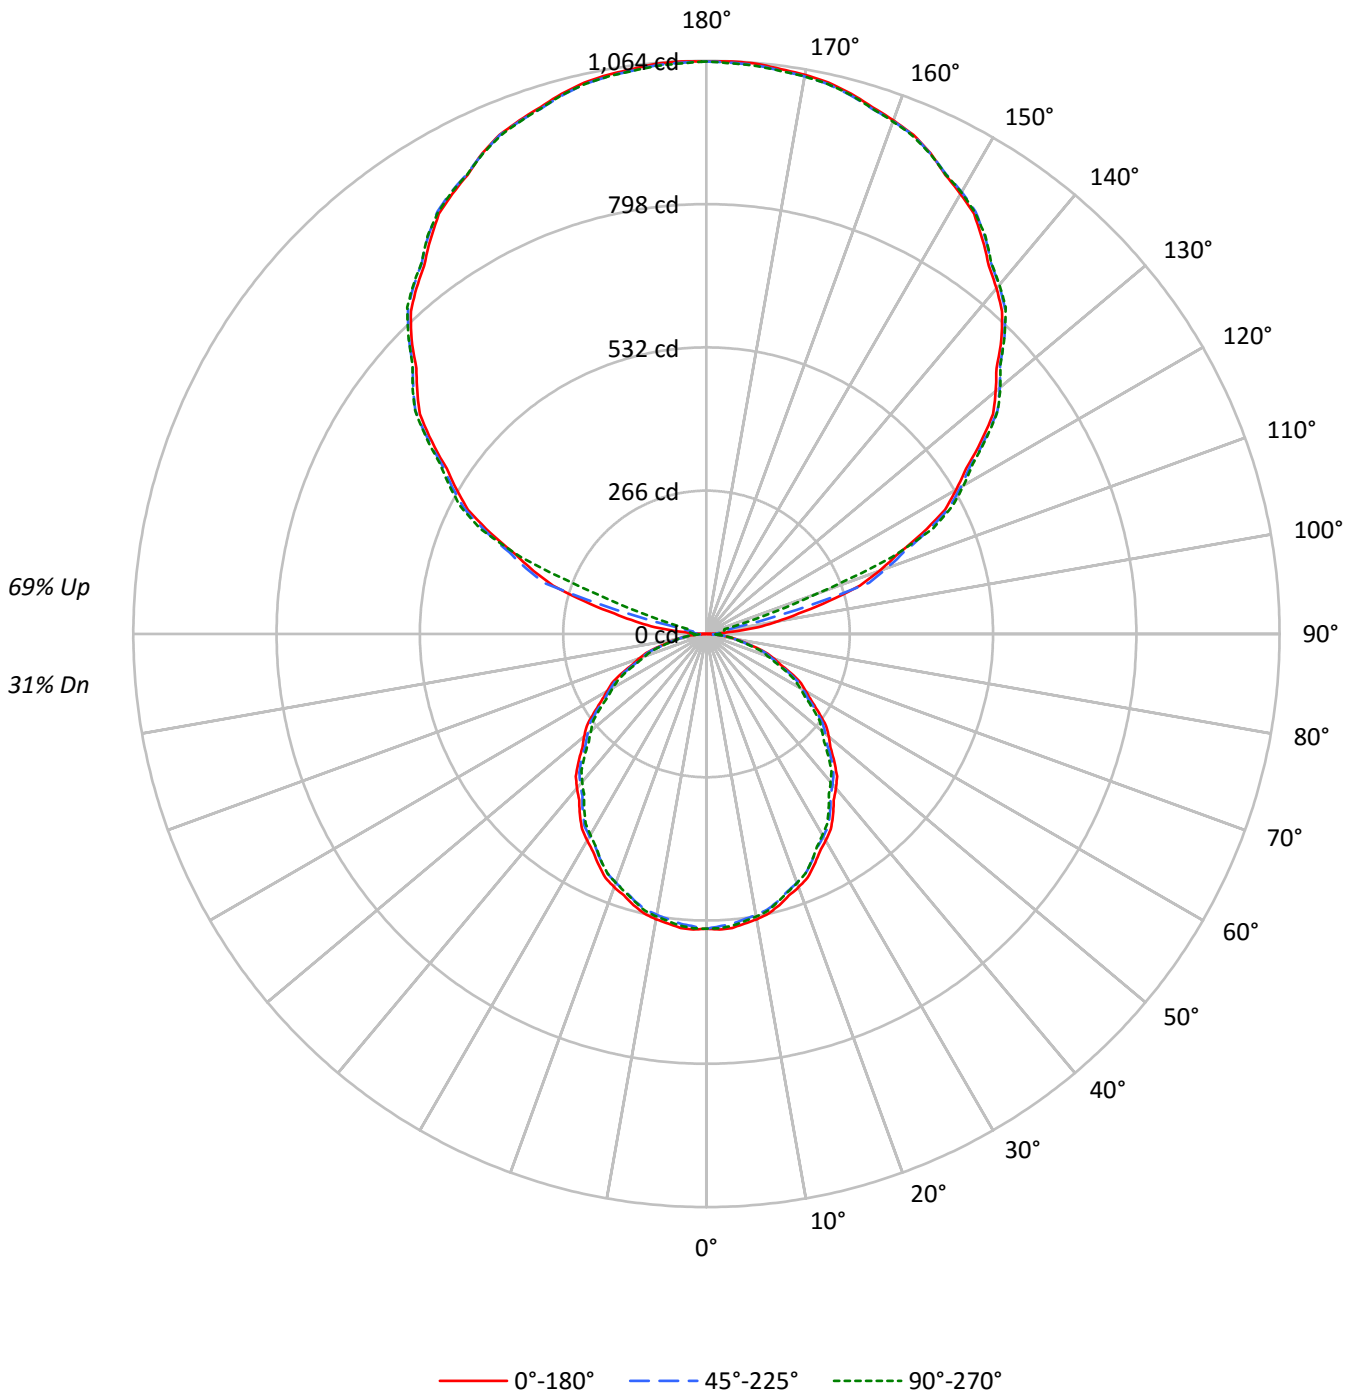



TEST NUMBER: P331889-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	38	38	38	31
1	93	89	85	82	84	80	77	74	63	61	59	48	47	45	34	33	32	26
2	85	78	72	67	76	70	65	61	55	52	49	42	40	38	30	28	27	21
3	77	68	61	56	69	62	56	51	49	45	41	37	34	32	26	24	23	18
4	71	60	53	47	63	54	48	43	43	39	35	33	30	27	23	21	20	16
5	65	54	46	40	58	48	42	37	39	34	30	30	26	23	21	19	17	13
6	60	48	40	34	53	43	37	32	35	30	26	27	23	20	19	17	15	12
7	55	43	35	30	49	39	32	28	31	26	23	24	21	18	17	15	13	10
8	51	39	32	26	46	35	29	24	29	24	20	22	19	16	16	14	12	9
9	47	36	28	23	42	32	26	22	26	21	18	20	17	14	15	12	11	8
10	44	32	25	21	40	30	23	19	24	19	16	19	15	13	14	11	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5890	5890	5890
5°	5919	5837	5877
10°	5879	5786	5822
15°	5810	5721	5731
20°	5730	5628	5632
25°	5621	5516	5505
30°	5504	5392	5351
35°	5380	5261	5194
40°	5251	5117	5039
45°	5107	4985	4864
50°	4963	4823	4687
55°	4778	4654	4511
60°	4590	4456	4316
65°	4422	4241	4111
70°	4176	3997	3821
75°	3818	3681	3523
80°	3440	3298	3267
85°	3013	2902	2791



TEST NUMBER: P331889-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.5	1.1
10°-20°	145.6	3.1
20°-30°	215.0	4.6
30°-40°	251.2	5.4
40°-50°	252.5	5.4
50°-60°	221.8	4.8
60°-70°	165.2	3.5
70°-80°	94.1	2.0
80°-90°	30.0	0.6
90°-100°	38.6	0.8
100°-110°	184.1	3.9
110°-120°	442.3	9.5
120°-130°	563.2	12.1
130°-140°	601.8	12.9
140°-150°	562.7	12.1
150°-160°	453.9	9.7
160°-170°	293.0	6.3
170°-180°	101.0	2.2
0°-30°	412.1	8.8
0°-40°	663.3	14.2
0°-60°	1137.6	24.4
0°-90°	1426.9	30.6
90°-120°	665.1	14.2
90°-150°	2392.8	51.3
90°-180°	3241.0	69.4
0°-180°	4667.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	547	547	547	547	547	
5°	548	545	540	545	544	52
15°	521	519	513	517	514	147
25°	473	470	464	465	464	218
35°	409	406	400	398	395	256
45°	336	333	328	322	320	259
55°	255	254	248	243	240	228
65°	174	171	166	163	161	171
75°	92	90	88	86	85	98
85°	24	24	24	23	23	27
90°	1	9	19	22	24	4
95°	48	18	24	30	30	60
105°	235	240	173	41	35	249
115°	441	446	453	461	464	435
125°	622	628	632	633	635	555
135°	774	779	782	784	782	596
145°	894	899	901	902	902	559
155°	984	983	984	987	983	453
165°	1038	1036	1035	1041	1036	293
175°	1063	1059	1060	1064	1059	101
180°	1063	1063	1063	1063	1063	



TEST NUMBER: P331889-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2
2.5°	549.2	548.8	548.5	548.2	547.8	547.1	546.2	545.3	544.4	543.5	544.3
5°	547.8	547.1	546.6	546.1	545.6	544.8	543.6	542.5	541.3	540.2	541.2
7.5°	542.4	541.8	541.3	540.8	540.3	539.4	538.3	537.0	535.8	534.6	535.5
10°	537.9	537.3	536.7	536.2	535.7	534.8	533.4	532.1	530.7	529.4	530.3
12.5°	531.8	531.4	530.9	530.5	530.1	529.2	528.0	526.6	525.3	524.1	524.8
15°	521.4	521.0	520.5	520.1	519.7	518.8	517.5	516.0	514.7	513.4	514.2
17.5°	509.2	508.7	508.2	507.6	507.1	506.1	504.7	503.4	502.0	500.7	501.2
20°	500.2	499.6	499.0	498.3	497.7	496.7	495.3	493.9	492.6	491.3	491.7
22.5°	490.0	489.4	488.8	488.2	487.6	486.6	485.1	483.8	482.4	481.1	481.4
25°	473.3	472.7	472.1	471.5	470.9	469.9	468.5	467.2	465.7	464.4	464.5
27.5°	455.6	454.9	454.3	453.7	453.1	452.1	450.7	449.2	447.8	446.3	446.4
30°	442.8	442.2	441.7	441.2	440.7	439.7	438.3	436.8	435.4	433.8	433.8
32.5°	430.0	429.3	428.6	427.9	427.3	426.3	425.2	424.0	422.9	421.8	421.2
35°	409.4	408.8	408.1	407.5	406.9	405.9	404.6	403.1	401.8	400.4	399.8
37.5°	388.3	387.5	386.7	385.9	385.2	384.1	382.6	381.2	379.9	378.5	377.8
40°	373.7	372.9	372.3	371.7	371.1	370.0	368.6	367.1	365.7	364.2	363.3
42.5°	358.9	358.2	357.5	356.8	356.1	355.0	353.6	352.0	350.6	349.1	348.3
45°	335.5	335.1	334.7	334.3	333.9	333.0	331.5	330.2	328.8	327.5	326.3
47.5°	312.3	311.6	311.0	310.4	309.8	308.9	307.6	306.3	305.1	303.8	302.6
50°	296.4	295.9	295.4	294.9	294.4	293.4	292.1	290.7	289.3	288.0	286.8
52.5°	279.8	279.5	279.1	278.8	278.4	277.5	276.1	274.7	273.3	271.8	270.8
55°	254.6	254.5	254.4	254.3	254.2	253.4	252.1	250.6	249.3	248.0	246.8
57.5°	230.5	230.1	229.7	229.4	229.0	228.3	227.2	226.1	225.1	224.0	223.0
60°	213.2	213.1	213.0	212.9	212.8	212.1	210.8	209.5	208.3	207.0	206.1
62.5°	197.7	197.4	197.2	196.9	196.6	195.9	194.6	193.4	192.1	190.9	190.0
65°	173.6	173.1	172.6	172.1	171.6	170.8	169.8	168.6	167.6	166.5	165.7
67.5°	148.1	147.6	147.2	146.7	146.3	145.6	144.9	144.1	143.3	142.5	141.8
70°	132.7	132.1	131.5	130.8	130.2	129.6	129.0	128.3	127.6	127.0	126.3
72.5°	116.5	116.0	115.6	115.1	114.6	114.1	113.4	112.7	112.0	111.3	110.6
75°	91.8	91.3	90.9	90.5	90.1	89.7	89.4	89.1	88.8	88.5	88.0
77.5°	69.8	69.6	69.4	69.2	68.9	68.6	68.3	67.9	67.5	67.1	66.8
80°	55.5	55.2	54.9	54.6	54.2	54.0	53.8	53.6	53.4	53.2	53.0
82.5°	41.6	41.5	41.5	41.4	41.3	41.3	41.2	41.2	41.2	41.1	40.9
85°	24.4	24.2	24.0	23.8	23.6	23.5	23.5	23.5	23.5	23.5	23.3
87.5°	9.9	10.0	10.1	10.2	10.3	10.6	10.9	11.3	11.7	12.1	12.1
90°	0.8	2.5	4.3	6.1	7.8	9.8	12.1	14.3	16.7	19.0	19.7
92.5°	14.6	14.2	13.7	13.2	12.7	13.3	15.0	16.8	18.5	20.2	21.3
95°	48.2	41.0	33.7	26.6	19.4	16.8	18.7	20.6	22.5	24.4	25.8
97.5°	96.7	93.6	90.4	87.2	83.9	75.9	63.3	50.7	38.1	25.4	26.9
100°	133.4	136.9	140.5	143.9	147.4	135.5	108.2	80.8	53.4	26.1	27.5
102.5°	175.1	177.6	180.2	182.7	185.2	171.6	141.7	111.7	81.8	51.9	47.6
105°	235.3	237.2	239.1	241.1	243.0	236.1	220.3	204.5	188.6	172.9	141.9
107.5°	298.7	300.3	301.8	303.4	304.9	306.9	309.4	311.9	314.4	316.9	294.2
110°	341.0	342.4	343.9	345.3	346.7	348.3	350.3	352.2	354.2	356.1	350.3



TEST NUMBER: P331889-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	381.5	382.7	384.1	385.3	386.6	388.1	390.1	392.0	393.9	395.9	396.0
115°	441.3	442.4	443.4	444.5	445.6	446.9	448.5	450.0	451.6	453.2	454.9
117.5°	499.3	500.6	501.9	503.2	504.4	505.5	506.3	507.2	508.0	508.8	510.2
120°	535.3	536.8	538.5	540.0	541.6	542.7	543.2	543.7	544.2	544.7	546.1
122.5°	571.9	573.2	574.5	575.8	577.1	578.0	578.8	579.5	580.1	580.8	581.8
125°	622.2	623.5	624.9	626.3	627.7	628.8	629.5	630.2	630.9	631.6	632.0
127.5°	670.8	672.2	673.6	675.0	676.4	677.5	678.3	679.2	680.0	680.9	681.5
130°	701.0	702.5	703.9	705.3	706.7	707.7	708.4	709.1	709.8	710.5	711.2
132.5°	730.1	731.5	733.0	734.4	735.8	736.7	737.3	737.8	738.4	739.0	739.7
135°	774.5	775.6	776.6	777.7	778.7	779.6	780.3	781.0	781.7	782.4	782.9
137.5°	812.4	813.7	815.1	816.4	817.7	818.6	819.0	819.4	819.7	820.1	821.0
140°	837.7	838.7	839.8	840.8	841.9	842.6	843.2	843.7	844.2	844.8	845.5
142.5°	861.0	862.1	863.1	864.2	865.3	866.1	866.6	867.1	867.6	868.2	868.7
145°	893.7	894.9	896.2	897.4	898.7	899.4	899.8	900.1	900.5	900.8	901.2
147.5°	924.5	925.3	926.1	927.0	927.8	928.4	928.7	929.0	929.4	929.7	930.1
150°	943.4	944.0	944.5	945.0	945.5	946.0	946.3	946.7	947.1	947.5	947.8
152.5°	960.5	960.8	961.0	961.3	961.5	961.7	961.9	962.1	962.4	962.6	963.2
155°	984.5	984.2	983.8	983.5	983.1	983.0	983.2	983.4	983.5	983.7	984.6
157.5°	1003.1	1003.1	1003.1	1003.0	1003.0	1002.9	1002.7	1002.6	1002.4	1002.2	1003.3
160°	1014.5	1014.3	1014.2	1014.0	1013.8	1013.6	1013.5	1013.3	1013.1	1012.9	1014.0
162.5°	1025.2	1024.8	1024.3	1023.9	1023.4	1023.1	1022.9	1022.8	1022.6	1022.4	1023.6
165°	1038.2	1037.6	1037.1	1036.6	1036.1	1035.7	1035.6	1035.4	1035.2	1035.0	1036.4
167.5°	1048.3	1047.6	1046.9	1046.2	1045.5	1045.1	1045.1	1045.1	1045.1	1045.1	1046.5
170°	1054.0	1053.3	1052.6	1051.9	1051.2	1050.9	1050.9	1050.9	1050.9	1050.9	1052.3
172.5°	1057.7	1056.9	1056.1	1055.2	1054.4	1054.1	1054.2	1054.3	1054.5	1054.6	1056.0
175°	1062.7	1061.8	1061.0	1060.1	1059.1	1058.8	1058.9	1059.1	1059.3	1059.6	1060.8
177.5°	1063.9	1063.3	1062.6	1061.9	1061.2	1060.9	1061.0	1061.2	1061.3	1061.4	1062.6
180°	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7



TEST NUMBER: P331889-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2
2.5°	545.1	546.0	546.8	547.2	547.1	547.0	546.9	546.8
5°	542.3	543.3	544.4	544.8	544.6	544.4	544.1	543.9
7.5°	536.5	537.5	538.4	538.8	538.7	538.6	538.5	538.3
10°	531.3	532.2	533.1	533.5	533.3	533.1	532.9	532.7
12.5°	525.4	526.1	526.8	527.1	527.0	526.8	526.7	526.6
15°	515.0	515.8	516.7	516.8	516.1	515.5	514.9	514.3
17.5°	501.8	502.4	503.0	503.2	502.9	502.7	502.5	502.3
20°	492.1	492.5	492.9	493.0	492.6	492.3	492.0	491.7
22.5°	481.7	482.1	482.4	482.4	482.0	481.6	481.2	480.8
25°	464.6	464.7	464.8	464.7	464.4	464.1	463.8	463.5
27.5°	446.5	446.6	446.6	446.5	446.1	445.7	445.2	444.8
30°	433.8	433.8	433.8	433.4	432.7	432.0	431.3	430.5
32.5°	420.6	420.0	419.5	419.0	418.6	418.2	417.8	417.4
35°	399.2	398.6	397.9	397.4	396.9	396.3	395.8	395.3
37.5°	377.0	376.3	375.5	375.0	374.7	374.3	374.0	373.7
40°	362.5	361.7	360.8	360.2	359.8	359.4	359.0	358.6
42.5°	347.5	346.6	345.8	345.2	344.8	344.4	344.0	343.5
45°	325.0	323.8	322.4	321.6	321.0	320.5	320.0	319.5
47.5°	301.3	300.1	298.8	298.0	297.5	297.1	296.6	296.2
50°	285.7	284.5	283.4	282.5	281.9	281.2	280.6	279.9
52.5°	269.8	268.8	267.8	267.0	266.4	265.8	265.2	264.6
55°	245.7	244.5	243.4	242.6	242.1	241.5	241.0	240.4
57.5°	222.0	220.9	219.8	219.0	218.4	217.8	217.2	216.6
60°	205.2	204.2	203.3	202.6	202.0	201.5	201.0	200.5
62.5°	188.9	188.0	187.1	186.4	186.1	185.7	185.4	185.0
65°	164.9	164.1	163.2	162.7	162.4	162.0	161.7	161.4
67.5°	141.0	140.3	139.6	139.0	138.6	138.0	137.6	137.2
70°	125.6	124.8	124.1	123.5	123.0	122.5	121.9	121.4
72.5°	110.0	109.3	108.7	108.2	108.0	107.7	107.3	107.0
75°	87.5	86.8	86.3	85.9	85.6	85.3	85.0	84.7
77.5°	66.3	66.0	65.6	65.5	65.5	65.5	65.5	65.5
80°	52.9	52.8	52.7	52.7	52.7	52.7	52.7	52.7
82.5°	40.8	40.6	40.4	40.2	40.2	40.1	40.0	39.9
85°	23.1	22.9	22.7	22.6	22.6	22.6	22.6	22.6
87.5°	12.2	12.2	12.3	12.3	12.4	12.5	12.5	12.6
90°	20.4	21.0	21.7	22.3	22.6	23.0	23.3	23.7
92.5°	22.4	23.5	24.7	25.3	25.5	25.8	26.0	26.3
95°	27.0	28.2	29.4	30.0	30.0	30.0	30.0	30.0
97.5°	28.3	29.6	31.0	31.8	32.0	32.2	32.3	32.5
100°	28.9	30.3	31.7	32.4	32.6	32.8	33.0	33.1
102.5°	43.2	38.9	34.5	32.5	32.8	33.1	33.4	33.8
105°	110.8	79.8	48.7	33.3	33.7	34.0	34.4	34.7
107.5°	271.4	248.6	225.8	202.7	179.4	155.9	132.5	109.1
110°	344.5	338.7	333.0	317.5	292.4	267.3	242.2	217.1



TEST NUMBER: P331889-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	396.1	396.2	396.3	393.6	388.4	383.0	377.8	372.5
115°	456.7	458.5	460.2	461.4	462.1	462.8	463.5	464.2
117.5°	511.6	513.0	514.3	515.1	515.3	515.4	515.5	515.7
120°	547.5	549.0	550.4	551.1	551.1	551.1	551.1	551.1
122.5°	582.7	583.7	584.7	585.2	585.4	585.5	585.7	585.8
125°	632.3	632.7	633.0	633.4	633.7	634.1	634.4	634.8
127.5°	682.0	682.6	683.1	683.2	682.9	682.6	682.2	681.9
130°	712.0	712.7	713.4	713.6	713.2	712.9	712.5	712.2
132.5°	740.3	741.0	741.7	741.8	741.4	740.9	740.4	739.9
135°	783.5	784.0	784.5	784.5	784.0	783.5	782.9	782.4
137.5°	821.8	822.6	823.5	823.7	823.4	823.0	822.7	822.3
140°	846.2	846.9	847.6	847.8	847.4	847.1	846.7	846.4
142.5°	869.3	869.8	870.4	870.4	869.9	869.4	869.0	868.5
145°	901.5	901.9	902.2	902.4	902.4	902.4	902.4	902.4
147.5°	930.4	930.8	931.1	930.9	930.1	929.3	928.5	927.7
150°	948.1	948.5	948.8	948.8	948.2	947.7	947.2	946.6
152.5°	963.8	964.4	965.1	965.0	964.2	963.4	962.6	961.8
155°	985.5	986.3	987.2	987.1	986.1	985.0	984.0	982.9
157.5°	1004.3	1005.3	1006.4	1006.2	1004.9	1003.5	1002.2	1000.8
160°	1015.0	1016.1	1017.1	1017.0	1015.8	1014.6	1013.4	1012.2
162.5°	1024.8	1026.0	1027.1	1027.2	1026.1	1025.0	1024.0	1022.9
165°	1037.8	1039.3	1040.7	1040.8	1039.6	1038.2	1037.0	1035.8
167.5°	1047.9	1049.4	1050.8	1050.8	1049.4	1047.9	1046.5	1045.1
170°	1053.6	1055.0	1056.4	1056.4	1055.0	1053.6	1052.3	1050.9
172.5°	1057.4	1058.8	1060.3	1060.2	1058.6	1057.1	1055.5	1054.0
175°	1062.0	1063.2	1064.4	1064.3	1063.0	1061.6	1060.2	1058.7
177.5°	1063.7	1064.8	1065.9	1065.8	1064.4	1063.0	1061.6	1060.2
180°	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7	1062.7

(END OF REPORT)