

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331890-840

Luminaire Tested: **S123DIP-S340D805U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331890-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S340D805U840-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4211.7 lumens
Efficiency: N/A
Efficacy: 135.0 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 31.2
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331890-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

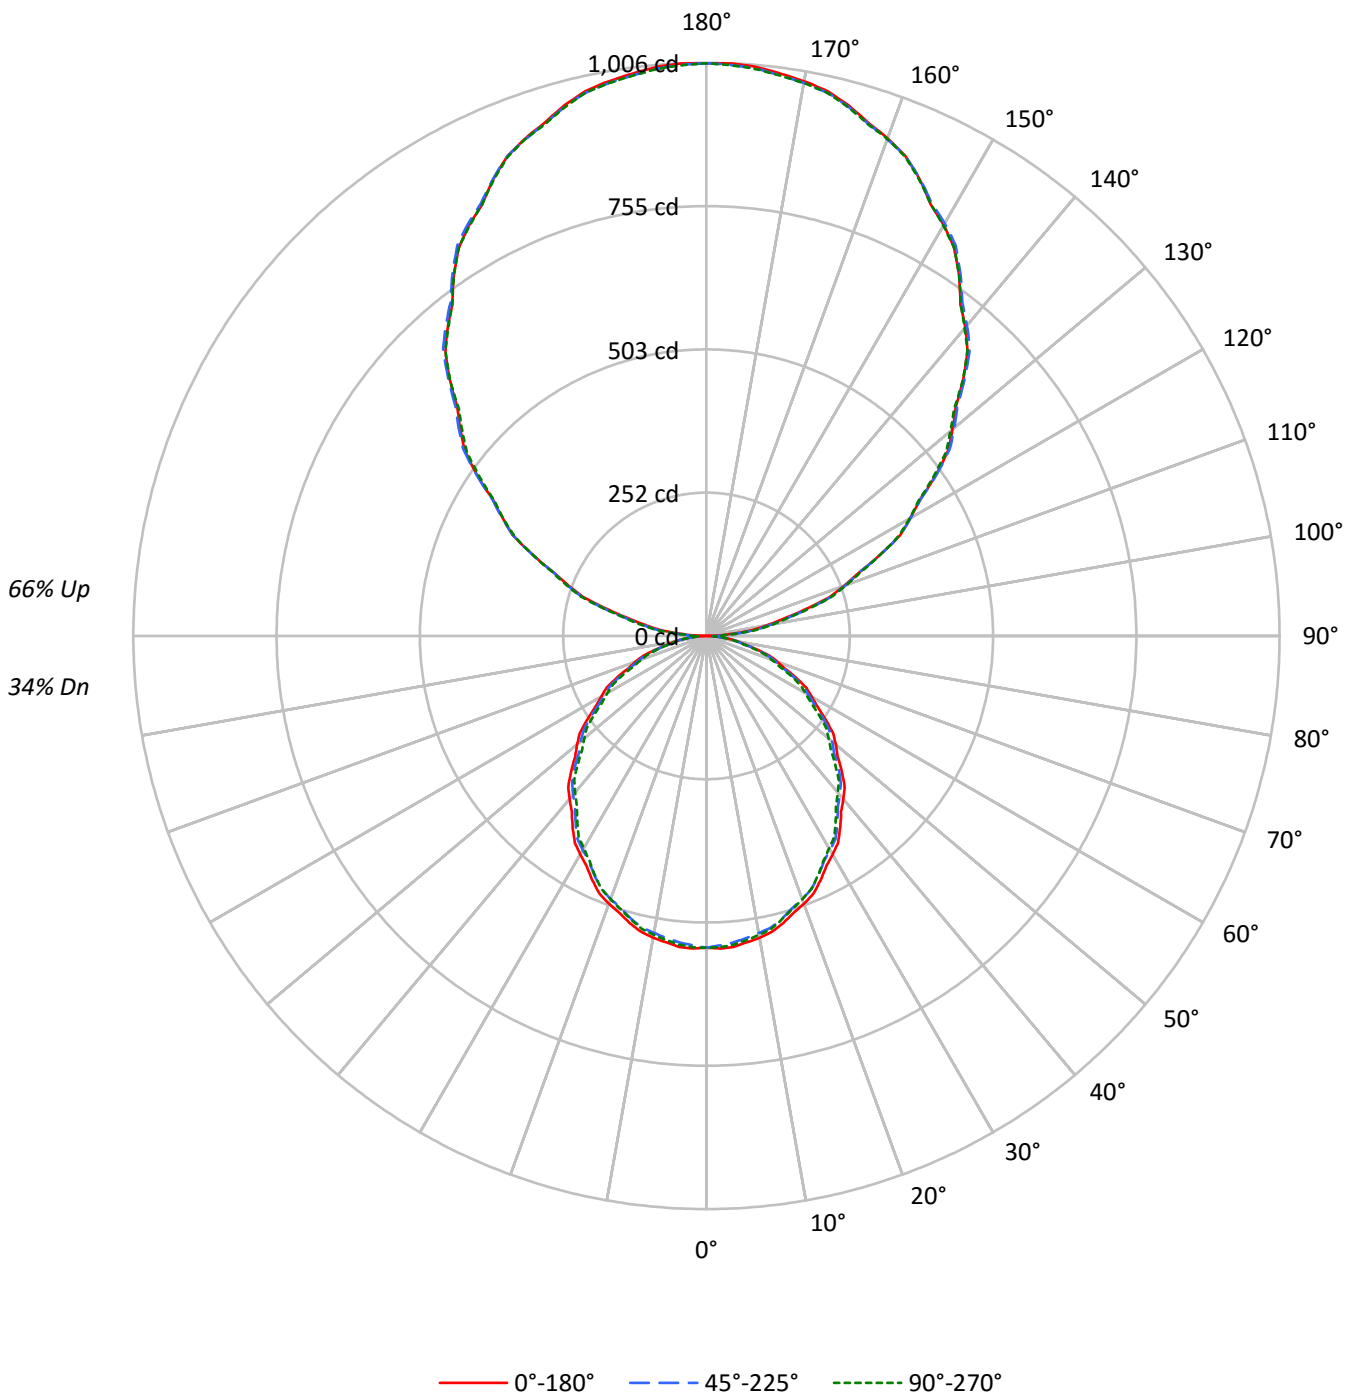



TEST NUMBER: P331890-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41	34
1	94	90	86	83	85	81	78	75	65	63	61	50	49	47	36	36	35	28
2	86	78	72	67	77	71	66	62	57	53	50	44	42	39	32	31	29	24
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25	20
4	71	61	53	47	64	55	49	43	44	40	36	35	31	28	25	23	21	17
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	19	15
6	60	48	40	35	54	44	37	32	36	31	27	28	24	21	21	18	16	13
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14	12
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13	10
9	48	36	29	24	43	33	26	22	27	22	18	21	18	15	16	13	12	9
10	45	33	26	21	40	30	24	20	25	20	17	20	16	14	15	12	11	9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5890	5890	5890
5°	5919	5837	5877
10°	5879	5786	5822
15°	5810	5721	5731
20°	5730	5628	5632
25°	5621	5516	5505
30°	5504	5392	5351
35°	5380	5261	5194
40°	5251	5117	5039
45°	5107	4985	4864
50°	4963	4823	4687
55°	4778	4654	4511
60°	4590	4456	4316
65°	4422	4241	4111
70°	4176	3997	3821
75°	3818	3681	3523
80°	3440	3298	3267
85°	3013	2902	2791



TEST NUMBER: P331890-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	51.5	1.2
10°-20°	145.6	3.5
20°-30°	215.0	5.1
30°-40°	251.2	6.0
40°-50°	252.5	6.0
50°-60°	221.8	5.3
60°-70°	165.2	3.9
70°-80°	94.1	2.2
80°-90°	30.0	0.7
90°-100°	65.5	1.6
100°-110°	196.0	4.7
110°-120°	333.3	7.9
120°-130°	438.5	10.4
130°-140°	492.8	11.7
140°-150°	484.4	11.5
150°-160°	407.8	9.7
160°-170°	271.5	6.4
170°-180°	95.1	2.3
0°-30°	412.1	9.8
0°-40°	663.3	15.7
0°-60°	1137.6	27.0
0°-90°	1426.9	33.9
90°-120°	594.8	14.1
90°-150°	2010.5	47.7
90°-180°	2785.0	66.1
0°-180°	4211.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	547	547	547	547	547	
5°	548	545	540	545	544	52
15°	521	519	513	517	514	147
25°	473	470	464	465	464	218
35°	409	406	400	398	395	256
45°	336	333	328	322	320	259
55°	255	254	248	243	240	228
65°	174	171	166	163	161	171
75°	92	90	88	86	85	98
85°	24	24	24	23	23	27
90°	1	9	19	22	24	4
95°	47	52	58	61	62	52
105°	178	180	186	186	188	190
115°	336	338	336	337	336	332
125°	491	493	492	489	486	438
135°	637	642	641	638	636	491
145°	773	775	777	776	773	483
155°	885	885	886	889	884	407
165°	964	962	962	966	961	272
175°	1003	1000	1000	1004	999	95
180°	1005	1005	1005	1005	1005	



TEST NUMBER: P331890-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2
2.5°	549.2	548.8	548.5	548.2	547.8	547.1	546.2	545.3	544.4	543.5	544.3
5°	547.8	547.1	546.6	546.1	545.6	544.8	543.6	542.5	541.3	540.2	541.2
7.5°	542.4	541.8	541.3	540.8	540.3	539.4	538.3	537.0	535.8	534.6	535.5
10°	537.9	537.3	536.7	536.2	535.7	534.8	533.4	532.1	530.7	529.4	530.3
12.5°	531.8	531.4	530.9	530.5	530.1	529.2	528.0	526.6	525.3	524.1	524.8
15°	521.4	521.0	520.5	520.1	519.7	518.8	517.5	516.0	514.7	513.4	514.2
17.5°	509.2	508.7	508.2	507.6	507.1	506.1	504.7	503.4	502.0	500.7	501.2
20°	500.2	499.6	499.0	498.3	497.7	496.7	495.3	493.9	492.6	491.3	491.7
22.5°	490.0	489.4	488.8	488.2	487.6	486.6	485.1	483.8	482.4	481.1	481.4
25°	473.3	472.7	472.1	471.5	470.9	469.9	468.5	467.2	465.7	464.4	464.5
27.5°	455.6	454.9	454.3	453.7	453.1	452.1	450.7	449.2	447.8	446.3	446.4
30°	442.8	442.2	441.7	441.2	440.7	439.7	438.3	436.8	435.4	433.8	433.8
32.5°	430.0	429.3	428.6	427.9	427.3	426.3	425.2	424.0	422.9	421.8	421.2
35°	409.4	408.8	408.1	407.5	406.9	405.9	404.6	403.1	401.8	400.4	399.8
37.5°	388.3	387.5	386.7	385.9	385.2	384.1	382.6	381.2	379.9	378.5	377.8
40°	373.7	372.9	372.3	371.7	371.1	370.0	368.6	367.1	365.7	364.2	363.3
42.5°	358.9	358.2	357.5	356.8	356.1	355.0	353.6	352.0	350.6	349.1	348.3
45°	335.5	335.1	334.7	334.3	333.9	333.0	331.5	330.2	328.8	327.5	326.3
47.5°	312.3	311.6	311.0	310.4	309.8	308.9	307.6	306.3	305.1	303.8	302.6
50°	296.4	295.9	295.4	294.9	294.4	293.4	292.1	290.7	289.3	288.0	286.8
52.5°	279.8	279.5	279.1	278.8	278.4	277.5	276.1	274.7	273.3	271.8	270.8
55°	254.6	254.5	254.4	254.3	254.2	253.4	252.1	250.6	249.3	248.0	246.8
57.5°	230.5	230.1	229.7	229.4	229.0	228.3	227.2	226.1	225.1	224.0	223.0
60°	213.2	213.1	213.0	212.9	212.8	212.1	210.8	209.5	208.3	207.0	206.1
62.5°	197.7	197.4	197.2	196.9	196.6	195.9	194.6	193.4	192.1	190.9	190.0
65°	173.6	173.1	172.6	172.1	171.6	170.8	169.8	168.6	167.6	166.5	165.7
67.5°	148.1	147.6	147.2	146.7	146.3	145.6	144.9	144.1	143.3	142.5	141.8
70°	132.7	132.1	131.5	130.8	130.2	129.6	129.0	128.3	127.6	127.0	126.3
72.5°	116.5	116.0	115.6	115.1	114.6	114.1	113.4	112.7	112.0	111.3	110.6
75°	91.8	91.3	90.9	90.5	90.1	89.7	89.4	89.1	88.8	88.5	88.0
77.5°	69.8	69.6	69.4	69.2	68.9	68.6	68.3	67.9	67.5	67.1	66.8
80°	55.5	55.2	54.9	54.6	54.2	54.0	53.8	53.6	53.4	53.2	53.0
82.5°	41.6	41.5	41.5	41.4	41.3	41.3	41.2	41.2	41.2	41.1	40.9
85°	24.4	24.2	24.0	23.8	23.6	23.5	23.5	23.5	23.5	23.5	23.3
87.5°	9.9	10.0	10.1	10.2	10.3	10.6	10.9	11.3	11.7	12.1	12.1
90°	0.8	2.5	4.3	6.1	7.8	9.8	12.1	14.3	16.7	19.0	19.7
92.5°	19.1	20.3	21.5	22.7	23.8	25.1	26.5	27.8	29.0	30.3	30.9
95°	46.6	47.8	49.1	50.3	51.5	52.8	54.2	55.6	57.1	58.5	59.2
97.5°	82.7	83.6	84.5	85.4	86.4	87.4	88.4	89.4	90.4	91.4	92.2
100°	107.3	108.5	109.5	110.6	111.6	112.6	113.4	114.3	115.2	116.0	116.6
102.5°	135.8	136.4	137.0	137.7	138.4	139.3	140.4	141.6	142.7	143.9	144.4
105°	177.6	178.0	178.3	178.7	179.0	180.1	181.6	183.2	184.8	186.3	186.3
107.5°	226.3	226.5	226.7	226.9	227.1	227.5	228.2	228.8	229.4	230.0	230.7
110°	256.6	256.9	257.3	257.6	258.0	258.3	258.7	259.0	259.4	259.7	260.4



TEST NUMBER: P331890-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	288.2	288.4	288.6	288.8	289.0	289.1	289.2	289.3	289.4	289.4	290.3
115°	335.6	336.1	336.6	337.1	337.7	337.8	337.4	337.1	336.7	336.4	336.5
117.5°	383.2	383.6	384.0	384.3	384.7	384.6	384.2	383.6	383.2	382.7	382.7
120°	412.9	413.9	415.1	416.1	417.2	417.3	416.4	415.5	414.7	413.7	413.5
122.5°	443.9	444.6	445.5	446.2	447.0	447.2	446.7	446.3	445.8	445.4	444.8
125°	491.1	491.6	492.1	492.7	493.2	493.3	492.9	492.6	492.2	491.9	491.2
127.5°	534.7	535.8	536.9	538.1	539.2	539.6	539.2	538.8	538.4	538.0	537.0
130°	563.7	565.1	566.5	567.9	569.4	569.8	569.3	568.8	568.3	567.6	566.9
132.5°	592.8	594.2	595.6	597.0	598.4	599.0	598.5	598.1	597.7	597.3	596.5
135°	637.1	638.2	639.2	640.4	641.4	641.9	641.7	641.5	641.3	641.2	640.5
137.5°	678.2	679.1	679.9	680.9	681.8	682.4	682.9	683.3	683.8	684.2	683.5
140°	706.6	707.5	708.4	709.3	710.1	710.6	710.8	711.0	711.2	711.3	711.2
142.5°	732.6	733.5	734.3	735.2	736.1	736.7	737.0	737.3	737.6	737.9	737.7
145°	773.0	773.4	773.7	774.1	774.4	774.8	775.4	775.9	776.4	776.9	776.8
147.5°	808.4	809.0	809.6	810.2	810.9	811.4	811.9	812.4	812.9	813.4	813.4
150°	832.9	833.3	833.6	834.0	834.4	834.8	835.1	835.5	835.8	836.2	836.2
152.5°	853.2	853.6	854.1	854.6	855.2	855.6	855.8	856.0	856.2	856.4	856.7
155°	885.0	885.0	885.0	885.0	885.0	885.1	885.3	885.6	885.8	885.9	886.6
157.5°	912.2	912.0	911.8	911.6	911.4	911.4	911.5	911.7	911.8	911.9	912.7
160°	929.3	929.0	928.6	928.3	927.9	927.8	927.8	927.8	927.8	927.8	928.6
162.5°	944.4	944.0	943.5	943.0	942.5	942.3	942.5	942.6	942.7	942.9	943.7
165°	964.0	963.5	963.0	962.5	961.9	961.7	961.7	961.7	961.7	961.7	962.7
167.5°	979.7	979.0	978.3	977.5	976.8	976.6	976.7	976.8	977.0	977.1	978.3
170°	988.6	987.8	987.1	986.4	985.7	985.3	985.3	985.3	985.3	985.3	986.6
172.5°	995.4	994.8	994.1	993.4	992.7	992.3	992.3	992.3	992.3	992.3	993.4
175°	1002.7	1002.0	1001.4	1000.7	1000.0	999.6	999.6	999.6	999.6	999.6	1000.7
177.5°	1005.7	1005.2	1004.6	1004.0	1003.5	1003.2	1003.2	1003.2	1003.2	1003.2	1004.0
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1



TEST NUMBER: P331890-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	547.2	547.2	547.2	547.2	547.2	547.2	547.2	547.2
2.5°	545.1	546.0	546.8	547.2	547.1	547.0	546.9	546.8
5°	542.3	543.3	544.4	544.8	544.6	544.4	544.1	543.9
7.5°	536.5	537.5	538.4	538.8	538.7	538.6	538.5	538.3
10°	531.3	532.2	533.1	533.5	533.3	533.1	532.9	532.7
12.5°	525.4	526.1	526.8	527.1	527.0	526.8	526.7	526.6
15°	515.0	515.8	516.7	516.8	516.1	515.5	514.9	514.3
17.5°	501.8	502.4	503.0	503.2	502.9	502.7	502.5	502.3
20°	492.1	492.5	492.9	493.0	492.6	492.3	492.0	491.7
22.5°	481.7	482.1	482.4	482.4	482.0	481.6	481.2	480.8
25°	464.6	464.7	464.8	464.7	464.4	464.1	463.8	463.5
27.5°	446.5	446.6	446.6	446.5	446.1	445.7	445.2	444.8
30°	433.8	433.8	433.8	433.4	432.7	432.0	431.3	430.5
32.5°	420.6	420.0	419.5	419.0	418.6	418.2	417.8	417.4
35°	399.2	398.6	397.9	397.4	396.9	396.3	395.8	395.3
37.5°	377.0	376.3	375.5	375.0	374.7	374.3	374.0	373.7
40°	362.5	361.7	360.8	360.2	359.8	359.4	359.0	358.6
42.5°	347.5	346.6	345.8	345.2	344.8	344.4	344.0	343.5
45°	325.0	323.8	322.4	321.6	321.0	320.5	320.0	319.5
47.5°	301.3	300.1	298.8	298.0	297.5	297.1	296.6	296.2
50°	285.7	284.5	283.4	282.5	281.9	281.2	280.6	279.9
52.5°	269.8	268.8	267.8	267.0	266.4	265.8	265.2	264.6
55°	245.7	244.5	243.4	242.6	242.1	241.5	241.0	240.4
57.5°	222.0	220.9	219.8	219.0	218.4	217.8	217.2	216.6
60°	205.2	204.2	203.3	202.6	202.0	201.5	201.0	200.5
62.5°	188.9	188.0	187.1	186.4	186.1	185.7	185.4	185.0
65°	164.9	164.1	163.2	162.7	162.4	162.0	161.7	161.4
67.5°	141.0	140.3	139.6	139.0	138.6	138.0	137.6	137.2
70°	125.6	124.8	124.1	123.5	123.0	122.5	121.9	121.4
72.5°	110.0	109.3	108.7	108.2	108.0	107.7	107.3	107.0
75°	87.5	86.8	86.3	85.9	85.6	85.3	85.0	84.7
77.5°	66.3	66.0	65.6	65.5	65.5	65.5	65.5	65.5
80°	52.9	52.8	52.7	52.7	52.7	52.7	52.7	52.7
82.5°	40.8	40.6	40.4	40.2	40.2	40.1	40.0	39.9
85°	23.1	22.9	22.7	22.6	22.6	22.6	22.6	22.6
87.5°	12.2	12.2	12.3	12.3	12.4	12.5	12.5	12.6
90°	20.4	21.0	21.7	22.3	22.6	23.0	23.3	23.7
92.5°	31.4	32.0	32.5	32.7	32.5	32.3	32.1	31.9
95°	59.8	60.5	61.2	61.6	61.6	61.6	61.6	61.6
97.5°	93.0	93.8	94.6	95.0	94.9	94.9	94.8	94.7
100°	117.1	117.6	118.2	118.7	119.0	119.3	119.7	120.0
102.5°	144.9	145.4	145.9	146.2	146.1	146.0	146.0	145.9
105°	186.3	186.3	186.3	186.5	186.8	187.2	187.5	187.9
107.5°	231.2	231.8	232.4	232.5	232.3	232.1	231.9	231.7
110°	261.2	261.9	262.6	262.8	262.4	262.1	261.7	261.4



TEST NUMBER: P331890-840

CATALOG NUMBER: S123DIP-S340D805U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	291.1	292.0	292.9	293.2	293.2	293.1	293.0	293.0
115°	336.7	336.9	337.1	337.1	336.9	336.7	336.5	336.4
117.5°	382.7	382.6	382.6	382.3	381.9	381.4	380.9	380.4
120°	413.3	413.2	413.0	412.7	412.4	412.0	411.7	411.3
122.5°	444.4	443.9	443.5	443.0	442.5	442.0	441.5	441.0
125°	490.5	489.8	489.1	488.4	487.7	487.0	486.3	485.5
127.5°	536.0	535.0	534.1	533.2	532.4	531.6	530.8	530.0
130°	566.3	565.6	564.9	563.9	562.7	561.5	560.3	559.0
132.5°	595.7	594.8	594.0	593.1	592.2	591.2	590.3	589.4
135°	639.7	639.0	638.3	637.8	637.4	637.1	636.7	636.4
137.5°	682.8	682.1	681.3	680.5	679.9	679.2	678.6	677.9
140°	711.0	710.8	710.6	710.0	708.7	707.5	706.3	705.1
142.5°	737.6	737.4	737.2	736.7	735.7	734.8	733.8	732.9
145°	776.6	776.4	776.2	775.8	775.1	774.4	773.7	773.0
147.5°	813.4	813.4	813.4	812.8	811.8	810.7	809.7	808.7
150°	836.2	836.2	836.2	835.7	834.6	833.5	832.4	831.4
152.5°	856.9	857.2	857.5	857.2	856.3	855.4	854.4	853.5
155°	887.3	888.0	888.7	888.4	887.2	886.0	884.7	883.5
157.5°	913.4	914.1	914.8	914.7	913.8	912.8	911.8	910.8
160°	929.5	930.4	931.2	931.3	930.6	929.9	929.2	928.5
162.5°	944.6	945.5	946.4	946.2	945.1	944.0	942.9	941.8
165°	963.8	964.8	965.9	965.8	964.6	963.3	962.1	960.9
167.5°	979.4	980.4	981.5	981.5	980.4	979.4	978.3	977.1
170°	987.8	989.1	990.3	990.3	989.1	987.8	986.6	985.3
172.5°	994.5	995.6	996.6	996.6	995.3	994.1	992.9	991.7
175°	1001.7	1002.7	1003.8	1003.7	1002.5	1001.3	1000.0	998.8
177.5°	1004.9	1005.7	1006.5	1006.5	1005.5	1004.5	1003.6	1002.6
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1

(END OF REPORT)