

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331945-840

Luminaire Tested: **S123DIP-S560D1025U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331945-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D1025U840-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6091.3 lumens  
Efficiency: N/A  
Efficacy: 136.9 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 44.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331945-840

CATALOG NUMBER: S123DIP-S560D1025U840-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

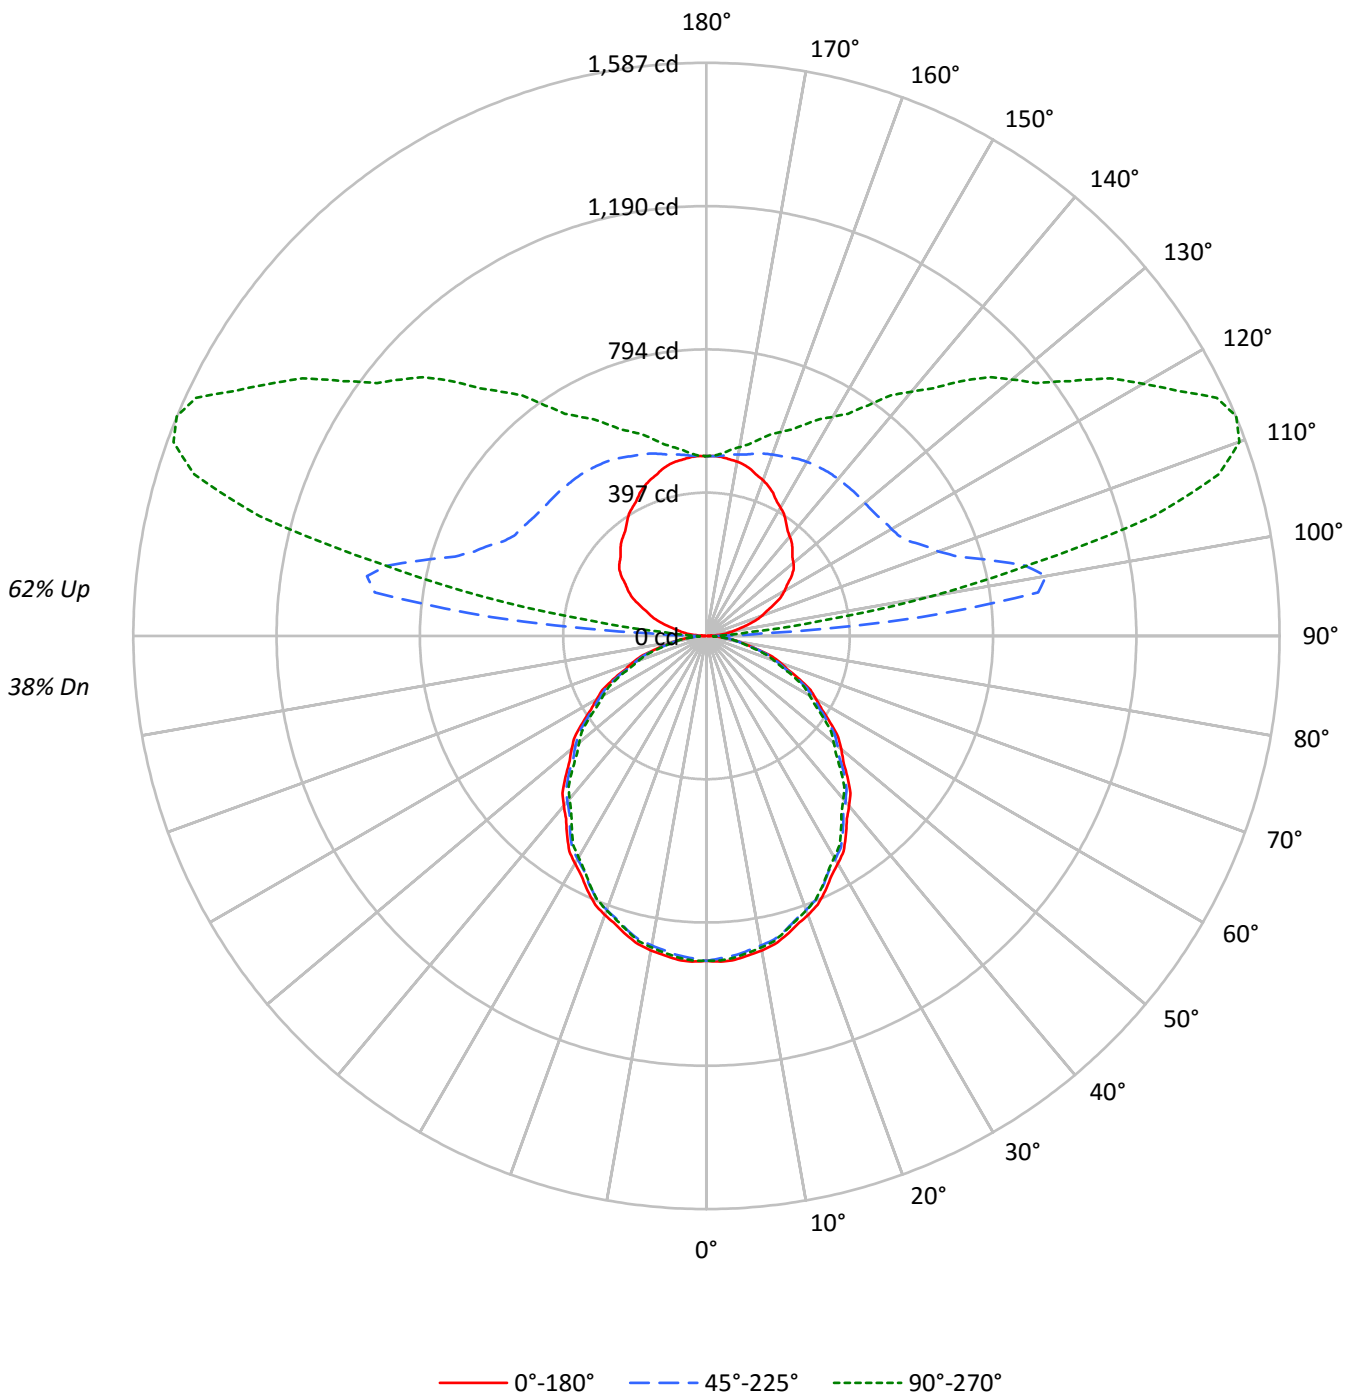



TEST NUMBER: P331945-840

CATALOG NUMBER: S123DIP-S560D1025U840-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	104	104	104	104	95	95	95	95	77	77	77	61	61	61	46	46	46	38
1	95	91	87	84	86	83	79	76	67	65	63	53	52	50	40	39	38	32
2	87	79	73	68	78	72	67	63	59	55	52	47	44	42	35	34	32	27
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27	23
4	72	62	54	48	65	56	49	44	46	41	37	37	33	30	28	26	24	20
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	23	20	17
6	61	49	41	35	55	45	38	33	37	32	28	30	26	23	23	20	18	15
7	56	44	36	31	51	40	34	29	33	28	24	27	23	20	21	18	16	13
8	52	40	32	27	47	37	30	25	30	25	22	25	21	18	19	16	14	12
9	48	36	29	24	44	34	27	23	28	23	19	23	19	16	18	15	13	11
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	14	12	10

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9684	9684	9684
5°	9729	9596	9662
10°	9664	9512	9571
15°	9551	9404	9423
20°	9419	9251	9260
25°	9242	9069	9049
30°	9047	8866	8797
35°	8843	8650	8539
40°	8630	8413	8283
45°	8397	8196	7995
50°	8162	7927	7708
55°	7854	7651	7418
60°	7543	7326	7093
65°	7272	6976	6757
70°	6864	6571	6279
75°	6276	6047	5793
80°	5659	5424	5368
85°	4965	4780	4594



TEST NUMBER: P331945-840

CATALOG NUMBER: S123DIP-S560D1025U840-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.7	1.4
10°-20°	239.3	3.9
20°-30°	353.5	5.8
30°-40°	412.9	6.8
40°-50°	415.1	6.8
50°-60°	364.6	6.0
60°-70°	271.7	4.5
70°-80°	154.8	2.5
80°-90°	48.3	0.8
90°-100°	277.1	4.5
100°-110°	784.7	12.9
110°-120°	771.9	12.7
120°-130°	615.7	10.1
130°-140°	485.5	8.0
140°-150°	362.3	5.9
150°-160°	252.5	4.1
160°-170°	148.4	2.4
170°-180°	48.3	0.8
0°-30°	677.5	11.1
0°-40°	1090.4	17.9
0°-60°	1870.2	30.7
0°-90°	2344.9	38.5
90°-120°	1833.8	30.1
90°-150°	3297.3	54.1
90°-180°	3746.0	61.5
0°-180°	6091.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	900	900	900	900	900	
5°	900	896	888	895	894	85
15°	857	854	844	850	846	242
25°	778	773	764	764	762	358
35°	673	668	658	654	650	421
45°	552	548	538	529	525	426
55°	418	417	408	399	395	375
65°	286	281	274	268	265	282
75°	151	148	145	142	139	161
85°	40	39	39	37	37	44
90°	2	12	25	28	29	5
95°	34	111	598	174	117	37
105°	117	173	810	1417	1282	124
115°	207	258	620	1359	1559	205
125°	287	339	579	1048	1230	255
135°	337	402	571	863	997	260
145°	384	440	564	708	779	241
155°	436	471	545	620	646	201
165°	477	490	522	554	564	134
175°	497	498	501	508	507	47
180°	498	498	498	498	498	



TEST NUMBER: P331945-840

CATALOG NUMBER: S123DIP-S560D1025U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	902.7	902.2	901.7	901.1	900.6	899.5	898.0	896.5	895.0	893.5	894.8
5°	900.4	899.6	898.7	897.9	897.0	895.6	893.7	891.8	890.0	888.1	889.8
7.5°	891.6	890.8	889.9	889.1	888.2	886.8	884.8	882.8	880.9	879.0	880.5
10°	884.2	883.3	882.5	881.6	880.8	879.2	877.0	874.7	872.5	870.3	871.8
12.5°	874.3	873.5	872.8	872.1	871.4	870.0	867.9	865.8	863.7	861.6	862.7
15°	857.1	856.5	855.8	855.1	854.3	852.9	850.7	848.5	846.2	843.9	845.4
17.5°	837.2	836.3	835.4	834.5	833.5	832.0	829.8	827.6	825.4	823.0	824.0
20°	822.3	821.3	820.2	819.2	818.2	816.6	814.4	812.1	809.8	807.6	808.3
22.5°	805.6	804.6	803.5	802.5	801.4	799.8	797.6	795.4	793.1	790.9	791.4
25°	778.2	777.2	776.2	775.2	774.1	772.4	770.2	768.0	765.8	763.6	763.7
27.5°	749.0	748.0	747.0	746.0	745.0	743.3	740.8	738.5	736.1	733.7	733.8
30°	727.9	727.1	726.2	725.4	724.5	722.9	720.4	718.0	715.7	713.3	713.3
32.5°	706.9	705.8	704.6	703.5	702.4	700.8	699.0	697.1	695.3	693.5	692.5
35°	673.0	672.0	671.0	669.9	668.9	667.2	665.0	662.8	660.6	658.3	657.3
37.5°	638.3	637.0	635.7	634.4	633.1	631.4	629.0	626.8	624.5	622.3	621.1
40°	614.2	613.2	612.2	611.2	610.1	608.3	605.9	603.6	601.2	598.7	597.3
42.5°	590.1	589.0	587.7	586.5	585.4	583.6	581.2	578.9	576.4	574.0	572.6
45°	551.6	550.9	550.2	549.5	548.8	547.3	545.1	542.9	540.7	538.4	536.3
47.5°	513.3	512.3	511.4	510.4	509.4	507.8	505.7	503.6	501.5	499.4	497.4
50°	487.4	486.5	485.6	484.7	483.9	482.4	480.1	477.9	475.6	473.4	471.5
52.5°	460.1	459.5	459.0	458.4	457.8	456.3	453.9	451.6	449.2	446.9	445.2
55°	418.5	418.3	418.2	418.0	417.8	416.6	414.3	412.1	409.9	407.7	405.8
57.5°	378.9	378.3	377.7	377.2	376.6	375.4	373.5	371.8	370.0	368.2	366.6
60°	350.4	350.2	350.1	349.9	349.7	348.6	346.6	344.5	342.4	340.3	338.8
62.5°	325.1	324.6	324.2	323.8	323.3	322.0	319.9	317.9	315.8	313.8	312.3
65°	285.5	284.6	283.8	282.9	282.1	280.7	279.0	277.3	275.6	273.9	272.5
67.5°	243.5	242.8	242.0	241.3	240.4	239.4	238.1	236.8	235.5	234.3	233.1
70°	218.1	217.1	216.1	215.1	214.0	213.0	212.0	211.0	209.8	208.8	207.6
72.5°	191.6	190.8	190.1	189.2	188.5	187.5	186.4	185.2	184.0	182.9	181.8
75°	150.9	150.2	149.5	148.8	148.1	147.5	146.9	146.4	145.9	145.4	144.6
77.5°	114.8	114.4	114.0	113.7	113.3	112.8	112.2	111.6	110.9	110.3	109.8
80°	91.3	90.8	90.3	89.8	89.2	88.8	88.5	88.1	87.8	87.5	87.3
82.5°	68.4	68.3	68.2	68.1	68.0	67.9	67.9	67.8	67.7	67.7	67.3
85°	40.2	39.9	39.6	39.2	38.9	38.7	38.7	38.7	38.7	38.7	38.4
87.5°	16.5	16.5	16.5	16.7	16.7	16.8	17.3	17.7	18.2	18.7	18.3
90°	2.0	4.0	6.1	9.1	11.1	13.1	16.2	19.2	22.2	25.2	24.2
92.5°	12.5	18.6	27.1	34.8	43.3	58.3	84.6	128.1	170.6	155.0	116.9
95°	34.2	37.3	48.4	65.5	91.7	131.1	216.7	366.9	532.2	597.7	484.8
97.5°	58.5	59.5	68.2	83.0	108.9	151.4	233.3	402.6	678.2	926.3	991.1
100°	74.6	75.6	82.7	96.7	121.0	160.3	230.9	380.0	645.1	954.6	1153.2
102.5°	91.5	93.3	99.6	112.9	134.7	170.8	234.1	360.6	596.7	902.2	1161.2
105°	116.9	120.0	126.0	138.1	157.2	188.5	243.0	346.8	537.2	810.4	1099.7
107.5°	143.9	146.9	152.8	164.7	182.7	211.7	259.4	345.8	499.4	729.4	992.1
110°	163.3	166.3	171.4	182.5	199.5	227.8	273.2	349.8	484.8	683.5	924.3



TEST NUMBER: P331945-840

CATALOG NUMBER: S123DIP-S560D1025U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	181.1	184.1	189.1	200.2	217.3	244.8	286.9	357.9	476.8	652.8	865.5
115°	206.6	210.7	216.7	226.8	244.0	271.1	309.4	370.9	473.7	620.0	794.4
117.5°	232.3	236.9	242.0	251.2	270.3	295.6	333.5	388.3	475.5	600.6	751.3
120°	249.9	253.0	258.0	268.1	287.3	312.5	348.8	401.2	478.8	591.7	728.8
122.5°	265.3	268.3	273.4	284.3	302.7	329.4	364.9	413.3	484.4	586.0	710.2
125°	287.3	289.3	295.4	306.4	325.6	352.8	388.1	432.4	492.9	578.7	686.5
127.5°	304.1	307.0	314.5	325.8	347.0	374.2	408.3	448.2	502.6	575.0	665.5
130°	314.5	317.5	326.6	338.7	359.8	387.1	420.3	458.7	509.1	572.6	654.2
132.5°	322.6	326.4	336.3	350.8	371.9	398.4	430.8	468.4	513.9	571.8	643.7
135°	336.7	340.7	351.8	366.9	388.1	415.3	446.6	480.8	521.2	570.6	630.1
137.5°	350.0	354.3	365.1	381.2	402.2	427.4	457.5	490.1	525.9	568.4	618.1
140°	358.9	363.9	374.0	390.1	410.3	435.5	464.7	494.9	529.2	567.5	610.9
142.5°	368.5	372.7	383.6	398.2	418.3	441.9	470.4	499.8	531.6	565.9	604.4
145°	384.1	387.1	396.2	411.3	428.4	451.6	477.8	505.0	533.2	563.5	595.7
147.5°	399.8	401.6	410.5	423.5	440.1	459.9	483.8	508.3	533.2	559.7	587.2
150°	410.3	411.3	419.3	432.4	446.6	464.7	487.9	509.1	533.2	556.4	581.6
152.5°	420.7	420.9	429.0	440.5	453.0	470.4	490.3	510.7	530.8	552.4	575.2
155°	436.5	436.5	442.5	452.6	463.7	477.8	494.9	511.1	528.2	545.3	565.5
157.5°	449.0	449.8	454.6	463.5	472.9	483.8	497.6	512.1	524.8	539.1	554.6
160°	458.7	458.7	462.7	470.7	477.8	487.9	500.0	512.1	523.2	534.2	547.3
162.5°	466.0	466.0	469.2	475.5	481.8	490.3	500.8	511.3	520.0	529.4	540.1
165°	476.8	475.7	477.8	482.8	486.9	493.9	502.0	509.1	515.1	522.2	530.2
167.5°	485.0	483.8	484.8	488.7	491.5	495.9	501.8	507.5	510.3	514.9	520.8
170°	489.9	487.9	488.9	491.9	493.9	495.9	501.0	505.0	507.1	510.1	515.1
172.5°	493.1	491.9	492.1	494.3	495.5	496.8	501.0	504.2	504.6	506.0	509.5
175°	497.0	495.9	494.9	497.0	497.0	498.0	500.0	502.0	501.0	501.0	503.0
177.5°	498.8	498.0	497.2	498.0	498.0	498.0	498.8	500.4	498.8	498.0	498.8
180°	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0



TEST NUMBER: P331945-840

CATALOG NUMBER: S123DIP-S560D1025U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	896.3	897.6	899.0	899.6	899.5	899.3	899.2	899.1
5°	891.5	893.2	894.9	895.6	895.2	894.9	894.6	894.2
7.5°	882.0	883.5	885.1	885.8	885.6	885.3	885.1	884.9
10°	873.3	874.9	876.5	877.1	876.8	876.4	876.1	875.7
12.5°	863.8	865.1	866.2	866.6	866.4	866.2	866.0	865.8
15°	846.8	848.1	849.5	849.6	848.6	847.6	846.6	845.6
17.5°	825.1	826.0	827.0	827.2	826.9	826.5	826.1	825.7
20°	809.0	809.7	810.3	810.4	809.9	809.4	808.9	808.4
22.5°	792.0	792.5	793.1	793.0	792.4	791.7	791.1	790.4
25°	763.9	764.1	764.2	764.1	763.6	763.1	762.4	761.9
27.5°	734.0	734.1	734.2	734.0	733.3	732.7	732.0	731.3
30°	713.3	713.3	713.3	712.7	711.4	710.2	709.0	707.8
32.5°	691.6	690.5	689.5	688.7	688.1	687.5	686.8	686.2
35°	656.2	655.2	654.2	653.3	652.4	651.6	650.7	649.8
37.5°	619.8	618.5	617.3	616.4	615.9	615.3	614.8	614.2
40°	596.0	594.6	593.3	592.2	591.5	590.9	590.2	589.5
42.5°	571.3	569.9	568.5	567.4	566.7	566.1	565.4	564.7
45°	534.3	532.2	530.2	528.7	527.9	526.9	526.1	525.2
47.5°	495.3	493.3	491.3	489.9	489.2	488.4	487.7	486.9
50°	469.7	467.8	465.9	464.4	463.3	462.3	461.3	460.3
52.5°	443.6	442.0	440.4	439.0	438.0	437.0	436.0	434.9
55°	403.8	402.0	400.1	398.7	397.9	397.0	396.2	395.3
57.5°	364.9	363.1	361.5	360.1	359.1	358.2	357.2	356.2
60°	337.3	335.8	334.2	333.0	332.1	331.2	330.4	329.5
62.5°	310.6	309.1	307.6	306.5	305.9	305.4	304.8	304.2
65°	271.0	269.7	268.3	267.4	266.9	266.4	265.9	265.3
67.5°	231.9	230.7	229.4	228.4	227.7	227.0	226.3	225.6
70°	206.4	205.3	204.1	203.0	202.2	201.3	200.5	199.5
72.5°	180.8	179.7	178.6	177.8	177.4	176.9	176.5	176.0
75°	143.7	142.9	142.0	141.3	140.8	140.3	139.8	139.3
77.5°	109.2	108.6	108.0	107.7	107.7	107.7	107.7	107.7
80°	87.1	86.8	86.7	86.6	86.6	86.6	86.6	86.6
82.5°	67.0	66.7	66.3	66.1	66.0	65.8	65.7	65.6
85°	38.0	37.7	37.3	37.2	37.2	37.2	37.2	37.2
87.5°	18.4	18.5	18.5	18.9	18.7	18.9	19.1	18.9
90°	25.2	26.3	27.3	29.2	28.2	29.2	30.2	29.2
92.5°	84.8	67.4	59.5	54.2	52.4	49.4	50.4	48.6
95°	362.8	246.0	192.6	156.2	137.1	128.1	121.0	116.9
97.5°	904.6	724.6	594.5	473.9	399.6	354.3	327.0	318.3
100°	1188.5	1106.8	988.9	845.8	744.0	670.3	631.1	632.1
102.5°	1282.8	1280.2	1211.4	1120.7	1041.5	983.2	950.4	927.2
105°	1310.4	1411.3	1430.4	1404.2	1357.8	1319.5	1287.3	1282.2
107.5°	1231.0	1394.7	1483.0	1518.9	1519.7	1506.8	1495.9	1486.6
110°	1155.2	1340.7	1467.6	1538.2	1566.5	1574.6	1572.6	1570.5





TEST NUMBER: P331945-840

CATALOG NUMBER: S123DIP-S560D1025U840-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1080.2	1269.7	1412.0	1502.8	1554.4	1579.3	1587.0	1587.4
115°	980.8	1156.2	1304.3	1414.2	1489.9	1534.2	1554.4	1559.4
117.5°	908.9	1060.3	1193.3	1304.7	1383.6	1434.4	1463.5	1470.3
120°	870.9	1007.0	1128.0	1229.8	1309.4	1365.8	1390.1	1396.1
122.5°	841.1	964.3	1076.4	1170.9	1241.7	1292.5	1319.1	1326.8
125°	801.4	911.3	1008.0	1088.6	1153.2	1197.5	1222.7	1229.8
127.5°	766.7	864.6	952.0	1025.3	1082.8	1120.7	1143.5	1149.9
130°	745.0	835.7	917.3	985.8	1039.3	1075.6	1096.7	1104.8
132.5°	724.8	808.2	884.2	949.6	999.8	1036.0	1054.8	1060.5
135°	697.5	769.1	834.7	892.1	941.5	971.7	989.9	996.9
137.5°	672.8	731.4	787.9	837.7	879.2	909.9	925.1	929.8
140°	658.2	709.6	758.0	801.4	839.7	867.9	884.0	883.0
142.5°	644.5	688.7	730.6	768.3	801.0	826.0	840.5	839.5
145°	628.0	661.3	693.5	722.8	747.9	769.1	777.2	779.2
147.5°	614.5	640.9	666.9	687.7	706.8	721.1	728.8	729.6
150°	604.8	628.0	649.1	668.3	683.5	694.5	700.5	700.5
152.5°	595.9	615.9	634.7	650.6	662.5	672.8	676.4	676.4
155°	582.6	598.7	613.9	626.0	635.1	643.1	645.1	646.1
157.5°	568.6	582.0	593.7	603.2	611.1	617.1	618.7	618.5
160°	560.5	571.6	581.6	588.7	595.7	601.8	601.8	600.8
162.5°	550.8	560.3	569.6	575.8	580.5	585.6	585.6	584.6
165°	538.3	544.3	551.4	556.4	560.5	564.5	563.5	563.5
167.5°	527.4	532.0	536.0	539.7	541.5	544.3	543.3	543.3
170°	520.2	523.2	527.1	529.2	530.2	532.2	531.2	531.2
172.5°	513.7	515.9	519.2	520.4	520.6	522.6	520.8	520.0
175°	505.0	506.0	508.1	508.1	508.1	509.1	508.1	507.1
177.5°	499.6	500.4	501.2	501.2	500.4	501.2	499.6	499.6
180°	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0

(END OF REPORT)