

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331911-840

Luminaire Tested: **S123DIP-S560D365U840-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331911-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D365U840-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 3669.5 lumens
Efficiency: N/A
Efficacy: 133.4 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 27.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

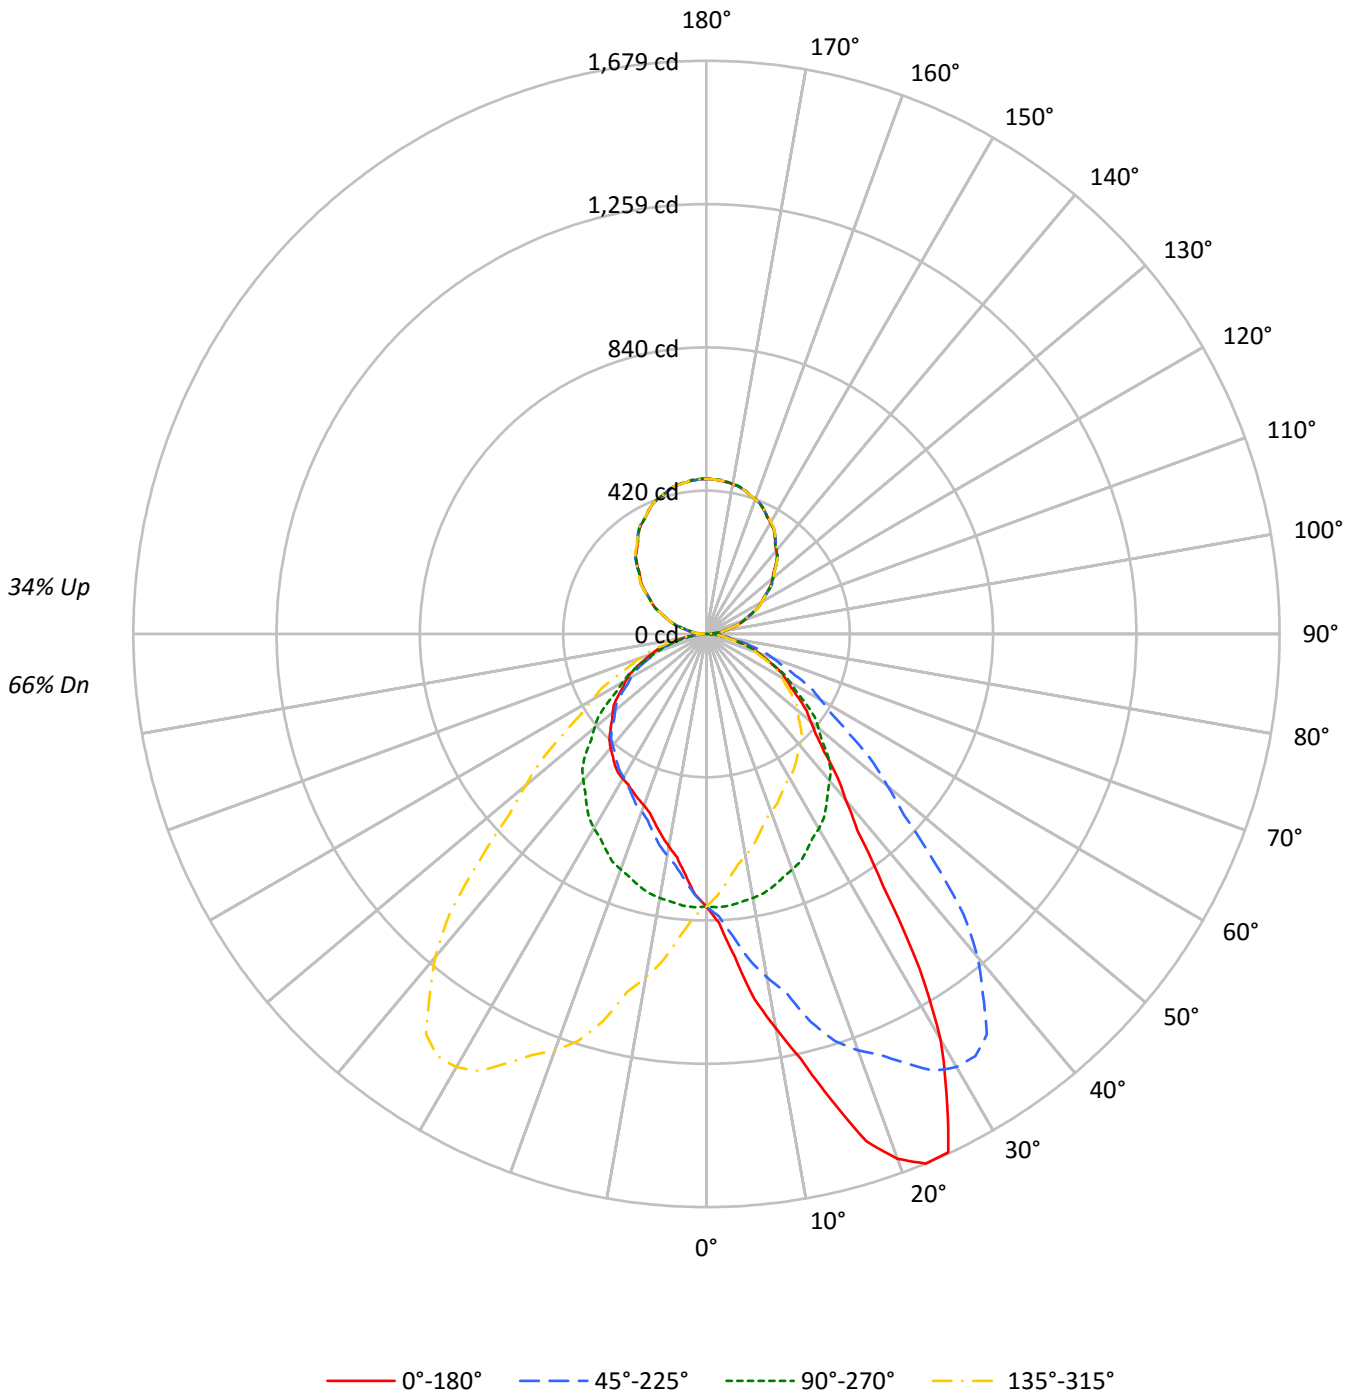



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20			20			20			20
RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	104	104	104	104	92	92	92	81	81	81	71	71	71	66
1	102	97	94	90	96	92	88	85	81	79	77	72	70	68	63	62	60	56
2	93	85	79	74	87	81	75	71	72	68	64	63	60	57	56	53	51	48
3	85	75	68	62	80	71	65	59	64	58	54	56	52	49	50	47	44	41
4	78	67	59	53	73	63	56	51	57	51	46	50	46	42	45	41	38	35
5	72	60	52	46	67	57	49	44	51	45	40	45	41	37	40	36	33	31
6	66	54	46	40	62	51	44	38	46	40	35	41	36	32	37	33	30	27
7	61	49	41	35	58	46	39	34	42	36	31	38	33	29	34	29	26	24
8	57	44	37	31	54	42	35	30	38	32	28	34	29	26	31	27	24	21
9	53	41	33	28	50	39	32	27	35	29	25	32	27	23	28	24	21	19
10	50	37	30	25	47	36	29	24	32	27	23	29	24	21	26	22	19	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	8593	8593	8593	8593
5°	10247	8630	7648	8630
10°	12826	8587	6908	8587
15°	15731	8517	6430	8517
20°	18741	8409	6123	8409
25°	19899	8278	6055	8278
30°	17056	8182	6087	8182
35°	11862	8046	6150	8046
40°	8934	7886	6131	7886
45°	7419	7648	6052	7648
50°	6646	7164	5998	7164
55°	6212	6641	5923	6641
60°	5828	6097	5862	6097
65°	5476	5555	5675	5555
70°	5136	4941	5404	4941
75°	4600	4325	4957	4325
80°	4023	3552	4271	3552
85°	3149	2581	2865	2581



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	78.6	2.1
10°-20°	252.2	6.9
20°-30°	423.2	11.5
30°-40°	479.2	13.1
40°-50°	429.7	11.7
50°-60°	346.8	9.5
60°-70°	241.7	6.6
70°-80°	127.0	3.5
80°-90°	32.4	0.9
90°-100°	29.6	0.8
100°-110°	88.6	2.4
110°-120°	150.7	4.1
120°-130°	198.2	5.4
130°-140°	222.7	6.1
140°-150°	219.0	6.0
150°-160°	184.3	5.0
160°-170°	122.7	3.3
170°-180°	43.0	1.2
0°-30°	754.0	20.5
0°-40°	1233.2	33.6
0°-60°	2009.7	54.8
0°-90°	2410.8	65.7
90°-120°	268.8	7.3
90°-150°	908.7	24.8
90°-180°	1259.0	34.3
0°-180°	3669.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	798	798	798	798	798	
5°	948	799	708	799	948	98
15°	1412	764	577	764	1412	408
25°	1676	697	510	697	1676	735
35°	903	612	468	612	903	586
45°	487	502	398	502	487	386
55°	331	354	316	354	331	297
65°	215	218	223	218	215	214
75°	111	104	119	104	111	118
85°	26	21	23	21	26	30
90°	11	0	11	0	11	6
95°	28	21	28	21	28	29
105°	85	80	85	80	85	90
115°	152	152	152	152	152	151
125°	219	222	219	222	219	196
135°	288	288	288	288	288	221
145°	349	349	349	349	349	218
155°	399	400	399	400	399	184
165°	434	436	434	436	434	122
175°	451	453	451	453	451	43
180°	454	454	454	454	454	



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3
2.5°	847.2	846.6	845.1	846.3	843.7	840.4	840.1	837.0	828.0	827.4	825.0
5°	948.4	945.2	944.9	944.5	939.1	931.7	917.8	916.7	898.1	888.8	877.6
7.5°	1079.4	1081.1	1075.4	1070.5	1053.9	1043.0	1028.0	1009.0	986.1	963.0	947.6
10°	1173.5	1186.2	1170.3	1159.5	1149.5	1130.5	1108.5	1081.1	1053.6	1021.5	997.1
12.5°	1274.3	1280.6	1277.5	1267.2	1251.6	1222.7	1183.7	1153.5	1128.1	1074.7	1053.1
15°	1411.7	1435.3	1420.3	1385.4	1386.2	1358.8	1307.7	1251.6	1221.8	1175.0	1111.2
17.5°	1558.1	1561.0	1554.6	1525.6	1506.2	1468.5	1421.4	1367.7	1307.3	1250.7	1183.0
20°	1636.1	1633.8	1620.2	1605.1	1571.9	1542.5	1491.0	1431.1	1353.7	1298.0	1224.2
22.5°	1679.4	1675.5	1669.1	1656.5	1628.8	1597.2	1551.1	1485.5	1411.9	1335.1	1249.8
25°	1675.5	1680.5	1681.3	1677.8	1668.2	1649.2	1612.9	1560.6	1487.1	1388.6	1299.6
27.5°	1523.9	1531.0	1551.7	1570.0	1590.5	1611.3	1608.6	1582.7	1528.3	1443.1	1334.3
30°	1372.3	1356.8	1395.1	1443.4	1476.3	1534.3	1566.8	1568.7	1538.2	1465.1	1359.1
32.5°	1161.8	1178.9	1195.8	1255.3	1327.2	1392.3	1456.9	1509.0	1515.0	1466.3	1373.6
35°	902.7	924.0	954.9	985.9	1063.3	1129.7	1243.4	1342.5	1421.4	1431.8	1374.9
37.5°	727.4	738.0	757.5	788.5	839.1	918.1	1006.0	1131.1	1245.5	1330.5	1334.2
40°	635.8	638.9	661.0	684.6	725.6	790.5	869.9	980.5	1117.4	1236.2	1285.7
42.5°	567.1	574.0	583.3	606.0	638.6	687.5	761.2	852.7	978.2	1114.8	1211.6
45°	487.4	495.0	500.9	515.9	539.2	572.0	623.5	707.0	802.5	943.7	1074.1
47.5°	434.5	435.2	439.5	450.9	466.7	491.4	527.8	581.4	669.1	783.6	917.5
50°	396.9	403.0	404.6	413.4	425.9	444.0	474.2	519.8	591.8	692.4	815.4
52.5°	370.2	372.0	376.4	382.8	393.6	407.8	433.9	469.7	526.1	611.9	725.0
55°	331.0	331.0	335.4	340.3	346.6	359.3	376.7	403.0	446.0	512.5	606.1
57.5°	294.9	296.8	299.8	301.3	306.6	315.1	329.6	349.6	381.6	432.8	507.3
60°	270.7	274.2	273.9	276.9	281.6	288.1	300.5	316.8	345.4	386.4	449.1
62.5°	249.7	249.4	249.4	253.1	257.7	264.0	272.1	286.1	310.4	346.8	400.1
65°	215.0	214.3	217.0	219.3	220.9	225.5	231.7	244.1	260.3	287.4	328.7
67.5°	184.3	182.0	183.5	184.3	186.9	190.6	196.3	204.0	216.9	238.6	269.8
70°	163.2	161.3	160.9	161.7	164.0	166.7	171.0	178.3	190.3	207.7	230.6
72.5°	141.6	140.3	140.2	141.9	143.0	144.7	147.7	154.5	164.0	177.0	198.3
75°	110.6	110.6	110.6	111.0	112.2	113.7	116.0	119.5	126.8	136.1	150.5
77.5°	82.9	82.8	82.4	82.3	84.0	84.7	85.2	88.5	92.6	98.9	109.3
80°	64.9	63.0	63.8	64.9	65.7	66.1	67.3	68.1	71.6	75.0	82.4
82.5°	48.3	46.7	46.8	48.6	48.8	49.1	50.3	51.4	52.7	55.8	59.8
85°	25.5	25.5	26.0	26.0	26.3	26.0	27.1	27.5	27.5	29.4	31.7
87.5°	11.4	10.8	11.0	11.3	11.0	11.2	11.5	11.7	12.0	12.2	12.3
90°	10.7	10.5	10.4	10.2	10.1	9.8	9.5	9.2	8.9	8.6	7.6
92.5°	14.4	14.5	14.6	14.7	14.8	14.7	14.4	14.2	13.9	13.7	13.1
95°	27.9	27.9	27.9	27.9	27.9	27.7	27.4	27.1	26.8	26.5	25.8
97.5°	42.8	42.8	42.9	42.9	42.9	42.8	42.4	42.0	41.7	41.3	40.9
100°	54.2	54.1	53.9	53.7	53.6	53.4	53.2	52.9	52.7	52.4	52.1
102.5°	65.9	65.9	66.0	66.0	66.0	65.9	65.7	65.5	65.2	65.0	64.5
105°	84.9	84.8	84.6	84.4	84.3	84.2	84.2	84.2	84.2	84.2	83.5
107.5°	104.7	104.8	104.9	105.0	105.1	105.0	104.7	104.5	104.2	104.0	103.7
110°	118.2	118.3	118.5	118.6	118.8	118.7	118.4	118.1	117.8	117.4	117.2



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	132.4	132.4	132.5	132.5	132.5	132.4	132.0	131.6	131.2	130.9	130.8
115°	152.0	152.1	152.2	152.3	152.4	152.4	152.3	152.2	152.1	152.0	152.2
117.5°	172.0	172.2	172.4	172.6	172.8	173.0	173.0	173.0	173.0	173.0	173.2
120°	185.9	186.1	186.2	186.4	186.5	186.7	186.7	186.8	186.9	187.0	187.4
122.5°	199.3	199.5	199.8	200.1	200.3	200.5	200.7	200.9	201.1	201.3	201.5
125°	219.4	219.7	220.2	220.5	220.8	221.1	221.4	221.7	222.0	222.4	222.5
127.5°	239.5	239.9	240.2	240.7	241.0	241.4	241.9	242.3	242.8	243.2	243.4
130°	252.7	253.3	253.8	254.4	254.9	255.3	255.6	256.0	256.3	256.6	256.8
132.5°	266.4	266.8	267.2	267.6	268.1	268.5	268.8	269.2	269.6	270.0	270.1
135°	287.6	287.8	287.9	288.1	288.3	288.5	288.8	289.1	289.4	289.8	289.8
137.5°	306.4	306.7	307.0	307.3	307.6	307.9	308.3	308.6	308.9	309.2	309.0
140°	318.7	319.2	319.8	320.3	320.9	321.2	321.3	321.3	321.4	321.5	321.4
142.5°	331.2	331.6	332.1	332.5	333.0	333.3	333.3	333.4	333.5	333.6	333.4
145°	349.4	349.7	350.0	350.3	350.6	350.8	350.9	351.0	351.1	351.1	350.9
147.5°	365.5	366.0	366.5	367.0	367.4	367.7	367.7	367.7	367.7	367.7	367.4
150°	375.8	376.3	376.8	377.2	377.7	377.9	377.9	377.9	377.9	377.9	377.8
152.5°	385.8	386.2	386.6	387.0	387.4	387.6	387.5	387.3	387.2	387.1	387.0
155°	399.3	399.9	400.4	401.0	401.5	401.7	401.3	401.0	400.7	400.4	400.3
157.5°	411.7	412.1	412.6	413.0	413.4	413.5	413.2	412.8	412.5	412.2	412.1
160°	419.7	420.0	420.3	420.6	420.9	420.9	420.5	420.1	419.7	419.3	419.3
162.5°	425.7	426.2	426.7	427.2	427.7	427.8	427.4	427.0	426.6	426.2	426.2
165°	434.3	434.8	435.5	436.0	436.6	436.6	436.1	435.7	435.2	434.6	434.6
167.5°	441.7	442.1	442.6	443.1	443.6	443.6	443.1	442.6	442.1	441.7	441.6
170°	445.4	446.0	446.5	447.1	447.6	447.6	447.1	446.5	446.0	445.4	445.4
172.5°	448.3	448.8	449.4	449.9	450.5	450.5	450.0	449.5	449.0	448.5	448.5
175°	451.4	452.0	452.5	453.1	453.6	453.7	453.2	452.7	452.3	451.8	451.8
177.5°	453.1	453.6	454.0	454.5	454.9	454.9	454.5	454.2	453.8	453.4	453.4
180°	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3
2.5°	823.0	820.6	818.1	813.7	810.0	804.8	803.2	801.4	795.9	790.8	787.2
5°	873.3	864.0	850.5	838.1	828.1	814.6	806.8	798.7	787.1	776.7	768.1
7.5°	925.9	907.7	886.7	863.9	842.7	822.2	805.8	791.1	774.9	759.4	747.5
10°	967.8	941.4	912.0	880.3	853.2	826.9	804.9	785.6	764.7	746.5	731.3
12.5°	1015.3	976.3	935.8	897.3	865.3	828.8	802.1	777.5	753.9	732.0	715.0
15°	1071.8	1022.3	974.3	921.3	872.5	826.9	795.2	764.3	736.8	714.4	692.7
17.5°	1123.1	1067.0	1003.8	939.4	880.6	826.5	782.0	747.1	712.8	685.3	663.7
20°	1152.2	1088.3	1016.8	949.9	884.9	824.6	775.9	734.1	697.0	667.9	643.6
22.5°	1177.3	1102.6	1028.5	957.0	884.6	819.6	764.5	721.4	681.2	652.8	626.9
25°	1203.3	1113.9	1039.7	955.7	874.8	807.6	745.7	697.0	656.7	623.5	596.8
27.5°	1225.6	1113.2	1025.0	934.7	859.6	792.1	726.1	673.8	631.1	594.9	567.8
30°	1240.4	1114.7	1009.9	920.5	844.8	775.1	710.8	658.3	613.4	576.6	551.2
32.5°	1249.7	1113.8	995.9	900.7	821.2	759.6	694.5	640.1	593.9	557.8	533.2
35°	1255.1	1106.9	972.0	859.8	783.3	723.3	668.7	612.3	563.9	530.3	502.4
37.5°	1244.3	1092.7	944.1	820.3	736.5	677.5	631.6	583.5	537.2	500.2	476.2
40°	1227.2	1083.4	922.4	792.5	704.3	647.4	608.4	561.2	515.5	480.4	458.0
42.5°	1194.8	1064.5	898.7	761.5	670.9	614.0	578.0	538.7	495.4	462.4	440.0
45°	1115.5	1023.4	862.9	715.2	621.6	562.8	531.1	502.4	463.3	431.2	411.9
47.5°	1005.4	961.6	811.2	666.2	570.1	513.5	480.5	457.5	428.9	403.0	384.5
50°	929.1	910.9	776.3	632.8	535.6	480.4	448.7	427.8	407.3	381.3	364.4
52.5°	840.8	852.0	735.4	598.1	500.7	446.4	416.5	399.9	381.3	360.0	345.2
55°	716.7	757.3	664.9	540.0	448.7	396.9	368.6	353.9	343.1	327.2	314.5
57.5°	600.5	652.1	588.5	480.0	397.5	352.8	325.8	309.7	302.8	294.5	284.5
60°	531.4	582.5	534.1	439.8	363.1	320.6	296.7	283.2	276.2	270.3	261.9
62.5°	469.9	521.5	480.9	398.9	329.4	290.0	269.1	255.9	250.4	247.4	240.1
65°	385.3	429.7	402.6	335.4	281.1	246.4	227.4	218.1	213.1	212.0	207.3
67.5°	313.6	347.4	327.7	278.1	235.5	205.4	189.3	181.5	177.6	177.2	173.7
70°	266.5	298.2	283.2	238.2	201.5	177.9	164.0	157.0	154.7	154.3	152.4
72.5°	229.9	252.1	240.1	202.7	174.3	152.9	142.6	135.3	132.7	133.3	132.0
75°	170.2	186.8	179.9	153.9	131.1	117.1	108.7	104.0	101.7	102.9	101.3
77.5°	122.5	133.0	126.7	108.8	94.7	84.6	78.4	75.5	73.4	73.3	72.6
80°	92.4	98.7	95.1	84.3	72.7	64.2	59.2	57.3	56.0	55.7	55.3
82.5°	65.8	71.1	67.0	59.6	51.7	46.6	43.7	41.2	40.3	40.5	40.2
85°	33.2	35.2	33.6	29.0	26.0	23.6	22.0	20.9	20.1	20.5	19.7
87.5°	12.7	12.8	11.7	10.3	9.5	8.5	8.3	7.5	7.1	7.2	7.1
90°	6.5	5.5	4.4	3.5	2.7	1.9	1.1	0.4	1.1	1.9	2.7
92.5°	12.5	11.9	11.3	10.8	10.3	9.7	9.2	8.7	9.2	9.7	10.3
95°	25.1	24.5	23.8	23.2	22.7	22.1	21.6	21.1	21.6	22.1	22.7
97.5°	40.4	40.0	39.5	39.1	38.7	38.3	37.8	37.4	37.8	38.3	38.7
100°	51.7	51.3	50.9	50.4	50.0	49.5	49.0	48.6	49.0	49.5	50.0
102.5°	64.0	63.4	62.9	62.5	62.2	61.9	61.7	61.4	61.7	61.9	62.2
105°	82.8	82.1	81.4	80.9	80.8	80.6	80.5	80.3	80.5	80.6	80.8
107.5°	103.4	103.1	102.8	102.7	102.6	102.5	102.4	102.3	102.4	102.5	102.6
110°	117.1	116.9	116.7	116.6	116.4	116.3	116.1	116.0	116.1	116.3	116.4



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	130.8	130.8	130.7	130.7	130.6	130.5	130.4	130.3	130.4	130.5	130.6
115°	152.4	152.5	152.7	152.6	152.4	152.2	151.9	151.7	151.9	152.2	152.4
117.5°	173.4	173.6	173.8	173.9	173.7	173.6	173.4	173.2	173.4	173.6	173.7
120°	187.8	188.2	188.5	188.5	188.0	187.6	187.1	186.6	187.1	187.6	188.0
122.5°	201.7	201.9	202.1	202.1	201.7	201.4	201.0	200.7	201.0	201.4	201.7
125°	222.7	222.8	223.0	223.0	222.7	222.5	222.2	222.0	222.2	222.5	222.7
127.5°	243.5	243.7	243.9	243.7	243.2	242.7	242.2	241.7	242.2	242.7	243.2
130°	257.1	257.3	257.5	257.3	256.7	256.1	255.4	254.8	255.4	256.1	256.7
132.5°	270.3	270.5	270.7	270.4	269.8	269.2	268.6	267.9	268.6	269.2	269.8
135°	289.9	290.0	290.1	289.9	289.4	288.9	288.5	288.0	288.5	288.9	289.4
137.5°	308.8	308.6	308.4	308.1	307.7	307.3	307.0	306.6	307.0	307.3	307.7
140°	321.3	321.3	321.2	321.0	320.6	320.2	319.8	319.4	319.8	320.2	320.6
142.5°	333.3	333.2	333.0	332.6	332.3	331.9	331.5	331.1	331.5	331.9	332.3
145°	350.7	350.4	350.2	350.0	349.8	349.7	349.5	349.4	349.5	349.7	349.8
147.5°	367.2	367.0	366.8	366.5	366.3	366.0	365.7	365.4	365.7	366.0	366.3
150°	377.6	377.5	377.3	377.2	377.0	376.8	376.7	376.5	376.7	376.8	377.0
152.5°	386.9	386.8	386.7	386.6	386.3	386.1	385.9	385.7	385.9	386.1	386.3
155°	400.2	400.2	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1	400.1
157.5°	412.0	412.0	411.9	411.9	412.0	412.1	412.2	412.3	412.2	412.1	412.0
160°	419.3	419.3	419.3	419.4	419.6	419.7	419.9	420.0	419.9	419.7	419.6
162.5°	426.1	426.0	426.0	426.0	426.3	426.5	426.7	426.9	426.7	426.5	426.3
165°	434.6	434.6	434.6	434.7	435.0	435.3	435.6	435.8	435.6	435.3	435.0
167.5°	441.5	441.5	441.4	441.5	441.8	442.2	442.5	442.8	442.5	442.2	441.8
170°	445.4	445.4	445.4	445.6	445.9	446.2	446.5	446.8	446.5	446.2	445.9
172.5°	448.5	448.5	448.5	448.7	449.0	449.3	449.6	450.0	449.6	449.3	449.0
175°	451.8	451.8	451.8	452.0	452.3	452.6	452.9	453.2	452.9	452.6	452.3
177.5°	453.4	453.4	453.4	453.5	453.8	454.0	454.3	454.5	454.3	454.0	453.8
180°	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3
2.5°	785.0	782.8	779.7	775.1	771.3	765.5	765.5	766.4	766.4	766.1	765.5
5°	761.1	755.4	748.4	740.3	731.7	723.3	721.8	718.6	716.3	714.8	712.9
7.5°	736.0	725.8	715.6	704.3	693.9	685.3	679.3	674.4	671.2	667.8	665.3
10°	719.0	706.2	694.3	682.3	669.1	658.6	652.1	647.4	644.0	640.9	639.3
12.5°	698.9	684.3	671.1	659.6	645.3	634.5	628.2	626.1	622.0	615.5	612.1
15°	669.5	656.0	640.2	622.7	615.7	602.6	595.2	591.8	589.5	584.4	582.9
17.5°	644.4	626.6	608.8	595.8	582.9	572.3	568.2	563.8	560.8	556.6	555.4
20°	624.3	608.4	592.2	578.2	564.7	553.1	549.6	546.5	543.4	541.5	540.0
22.5°	603.8	587.9	574.5	561.5	547.0	539.5	535.6	532.3	530.1	528.8	527.3
25°	575.1	561.2	546.1	534.5	522.9	517.9	515.5	513.6	512.1	510.2	509.8
27.5°	549.5	534.3	522.1	511.2	502.9	498.7	496.4	495.5	495.8	496.6	497.0
30°	530.3	516.3	506.2	497.0	489.3	485.4	485.0	485.0	486.6	487.0	487.8
32.5°	512.6	501.2	491.1	482.1	476.3	473.6	475.1	475.1	476.4	477.4	478.8
35°	487.0	476.9	469.2	461.4	456.4	457.6	458.3	459.1	461.0	463.3	464.9
37.5°	462.4	453.7	445.7	439.6	437.3	439.4	441.2	442.8	445.1	446.9	448.4
40°	444.7	438.2	430.5	425.1	425.9	427.0	428.6	430.5	432.4	433.5	435.2
42.5°	428.4	421.5	415.7	411.1	412.2	413.7	414.7	415.7	417.9	420.0	420.9
45°	403.4	398.0	392.5	389.9	390.6	391.4	392.2	393.3	395.3	396.9	397.2
47.5°	375.4	371.5	367.9	365.3	366.5	366.2	367.2	369.7	370.3	371.2	373.3
50°	357.4	353.9	349.6	348.9	348.9	348.9	349.2	352.3	352.3	353.9	355.5
52.5°	337.6	335.4	332.6	331.2	330.6	330.6	332.2	333.8	334.4	336.6	338.1
55°	308.2	305.9	303.7	302.5	301.6	302.5	305.6	306.3	308.2	309.4	310.5
57.5°	277.7	275.9	274.1	273.5	273.3	274.3	276.0	278.3	278.8	282.4	284.1
60°	257.6	254.9	253.4	253.4	252.6	256.0	255.3	259.1	259.9	262.3	265.0
62.5°	236.8	233.2	232.6	232.6	233.7	234.7	235.8	237.5	239.5	242.5	244.5
65°	203.5	201.5	204.2	203.8	203.1	205.4	205.4	207.3	209.6	212.4	216.6
67.5°	171.8	170.8	171.1	171.1	172.2	173.5	174.6	176.3	179.0	182.0	184.7
70°	150.5	151.6	149.7	151.3	152.4	152.8	153.5	155.8	159.0	160.9	164.0
72.5°	129.8	129.7	129.9	130.5	131.7	132.4	133.1	135.7	139.2	140.8	143.3
75°	99.8	99.4	100.6	100.6	102.5	103.3	104.0	105.2	108.3	110.6	112.6
77.5°	72.9	73.3	73.1	74.4	73.9	74.0	76.4	77.6	77.9	82.5	83.5
80°	54.9	55.7	56.0	56.5	56.9	56.0	58.8	60.0	60.0	62.6	64.6
82.5°	39.5	39.9	40.9	41.3	41.4	42.1	42.4	43.2	44.1	45.3	47.9
85°	19.7	20.9	21.3	20.9	21.3	20.5	21.6	22.0	22.4	22.4	22.4
87.5°	6.9	7.4	7.3	7.8	7.7	8.2	8.3	7.7	7.8	8.8	7.6
90°	3.5	4.4	5.5	6.5	7.6	8.6	8.9	9.2	9.5	9.8	10.1
92.5°	10.8	11.3	11.9	12.5	13.1	13.7	13.9	14.2	14.4	14.7	14.8
95°	23.2	23.8	24.5	25.1	25.8	26.5	26.8	27.1	27.4	27.7	27.9
97.5°	39.1	39.5	40.0	40.4	40.9	41.3	41.7	42.0	42.4	42.8	42.9
100°	50.4	50.9	51.3	51.7	52.1	52.4	52.7	52.9	53.2	53.4	53.6
102.5°	62.5	62.9	63.4	64.0	64.5	65.0	65.2	65.5	65.7	65.9	66.0
105°	80.9	81.4	82.1	82.8	83.5	84.2	84.2	84.2	84.2	84.2	84.3
107.5°	102.7	102.8	103.1	103.4	103.7	104.0	104.2	104.5	104.7	105.0	105.1
110°	116.6	116.7	116.9	117.1	117.2	117.4	117.8	118.1	118.4	118.7	118.8



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	130.7	130.7	130.8	130.8	130.8	130.9	131.2	131.6	132.0	132.4	132.5
115°	152.6	152.7	152.5	152.4	152.2	152.0	152.1	152.2	152.3	152.4	152.4
117.5°	173.9	173.8	173.6	173.4	173.2	173.0	173.0	173.0	173.0	173.0	172.8
120°	188.5	188.5	188.2	187.8	187.4	187.0	186.9	186.8	186.7	186.7	186.5
122.5°	202.1	202.1	201.9	201.7	201.5	201.3	201.1	200.9	200.7	200.5	200.3
125°	223.0	223.0	222.8	222.7	222.5	222.4	222.0	221.7	221.4	221.1	220.8
127.5°	243.7	243.9	243.7	243.5	243.4	243.2	242.8	242.3	241.9	241.4	241.0
130°	257.3	257.5	257.3	257.1	256.8	256.6	256.3	256.0	255.6	255.3	254.9
132.5°	270.4	270.7	270.5	270.3	270.1	270.0	269.6	269.2	268.8	268.5	268.1
135°	289.9	290.1	290.0	289.9	289.8	289.8	289.4	289.1	288.8	288.5	288.3
137.5°	308.1	308.4	308.6	308.8	309.0	309.2	308.9	308.6	308.3	307.9	307.6
140°	321.0	321.2	321.3	321.3	321.4	321.5	321.4	321.3	321.3	321.2	320.9
142.5°	332.6	333.0	333.2	333.3	333.4	333.6	333.5	333.4	333.3	333.3	333.0
145°	350.0	350.2	350.4	350.7	350.9	351.1	351.1	351.0	350.9	350.8	350.6
147.5°	366.5	366.8	367.0	367.2	367.4	367.7	367.7	367.7	367.7	367.7	367.4
150°	377.2	377.3	377.5	377.6	377.8	377.9	377.9	377.9	377.9	377.9	377.7
152.5°	386.6	386.7	386.8	386.9	387.0	387.1	387.2	387.3	387.5	387.6	387.4
155°	400.1	400.1	400.2	400.2	400.3	400.4	400.7	401.0	401.3	401.7	401.5
157.5°	411.9	411.9	412.0	412.0	412.1	412.2	412.5	412.8	413.2	413.5	413.4
160°	419.4	419.3	419.3	419.3	419.3	419.3	419.7	420.1	420.5	420.9	420.9
162.5°	426.0	426.0	426.0	426.1	426.2	426.2	426.6	427.0	427.4	427.8	427.7
165°	434.7	434.6	434.6	434.6	434.6	434.6	435.2	435.7	436.1	436.6	436.6
167.5°	441.5	441.4	441.5	441.5	441.6	441.7	442.1	442.6	443.1	443.6	443.6
170°	445.6	445.4	445.4	445.4	445.4	445.4	446.0	446.5	447.1	447.6	447.6
172.5°	448.7	448.5	448.5	448.5	448.5	448.5	449.0	449.5	450.0	450.5	450.5
175°	452.0	451.8	451.8	451.8	451.8	451.8	452.3	452.7	453.2	453.7	453.6
177.5°	453.5	453.4	453.4	453.4	453.4	453.4	453.8	454.2	454.5	454.9	454.9
180°	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3
2.5°	763.4	763.1	765.2	763.7	765.2	763.1	763.4	765.5	766.1	766.4	766.4
5°	710.5	711.7	707.8	707.8	707.8	711.7	710.5	712.9	714.8	716.3	718.6
7.5°	663.5	661.8	662.0	659.8	662.0	661.8	663.5	665.3	667.8	671.2	674.4
10°	634.7	632.4	631.6	632.0	631.6	632.4	634.7	639.3	640.9	644.0	647.4
12.5°	610.9	610.4	605.3	605.4	605.3	610.4	610.9	612.1	615.5	622.0	626.1
15°	582.9	575.5	574.7	577.0	574.7	575.5	582.9	582.9	584.4	589.5	591.8
17.5°	554.8	550.9	551.2	550.0	551.2	550.9	554.8	555.4	556.6	560.8	563.8
20°	540.0	537.7	537.2	534.5	537.2	537.7	540.0	540.0	541.5	543.4	546.5
22.5°	526.3	525.5	525.7	522.8	525.7	525.5	526.3	527.3	528.8	530.1	532.3
25°	509.4	511.3	509.8	509.8	509.8	511.3	509.4	509.8	510.2	512.1	513.6
27.5°	498.0	497.9	497.1	497.1	497.1	497.9	498.0	497.0	496.6	495.8	495.5
30°	489.3	488.9	489.7	489.7	489.7	488.9	489.3	487.8	487.0	486.6	485.0
32.5°	480.6	481.1	481.3	481.6	481.3	481.1	480.6	478.8	477.4	476.4	475.1
35°	467.3	467.6	468.8	468.0	468.8	467.6	467.3	464.9	463.3	461.0	459.1
37.5°	449.1	450.9	450.5	451.1	450.5	450.9	449.1	448.4	446.9	445.1	442.8
40°	435.6	436.7	436.3	436.3	436.3	436.7	435.6	435.2	433.5	432.4	430.5
42.5°	421.6	422.4	421.4	420.8	421.4	422.4	421.6	420.9	420.0	417.9	415.7
45°	398.8	398.0	399.2	397.6	399.2	398.0	398.8	397.2	396.9	395.3	393.3
47.5°	373.2	374.1	374.4	375.5	374.4	374.1	373.2	373.3	371.2	370.3	369.7
50°	356.2	358.5	358.5	358.2	358.5	358.5	356.2	355.5	353.9	352.3	352.3
52.5°	339.5	340.6	342.1	342.0	342.1	340.6	339.5	338.1	336.6	334.4	333.8
55°	313.7	314.5	315.2	315.6	315.2	314.5	313.7	310.5	309.4	308.2	306.3
57.5°	286.9	286.6	288.4	289.0	288.4	286.6	286.9	284.1	282.4	278.8	278.3
60°	268.0	268.0	271.1	272.3	271.1	268.0	268.0	265.0	262.3	259.9	259.1
62.5°	247.9	249.1	252.3	250.6	252.3	249.1	247.9	244.5	242.5	239.5	237.5
65°	218.5	221.7	221.3	222.8	221.3	221.7	218.5	216.6	212.4	209.6	207.3
67.5°	187.8	189.8	192.6	192.8	192.6	189.8	187.8	184.7	182.0	179.0	176.3
70°	167.1	169.1	170.6	171.7	170.6	169.1	167.1	164.0	160.9	159.0	155.8
72.5°	146.9	147.9	151.7	150.1	151.7	147.9	146.9	143.3	140.8	139.2	135.7
75°	115.2	118.0	120.3	119.2	120.3	118.0	115.2	112.6	110.6	108.3	105.2
77.5°	85.2	88.0	89.1	88.1	89.1	88.0	85.2	83.5	82.5	77.9	77.6
80°	67.3	67.0	69.3	68.9	69.3	67.0	67.3	64.6	62.6	60.0	60.0
82.5°	49.4	49.0	50.1	50.3	50.1	49.0	49.4	47.9	45.3	44.1	43.2
85°	23.9	25.1	23.6	23.2	23.6	25.1	23.9	22.4	22.4	22.4	22.0
87.5°	7.6	7.7	7.4	7.1	7.4	7.7	7.6	7.6	8.8	7.8	7.7
90°	10.2	10.4	10.5	10.7	10.5	10.4	10.2	10.1	9.8	9.5	9.2
92.5°	14.7	14.6	14.5	14.4	14.5	14.6	14.7	14.8	14.7	14.4	14.2
95°	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.9	27.7	27.4	27.1
97.5°	42.9	42.9	42.8	42.8	42.8	42.9	42.9	42.9	42.8	42.4	42.0
100°	53.7	53.9	54.1	54.2	54.1	53.9	53.7	53.6	53.4	53.2	52.9
102.5°	66.0	66.0	65.9	65.9	65.9	66.0	66.0	66.0	65.9	65.7	65.5
105°	84.4	84.6	84.8	84.9	84.8	84.6	84.4	84.3	84.2	84.2	84.2
107.5°	105.0	104.9	104.8	104.7	104.8	104.9	105.0	105.1	105.0	104.7	104.5
110°	118.6	118.5	118.3	118.2	118.3	118.5	118.6	118.8	118.7	118.4	118.1



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	132.5	132.5	132.4	132.4	132.4	132.5	132.5	132.5	132.4	132.0	131.6
115°	152.3	152.2	152.1	152.0	152.1	152.2	152.3	152.4	152.4	152.3	152.2
117.5°	172.6	172.4	172.2	172.0	172.2	172.4	172.6	172.8	173.0	173.0	173.0
120°	186.4	186.2	186.1	185.9	186.1	186.2	186.4	186.5	186.7	186.7	186.8
122.5°	200.1	199.8	199.5	199.3	199.5	199.8	200.1	200.3	200.5	200.7	200.9
125°	220.5	220.2	219.7	219.4	219.7	220.2	220.5	220.8	221.1	221.4	221.7
127.5°	240.7	240.2	239.9	239.5	239.9	240.2	240.7	241.0	241.4	241.9	242.3
130°	254.4	253.8	253.3	252.7	253.3	253.8	254.4	254.9	255.3	255.6	256.0
132.5°	267.6	267.2	266.8	266.4	266.8	267.2	267.6	268.1	268.5	268.8	269.2
135°	288.1	287.9	287.8	287.6	287.8	287.9	288.1	288.3	288.5	288.8	289.1
137.5°	307.3	307.0	306.7	306.4	306.7	307.0	307.3	307.6	307.9	308.3	308.6
140°	320.3	319.8	319.2	318.7	319.2	319.8	320.3	320.9	321.2	321.3	321.3
142.5°	332.5	332.1	331.6	331.2	331.6	332.1	332.5	333.0	333.3	333.3	333.4
145°	350.3	350.0	349.7	349.4	349.7	350.0	350.3	350.6	350.8	350.9	351.0
147.5°	367.0	366.5	366.0	365.5	366.0	366.5	367.0	367.4	367.7	367.7	367.7
150°	377.2	376.8	376.3	375.8	376.3	376.8	377.2	377.7	377.9	377.9	377.9
152.5°	387.0	386.6	386.2	385.8	386.2	386.6	387.0	387.4	387.6	387.5	387.3
155°	401.0	400.4	399.9	399.3	399.9	400.4	401.0	401.5	401.7	401.3	401.0
157.5°	413.0	412.6	412.1	411.7	412.1	412.6	413.0	413.4	413.5	413.2	412.8
160°	420.6	420.3	420.0	419.7	420.0	420.3	420.6	420.9	420.9	420.5	420.1
162.5°	427.2	426.7	426.2	425.7	426.2	426.7	427.2	427.7	427.8	427.4	427.0
165°	436.0	435.5	434.8	434.3	434.8	435.5	436.0	436.6	436.6	436.1	435.7
167.5°	443.1	442.6	442.1	441.7	442.1	442.6	443.1	443.6	443.6	443.1	442.6
170°	447.1	446.5	446.0	445.4	446.0	446.5	447.1	447.6	447.6	447.1	446.5
172.5°	449.9	449.4	448.8	448.3	448.8	449.4	449.9	450.5	450.5	450.0	449.5
175°	453.1	452.5	452.0	451.4	452.0	452.5	453.1	453.6	453.7	453.2	452.7
177.5°	454.5	454.0	453.6	453.1	453.6	454.0	454.5	454.9	454.9	454.5	454.2
180°	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3
2.5°	765.5	765.5	771.3	775.1	779.7	782.8	785.0	787.2	790.8	795.9	801.4
5°	721.8	723.3	731.7	740.3	748.4	755.4	761.1	768.1	776.7	787.1	798.7
7.5°	679.3	685.3	693.9	704.3	715.6	725.8	736.0	747.5	759.4	774.9	791.1
10°	652.1	658.6	669.1	682.3	694.3	706.2	719.0	731.3	746.5	764.7	785.6
12.5°	628.2	634.5	645.3	659.6	671.1	684.3	698.9	715.0	732.0	753.9	777.5
15°	595.2	602.6	615.7	622.7	640.2	656.0	669.5	692.7	714.4	736.8	764.3
17.5°	568.2	572.3	582.9	595.8	608.8	626.6	644.4	663.7	685.3	712.8	747.1
20°	549.6	553.1	564.7	578.2	592.2	608.4	624.3	643.6	667.9	697.0	734.1
22.5°	535.6	539.5	547.0	561.5	574.5	587.9	603.8	626.9	652.8	681.2	721.4
25°	515.5	517.9	522.9	534.5	546.1	561.2	575.1	596.8	623.5	656.7	697.0
27.5°	496.4	498.7	502.9	511.2	522.1	534.3	549.5	567.8	594.9	631.1	673.8
30°	485.0	485.4	489.3	497.0	506.2	516.3	530.3	551.2	576.6	613.4	658.3
32.5°	475.1	473.6	476.3	482.1	491.1	501.2	512.6	533.2	557.8	593.9	640.1
35°	458.3	457.6	456.4	461.4	469.2	476.9	487.0	502.4	530.3	563.9	612.3
37.5°	441.2	439.4	437.3	439.6	445.7	453.7	462.4	476.2	500.2	537.2	583.5
40°	428.6	427.0	425.9	425.1	430.5	438.2	444.7	458.0	480.4	515.5	561.2
42.5°	414.7	413.7	412.2	411.1	415.7	421.5	428.4	440.0	462.4	495.4	538.7
45°	392.2	391.4	390.6	389.9	392.5	398.0	403.4	411.9	431.2	463.3	502.4
47.5°	367.2	366.2	366.5	365.3	367.9	371.5	375.4	384.5	403.0	428.9	457.5
50°	349.2	348.9	348.9	348.9	349.6	353.9	357.4	364.4	381.3	407.3	427.8
52.5°	332.2	330.6	330.6	331.2	332.6	335.4	337.6	345.2	360.0	381.3	399.9
55°	305.6	302.5	301.6	302.5	303.7	305.9	308.2	314.5	327.2	343.1	353.9
57.5°	276.0	274.3	273.3	273.5	274.1	275.9	277.7	284.5	294.5	302.8	309.7
60°	255.3	256.0	252.6	253.4	253.4	254.9	257.6	261.9	270.3	276.2	283.2
62.5°	235.8	234.7	233.7	232.6	232.6	233.2	236.8	240.1	247.4	250.4	255.9
65°	205.4	205.4	203.1	203.8	204.2	201.5	203.5	207.3	212.0	213.1	218.1
67.5°	174.6	173.5	172.2	171.1	171.1	170.8	171.8	173.7	177.2	177.6	181.5
70°	153.5	152.8	152.4	151.3	149.7	151.6	150.5	152.4	154.3	154.7	157.0
72.5°	133.1	132.4	131.7	130.5	129.9	129.7	129.8	132.0	133.3	132.7	135.3
75°	104.0	103.3	102.5	100.6	100.6	99.4	99.8	101.3	102.9	101.7	104.0
77.5°	76.4	74.0	73.9	74.4	73.1	73.3	72.9	72.6	73.3	73.4	75.5
80°	58.8	56.0	56.9	56.5	56.0	55.7	54.9	55.3	55.7	56.0	57.3
82.5°	42.4	42.1	41.4	41.3	40.9	39.9	39.5	40.2	40.5	40.3	41.2
85°	21.6	20.5	21.3	20.9	21.3	20.9	19.7	19.7	20.5	20.1	20.9
87.5°	8.3	8.2	7.7	7.8	7.3	7.4	6.9	7.1	7.2	7.1	7.5
90°	8.9	8.6	7.6	6.5	5.5	4.4	3.5	2.7	1.9	1.1	0.4
92.5°	13.9	13.7	13.1	12.5	11.9	11.3	10.8	10.3	9.7	9.2	8.7
95°	26.8	26.5	25.8	25.1	24.5	23.8	23.2	22.7	22.1	21.6	21.1
97.5°	41.7	41.3	40.9	40.4	40.0	39.5	39.1	38.7	38.3	37.8	37.4
100°	52.7	52.4	52.1	51.7	51.3	50.9	50.4	50.0	49.5	49.0	48.6
102.5°	65.2	65.0	64.5	64.0	63.4	62.9	62.5	62.2	61.9	61.7	61.4
105°	84.2	84.2	83.5	82.8	82.1	81.4	80.9	80.8	80.6	80.5	80.3
107.5°	104.2	104.0	103.7	103.4	103.1	102.8	102.7	102.6	102.5	102.4	102.3
110°	117.8	117.4	117.2	117.1	116.9	116.7	116.6	116.4	116.3	116.1	116.0



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	131.2	130.9	130.8	130.8	130.8	130.7	130.7	130.6	130.5	130.4	130.3
115°	152.1	152.0	152.2	152.4	152.5	152.7	152.6	152.4	152.2	151.9	151.7
117.5°	173.0	173.0	173.2	173.4	173.6	173.8	173.9	173.7	173.6	173.4	173.2
120°	186.9	187.0	187.4	187.8	188.2	188.5	188.5	188.0	187.6	187.1	186.6
122.5°	201.1	201.3	201.5	201.7	201.9	202.1	202.1	201.7	201.4	201.0	200.7
125°	222.0	222.4	222.5	222.7	222.8	223.0	223.0	222.7	222.5	222.2	222.0
127.5°	242.8	243.2	243.4	243.5	243.7	243.9	243.7	243.2	242.7	242.2	241.7
130°	256.3	256.6	256.8	257.1	257.3	257.5	257.3	256.7	256.1	255.4	254.8
132.5°	269.6	270.0	270.1	270.3	270.5	270.7	270.4	269.8	269.2	268.6	267.9
135°	289.4	289.8	289.8	289.9	290.0	290.1	289.9	289.4	288.9	288.5	288.0
137.5°	308.9	309.2	309.0	308.8	308.6	308.4	308.1	307.7	307.3	307.0	306.6
140°	321.4	321.5	321.4	321.3	321.3	321.2	321.0	320.6	320.2	319.8	319.4
142.5°	333.5	333.6	333.4	333.3	333.2	333.0	332.6	332.3	331.9	331.5	331.1
145°	351.1	351.1	350.9	350.7	350.4	350.2	350.0	349.8	349.7	349.5	349.4
147.5°	367.7	367.7	367.4	367.2	367.0	366.8	366.5	366.3	366.0	365.7	365.4
150°	377.9	377.9	377.8	377.6	377.5	377.3	377.2	377.0	376.8	376.7	376.5
152.5°	387.2	387.1	387.0	386.9	386.8	386.7	386.6	386.3	386.1	385.9	385.7
155°	400.7	400.4	400.3	400.2	400.2	400.1	400.1	400.1	400.1	400.1	400.1
157.5°	412.5	412.2	412.1	412.0	412.0	411.9	411.9	412.0	412.1	412.2	412.3
160°	419.7	419.3	419.3	419.3	419.3	419.3	419.4	419.6	419.7	419.9	420.0
162.5°	426.6	426.2	426.2	426.1	426.0	426.0	426.0	426.3	426.5	426.7	426.9
165°	435.2	434.6	434.6	434.6	434.6	434.6	434.7	435.0	435.3	435.6	435.8
167.5°	442.1	441.7	441.6	441.5	441.5	441.4	441.5	441.8	442.2	442.5	442.8
170°	446.0	445.4	445.4	445.4	445.4	445.4	445.6	445.9	446.2	446.5	446.8
172.5°	449.0	448.5	448.5	448.5	448.5	448.5	448.7	449.0	449.3	449.6	450.0
175°	452.3	451.8	451.8	451.8	451.8	451.8	452.0	452.3	452.6	452.9	453.2
177.5°	453.8	453.4	453.4	453.4	453.4	453.4	453.5	453.8	454.0	454.3	454.5
180°	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3	798.3
2.5°	803.2	804.8	810.0	813.7	818.1	820.6	823.0	825.0	827.4	828.0	837.0
5°	806.8	814.6	828.1	838.1	850.5	864.0	873.3	877.6	888.8	898.1	916.7
7.5°	805.8	822.2	842.7	863.9	886.7	907.7	925.9	947.6	963.0	986.1	1009.0
10°	804.9	826.9	853.2	880.3	912.0	941.4	967.8	997.1	1021.5	1053.6	1081.1
12.5°	802.1	828.8	865.3	897.3	935.8	976.3	1015.3	1053.1	1074.7	1128.1	1153.5
15°	795.2	826.9	872.5	921.3	974.3	1022.3	1071.8	1111.2	1175.0	1221.8	1251.6
17.5°	782.0	826.5	880.6	939.4	1003.8	1067.0	1123.1	1183.0	1250.7	1307.3	1367.7
20°	775.9	824.6	884.9	949.9	1016.8	1088.3	1152.2	1224.2	1298.0	1353.7	1431.1
22.5°	764.5	819.6	884.6	957.0	1028.5	1102.6	1177.3	1249.8	1335.1	1411.9	1485.5
25°	745.7	807.6	874.8	955.7	1039.7	1113.9	1203.3	1299.6	1388.6	1487.1	1560.6
27.5°	726.1	792.1	859.6	934.7	1025.0	1113.2	1225.6	1334.3	1443.1	1528.3	1582.7
30°	710.8	775.1	844.8	920.5	1009.9	1114.7	1240.4	1359.1	1465.1	1538.2	1568.7
32.5°	694.5	759.6	821.2	900.7	995.9	1113.8	1249.7	1373.6	1466.3	1515.0	1509.0
35°	668.7	723.3	783.3	859.8	972.0	1106.9	1255.1	1374.9	1431.8	1421.4	1342.5
37.5°	631.6	677.5	736.5	820.3	944.1	1092.7	1244.3	1334.2	1330.5	1245.5	1131.1
40°	608.4	647.4	704.3	792.5	922.4	1083.4	1227.2	1285.7	1236.2	1117.4	980.5
42.5°	578.0	614.0	670.9	761.5	898.7	1064.5	1194.8	1211.6	1114.8	978.2	852.7
45°	531.1	562.8	621.6	715.2	862.9	1023.4	1115.5	1074.1	943.7	802.5	707.0
47.5°	480.5	513.5	570.1	666.2	811.2	961.6	1005.4	917.5	783.6	669.1	581.4
50°	448.7	480.4	535.6	632.8	776.3	910.9	929.1	815.4	692.4	591.8	519.8
52.5°	416.5	446.4	500.7	598.1	735.4	852.0	840.8	725.0	611.9	526.1	469.7
55°	368.6	396.9	448.7	540.0	664.9	757.3	716.7	606.1	512.5	446.0	403.0
57.5°	325.8	352.8	397.5	480.0	588.5	652.1	600.5	507.3	432.8	381.6	349.6
60°	296.7	320.6	363.1	439.8	534.1	582.5	531.4	449.1	386.4	345.4	316.8
62.5°	269.1	290.0	329.4	398.9	480.9	521.5	469.9	400.1	346.8	310.4	286.1
65°	227.4	246.4	281.1	335.4	402.6	429.7	385.3	328.7	287.4	260.3	244.1
67.5°	189.3	205.4	235.5	278.1	327.7	347.4	313.6	269.8	238.6	216.9	204.0
70°	164.0	177.9	201.5	238.2	283.2	298.2	266.5	230.6	207.7	190.3	178.3
72.5°	142.6	152.9	174.3	202.7	240.1	252.1	229.9	198.3	177.0	164.0	154.5
75°	108.7	117.1	131.1	153.9	179.9	186.8	170.2	150.5	136.1	126.8	119.5
77.5°	78.4	84.6	94.7	108.8	126.7	133.0	122.5	109.3	98.9	92.6	88.5
80°	59.2	64.2	72.7	84.3	95.1	98.7	92.4	82.4	75.0	71.6	68.1
82.5°	43.7	46.6	51.7	59.6	67.0	71.1	65.8	59.8	55.8	52.7	51.4
85°	22.0	23.6	26.0	29.0	33.6	35.2	33.2	31.7	29.4	27.5	27.5
87.5°	8.3	8.5	9.5	10.3	11.7	12.8	12.7	12.3	12.2	12.0	11.7
90°	1.1	1.9	2.7	3.5	4.4	5.5	6.5	7.6	8.6	8.9	9.2
92.5°	9.2	9.7	10.3	10.8	11.3	11.9	12.5	13.1	13.7	13.9	14.2
95°	21.6	22.1	22.7	23.2	23.8	24.5	25.1	25.8	26.5	26.8	27.1
97.5°	37.8	38.3	38.7	39.1	39.5	40.0	40.4	40.9	41.3	41.7	42.0
100°	49.0	49.5	50.0	50.4	50.9	51.3	51.7	52.1	52.4	52.7	52.9
102.5°	61.7	61.9	62.2	62.5	62.9	63.4	64.0	64.5	65.0	65.2	65.5
105°	80.5	80.6	80.8	80.9	81.4	82.1	82.8	83.5	84.2	84.2	84.2
107.5°	102.4	102.5	102.6	102.7	102.8	103.1	103.4	103.7	104.0	104.2	104.5
110°	116.1	116.3	116.4	116.6	116.7	116.9	117.1	117.2	117.4	117.8	118.1



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	130.4	130.5	130.6	130.7	130.7	130.8	130.8	130.8	130.9	131.2	131.6
115°	151.9	152.2	152.4	152.6	152.7	152.5	152.4	152.2	152.0	152.1	152.2
117.5°	173.4	173.6	173.7	173.9	173.8	173.6	173.4	173.2	173.0	173.0	173.0
120°	187.1	187.6	188.0	188.5	188.5	188.2	187.8	187.4	187.0	186.9	186.8
122.5°	201.0	201.4	201.7	202.1	202.1	201.9	201.7	201.5	201.3	201.1	200.9
125°	222.2	222.5	222.7	223.0	223.0	222.8	222.7	222.5	222.4	222.0	221.7
127.5°	242.2	242.7	243.2	243.7	243.9	243.7	243.5	243.4	243.2	242.8	242.3
130°	255.4	256.1	256.7	257.3	257.5	257.3	257.1	256.8	256.6	256.3	256.0
132.5°	268.6	269.2	269.8	270.4	270.7	270.5	270.3	270.1	270.0	269.6	269.2
135°	288.5	288.9	289.4	289.9	290.1	290.0	289.9	289.8	289.8	289.4	289.1
137.5°	307.0	307.3	307.7	308.1	308.4	308.6	308.8	309.0	309.2	308.9	308.6
140°	319.8	320.2	320.6	321.0	321.2	321.3	321.3	321.4	321.5	321.4	321.3
142.5°	331.5	331.9	332.3	332.6	333.0	333.2	333.3	333.4	333.6	333.5	333.4
145°	349.5	349.7	349.8	350.0	350.2	350.4	350.7	350.9	351.1	351.1	351.0
147.5°	365.7	366.0	366.3	366.5	366.8	367.0	367.2	367.4	367.7	367.7	367.7
150°	376.7	376.8	377.0	377.2	377.3	377.5	377.6	377.8	377.9	377.9	377.9
152.5°	385.9	386.1	386.3	386.6	386.7	386.8	386.9	387.0	387.1	387.2	387.3
155°	400.1	400.1	400.1	400.1	400.1	400.2	400.2	400.3	400.4	400.7	401.0
157.5°	412.2	412.1	412.0	411.9	411.9	412.0	412.0	412.1	412.2	412.5	412.8
160°	419.9	419.7	419.6	419.4	419.3	419.3	419.3	419.3	419.3	419.7	420.1
162.5°	426.7	426.5	426.3	426.0	426.0	426.0	426.1	426.2	426.2	426.6	427.0
165°	435.6	435.3	435.0	434.7	434.6	434.6	434.6	434.6	434.6	435.2	435.7
167.5°	442.5	442.2	441.8	441.5	441.4	441.5	441.5	441.6	441.7	442.1	442.6
170°	446.5	446.2	445.9	445.6	445.4	445.4	445.4	445.4	445.4	446.0	446.5
172.5°	449.6	449.3	449.0	448.7	448.5	448.5	448.5	448.5	448.5	449.0	449.5
175°	452.9	452.6	452.3	452.0	451.8	451.8	451.8	451.8	451.8	452.3	452.7
177.5°	454.3	454.0	453.8	453.5	453.4	453.4	453.4	453.4	453.4	453.8	454.2
180°	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3	454.3



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	798.3	798.3	798.3	798.3	798.3	798.3	798.3
2.5°	840.1	840.4	843.7	846.3	845.1	846.6	847.2
5°	917.8	931.7	939.1	944.5	944.9	945.2	948.4
7.5°	1028.0	1043.0	1053.9	1070.5	1075.4	1081.1	1079.4
10°	1108.5	1130.5	1149.5	1159.5	1170.3	1186.2	1173.5
12.5°	1183.7	1222.7	1251.6	1267.2	1277.5	1280.6	1274.3
15°	1307.7	1358.8	1386.2	1385.4	1420.3	1435.3	1411.7
17.5°	1421.4	1468.5	1506.2	1525.6	1554.6	1561.0	1558.1
20°	1491.0	1542.5	1571.9	1605.1	1620.2	1633.8	1636.1
22.5°	1551.1	1597.2	1628.8	1656.5	1669.1	1675.5	1679.4
25°	1612.9	1649.2	1668.2	1677.8	1681.3	1680.5	1675.5
27.5°	1608.6	1611.3	1590.5	1570.0	1551.7	1531.0	1523.9
30°	1566.8	1534.3	1476.3	1443.4	1395.1	1356.8	1372.3
32.5°	1456.9	1392.3	1327.2	1255.3	1195.8	1178.9	1161.8
35°	1243.4	1129.7	1063.3	985.9	954.9	924.0	902.7
37.5°	1006.0	918.1	839.1	788.5	757.5	738.0	727.4
40°	869.9	790.5	725.6	684.6	661.0	638.9	635.8
42.5°	761.2	687.5	638.6	606.0	583.3	574.0	567.1
45°	623.5	572.0	539.2	515.9	500.9	495.0	487.4
47.5°	527.8	491.4	466.7	450.9	439.5	435.2	434.5
50°	474.2	444.0	425.9	413.4	404.6	403.0	396.9
52.5°	433.9	407.8	393.6	382.8	376.4	372.0	370.2
55°	376.7	359.3	346.6	340.3	335.4	331.0	331.0
57.5°	329.6	315.1	306.6	301.3	299.8	296.8	294.9
60°	300.5	288.1	281.6	276.9	273.9	274.2	270.7
62.5°	272.1	264.0	257.7	253.1	249.4	249.4	249.7
65°	231.7	225.5	220.9	219.3	217.0	214.3	215.0
67.5°	196.3	190.6	186.9	184.3	183.5	182.0	184.3
70°	171.0	166.7	164.0	161.7	160.9	161.3	163.2
72.5°	147.7	144.7	143.0	141.9	140.2	140.3	141.6
75°	116.0	113.7	112.2	111.0	110.6	110.6	110.6
77.5°	85.2	84.7	84.0	82.3	82.4	82.8	82.9
80°	67.3	66.1	65.7	64.9	63.8	63.0	64.9
82.5°	50.3	49.1	48.8	48.6	46.8	46.7	48.3
85°	27.1	26.0	26.3	26.0	26.0	25.5	25.5
87.5°	11.5	11.2	11.0	11.3	11.0	10.8	11.4
90°	9.5	9.8	10.1	10.2	10.4	10.5	10.7
92.5°	14.4	14.7	14.8	14.7	14.6	14.5	14.4
95°	27.4	27.7	27.9	27.9	27.9	27.9	27.9
97.5°	42.4	42.8	42.9	42.9	42.9	42.8	42.8
100°	53.2	53.4	53.6	53.7	53.9	54.1	54.2
102.5°	65.7	65.9	66.0	66.0	66.0	65.9	65.9
105°	84.2	84.2	84.3	84.4	84.6	84.8	84.9
107.5°	104.7	105.0	105.1	105.0	104.9	104.8	104.7
110°	118.4	118.7	118.8	118.6	118.5	118.3	118.2



TEST NUMBER: P331911-840

CATALOG NUMBER: S123DIP-S560D365U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	132.0	132.4	132.5	132.5	132.5	132.4	132.4
115°	152.3	152.4	152.4	152.3	152.2	152.1	152.0
117.5°	173.0	173.0	172.8	172.6	172.4	172.2	172.0
120°	186.7	186.7	186.5	186.4	186.2	186.1	185.9
122.5°	200.7	200.5	200.3	200.1	199.8	199.5	199.3
125°	221.4	221.1	220.8	220.5	220.2	219.7	219.4
127.5°	241.9	241.4	241.0	240.7	240.2	239.9	239.5
130°	255.6	255.3	254.9	254.4	253.8	253.3	252.7
132.5°	268.8	268.5	268.1	267.6	267.2	266.8	266.4
135°	288.8	288.5	288.3	288.1	287.9	287.8	287.6
137.5°	308.3	307.9	307.6	307.3	307.0	306.7	306.4
140°	321.3	321.2	320.9	320.3	319.8	319.2	318.7
142.5°	333.3	333.3	333.0	332.5	332.1	331.6	331.2
145°	350.9	350.8	350.6	350.3	350.0	349.7	349.4
147.5°	367.7	367.7	367.4	367.0	366.5	366.0	365.5
150°	377.9	377.9	377.7	377.2	376.8	376.3	375.8
152.5°	387.5	387.6	387.4	387.0	386.6	386.2	385.8
155°	401.3	401.7	401.5	401.0	400.4	399.9	399.3
157.5°	413.2	413.5	413.4	413.0	412.6	412.1	411.7
160°	420.5	420.9	420.9	420.6	420.3	420.0	419.7
162.5°	427.4	427.8	427.7	427.2	426.7	426.2	425.7
165°	436.1	436.6	436.6	436.0	435.5	434.8	434.3
167.5°	443.1	443.6	443.6	443.1	442.6	442.1	441.7
170°	447.1	447.6	447.6	447.1	446.5	446.0	445.4
172.5°	450.0	450.5	450.5	449.9	449.4	448.8	448.3
175°	453.2	453.7	453.6	453.1	452.5	452.0	451.4
177.5°	454.5	454.9	454.9	454.5	454.0	453.6	453.1
180°	454.3	454.3	454.3	454.3	454.3	454.3	454.3

(END OF REPORT)