

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331926-840

Luminaire Tested: **S123DIP-S560D585U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331926-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D585U840-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 585 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4374.8 lumens  
Efficiency: N/A  
Efficacy: 133.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 32.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331926-840

CATALOG NUMBER: S123DIP-S560D585U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

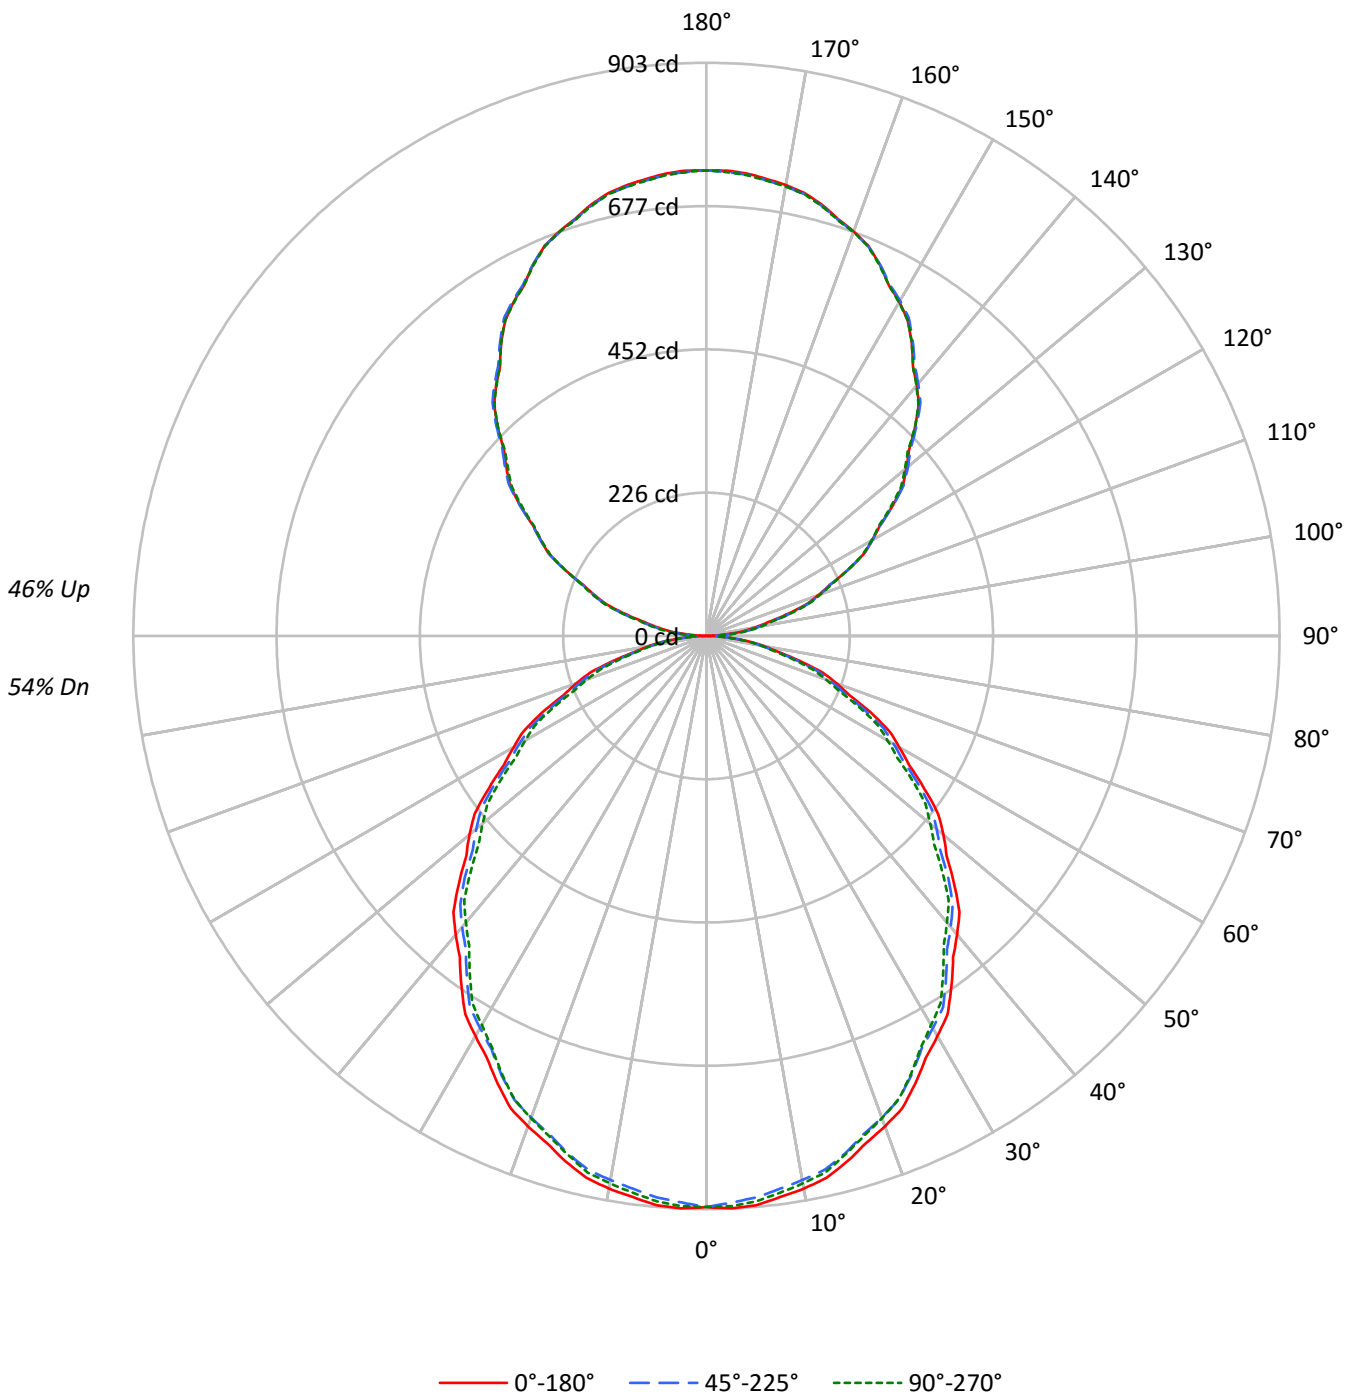



TEST NUMBER: P331926-840

CATALOG NUMBER: S123DIP-S560D585U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	54
1	99	94	90	87	91	87	84	81	75	72	70	63	61	60	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	38
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	44	39	36	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	21
7	59	46	38	32	54	43	36	31	37	32	27	32	28	24	27	24	21	18
8	54	42	34	29	50	39	32	27	34	28	24	29	25	22	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	9684	9684	9684
5°	9729	9596	9662
10°	9664	9512	9571
15°	9551	9404	9423
20°	9419	9251	9260
25°	9242	9069	9049
30°	9047	8866	8797
35°	8843	8650	8539
40°	8630	8413	8283
45°	8397	8196	7995
50°	8162	7927	7708
55°	7854	7651	7418
60°	7543	7326	7093
65°	7272	6976	6757
70°	6864	6571	6279
75°	6276	6047	5793
80°	5659	5424	5368
85°	4965	4780	4594



TEST NUMBER: P331926-840

CATALOG NUMBER: S123DIP-S560D585U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	84.7	1.9
10°-20°	239.3	5.5
20°-30°	353.5	8.1
30°-40°	412.9	9.4
40°-50°	415.1	9.5
50°-60°	364.6	8.3
60°-70°	271.7	6.2
70°-80°	154.8	3.5
80°-90°	46.6	1.1
90°-100°	47.8	1.1
100°-110°	143.0	3.3
110°-120°	243.2	5.6
120°-130°	319.9	7.3
130°-140°	359.5	8.2
140°-150°	353.4	8.1
150°-160°	297.5	6.8
160°-170°	198.0	4.5
170°-180°	69.3	1.6
0°-30°	677.5	15.5
0°-40°	1090.4	24.9
0°-60°	1870.2	42.7
0°-90°	2343.2	53.6
90°-120°	433.9	9.9
90°-150°	1466.7	33.5
90°-180°	2032.0	46.4
0°-180°	4374.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	900	900	900	900	900	
5°	900	896	888	895	894	85
15°	857	854	844	850	846	242
25°	778	773	764	764	762	358
35°	673	668	658	654	650	421
45°	552	548	538	529	525	426
55°	418	417	408	399	395	375
65°	286	281	274	268	265	282
75°	151	148	145	142	139	161
85°	40	39	39	37	37	44
90°	1	6	14	16	17	4
95°	34	38	43	45	45	38
105°	130	131	136	136	137	139
115°	245	246	245	246	245	242
125°	358	360	359	357	354	319
135°	465	468	468	465	464	358
145°	564	565	567	566	564	352
155°	646	646	646	648	645	297
165°	703	702	702	705	701	198
175°	732	729	729	732	729	69
180°	733	733	733	733	733	



TEST NUMBER: P331926-840

CATALOG NUMBER: S123DIP-S560D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	902.7	902.2	901.7	901.1	900.6	899.5	898.0	896.5	895.0	893.5	894.8
5°	900.4	899.6	898.7	897.9	897.0	895.6	893.7	891.8	890.0	888.1	889.8
7.5°	891.6	890.8	889.9	889.1	888.2	886.8	884.8	882.8	880.9	879.0	880.5
10°	884.2	883.3	882.5	881.6	880.8	879.2	877.0	874.7	872.5	870.3	871.8
12.5°	874.3	873.5	872.8	872.1	871.4	870.0	867.9	865.8	863.7	861.6	862.7
15°	857.1	856.5	855.8	855.1	854.3	852.9	850.7	848.5	846.2	843.9	845.4
17.5°	837.2	836.3	835.4	834.5	833.5	832.0	829.8	827.6	825.4	823.0	824.0
20°	822.3	821.3	820.2	819.2	818.2	816.6	814.4	812.1	809.8	807.6	808.3
22.5°	805.6	804.6	803.5	802.5	801.4	799.8	797.6	795.4	793.1	790.9	791.4
25°	778.2	777.2	776.2	775.2	774.1	772.4	770.2	768.0	765.8	763.6	763.7
27.5°	749.0	748.0	747.0	746.0	745.0	743.3	740.8	738.5	736.1	733.7	733.8
30°	727.9	727.1	726.2	725.4	724.5	722.9	720.4	718.0	715.7	713.3	713.3
32.5°	706.9	705.8	704.6	703.5	702.4	700.8	699.0	697.1	695.3	693.5	692.5
35°	673.0	672.0	671.0	669.9	668.9	667.2	665.0	662.8	660.6	658.3	657.3
37.5°	638.3	637.0	635.7	634.4	633.1	631.4	629.0	626.8	624.5	622.3	621.1
40°	614.2	613.2	612.2	611.2	610.1	608.3	605.9	603.6	601.2	598.7	597.3
42.5°	590.1	589.0	587.7	586.5	585.4	583.6	581.2	578.9	576.4	574.0	572.6
45°	551.6	550.9	550.2	549.5	548.8	547.3	545.1	542.9	540.7	538.4	536.3
47.5°	513.3	512.3	511.4	510.4	509.4	507.8	505.7	503.6	501.5	499.4	497.4
50°	487.4	486.5	485.6	484.7	483.9	482.4	480.1	477.9	475.6	473.4	471.5
52.5°	460.1	459.5	459.0	458.4	457.8	456.3	453.9	451.6	449.2	446.9	445.2
55°	418.5	418.3	418.2	418.0	417.8	416.6	414.3	412.1	409.9	407.7	405.8
57.5°	378.9	378.3	377.7	377.2	376.6	375.4	373.5	371.8	370.0	368.2	366.6
60°	350.4	350.2	350.1	349.9	349.7	348.6	346.6	344.5	342.4	340.3	338.8
62.5°	325.1	324.6	324.2	323.8	323.3	322.0	319.9	317.9	315.8	313.8	312.3
65°	285.5	284.6	283.8	282.9	282.1	280.7	279.0	277.3	275.6	273.9	272.5
67.5°	243.5	242.8	242.0	241.3	240.4	239.4	238.1	236.8	235.5	234.3	233.1
70°	218.1	217.1	216.1	215.1	214.0	213.0	212.0	211.0	209.8	208.8	207.6
72.5°	191.6	190.8	190.1	189.2	188.5	187.5	186.4	185.2	184.0	182.9	181.8
75°	150.9	150.2	149.5	148.8	148.1	147.5	146.9	146.4	145.9	145.4	144.6
77.5°	114.8	114.4	114.0	113.7	113.3	112.8	112.2	111.6	110.9	110.3	109.8
80°	91.3	90.8	90.3	89.8	89.2	88.8	88.5	88.1	87.8	87.5	87.3
82.5°	68.4	68.3	68.2	68.1	68.0	67.9	67.9	67.8	67.7	67.7	67.3
85°	40.2	39.9	39.6	39.2	38.9	38.7	38.7	38.7	38.7	38.7	38.4
87.5°	16.2	16.1	15.9	15.8	15.6	15.6	15.8	16.0	16.2	16.4	16.4
90°	0.6	1.8	3.1	4.4	5.7	7.2	8.8	10.5	12.1	13.8	14.3
92.5°	13.9	14.8	15.7	16.6	17.5	18.4	19.3	20.2	21.2	22.1	22.5
95°	34.0	34.8	35.7	36.7	37.6	38.6	39.6	40.6	41.6	42.6	43.1
97.5°	60.4	61.0	61.7	62.4	63.0	63.7	64.4	65.2	65.9	66.8	67.3
100°	78.4	79.1	79.9	80.7	81.4	82.1	82.7	83.4	84.0	84.6	85.0
102.5°	99.1	99.6	100.0	100.5	100.9	101.6	102.4	103.3	104.1	104.9	105.3
105°	129.6	129.9	130.1	130.4	130.7	131.3	132.5	133.6	134.8	135.9	135.9
107.5°	165.1	165.2	165.4	165.5	165.7	166.0	166.4	166.9	167.4	167.8	168.2
110°	187.2	187.4	187.7	187.9	188.2	188.4	188.7	189.0	189.2	189.6	190.1



TEST NUMBER: P331926-840

CATALOG NUMBER: S123DIP-S560D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	210.3	210.4	210.6	210.7	210.9	211.0	211.1	211.1	211.2	211.2	211.8
115°	244.8	245.2	245.6	246.0	246.3	246.4	246.1	245.9	245.6	245.4	245.5
117.5°	279.6	279.8	280.1	280.3	280.6	280.5	280.2	279.9	279.6	279.2	279.2
120°	301.2	302.1	302.8	303.6	304.4	304.4	303.8	303.2	302.5	301.8	301.7
122.5°	323.9	324.4	325.0	325.5	326.1	326.2	325.9	325.6	325.2	324.9	324.6
125°	358.3	358.7	359.0	359.4	359.8	359.9	359.6	359.4	359.1	358.9	358.3
127.5°	390.1	390.9	391.7	392.5	393.3	393.6	393.3	393.0	392.7	392.5	391.8
130°	411.3	412.3	413.3	414.3	415.4	415.7	415.4	415.0	414.5	414.1	413.6
132.5°	432.4	433.5	434.5	435.6	436.6	437.0	436.7	436.4	436.1	435.9	435.2
135°	464.8	465.6	466.4	467.2	467.9	468.3	468.1	468.0	467.9	467.8	467.3
137.5°	494.8	495.4	496.0	496.8	497.4	497.9	498.2	498.5	498.9	499.2	498.7
140°	515.5	516.1	516.8	517.5	518.1	518.5	518.6	518.8	518.9	519.0	518.9
142.5°	534.4	535.0	535.7	536.3	536.9	537.5	537.7	537.9	538.2	538.4	538.3
145°	563.9	564.2	564.4	564.7	564.9	565.2	565.6	566.0	566.4	566.8	566.6
147.5°	589.8	590.2	590.7	591.1	591.6	592.0	592.4	592.7	593.1	593.4	593.4
150°	607.7	607.9	608.2	608.4	608.7	608.9	609.3	609.5	609.8	610.0	610.0
152.5°	622.5	622.8	623.2	623.5	623.9	624.1	624.3	624.4	624.6	624.7	624.9
155°	645.7	645.7	645.7	645.7	645.7	645.8	645.9	646.0	646.2	646.3	646.8
157.5°	665.5	665.4	665.2	665.1	664.9	664.9	665.0	665.1	665.2	665.3	665.8
160°	677.9	677.7	677.4	677.2	676.9	676.8	676.8	676.8	676.8	676.8	677.4
162.5°	689.0	688.6	688.3	687.9	687.6	687.5	687.6	687.7	687.8	687.9	688.5
165°	703.3	703.0	702.6	702.2	701.8	701.6	701.6	701.6	701.6	701.6	702.4
167.5°	714.7	714.2	713.7	713.2	712.7	712.5	712.6	712.7	712.8	712.9	713.7
170°	721.1	720.6	720.1	719.6	719.1	718.8	718.8	718.8	718.8	718.8	719.7
172.5°	726.2	725.7	725.2	724.7	724.2	724.0	724.0	724.0	724.0	724.0	724.8
175°	731.5	731.0	730.5	730.0	729.5	729.2	729.2	729.2	729.2	729.2	730.0
177.5°	733.8	733.4	733.0	732.5	732.1	731.8	731.8	731.8	731.8	731.8	732.5
180°	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3



TEST NUMBER: P331926-840

CATALOG NUMBER: S123DIP-S560D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	896.3	897.6	899.0	899.6	899.5	899.3	899.2	899.1
5°	891.5	893.2	894.9	895.6	895.2	894.9	894.6	894.2
7.5°	882.0	883.5	885.1	885.8	885.6	885.3	885.1	884.9
10°	873.3	874.9	876.5	877.1	876.8	876.4	876.1	875.7
12.5°	863.8	865.1	866.2	866.6	866.4	866.2	866.0	865.8
15°	846.8	848.1	849.5	849.6	848.6	847.6	846.6	845.6
17.5°	825.1	826.0	827.0	827.2	826.9	826.5	826.1	825.7
20°	809.0	809.7	810.3	810.4	809.9	809.4	808.9	808.4
22.5°	792.0	792.5	793.1	793.0	792.4	791.7	791.1	790.4
25°	763.9	764.1	764.2	764.1	763.6	763.1	762.4	761.9
27.5°	734.0	734.1	734.2	734.0	733.3	732.7	732.0	731.3
30°	713.3	713.3	713.3	712.7	711.4	710.2	709.0	707.8
32.5°	691.6	690.5	689.5	688.7	688.1	687.5	686.8	686.2
35°	656.2	655.2	654.2	653.3	652.4	651.6	650.7	649.8
37.5°	619.8	618.5	617.3	616.4	615.9	615.3	614.8	614.2
40°	596.0	594.6	593.3	592.2	591.5	590.9	590.2	589.5
42.5°	571.3	569.9	568.5	567.4	566.7	566.1	565.4	564.7
45°	534.3	532.2	530.2	528.7	527.9	526.9	526.1	525.2
47.5°	495.3	493.3	491.3	489.9	489.2	488.4	487.7	486.9
50°	469.7	467.8	465.9	464.4	463.3	462.3	461.3	460.3
52.5°	443.6	442.0	440.4	439.0	438.0	437.0	436.0	434.9
55°	403.8	402.0	400.1	398.7	397.9	397.0	396.2	395.3
57.5°	364.9	363.1	361.5	360.1	359.1	358.2	357.2	356.2
60°	337.3	335.8	334.2	333.0	332.1	331.2	330.4	329.5
62.5°	310.6	309.1	307.6	306.5	305.9	305.4	304.8	304.2
65°	271.0	269.7	268.3	267.4	266.9	266.4	265.9	265.3
67.5°	231.9	230.7	229.4	228.4	227.7	227.0	226.3	225.6
70°	206.4	205.3	204.1	203.0	202.2	201.3	200.5	199.5
72.5°	180.8	179.7	178.6	177.8	177.4	176.9	176.5	176.0
75°	143.7	142.9	142.0	141.3	140.8	140.3	139.8	139.3
77.5°	109.2	108.6	108.0	107.7	107.7	107.7	107.7	107.7
80°	87.1	86.8	86.7	86.6	86.6	86.6	86.6	86.6
82.5°	67.0	66.7	66.3	66.1	66.0	65.8	65.7	65.6
85°	38.0	37.7	37.3	37.2	37.2	37.2	37.2	37.2
87.5°	16.4	16.3	16.3	16.3	16.3	16.4	16.4	16.5
90°	14.8	15.3	15.9	16.3	16.6	16.8	17.1	17.3
92.5°	22.9	23.3	23.7	23.9	23.7	23.5	23.4	23.2
95°	43.6	44.1	44.6	44.9	44.9	44.9	44.9	44.9
97.5°	67.9	68.5	69.1	69.3	69.3	69.2	69.2	69.1
100°	85.4	85.8	86.2	86.5	86.7	87.1	87.3	87.6
102.5°	105.7	106.1	106.4	106.6	106.6	106.5	106.5	106.4
105°	135.9	135.9	135.9	136.0	136.3	136.5	136.8	137.1
107.5°	168.6	169.1	169.5	169.7	169.5	169.4	169.2	169.1
110°	190.6	191.1	191.6	191.7	191.5	191.2	191.0	190.7





TEST NUMBER: P331926-840

CATALOG NUMBER: S123DIP-S560D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	212.4	213.0	213.6	213.9	213.9	213.8	213.8	213.7
115°	245.6	245.8	245.9	245.9	245.8	245.6	245.5	245.4
117.5°	279.2	279.1	279.1	278.9	278.6	278.2	277.9	277.5
120°	301.5	301.4	301.3	301.1	300.8	300.6	300.3	300.1
122.5°	324.2	323.9	323.6	323.2	322.9	322.4	322.1	321.7
125°	357.8	357.3	356.8	356.3	355.8	355.3	354.8	354.3
127.5°	391.0	390.3	389.6	389.0	388.4	387.8	387.2	386.6
130°	413.1	412.6	412.1	411.4	410.5	409.6	408.7	407.8
132.5°	434.5	433.9	433.3	432.7	432.0	431.3	430.6	429.9
135°	466.7	466.2	465.6	465.2	465.0	464.7	464.5	464.2
137.5°	498.1	497.6	497.1	496.6	496.0	495.5	495.0	494.5
140°	518.8	518.6	518.5	518.0	517.1	516.1	515.2	514.4
142.5°	538.1	538.0	537.9	537.5	536.7	536.0	535.3	534.6
145°	566.5	566.4	566.3	565.9	565.4	564.9	564.4	563.9
147.5°	593.4	593.4	593.4	593.0	592.3	591.5	590.8	590.0
150°	610.0	610.0	610.0	609.7	608.8	608.0	607.3	606.5
152.5°	625.2	625.4	625.6	625.3	624.7	624.0	623.4	622.7
155°	647.3	647.8	648.3	648.1	647.2	646.3	645.5	644.6
157.5°	666.4	666.9	667.4	667.3	666.6	665.9	665.2	664.5
160°	678.1	678.7	679.3	679.4	678.9	678.4	677.9	677.4
162.5°	689.1	689.8	690.4	690.3	689.5	688.7	687.9	687.1
165°	703.2	703.9	704.7	704.6	703.7	702.8	702.0	701.0
167.5°	714.5	715.3	716.1	716.1	715.3	714.5	713.7	712.9
170°	720.6	721.5	722.5	722.5	721.5	720.6	719.7	718.8
172.5°	725.5	726.3	727.1	727.1	726.2	725.3	724.4	723.5
175°	730.7	731.5	732.4	732.3	731.3	730.4	729.5	728.6
177.5°	733.2	733.8	734.4	734.3	733.6	732.9	732.2	731.4
180°	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3

(END OF REPORT)