

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331936-840

Luminaire Tested: **S123DIP-S560D805U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331936-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S560D805U840-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5278.5 lumens
Efficiency: N/A
Efficacy: 137.5 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 38.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331936-840

CATALOG NUMBER: S123DIP-S560D805U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

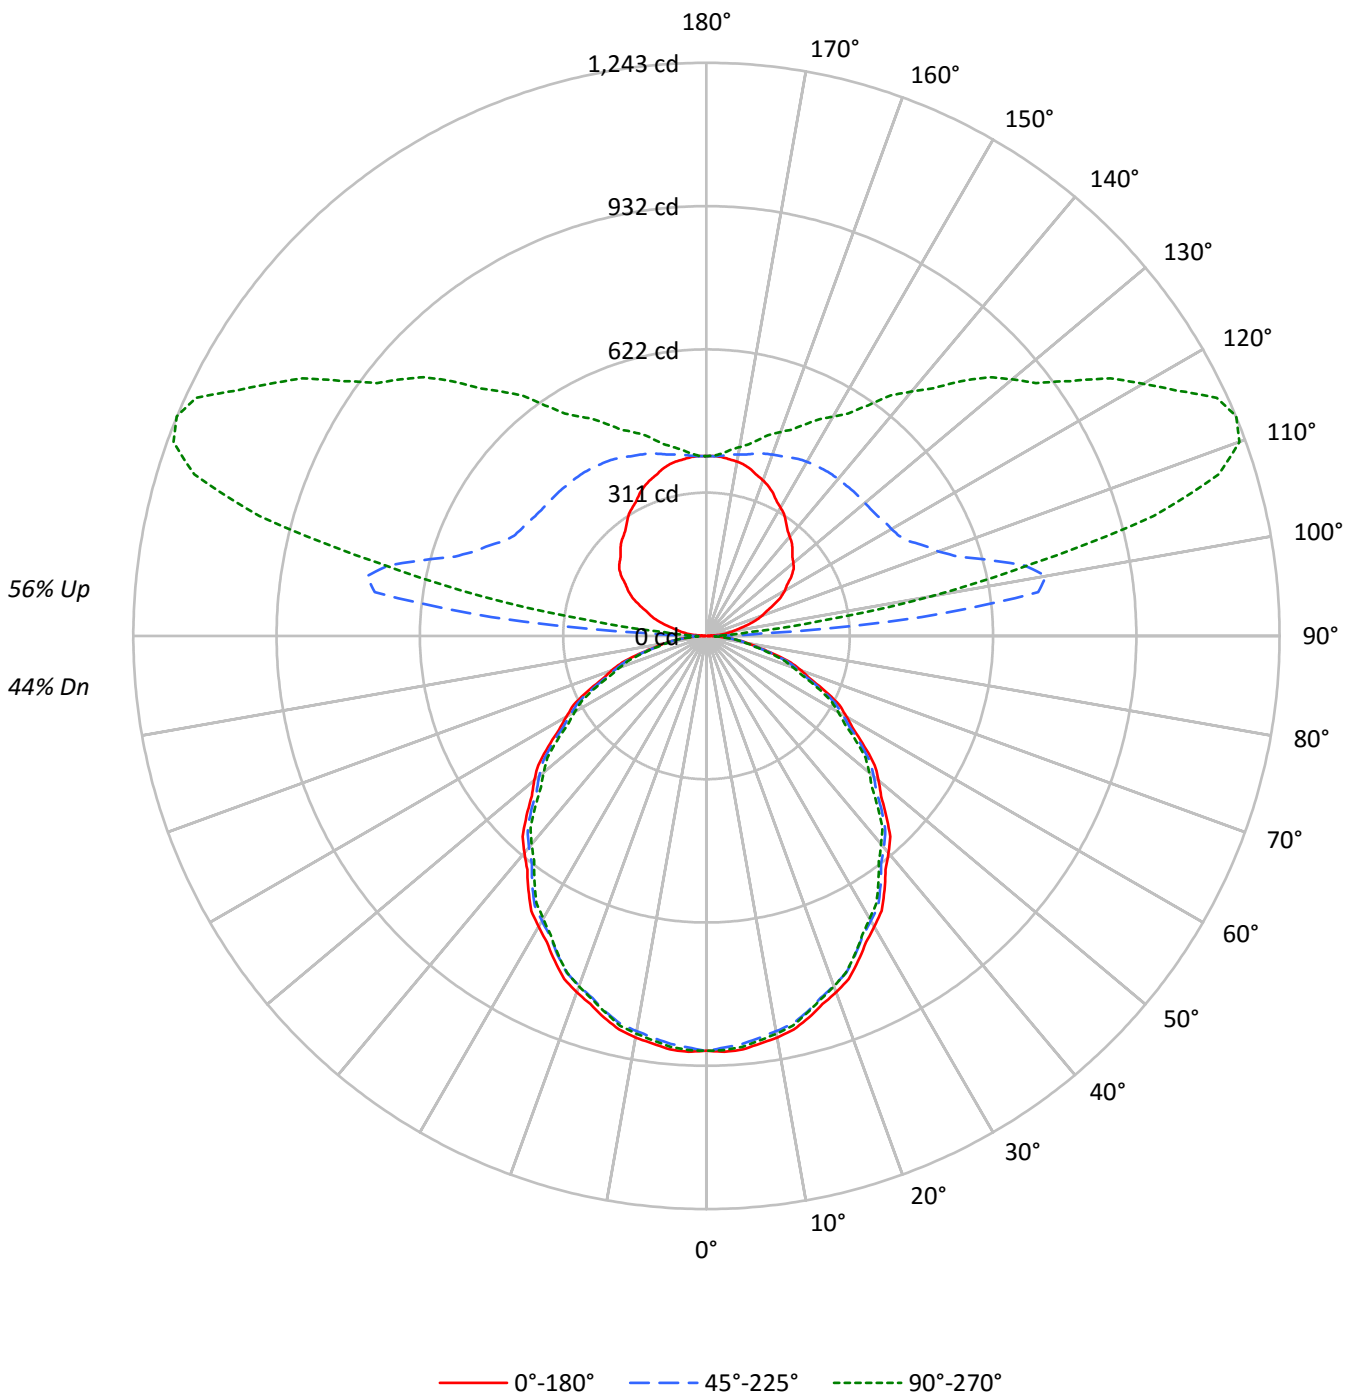



TEST NUMBER: P331936-840

CATALOG NUMBER: S123DIP-S560D805U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44
1	96	92	88	85	88	85	81	78	70	68	66	57	55	54	45	44	43	37
2	88	80	74	69	80	74	69	64	61	58	54	50	47	45	40	38	36	31
3	80	71	63	58	73	65	59	54	54	49	46	44	41	38	35	33	31	26
4	73	62	55	49	67	57	51	45	48	43	39	39	36	33	31	29	26	23
5	67	56	48	42	61	51	44	39	43	38	33	35	31	28	28	25	23	20
6	62	50	42	36	56	46	39	34	39	33	29	32	28	25	26	23	20	17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15
8	53	41	33	28	48	38	31	26	32	27	23	26	22	19	21	18	16	14
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	20	17	15	12
10	46	34	27	22	42	32	25	21	27	22	18	22	19	16	18	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	9684	9684	9684
5°	9729	9596	9662
10°	9664	9512	9571
15°	9551	9404	9423
20°	9419	9251	9260
25°	9242	9069	9049
30°	9047	8866	8797
35°	8843	8650	8539
40°	8630	8413	8283
45°	8397	8196	7995
50°	8162	7927	7708
55°	7854	7651	7418
60°	7543	7326	7093
65°	7272	6976	6757
70°	6864	6571	6279
75°	6276	6047	5793
80°	5659	5424	5368
85°	4965	4780	4594



TEST NUMBER: P331936-840

CATALOG NUMBER: S123DIP-S560D805U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	84.7	1.6
10°-20°	239.3	4.5
20°-30°	353.5	6.7
30°-40°	412.9	7.8
40°-50°	415.1	7.9
50°-60°	364.6	6.9
60°-70°	271.7	5.1
70°-80°	154.8	2.9
80°-90°	47.5	0.9
90°-100°	217.1	4.1
100°-110°	614.6	11.6
110°-120°	604.6	11.5
120°-130°	482.3	9.1
130°-140°	380.2	7.2
140°-150°	283.8	5.4
150°-160°	197.8	3.7
160°-170°	116.2	2.2
170°-180°	37.8	0.7
0°-30°	677.5	12.8
0°-40°	1090.4	20.7
0°-60°	1870.2	35.4
0°-90°	2344.1	44.4
90°-120°	1436.3	27.2
90°-150°	2582.6	48.9
90°-180°	2934.0	55.6
0°-180°	5278.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	900	900	900	900	900	
5°	900	896	888	895	894	85
15°	857	854	844	850	846	242
25°	778	773	764	764	762	358
35°	673	668	658	654	650	421
45°	552	548	538	529	525	426
55°	418	417	408	399	395	375
65°	286	281	274	268	265	282
75°	151	148	145	142	139	161
85°	40	39	39	37	37	44
90°	2	10	20	22	23	4
95°	27	87	468	137	92	29
105°	92	135	635	1110	1004	97
115°	162	202	486	1065	1221	160
125°	225	266	453	821	963	200
135°	264	315	447	676	781	204
145°	301	345	441	555	610	189
155°	342	369	427	486	506	157
165°	373	384	409	434	441	105
175°	389	390	392	398	397	37
180°	390	390	390	390	390	



TEST NUMBER: P331936-840

CATALOG NUMBER: S123DIP-S560D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	902.7	902.2	901.7	901.1	900.6	899.5	898.0	896.5	895.0	893.5	894.8
5°	900.4	899.6	898.7	897.9	897.0	895.6	893.7	891.8	890.0	888.1	889.8
7.5°	891.6	890.8	889.9	889.1	888.2	886.8	884.8	882.8	880.9	879.0	880.5
10°	884.2	883.3	882.5	881.6	880.8	879.2	877.0	874.7	872.5	870.3	871.8
12.5°	874.3	873.5	872.8	872.1	871.4	870.0	867.9	865.8	863.7	861.6	862.7
15°	857.1	856.5	855.8	855.1	854.3	852.9	850.7	848.5	846.2	843.9	845.4
17.5°	837.2	836.3	835.4	834.5	833.5	832.0	829.8	827.6	825.4	823.0	824.0
20°	822.3	821.3	820.2	819.2	818.2	816.6	814.4	812.1	809.8	807.6	808.3
22.5°	805.6	804.6	803.5	802.5	801.4	799.8	797.6	795.4	793.1	790.9	791.4
25°	778.2	777.2	776.2	775.2	774.1	772.4	770.2	768.0	765.8	763.6	763.7
27.5°	749.0	748.0	747.0	746.0	745.0	743.3	740.8	738.5	736.1	733.7	733.8
30°	727.9	727.1	726.2	725.4	724.5	722.9	720.4	718.0	715.7	713.3	713.3
32.5°	706.9	705.8	704.6	703.5	702.4	700.8	699.0	697.1	695.3	693.5	692.5
35°	673.0	672.0	671.0	669.9	668.9	667.2	665.0	662.8	660.6	658.3	657.3
37.5°	638.3	637.0	635.7	634.4	633.1	631.4	629.0	626.8	624.5	622.3	621.1
40°	614.2	613.2	612.2	611.2	610.1	608.3	605.9	603.6	601.2	598.7	597.3
42.5°	590.1	589.0	587.7	586.5	585.4	583.6	581.2	578.9	576.4	574.0	572.6
45°	551.6	550.9	550.2	549.5	548.8	547.3	545.1	542.9	540.7	538.4	536.3
47.5°	513.3	512.3	511.4	510.4	509.4	507.8	505.7	503.6	501.5	499.4	497.4
50°	487.4	486.5	485.6	484.7	483.9	482.4	480.1	477.9	475.6	473.4	471.5
52.5°	460.1	459.5	459.0	458.4	457.8	456.3	453.9	451.6	449.2	446.9	445.2
55°	418.5	418.3	418.2	418.0	417.8	416.6	414.3	412.1	409.9	407.7	405.8
57.5°	378.9	378.3	377.7	377.2	376.6	375.4	373.5	371.8	370.0	368.2	366.6
60°	350.4	350.2	350.1	349.9	349.7	348.6	346.6	344.5	342.4	340.3	338.8
62.5°	325.1	324.6	324.2	323.8	323.3	322.0	319.9	317.9	315.8	313.8	312.3
65°	285.5	284.6	283.8	282.9	282.1	280.7	279.0	277.3	275.6	273.9	272.5
67.5°	243.5	242.8	242.0	241.3	240.4	239.4	238.1	236.8	235.5	234.3	233.1
70°	218.1	217.1	216.1	215.1	214.0	213.0	212.0	211.0	209.8	208.8	207.6
72.5°	191.6	190.8	190.1	189.2	188.5	187.5	186.4	185.2	184.0	182.9	181.8
75°	150.9	150.2	149.5	148.8	148.1	147.5	146.9	146.4	145.9	145.4	144.6
77.5°	114.8	114.4	114.0	113.7	113.3	112.8	112.2	111.6	110.9	110.3	109.8
80°	91.3	90.8	90.3	89.8	89.2	88.8	88.5	88.1	87.8	87.5	87.3
82.5°	68.4	68.3	68.2	68.1	68.0	67.9	67.9	67.8	67.7	67.7	67.3
85°	40.2	39.9	39.6	39.2	38.9	38.7	38.7	38.7	38.7	38.7	38.4
87.5°	16.4	16.4	16.3	16.3	16.2	16.3	16.6	16.9	17.3	17.6	17.3
90°	1.6	3.1	4.7	7.1	8.7	10.3	12.6	15.0	17.4	19.7	19.0
92.5°	9.8	14.5	21.2	27.4	33.9	45.6	66.3	100.3	133.6	121.4	91.6
95°	26.9	29.2	37.9	51.3	71.8	102.6	169.8	287.4	416.9	468.2	379.8
97.5°	45.7	46.6	53.4	65.0	85.2	118.6	182.7	315.4	531.2	725.6	776.3
100°	58.5	59.2	64.7	75.8	94.7	125.5	180.8	297.6	505.3	747.7	903.2
102.5°	71.7	73.1	78.0	88.5	105.5	133.7	183.3	282.5	467.4	706.6	909.6
105°	91.6	93.9	98.7	108.2	123.2	147.6	190.3	271.6	420.8	634.8	861.4
107.5°	112.7	115.1	119.7	129.0	143.1	165.8	203.2	270.8	391.1	571.3	777.1
110°	127.9	130.3	134.2	142.9	156.3	178.4	214.0	274.0	379.8	535.3	724.0



TEST NUMBER: P331936-840

CATALOG NUMBER: S123DIP-S560D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	141.8	144.2	148.1	156.8	170.3	191.7	224.7	280.2	373.4	511.3	677.9
115°	161.9	165.0	169.8	177.6	191.1	212.4	242.4	290.5	371.1	485.5	622.2
117.5°	181.9	185.5	189.5	196.7	211.8	231.5	261.2	304.2	372.5	470.4	588.5
120°	195.8	198.1	202.1	210.1	225.0	244.8	273.2	314.3	375.1	463.4	570.9
122.5°	207.8	210.2	214.1	222.7	237.0	258.0	285.8	323.7	379.4	459.1	556.3
125°	225.0	226.6	231.4	240.0	255.0	276.3	304.0	338.7	386.1	453.2	537.7
127.5°	238.1	240.4	246.3	255.2	271.8	293.1	319.7	351.0	393.6	450.4	521.3
130°	246.3	248.7	255.8	265.3	281.9	303.2	329.2	359.2	398.7	448.5	512.4
132.5°	252.7	255.7	263.4	274.8	291.3	312.0	337.4	366.8	402.5	447.8	504.2
135°	263.7	266.9	275.6	287.4	304.0	325.3	349.7	376.6	408.2	446.9	493.4
137.5°	274.1	277.4	286.0	298.6	315.0	334.8	358.3	383.8	412.0	445.1	484.1
140°	281.0	285.0	293.0	305.6	321.3	341.0	364.0	387.7	414.5	444.5	478.5
142.5°	288.6	292.0	300.5	311.8	327.7	346.1	368.4	391.4	416.4	443.2	473.4
145°	300.8	303.2	310.3	322.1	335.6	353.8	374.3	395.6	417.7	441.3	466.7
147.5°	313.2	314.6	321.5	331.7	344.7	360.2	379.0	398.1	417.7	438.4	460.0
150°	321.3	322.1	328.4	338.7	349.7	364.0	382.1	398.7	417.7	435.9	455.6
152.5°	329.5	329.7	336.0	345.1	354.8	368.4	384.1	400.0	415.8	432.6	450.5
155°	341.8	341.8	346.6	354.5	363.1	374.3	387.7	400.3	413.7	427.2	442.9
157.5°	351.6	352.2	356.1	363.0	370.4	379.0	389.7	401.1	411.0	422.2	434.4
160°	359.2	359.2	362.4	368.7	374.3	382.1	391.6	401.1	409.8	418.5	428.7
162.5°	365.0	365.0	367.5	372.5	377.4	384.1	392.2	400.4	407.3	414.7	423.0
165°	373.4	372.6	374.3	378.2	381.3	386.9	393.1	398.7	403.4	409.0	415.3
167.5°	379.9	379.0	379.8	382.7	385.0	388.5	393.0	397.5	399.7	403.3	407.9
170°	383.7	382.1	382.9	385.3	386.9	388.5	392.4	395.6	397.2	399.5	403.4
172.5°	386.3	385.3	385.5	387.2	388.1	389.1	392.4	395.0	395.3	396.4	399.0
175°	389.2	388.5	387.7	389.2	389.2	390.0	391.6	393.1	392.4	392.4	393.9
177.5°	390.6	390.0	389.4	390.0	390.0	390.0	390.6	391.9	390.6	390.0	390.6
180°	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0



TEST NUMBER: P331936-840

CATALOG NUMBER: S123DIP-S560D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	899.7	899.7	899.7	899.7	899.7	899.7	899.7	899.7
2.5°	896.3	897.6	899.0	899.6	899.5	899.3	899.2	899.1
5°	891.5	893.2	894.9	895.6	895.2	894.9	894.6	894.2
7.5°	882.0	883.5	885.1	885.8	885.6	885.3	885.1	884.9
10°	873.3	874.9	876.5	877.1	876.8	876.4	876.1	875.7
12.5°	863.8	865.1	866.2	866.6	866.4	866.2	866.0	865.8
15°	846.8	848.1	849.5	849.6	848.6	847.6	846.6	845.6
17.5°	825.1	826.0	827.0	827.2	826.9	826.5	826.1	825.7
20°	809.0	809.7	810.3	810.4	809.9	809.4	808.9	808.4
22.5°	792.0	792.5	793.1	793.0	792.4	791.7	791.1	790.4
25°	763.9	764.1	764.2	764.1	763.6	763.1	762.4	761.9
27.5°	734.0	734.1	734.2	734.0	733.3	732.7	732.0	731.3
30°	713.3	713.3	713.3	712.7	711.4	710.2	709.0	707.8
32.5°	691.6	690.5	689.5	688.7	688.1	687.5	686.8	686.2
35°	656.2	655.2	654.2	653.3	652.4	651.6	650.7	649.8
37.5°	619.8	618.5	617.3	616.4	615.9	615.3	614.8	614.2
40°	596.0	594.6	593.3	592.2	591.5	590.9	590.2	589.5
42.5°	571.3	569.9	568.5	567.4	566.7	566.1	565.4	564.7
45°	534.3	532.2	530.2	528.7	527.9	526.9	526.1	525.2
47.5°	495.3	493.3	491.3	489.9	489.2	488.4	487.7	486.9
50°	469.7	467.8	465.9	464.4	463.3	462.3	461.3	460.3
52.5°	443.6	442.0	440.4	439.0	438.0	437.0	436.0	434.9
55°	403.8	402.0	400.1	398.7	397.9	397.0	396.2	395.3
57.5°	364.9	363.1	361.5	360.1	359.1	358.2	357.2	356.2
60°	337.3	335.8	334.2	333.0	332.1	331.2	330.4	329.5
62.5°	310.6	309.1	307.6	306.5	305.9	305.4	304.8	304.2
65°	271.0	269.7	268.3	267.4	266.9	266.4	265.9	265.3
67.5°	231.9	230.7	229.4	228.4	227.7	227.0	226.3	225.6
70°	206.4	205.3	204.1	203.0	202.2	201.3	200.5	199.5
72.5°	180.8	179.7	178.6	177.8	177.4	176.9	176.5	176.0
75°	143.7	142.9	142.0	141.3	140.8	140.3	139.8	139.3
77.5°	109.2	108.6	108.0	107.7	107.7	107.7	107.7	107.7
80°	87.1	86.8	86.7	86.6	86.6	86.6	86.6	86.6
82.5°	67.0	66.7	66.3	66.1	66.0	65.8	65.7	65.6
85°	38.0	37.7	37.3	37.2	37.2	37.2	37.2	37.2
87.5°	17.3	17.3	17.4	17.6	17.4	17.6	17.8	17.6
90°	19.7	20.5	21.3	22.9	22.1	22.9	23.7	22.9
92.5°	66.4	52.7	46.6	42.5	41.1	38.7	39.5	38.1
95°	284.3	192.7	150.8	122.4	107.3	100.3	94.7	91.6
97.5°	708.5	567.5	465.6	371.2	313.0	277.4	256.1	249.3
100°	930.9	866.9	774.6	662.4	582.7	525.0	494.2	495.0
102.5°	1004.7	1002.7	948.9	877.8	815.8	770.1	744.4	726.2
105°	1026.4	1105.3	1120.3	1099.8	1063.5	1033.5	1008.2	1004.3
107.5°	964.2	1092.4	1161.5	1189.6	1190.3	1180.2	1171.6	1164.4
110°	904.8	1050.1	1149.5	1204.9	1226.9	1233.2	1231.6	1230.1



TEST NUMBER: P331936-840

CATALOG NUMBER: S123DIP-S560D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	846.1	994.5	1106.0	1177.0	1217.5	1237.1	1243.0	1243.3
115°	768.2	905.5	1021.7	1107.7	1166.9	1201.6	1217.5	1221.4
117.5°	711.9	830.4	934.6	1022.0	1083.7	1123.5	1146.2	1151.7
120°	682.2	788.7	883.5	963.2	1025.6	1069.9	1088.7	1093.5
122.5°	658.8	755.3	843.0	917.2	972.5	1012.3	1033.2	1039.2
125°	627.6	713.8	789.5	852.7	903.2	938.0	957.7	963.2
127.5°	600.6	677.2	745.7	803.1	848.1	877.8	895.6	900.7
130°	583.5	654.5	718.5	772.1	814.1	842.4	859.0	865.4
132.5°	567.6	633.1	692.6	743.8	783.0	811.5	826.2	830.6
135°	546.3	602.4	653.7	698.7	737.4	761.1	775.3	780.8
137.5°	526.9	572.9	617.1	656.1	688.6	712.7	724.7	728.3
140°	515.5	555.8	593.7	627.6	657.7	679.7	692.5	691.7
142.5°	504.8	539.4	572.3	601.8	627.3	646.9	658.3	657.5
145°	491.9	518.0	543.2	566.1	585.8	602.4	608.7	610.3
147.5°	481.3	502.0	522.4	538.7	553.6	564.8	570.9	571.5
150°	473.7	491.9	508.5	523.4	535.3	544.0	548.8	548.8
152.5°	466.8	482.4	497.1	509.6	518.9	526.9	529.8	529.8
155°	456.4	469.0	480.8	490.3	497.4	503.7	505.3	506.0
157.5°	445.2	455.9	465.0	472.4	478.6	483.3	484.6	484.4
160°	439.0	447.7	455.6	461.1	466.7	471.3	471.3	470.6
162.5°	431.4	438.8	446.1	451.0	454.6	458.7	458.7	458.0
165°	421.6	426.4	431.9	435.9	439.0	442.1	441.3	441.3
167.5°	413.0	416.7	419.9	422.7	424.1	426.4	425.6	425.6
170°	407.4	409.8	412.9	414.5	415.3	416.9	416.1	416.1
172.5°	402.3	404.0	406.6	407.6	407.7	409.3	407.9	407.3
175°	395.6	396.4	397.9	397.9	397.9	398.7	397.9	397.2
177.5°	391.3	391.9	392.5	392.5	391.9	392.5	391.3	391.3
180°	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0

(END OF REPORT)