

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831592

Luminaire Tested: S123DIP-S775D1025U840-4F0-1E-UDD-G1

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831592  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S775D1025U840-4F0-1E-UDD-G1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7140.1 lumens  
Efficiency: N/A  
Efficacy: 137.8 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 51.8  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

### Luminous Intensity Polar Plot

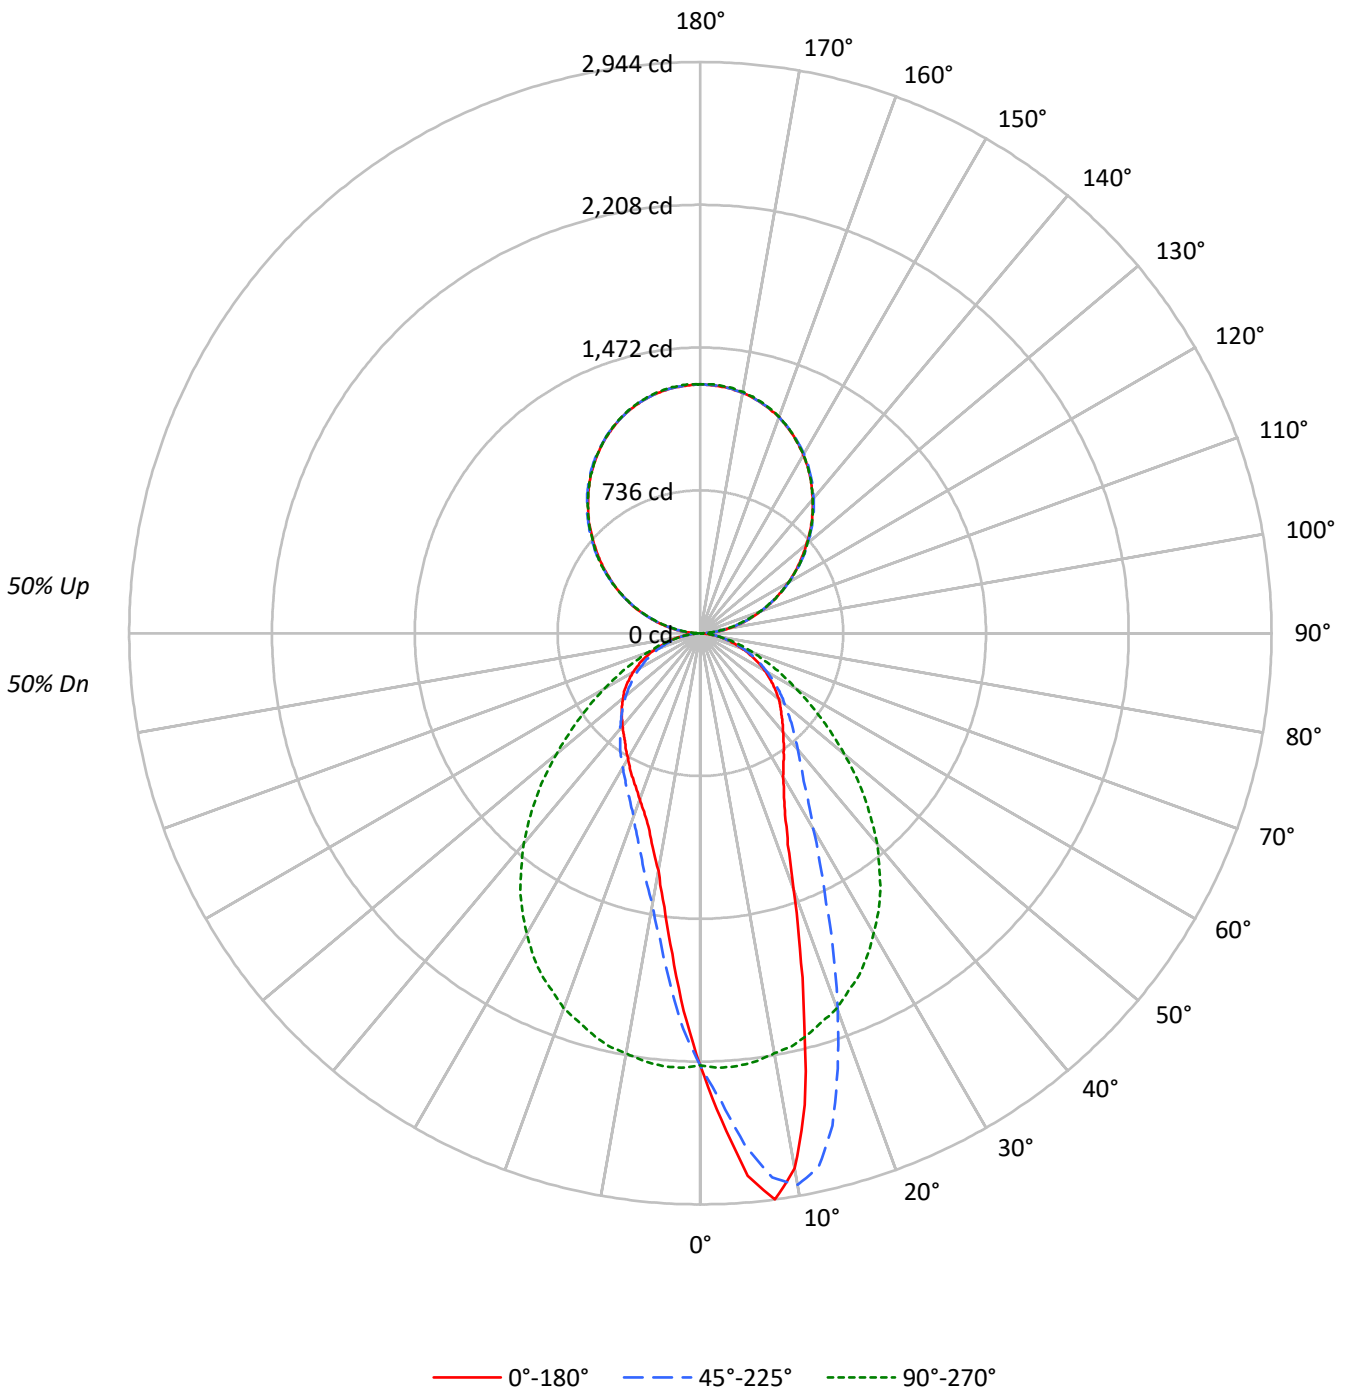

TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50				
1	98	94	90	87	91	87	84	81	74	72	70	62	60	59	51	49	49	43				
2	90	83	77	72	83	77	72	67	65	62	58	55	52	50	45	43	42	37				
3	83	73	66	61	76	68	62	57	58	54	50	49	46	43	41	38	36	32				
4	76	65	58	52	70	61	54	49	52	47	43	44	40	37	37	34	32	28				
5	70	59	51	45	64	55	48	43	47	42	38	40	36	33	33	31	28	25				
6	65	53	45	40	60	49	43	37	43	37	33	37	32	29	31	28	25	22				
7	60	48	40	35	55	45	38	33	39	34	30	34	29	26	28	25	23	20				
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	26	23	21	18				
9	52	40	33	28	48	38	31	27	33	28	24	29	25	22	24	21	19	17				
10	49	37	30	26	45	35	29	24	31	26	22	27	23	20	23	20	17	16				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	23983	23983	23983	23983	23983
5°	30331	28627	24198	19500	17919
10°	30626	31552	24037	15545	13584
15°	23066	29294	23873	13164	11487
20°	16071	23704	23568	11512	10434
25°	12256	18229	23049	10592	9786
30°	10602	14482	22219	9940	9266
35°	9837	12227	21262	9469	8899
40°	9312	10968	19918	9022	8775
45°	9003	10152	18211	8672	8719
50°	8847	9505	16188	8354	8674
55°	8518	9032	14202	8053	8711
60°	8213	8525	12243	7767	8570
65°	7715	8046	10560	7465	8400
70°	7125	7437	8982	6965	7906
75°	6450	6667	7698	6471	7224
80°	5318	5833	6087	5641	6087
85°	4211	4730	4471	4792	4854

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 20791 cd/sqm



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	210.6	3.0
10°-20°	524.0	7.3
20°-30°	620.5	8.7
30°-40°	623.9	8.7
40°-50°	572.4	8.0
50°-60°	472.4	6.6
60°-70°	334.2	4.7
70°-80°	178.4	2.5
80°-90°	48.0	0.7
90°-100°	82.6	1.2
100°-110°	250.0	3.5
110°-120°	425.6	6.0
120°-130°	559.9	7.8
130°-140°	629.4	8.8
140°-150°	618.8	8.7
150°-160°	520.9	7.3
160°-170°	346.8	4.9
170°-180°	121.4	1.7
0°-30°	1355.2	19.0
0°-40°	1979.1	27.7
0°-60°	3023.9	42.4
0°-90°	3584.5	50.2
90°-120°	758.3	10.6
90°-150°	2566.4	35.9
90°-180°	3556.0	49.8
0°-180°	7140.1	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2228	2228	2228	2228	2228	
5°	2807	2649	2240	1805	1658	267
15°	2070	2629	2142	1181	1031	572
25°	1032	1535	1941	892	824	487
35°	749	930	1618	721	677	470
45°	591	667	1196	570	573	458
55°	454	481	757	429	464	406
65°	303	316	415	293	330	301
75°	155	160	185	156	174	163
85°	34	38	36	39	39	38
90°	30	24	1	24	30	16
95°	79	75	60	75	79	79
105°	240	238	227	238	240	254
115°	429	429	428	429	429	425
125°	620	628	627	628	620	554
135°	812	818	814	818	812	625
145°	987	992	987	992	987	616
155°	1128	1131	1130	1131	1128	520
165°	1227	1228	1231	1228	1227	346
175°	1275	1276	1280	1276	1275	121
180°	1283	1283	1283	1283	1283	



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1
2.5°	2511.4	2508.8	2506.2	2493.3	2480.4	2474.2	2468.0	2449.4	2430.8	2410.1	2389.4
5°	2807.1	2814.4	2821.6	2813.3	2805.1	2779.7	2754.4	2720.8	2687.2	2649.4	2611.7
7.5°	2943.6	2947.7	2951.9	2946.7	2941.5	2934.8	2928.1	2898.1	2868.1	2829.4	2790.6
10°	2802.0	2811.3	2820.6	2840.7	2860.9	2883.6	2906.4	2902.2	2898.1	2886.7	2875.4
12.5°	2490.7	2502.1	2513.5	2553.8	2594.1	2645.8	2697.5	2742.0	2786.4	2817.5	2848.5
15°	2069.9	2101.5	2133.0	2169.7	2206.4	2282.4	2358.4	2452.0	2545.5	2628.8	2712.0
17.5°	1705.0	1716.8	1728.7	1768.0	1807.3	1902.9	1998.6	2106.6	2214.7	2352.7	2490.7
20°	1403.0	1413.9	1424.8	1476.5	1528.1	1603.1	1678.1	1799.6	1921.0	2069.4	2217.8
22.5°	1178.7	1195.7	1212.8	1241.8	1270.7	1342.6	1414.4	1522.5	1630.5	1794.4	1958.3
25°	1031.9	1044.3	1056.7	1074.3	1091.8	1149.2	1206.6	1295.5	1384.4	1534.9	1685.3
27.5°	931.6	936.7	941.9	959.5	977.1	1014.3	1051.5	1128.0	1204.5	1332.2	1459.9
30°	853.0	856.6	860.2	875.7	891.2	916.6	941.9	997.2	1052.5	1165.2	1277.9
32.5°	798.2	800.8	803.4	815.3	827.1	845.2	863.3	903.7	944.0	1037.0	1130.1
35°	748.6	750.1	751.7	760.5	769.2	782.7	796.1	826.6	857.1	930.5	1003.9
37.5°	705.1	707.2	709.3	714.4	719.6	731.5	743.4	767.7	792.0	848.3	904.7
40°	662.7	666.4	670.0	673.6	677.2	687.0	696.9	715.5	734.1	780.6	827.1
42.5°	626.6	630.2	633.8	635.4	636.9	642.6	648.3	665.3	682.4	717.0	751.7
45°	591.4	593.0	594.5	596.1	597.6	602.3	606.9	621.9	636.9	666.9	696.9
47.5°	559.4	559.4	559.4	560.4	561.4	565.6	569.7	580.6	591.4	614.7	637.9
50°	528.3	528.3	528.3	526.8	525.2	527.8	530.4	538.7	546.9	567.6	588.3
52.5°	491.1	491.1	491.1	491.6	492.2	492.2	492.2	499.4	506.6	525.2	543.8
55°	453.9	456.0	458.0	456.5	454.9	456.0	457.0	461.6	466.3	481.3	496.3
57.5°	416.7	417.7	418.7	418.2	417.7	418.2	418.7	422.9	427.0	438.4	449.8
60°	381.5	381.5	381.5	380.5	379.5	380.5	381.5	383.6	385.7	396.0	406.3
62.5°	342.2	342.7	343.3	343.8	344.3	343.3	342.2	344.8	347.4	355.2	362.9
65°	302.9	303.5	304.0	305.5	307.1	306.0	305.0	307.6	310.2	315.9	321.6
67.5°	267.8	266.8	265.7	266.2	266.8	268.3	269.9	270.4	270.9	277.1	283.3
70°	226.4	227.5	228.5	228.0	227.5	228.0	228.5	230.0	231.6	236.3	240.9
72.5°	189.2	189.7	190.2	190.2	190.2	191.3	192.3	193.9	195.4	198.0	200.6
75°	155.1	155.1	155.1	156.1	157.2	157.7	158.2	158.2	158.2	160.3	162.3
77.5°	117.9	120.5	123.0	122.5	122.0	123.0	124.1	125.6	127.2	128.2	129.2
80°	85.8	85.8	85.8	86.3	86.9	88.4	90.0	91.0	92.0	94.1	96.2
82.5°	54.8	55.3	55.8	57.4	58.9	60.0	61.0	62.6	64.1	64.1	64.1
85°	34.1	33.1	32.1	33.1	34.1	35.2	36.2	36.7	37.2	38.3	39.3
87.5°	16.5	16.5	16.5	16.5	16.5	17.1	17.6	17.6	17.6	17.6	17.6
90°	30.2	29.8	29.3	28.9	28.4	27.8	26.9	26.0	25.1	24.2	21.3
92.5°	43.3	43.8	44.2	44.7	45.1	45.0	44.4	43.7	43.0	42.3	41.0
95°	78.6	78.6	78.6	78.6	78.6	78.2	77.3	76.4	75.5	74.6	72.8
97.5°	112.9	113.1	113.4	113.6	113.8	113.4	112.2	111.1	110.0	108.9	107.5
100°	153.2	152.8	152.3	151.9	151.4	150.9	150.2	149.5	148.9	148.2	147.1
102.5°	194.6	194.8	195.0	195.2	195.5	195.2	194.6	193.9	193.2	192.5	191.0
105°	239.9	239.5	239.0	238.6	238.1	237.9	237.9	237.9	237.9	237.9	235.9
107.5°	286.3	286.5	286.7	287.0	287.2	287.0	286.3	285.6	284.9	284.3	283.4
110°	333.7	334.1	334.6	335.0	335.5	335.2	334.3	333.4	332.5	331.7	331.2



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	384.1	384.1	384.1	384.1	384.1	383.5	382.4	381.3	380.1	379.0	379.0
115°	429.4	429.7	429.9	430.1	430.3	430.3	430.1	429.9	429.7	429.4	429.9
117.5°	475.8	476.5	477.1	477.8	478.5	478.8	478.8	478.8	478.8	478.8	479.3
120°	525.2	525.6	526.1	526.5	527.0	527.3	527.5	527.8	528.0	528.2	529.3
122.5°	572.6	573.2	573.9	574.6	575.3	575.9	576.6	577.3	578.0	578.6	579.1
125°	620.0	620.9	621.7	622.6	623.5	624.4	625.3	626.2	627.1	628.0	628.5
127.5°	667.3	668.2	669.1	670.0	670.9	672.0	673.4	674.7	676.1	677.4	677.9
130°	713.7	715.3	716.8	718.4	720.0	721.2	722.1	723.0	723.9	724.8	725.5
132.5°	762.1	763.2	764.3	765.5	766.6	767.7	768.8	769.9	771.1	772.2	772.6
135°	812.5	812.9	813.4	813.8	814.3	815.0	815.9	816.7	817.6	818.5	818.8
137.5°	856.8	857.5	858.2	858.9	859.5	860.4	861.6	862.7	863.8	864.9	864.2
140°	900.2	901.8	903.3	904.9	906.5	907.4	907.6	907.8	908.0	908.3	908.0
142.5°	944.5	945.7	946.8	947.9	949.0	949.7	949.9	950.1	950.4	950.6	950.1
145°	986.9	987.8	988.7	989.6	990.5	991.0	991.3	991.5	991.7	991.9	991.3
147.5°	1025.2	1026.5	1027.9	1029.2	1030.6	1031.2	1031.2	1031.2	1031.2	1031.2	1030.6
150°	1061.5	1062.8	1064.2	1065.5	1066.9	1067.5	1067.5	1067.5	1067.5	1067.5	1067.1
152.5°	1096.8	1097.9	1099.0	1100.1	1101.2	1101.6	1101.1	1100.7	1100.2	1099.8	1099.6
155°	1128.0	1129.6	1131.2	1132.7	1134.3	1134.6	1133.7	1132.8	1131.9	1131.0	1130.8
157.5°	1157.2	1158.6	1159.9	1161.3	1162.6	1162.8	1162.0	1161.1	1160.2	1159.3	1159.0
160°	1185.5	1186.4	1187.3	1188.2	1189.1	1188.9	1187.8	1186.7	1185.6	1184.5	1184.5
162.5°	1206.6	1208.2	1209.8	1211.3	1212.9	1213.1	1212.0	1210.9	1209.8	1208.7	1208.4
165°	1226.8	1228.4	1229.9	1231.5	1233.1	1233.2	1231.8	1230.5	1229.2	1227.8	1227.8
167.5°	1244.9	1246.3	1247.6	1249.0	1250.3	1250.3	1249.0	1247.6	1246.3	1244.9	1244.7
170°	1258.1	1259.6	1261.2	1262.8	1264.3	1264.3	1262.8	1261.2	1259.6	1258.1	1258.1
172.5°	1268.1	1269.7	1271.3	1272.8	1274.4	1274.5	1273.2	1271.8	1270.5	1269.1	1269.1
175°	1275.2	1276.8	1278.3	1279.9	1281.5	1281.6	1280.2	1278.9	1277.5	1276.2	1276.2
177.5°	1279.2	1280.8	1282.4	1283.9	1285.5	1285.6	1284.3	1282.9	1281.6	1280.2	1280.2
180°	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1
2.5°	2383.2	2377.0	2354.3	2331.5	2305.7	2279.8	2260.7	2241.6	2213.1	2184.7	2161.4
5°	2582.8	2553.8	2505.7	2457.7	2392.5	2327.4	2283.4	2239.5	2180.6	2121.6	2074.6
7.5°	2740.9	2691.3	2624.1	2556.9	2471.6	2386.3	2305.7	2225.0	2135.1	2045.1	1971.7
10°	2841.8	2808.2	2730.6	2653.1	2538.8	2424.6	2311.9	2199.2	2083.4	1967.6	1870.4
12.5°	2851.6	2854.7	2783.3	2712.0	2582.8	2453.5	2316.5	2179.5	2033.7	1888.0	1774.7
15°	2765.2	2818.5	2779.2	2739.9	2609.6	2479.4	2310.8	2142.3	1974.3	1806.3	1675.5
17.5°	2605.0	2719.2	2724.9	2730.6	2600.3	2470.1	2283.4	2096.8	1906.6	1716.3	1578.8
20°	2386.3	2554.8	2612.7	2670.6	2564.7	2458.7	2258.1	2057.5	1844.5	1631.5	1487.3
22.5°	2163.0	2367.7	2473.7	2579.7	2501.1	2422.5	2209.0	1995.5	1770.6	1545.7	1399.4
25°	1908.6	2132.0	2294.8	2457.7	2409.6	2361.5	2151.1	1940.7	1701.3	1462.0	1312.6
27.5°	1686.9	1913.8	2110.3	2306.7	2296.4	2286.0	2077.2	1868.3	1623.3	1378.2	1234.0
30°	1489.4	1700.8	1920.5	2140.2	2165.6	2190.9	1989.3	1787.7	1542.1	1296.5	1157.5
32.5°	1314.6	1499.2	1734.9	1970.7	2020.3	2069.9	1888.0	1706.0	1463.0	1220.0	1086.1
35°	1171.4	1338.9	1574.7	1810.4	1872.4	1934.5	1776.3	1618.1	1381.3	1144.6	1016.9
37.5°	1044.8	1184.9	1414.9	1645.0	1721.0	1797.0	1655.3	1513.7	1291.9	1070.1	952.8
40°	939.8	1052.5	1264.0	1475.4	1563.3	1651.2	1534.4	1417.5	1207.1	996.7	888.7
42.5°	852.0	952.2	1144.0	1335.8	1420.1	1504.4	1405.6	1306.9	1119.7	932.6	833.9
45°	777.0	857.1	1031.3	1205.6	1285.7	1365.8	1281.0	1196.3	1031.3	866.4	774.4
47.5°	706.7	775.4	924.3	1073.2	1144.6	1215.9	1149.7	1083.6	944.0	804.4	721.2
50°	643.6	698.9	829.2	959.5	1021.5	1083.6	1025.1	966.7	852.0	737.2	664.8
52.5°	588.8	633.8	742.9	852.0	905.2	958.5	908.3	858.2	767.2	676.2	613.1
55°	534.5	572.8	667.4	762.0	798.2	834.4	795.6	756.8	683.4	610.0	556.8
57.5°	483.9	518.0	595.5	673.1	701.0	728.9	693.8	658.6	603.3	548.0	503.5
60°	434.3	462.2	526.8	591.4	608.5	625.5	597.1	568.7	529.9	491.1	451.3
62.5°	388.2	413.6	461.6	509.7	521.1	532.5	510.8	489.0	459.6	430.1	399.1
65°	340.7	359.8	399.1	438.4	445.6	452.9	433.7	414.6	392.4	370.1	347.4
67.5°	296.7	310.2	342.2	374.3	374.8	375.3	359.8	344.3	331.9	319.5	301.4
70°	253.8	266.8	287.9	309.1	309.7	310.2	297.8	285.4	276.1	266.8	253.3
72.5°	209.9	219.2	235.2	251.2	250.2	249.2	241.4	233.7	226.4	219.2	209.4
75°	170.1	177.8	188.7	199.5	196.4	193.3	189.2	185.1	178.9	172.7	166.5
77.5°	133.9	138.5	144.8	151.0	148.9	146.8	143.2	139.6	134.9	130.3	127.7
80°	98.2	100.3	104.4	108.6	107.5	106.5	102.4	98.2	97.2	96.2	92.5
82.5°	66.7	69.3	70.3	71.3	70.8	70.3	67.2	64.1	63.1	62.0	61.5
85°	39.8	40.3	40.8	41.4	39.8	38.3	37.2	36.2	36.2	36.2	35.7
87.5°	18.1	18.6	18.6	18.6	18.1	17.6	16.5	15.5	16.0	16.5	16.5
90°	18.4	15.5	12.5	10.0	7.7	5.5	3.2	1.0	3.2	5.5	7.7
92.5°	39.7	38.3	37.0	35.6	34.3	32.9	31.6	30.2	31.6	32.9	34.3
95°	71.0	69.2	67.4	65.7	64.2	62.6	61.0	59.5	61.0	62.6	64.2
97.5°	106.2	104.8	103.5	102.3	101.1	100.0	98.9	97.8	98.9	100.0	101.1
100°	145.9	144.8	143.7	142.5	141.1	139.8	138.4	137.1	138.4	139.8	141.1
102.5°	189.4	187.8	186.3	185.1	184.5	183.8	183.1	182.5	183.1	183.8	184.5
105°	233.9	231.9	229.8	228.6	228.2	227.7	227.3	226.8	227.3	227.7	228.2
107.5°	282.5	281.6	280.7	280.1	279.9	279.7	279.5	279.2	279.5	279.7	279.9
110°	330.8	330.3	329.9	329.4	329.0	328.5	328.1	327.6	328.1	328.5	329.0





TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	379.0	379.0	379.0	378.9	378.7	378.5	378.2	378.0	378.2	378.5	378.7
115°	430.3	430.8	431.2	431.1	430.4	429.8	429.1	428.4	429.1	429.8	430.4
117.5°	479.7	480.2	480.6	480.7	480.5	480.3	480.1	479.8	480.1	480.3	480.5
120°	530.5	531.6	532.7	532.6	531.2	529.9	528.6	527.2	528.6	529.9	531.2
122.5°	579.5	580.0	580.4	580.2	579.3	578.4	577.5	576.6	577.5	578.4	579.3
125°	628.9	629.4	629.8	629.7	629.0	628.4	627.7	627.0	627.7	628.4	629.0
127.5°	678.3	678.8	679.2	678.8	677.4	676.1	674.7	673.4	674.7	676.1	677.4
130°	726.1	726.8	727.5	726.9	725.1	723.3	721.5	719.8	721.5	723.3	725.1
132.5°	773.1	773.5	774.0	773.3	771.5	769.7	767.9	766.1	767.9	769.7	771.5
135°	819.0	819.2	819.4	818.9	817.5	816.2	814.8	813.5	814.8	816.2	817.5
137.5°	863.6	862.9	862.2	861.3	860.2	859.1	858.0	856.8	858.0	859.1	860.2
140°	907.8	907.6	907.4	906.7	905.6	904.5	903.3	902.2	903.3	904.5	905.6
142.5°	949.7	949.3	948.8	948.0	946.9	945.8	944.7	943.5	944.7	945.8	946.9
145°	990.6	989.9	989.2	988.7	988.2	987.8	987.3	986.9	987.3	987.8	988.2
147.5°	1029.9	1029.2	1028.6	1027.8	1026.9	1026.0	1025.1	1024.2	1025.1	1026.0	1026.9
150°	1066.6	1066.2	1065.7	1065.3	1064.8	1064.4	1063.9	1063.5	1063.9	1064.4	1064.8
152.5°	1099.3	1099.1	1098.9	1098.4	1097.8	1097.1	1096.4	1095.8	1096.4	1097.1	1097.8
155°	1130.6	1130.4	1130.1	1130.0	1130.0	1130.0	1130.0	1130.0	1130.0	1130.0	1130.0
157.5°	1158.8	1158.6	1158.4	1158.4	1158.6	1158.8	1159.0	1159.3	1159.0	1158.8	1158.6
160°	1184.5	1184.5	1184.5	1184.7	1185.1	1185.6	1186.0	1186.5	1186.0	1185.6	1185.1
162.5°	1208.2	1208.0	1207.8	1208.0	1208.7	1209.3	1210.0	1210.7	1210.0	1209.3	1208.7
165°	1227.8	1227.8	1227.8	1228.1	1228.8	1229.5	1230.2	1230.8	1230.2	1229.5	1228.8
167.5°	1244.5	1244.3	1244.1	1244.4	1245.3	1246.2	1247.1	1248.0	1247.1	1246.2	1245.3
170°	1258.1	1258.1	1258.1	1258.5	1259.4	1260.3	1261.2	1262.1	1261.2	1260.3	1259.4
172.5°	1269.1	1269.1	1269.1	1269.6	1270.5	1271.4	1272.3	1273.2	1272.3	1271.4	1270.5
175°	1276.2	1276.2	1276.2	1276.6	1277.5	1278.4	1279.3	1280.2	1279.3	1278.4	1277.5
177.5°	1280.2	1280.2	1280.2	1280.7	1281.6	1282.5	1283.4	1284.3	1283.4	1282.5	1281.6
180°	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1
2.5°	2138.2	2118.0	2097.8	2082.3	2066.8	2040.5	2014.1	2007.9	2001.7	1992.9	1984.1
5°	2027.5	1977.9	1928.3	1883.8	1839.4	1804.7	1770.1	1747.3	1724.6	1708.1	1691.5
7.5°	1898.3	1823.9	1749.4	1696.7	1643.9	1593.8	1543.7	1527.6	1511.6	1489.9	1468.2
10°	1773.2	1691.0	1608.8	1540.0	1471.3	1422.2	1373.1	1353.4	1333.8	1306.4	1279.0
12.5°	1661.5	1571.6	1481.6	1412.3	1343.1	1295.5	1248.0	1219.5	1191.1	1175.6	1160.1
15°	1544.7	1448.5	1352.4	1288.3	1224.2	1181.3	1138.4	1113.5	1088.7	1073.7	1058.7
17.5°	1441.3	1346.2	1251.1	1189.5	1128.0	1088.7	1049.4	1027.7	1006.0	994.6	983.3
20°	1343.1	1250.0	1157.0	1097.0	1037.0	1005.0	972.9	959.0	945.0	935.7	926.4
22.5°	1253.1	1161.6	1070.1	1018.9	967.8	941.9	916.1	906.2	896.4	888.7	880.9
25°	1163.2	1081.5	999.8	956.4	913.0	891.8	870.6	860.7	850.9	843.2	835.4
27.5°	1089.8	1011.7	933.6	896.4	859.2	842.7	826.1	818.4	810.6	803.4	796.1
30°	1018.4	948.6	878.8	846.8	814.7	799.7	784.8	777.0	769.2	762.5	755.8
32.5°	952.2	892.3	832.3	802.8	773.4	761.0	748.6	739.3	730.0	724.8	719.6
35°	889.2	835.4	781.7	757.4	733.1	720.6	708.2	700.5	692.7	688.6	684.5
37.5°	835.4	787.3	739.3	716.0	692.7	680.8	669.0	662.2	655.5	654.0	652.4
40°	780.6	739.3	697.9	675.2	652.4	642.1	631.7	627.6	623.5	622.4	621.4
42.5°	735.1	694.8	654.5	633.8	613.1	604.3	595.5	593.5	591.4	593.0	594.5
45°	682.4	648.8	615.2	596.1	576.9	569.7	562.5	560.9	559.4	562.5	565.6
47.5°	637.9	606.9	575.9	557.8	539.7	534.5	529.4	528.9	528.3	532.5	536.6
50°	592.4	562.5	532.5	518.0	503.5	498.9	494.2	495.8	497.3	504.0	510.8
52.5°	550.1	522.1	494.2	480.8	467.3	464.2	461.1	464.8	468.4	475.6	482.8
55°	503.5	478.2	452.9	442.5	432.2	429.1	426.0	433.2	440.5	447.2	453.9
57.5°	459.1	436.8	414.6	405.3	396.0	395.5	395.0	401.7	408.4	415.6	422.9
60°	411.5	392.9	374.3	367.0	359.8	360.8	361.9	369.6	377.4	383.1	388.8
62.5°	368.1	352.6	337.1	330.3	323.6	326.2	328.8	336.5	344.3	351.0	357.7
65°	324.7	311.7	298.8	294.2	289.5	293.1	296.7	303.5	310.2	314.8	319.5
67.5°	283.3	272.4	261.6	258.0	254.3	258.0	261.6	268.3	275.0	279.7	284.3
70°	239.9	231.1	222.3	219.7	217.1	221.3	225.4	231.1	236.8	241.4	246.1
72.5°	199.5	192.8	186.1	185.6	185.1	188.7	192.3	198.0	203.7	206.8	209.9
75°	160.3	156.6	153.0	152.5	152.0	155.6	159.2	162.3	165.4	168.0	170.6
77.5°	125.1	122.0	118.9	119.4	119.9	122.5	125.1	128.2	131.3	132.9	134.4
80°	88.9	87.9	86.9	87.9	88.9	91.0	93.1	95.1	97.2	98.2	99.3
82.5°	61.0	60.0	58.9	60.5	62.0	63.6	65.1	66.7	68.2	68.8	69.3
85°	35.2	36.7	38.3	38.3	38.3	38.8	39.3	39.8	40.3	39.8	39.3
87.5°	16.5	17.1	17.6	17.6	17.6	18.1	18.6	18.6	18.6	18.1	17.6
90°	10.0	12.5	15.5	18.4	21.3	24.2	25.1	26.0	26.9	27.8	28.4
92.5°	35.6	37.0	38.3	39.7	41.0	42.3	43.0	43.7	44.4	45.0	45.1
95°	65.7	67.4	69.2	71.0	72.8	74.6	75.5	76.4	77.3	78.2	78.6
97.5°	102.3	103.5	104.8	106.2	107.5	108.9	110.0	111.1	112.2	113.4	113.8
100°	142.5	143.7	144.8	145.9	147.1	148.2	148.9	149.5	150.2	150.9	151.4
102.5°	185.1	186.3	187.8	189.4	191.0	192.5	193.2	193.9	194.6	195.2	195.5
105°	228.6	229.8	231.9	233.9	235.9	237.9	237.9	237.9	237.9	237.9	238.1
107.5°	280.1	280.7	281.6	282.5	283.4	284.3	284.9	285.6	286.3	287.0	287.2
110°	329.4	329.9	330.3	330.8	331.2	331.7	332.5	333.4	334.3	335.2	335.5



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	378.9	379.0	379.0	379.0	379.0	379.0	380.1	381.3	382.4	383.5	384.1
115°	431.1	431.2	430.8	430.3	429.9	429.4	429.7	429.9	430.1	430.3	430.3
117.5°	480.7	480.6	480.2	479.7	479.3	478.8	478.8	478.8	478.8	478.8	478.5
120°	532.6	532.7	531.6	530.5	529.3	528.2	528.0	527.8	527.5	527.3	527.0
122.5°	580.2	580.4	580.0	579.5	579.1	578.6	578.0	577.3	576.6	575.9	575.3
125°	629.7	629.8	629.4	628.9	628.5	628.0	627.1	626.2	625.3	624.4	623.5
127.5°	678.8	679.2	678.8	678.3	677.9	677.4	676.1	674.7	673.4	672.0	670.9
130°	726.9	727.5	726.8	726.1	725.5	724.8	723.9	723.0	722.1	721.2	720.0
132.5°	773.3	774.0	773.5	773.1	772.6	772.2	771.1	769.9	768.8	767.7	766.6
135°	818.9	819.4	819.2	819.0	818.8	818.5	817.6	816.7	815.9	815.0	814.3
137.5°	861.3	862.2	862.9	863.6	864.2	864.9	863.8	862.7	861.6	860.4	859.5
140°	906.7	907.4	907.6	907.8	908.0	908.3	908.0	907.8	907.6	907.4	906.5
142.5°	948.0	948.8	949.3	949.7	950.1	950.6	950.4	950.1	949.9	949.7	949.0
145°	988.7	989.2	989.9	990.6	991.3	991.9	991.7	991.5	991.3	991.0	990.5
147.5°	1027.8	1028.6	1029.2	1029.9	1030.6	1031.2	1031.2	1031.2	1031.2	1031.2	1030.6
150°	1065.3	1065.7	1066.2	1066.6	1067.1	1067.5	1067.5	1067.5	1067.5	1067.5	1066.9
152.5°	1098.4	1098.9	1099.1	1099.3	1099.6	1099.8	1100.2	1100.7	1101.1	1101.6	1101.2
155°	1130.0	1130.1	1130.4	1130.6	1130.8	1131.0	1131.9	1132.8	1133.7	1134.6	1134.3
157.5°	1158.4	1158.4	1158.6	1158.8	1159.0	1159.3	1160.2	1161.1	1162.0	1162.8	1162.6
160°	1184.7	1184.5	1184.5	1184.5	1184.5	1184.5	1185.6	1186.7	1187.8	1188.9	1189.1
162.5°	1208.0	1207.8	1208.0	1208.2	1208.4	1208.7	1209.8	1210.9	1212.0	1213.1	1212.9
165°	1228.1	1227.8	1227.8	1227.8	1227.8	1227.8	1229.2	1230.5	1231.8	1233.2	1233.1
167.5°	1244.4	1244.1	1244.3	1244.5	1244.7	1244.9	1246.3	1247.6	1249.0	1250.3	1250.3
170°	1258.5	1258.1	1258.1	1258.1	1258.1	1258.1	1259.6	1261.2	1262.8	1264.3	1264.3
172.5°	1269.6	1269.1	1269.1	1269.1	1269.1	1269.1	1270.5	1271.8	1273.2	1274.5	1274.4
175°	1276.6	1276.2	1276.2	1276.2	1276.2	1276.2	1277.5	1278.9	1280.2	1281.6	1281.5
177.5°	1280.7	1280.2	1280.2	1280.2	1280.2	1280.2	1281.6	1282.9	1284.3	1285.6	1285.5
180°	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	2228.1	2228.1	2228.1	2228.1
2.5°	1980.5	1976.9	1962.4	1947.9
5°	1679.1	1666.7	1662.6	1658.4
7.5°	1467.1	1466.1	1444.4	1422.7
10°	1280.5	1282.1	1262.4	1242.8
12.5°	1147.1	1134.2	1132.7	1131.1
15°	1046.9	1035.0	1032.9	1030.8
17.5°	976.0	968.8	966.7	964.7
20°	922.3	918.1	914.5	910.9
22.5°	875.7	870.6	867.5	864.4
25°	830.8	826.1	825.1	824.0
27.5°	790.4	784.8	784.8	784.8
30°	752.2	748.6	747.0	745.5
32.5°	716.5	713.4	713.4	713.4
35°	682.9	681.4	679.3	677.2
37.5°	652.4	652.4	651.4	650.3
40°	622.9	624.5	624.5	624.5
42.5°	596.1	597.6	597.6	597.6
45°	568.1	570.7	571.8	572.8
47.5°	540.7	544.9	545.9	546.9
50°	513.9	517.0	517.5	518.0
52.5°	486.5	490.1	492.7	495.3
55°	457.5	461.1	462.7	464.2
57.5°	426.5	430.1	430.6	431.1
60°	392.4	396.0	397.0	398.1
62.5°	359.8	361.9	362.9	363.9
65°	322.6	325.7	327.8	329.8
67.5°	286.9	289.5	289.5	289.5
70°	247.1	248.1	249.7	251.2
72.5°	210.4	210.9	210.9	210.9
75°	171.6	172.7	173.2	173.7
77.5°	134.9	135.4	135.4	135.4
80°	98.7	98.2	98.2	98.2
82.5°	67.7	66.2	66.2	66.2
85°	38.8	38.3	38.8	39.3
87.5°	17.6	17.6	17.6	17.6
90°	28.9	29.3	29.8	30.2
92.5°	44.7	44.2	43.8	43.3
95°	78.6	78.6	78.6	78.6
97.5°	113.6	113.4	113.1	112.9
100°	151.9	152.3	152.8	153.2
102.5°	195.2	195.0	194.8	194.6
105°	238.6	239.0	239.5	239.9
107.5°	287.0	286.7	286.5	286.3
110°	335.0	334.6	334.1	333.7



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	384.1	384.1	384.1	384.1
115°	430.1	429.9	429.7	429.4
117.5°	477.8	477.1	476.5	475.8
120°	526.5	526.1	525.6	525.2
122.5°	574.6	573.9	573.2	572.6
125°	622.6	621.7	620.9	620.0
127.5°	670.0	669.1	668.2	667.3
130°	718.4	716.8	715.3	713.7
132.5°	765.5	764.3	763.2	762.1
135°	813.8	813.4	812.9	812.5
137.5°	858.9	858.2	857.5	856.8
140°	904.9	903.3	901.8	900.2
142.5°	947.9	946.8	945.7	944.5
145°	989.6	988.7	987.8	986.9
147.5°	1029.2	1027.9	1026.5	1025.2
150°	1065.5	1064.2	1062.8	1061.5
152.5°	1100.1	1099.0	1097.9	1096.8
155°	1132.7	1131.2	1129.6	1128.0
157.5°	1161.3	1159.9	1158.6	1157.2
160°	1188.2	1187.3	1186.4	1185.5
162.5°	1211.3	1209.8	1208.2	1206.6
165°	1231.5	1229.9	1228.4	1226.8
167.5°	1249.0	1247.6	1246.3	1244.9
170°	1262.8	1261.2	1259.6	1258.1
172.5°	1272.8	1271.3	1269.7	1268.1
175°	1279.9	1278.3	1276.8	1275.2
177.5°	1283.9	1282.4	1280.8	1279.2
180°	1283.3	1283.3	1283.3	1283.3



TEST NUMBER: P831592

CATALOG NUMBER: S123DIP-S775D1025U840-4F0-1E-UDD-G1

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.63	15.45	15.59	16.43	17.70	16.86	17.69	17.83	18.66	19.93
	3H	16.27	17.01	17.24	17.99	19.29	18.28	19.02	19.26	20.01	21.30
	4H	16.85	17.55	17.83	18.53	19.83	18.73	19.43	19.72	20.42	21.72
	6H	17.21	17.86	18.21	18.85	20.16	19.01	19.65	20.01	20.64	21.96
	8H	17.31	17.92	18.31	18.93	20.24	19.07	19.68	20.07	20.69	22.00
	12H	17.35	17.94	18.36	18.94	20.27	19.09	19.67	20.10	20.67	22.01
4H	2H	15.20	15.90	16.19	16.88	18.18	17.02	17.72	18.02	18.71	20.01
	3H	17.02	17.61	18.02	18.62	19.94	18.64	19.22	19.64	20.24	21.55
	4H	17.72	18.25	18.73	19.26	20.60	19.22	19.75	20.23	20.76	22.10
	6H	18.19	18.65	19.21	19.68	21.02	19.62	20.08	20.64	21.11	22.45
	8H	18.33	18.76	19.35	19.78	21.13	19.73	20.16	20.76	21.19	22.54
	12H	18.39	18.78	19.43	19.82	21.17	19.78	20.16	20.82	21.20	22.56
8H	4H	17.98	18.41	19.01	19.43	20.78	19.32	19.75	20.35	20.77	22.13
	6H	18.57	18.92	19.62	19.99	21.34	19.82	20.18	20.87	21.24	22.59
	8H	18.78	19.09	19.83	20.14	21.51	20.00	20.31	21.06	21.37	22.73
	12H	18.90	19.17	19.96	20.22	21.63	20.10	20.38	21.16	21.42	22.83
12H	4H	17.98	18.37	19.02	19.41	20.76	19.30	19.68	20.34	20.72	22.08
	6H	18.62	18.93	19.67	19.98	21.35	19.84	20.15	20.89	21.20	22.57
	8H	18.85	19.13	19.91	20.17	21.58	20.04	20.31	21.09	21.36	22.77