

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831618

Luminaire Tested: S123DIP-S775D1195U840-4F0-1E-UDD-G

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831618  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-5)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S775D1195U840-4F0-1E-UDD-G  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1195 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8399.1 lumens  
Efficiency: N/A  
Efficacy: 147.6 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: General Diffuse  
  
Input Watts (W): 56.9  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

### Luminous Intensity Polar Plot

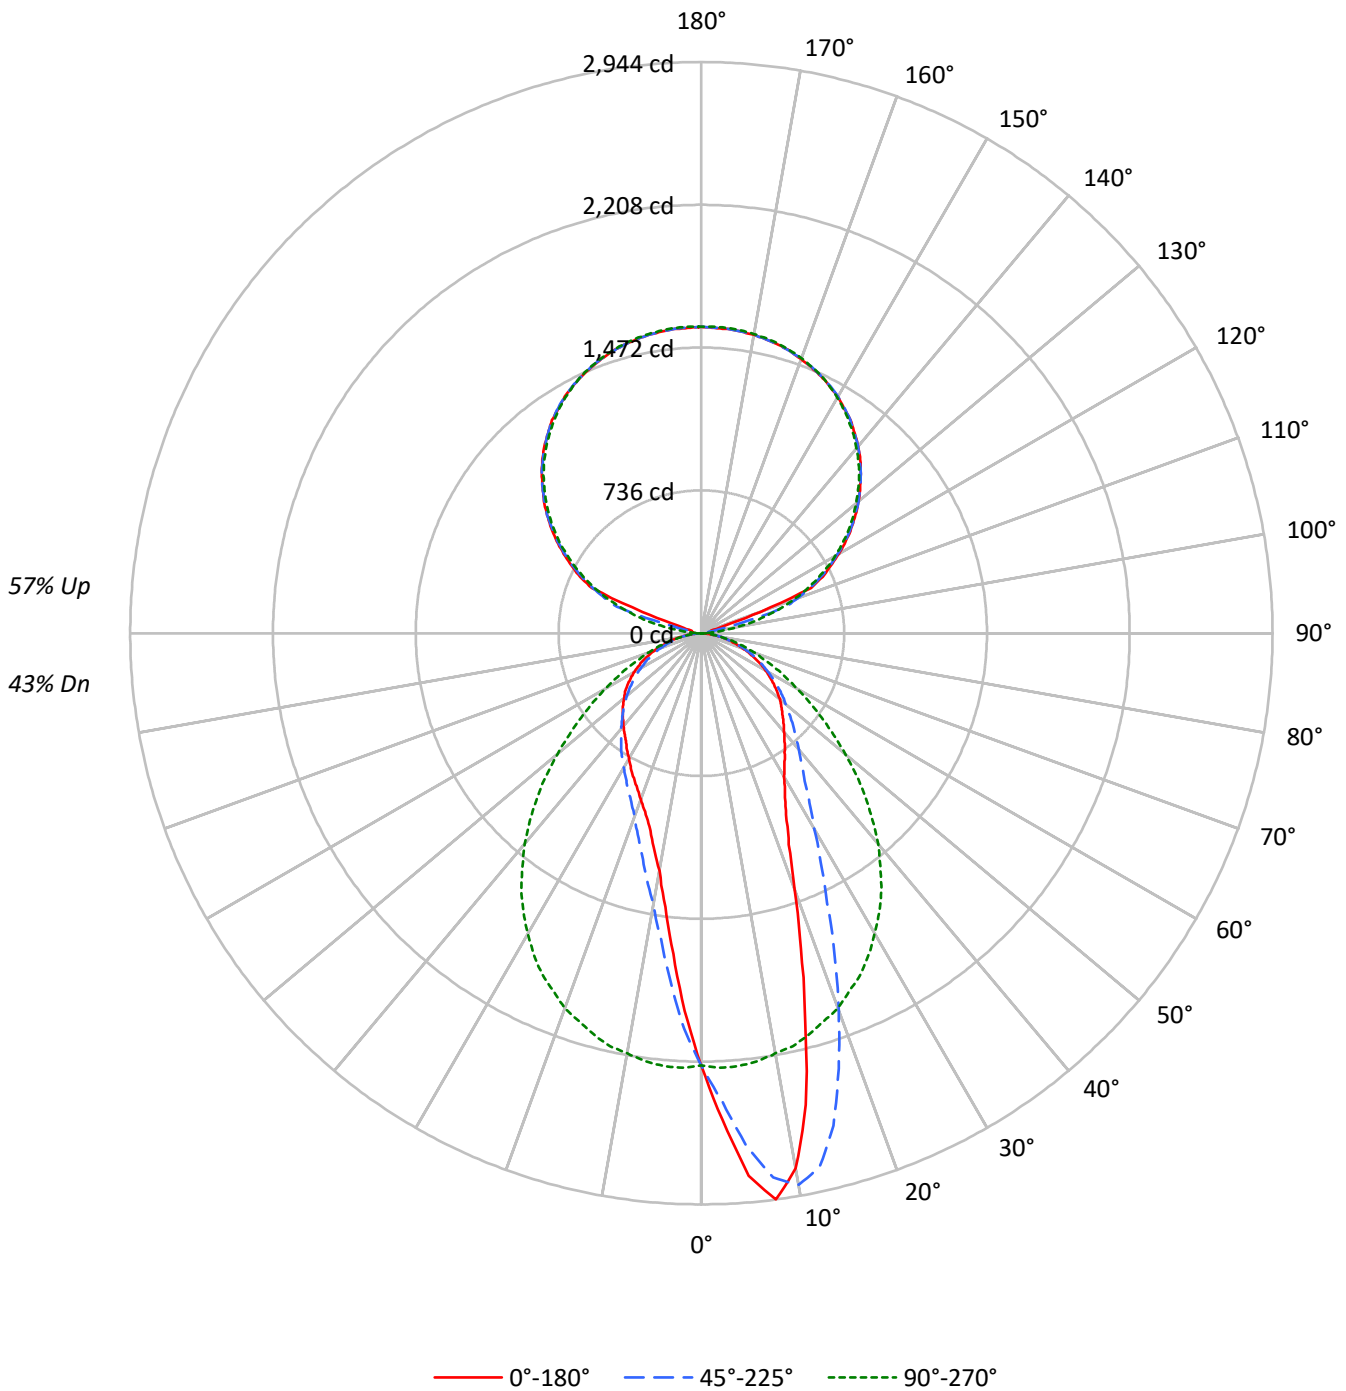



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	96	96	96	96	79	79	79	64	64	64	49	49	49	43				43
1	97	92	89	85	88	85	82	79	70	68	66	57	55	54	44	43	43	37				37
2	88	81	75	71	81	75	70	65	62	58	55	50	48	46	40	38	37	32				32
3	81	72	65	59	74	66	60	55	55	51	47	45	42	39	36	33	32	27				27
4	74	64	56	51	68	59	52	47	49	44	41	40	37	34	32	30	28	24				24
5	68	57	50	44	62	53	46	41	44	39	35	37	33	30	29	27	25	21				21
6	63	52	44	38	58	48	41	36	40	35	31	33	30	27	27	24	22	19				19
7	59	47	39	34	54	43	37	32	37	32	28	31	27	24	25	22	20	17				17
8	54	43	35	30	50	40	33	28	34	29	25	28	24	21	23	20	18	16				16
9	51	39	32	27	47	36	30	26	31	26	22	26	22	19	21	19	17	14				14
10	48	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15	13				13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	23983	23983	23983	23983	23983
5°	30331	28627	24198	19500	17919
10°	30626	31552	24037	15545	13584
15°	23066	29294	23873	13164	11487
20°	16071	23704	23568	11512	10434
25°	12256	18229	23049	10592	9786
30°	10602	14482	22219	9940	9266
35°	9837	12227	21262	9469	8899
40°	9312	10968	19918	9022	8775
45°	9003	10152	18211	8672	8719
50°	8847	9505	16188	8354	8674
55°	8518	9032	14202	8053	8711
60°	8213	8525	12243	7767	8570
65°	7715	8046	10560	7465	8400
70°	7125	7437	8982	6965	7906
75°	6450	6667	7698	6471	7224
80°	5318	5833	6087	5641	6087
85°	4211	4730	4471	4792	4854

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 20791 cd/sqm



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	210.6	2.5
10°-20°	524.0	6.2
20°-30°	620.5	7.4
30°-40°	623.9	7.4
40°-50°	572.4	6.8
50°-60°	472.4	5.6
60°-70°	334.2	4.0
70°-80°	178.4	2.1
80°-90°	48.4	0.6
90°-100°	55.7	0.7
100°-110°	269.2	3.2
110°-120°	659.8	7.9
120°-130°	837.6	10.0
130°-140°	894.8	10.7
140°-150°	836.7	10.0
150°-160°	674.9	8.0
160°-170°	435.5	5.2
170°-180°	150.1	1.8
0°-30°	1355.2	16.1
0°-40°	1979.1	23.6
0°-60°	3023.9	36.0
0°-90°	3584.9	42.7
90°-120°	984.6	11.7
90°-150°	3553.7	42.3
90°-180°	4814.0	57.3
0°-180°	8399.1	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	2228	2228	2228	2228	2228	
5°	2807	2649	2240	1805	1658	267
15°	2070	2629	2142	1181	1031	572
25°	1032	1535	1941	892	824	487
35°	749	930	1618	721	677	470
45°	591	667	1196	570	573	458
55°	454	481	757	429	464	406
65°	303	316	415	293	330	301
75°	155	160	185	156	174	163
85°	34	38	36	39	39	38
90°	35	28	1	28	35	17
95°	45	36	72	36	45	37
105°	52	257	350	257	52	108
115°	690	674	656	674	690	649
125°	943	939	924	939	943	843
135°	1163	1163	1151	1163	1163	897
145°	1341	1339	1328	1339	1341	837
155°	1461	1462	1463	1462	1461	674
165°	1539	1538	1543	1538	1539	435
175°	1573	1574	1579	1574	1573	150
180°	1579	1579	1579	1579	1579	



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1
2.5°	2511.4	2508.8	2506.2	2493.3	2480.4	2474.2	2468.0	2449.4	2430.8	2410.1	2389.4
5°	2807.1	2814.4	2821.6	2813.3	2805.1	2779.7	2754.4	2720.8	2687.2	2649.4	2611.7
7.5°	2943.6	2947.7	2951.9	2946.7	2941.5	2934.8	2928.1	2898.1	2868.1	2829.4	2790.6
10°	2802.0	2811.3	2820.6	2840.7	2860.9	2883.6	2906.4	2902.2	2898.1	2886.7	2875.4
12.5°	2490.7	2502.1	2513.5	2553.8	2594.1	2645.8	2697.5	2742.0	2786.4	2817.5	2848.5
15°	2069.9	2101.5	2133.0	2169.7	2206.4	2282.4	2358.4	2452.0	2545.5	2628.8	2712.0
17.5°	1705.0	1716.8	1728.7	1768.0	1807.3	1902.9	1998.6	2106.6	2214.7	2352.7	2490.7
20°	1403.0	1413.9	1424.8	1476.5	1528.1	1603.1	1678.1	1799.6	1921.0	2069.4	2217.8
22.5°	1178.7	1195.7	1212.8	1241.8	1270.7	1342.6	1414.4	1522.5	1630.5	1794.4	1958.3
25°	1031.9	1044.3	1056.7	1074.3	1091.8	1149.2	1206.6	1295.5	1384.4	1534.9	1685.3
27.5°	931.6	936.7	941.9	959.5	977.1	1014.3	1051.5	1128.0	1204.5	1332.2	1459.9
30°	853.0	856.6	860.2	875.7	891.2	916.6	941.9	997.2	1052.5	1165.2	1277.9
32.5°	798.2	800.8	803.4	815.3	827.1	845.2	863.3	903.7	944.0	1037.0	1130.1
35°	748.6	750.1	751.7	760.5	769.2	782.7	796.1	826.6	857.1	930.5	1003.9
37.5°	705.1	707.2	709.3	714.4	719.6	731.5	743.4	767.7	792.0	848.3	904.7
40°	662.7	666.4	670.0	673.6	677.2	687.0	696.9	715.5	734.1	780.6	827.1
42.5°	626.6	630.2	633.8	635.4	636.9	642.6	648.3	665.3	682.4	717.0	751.7
45°	591.4	593.0	594.5	596.1	597.6	602.3	606.9	621.9	636.9	666.9	696.9
47.5°	559.4	559.4	559.4	560.4	561.4	565.6	569.7	580.6	591.4	614.7	637.9
50°	528.3	528.3	528.3	526.8	525.2	527.8	530.4	538.7	546.9	567.6	588.3
52.5°	491.1	491.1	491.1	491.6	492.2	492.2	492.2	499.4	506.6	525.2	543.8
55°	453.9	456.0	458.0	456.5	454.9	456.0	457.0	461.6	466.3	481.3	496.3
57.5°	416.7	417.7	418.7	418.2	417.7	418.2	418.7	422.9	427.0	438.4	449.8
60°	381.5	381.5	381.5	380.5	379.5	380.5	381.5	383.6	385.7	396.0	406.3
62.5°	342.2	342.7	343.3	343.8	344.3	343.3	342.2	344.8	347.4	355.2	362.9
65°	302.9	303.5	304.0	305.5	307.1	306.0	305.0	307.6	310.2	315.9	321.6
67.5°	267.8	266.8	265.7	266.2	266.8	268.3	269.9	270.4	270.9	277.1	283.3
70°	226.4	227.5	228.5	228.0	227.5	228.0	228.5	230.0	231.6	236.3	240.9
72.5°	189.2	189.7	190.2	190.2	190.2	191.3	192.3	193.9	195.4	198.0	200.6
75°	155.1	155.1	155.1	156.1	157.2	157.7	158.2	158.2	158.2	160.3	162.3
77.5°	117.9	120.5	123.0	122.5	122.0	123.0	124.1	125.6	127.2	128.2	129.2
80°	85.8	85.8	85.8	86.3	86.9	88.4	90.0	91.0	92.0	94.1	96.2
82.5°	54.8	55.3	55.8	57.4	58.9	60.0	61.0	62.6	64.1	64.1	64.1
85°	34.1	33.1	32.1	33.1	34.1	35.2	36.2	36.7	37.2	38.3	39.3
87.5°	16.5	16.5	16.5	16.5	16.5	17.1	17.6	17.6	17.6	17.6	17.6
90°	35.2	34.7	34.2	33.6	33.1	32.3	31.3	30.2	29.2	28.2	24.8
92.5°	39.9	39.6	39.4	39.1	38.8	37.8	36.0	34.2	32.3	30.5	28.2
95°	44.6	44.6	44.6	44.6	44.6	43.7	41.8	40.0	38.2	36.4	33.5
97.5°	48.1	47.8	47.6	47.3	47.1	45.9	43.8	41.7	39.6	37.5	50.8
100°	49.3	49.0	48.8	48.5	48.2	47.1	45.0	42.9	40.8	38.7	79.4
102.5°	50.5	49.9	49.4	48.9	48.4	52.4	61.0	69.6	78.2	86.8	132.2
105°	51.6	51.1	50.6	50.1	49.5	72.4	118.5	164.6	210.8	256.9	280.4
107.5°	122.0	156.2	190.3	224.5	258.6	295.8	335.9	376.1	416.3	456.4	452.5
110°	322.6	359.9	397.2	434.5	471.8	494.7	503.3	511.9	520.5	529.1	526.3



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	611.3	611.8	612.3	612.8	613.4	612.4	610.1	607.8	605.4	603.1	600.2
115°	689.9	688.8	687.8	686.8	685.7	683.9	681.3	678.7	676.1	673.5	671.1
117.5°	753.2	753.0	752.7	752.5	752.2	751.0	748.9	746.9	744.8	742.7	741.4
120°	818.9	818.9	818.9	818.9	818.9	817.9	815.8	813.7	811.6	809.6	808.8
122.5°	883.5	883.2	883.0	882.7	882.4	881.6	880.3	879.0	877.7	876.4	875.4
125°	943.3	942.8	942.3	941.7	941.2	940.7	940.2	939.7	939.1	938.6	937.6
127.5°	1002.0	1002.5	1003.0	1003.5	1004.1	1003.9	1003.1	1002.4	1001.6	1000.8	999.5
130°	1058.3	1058.8	1059.3	1059.9	1060.4	1060.1	1059.1	1058.0	1057.0	1055.9	1054.9
132.5°	1109.9	1110.7	1111.5	1112.3	1113.0	1112.9	1111.9	1110.8	1109.8	1108.7	1108.0
135°	1162.7	1163.5	1164.3	1165.1	1165.8	1165.8	1165.1	1164.3	1163.5	1162.7	1161.7
137.5°	1213.2	1213.7	1214.2	1214.7	1215.2	1214.9	1213.6	1212.3	1210.9	1209.6	1209.1
140°	1257.7	1258.3	1258.8	1259.3	1259.8	1259.6	1258.5	1257.5	1256.4	1255.4	1254.6
142.5°	1298.8	1299.6	1300.4	1301.2	1301.9	1301.9	1301.2	1300.4	1299.6	1298.8	1298.0
145°	1341.0	1341.0	1341.0	1341.0	1341.0	1340.8	1340.3	1339.7	1339.2	1338.7	1338.2
147.5°	1371.6	1372.9	1374.2	1375.5	1376.8	1377.2	1376.6	1376.1	1375.6	1375.1	1374.6
150°	1406.8	1407.5	1408.3	1409.1	1409.9	1410.0	1409.5	1409.0	1408.4	1407.9	1407.4
152.5°	1434.9	1436.2	1437.5	1438.8	1440.1	1440.3	1439.2	1438.2	1437.1	1436.1	1435.8
155°	1460.7	1462.3	1463.9	1465.4	1467.0	1467.1	1465.8	1464.5	1463.2	1461.9	1461.6
157.5°	1483.0	1485.1	1487.2	1489.3	1491.4	1491.6	1490.1	1488.5	1486.9	1485.4	1485.6
160°	1504.1	1506.0	1507.8	1509.6	1511.4	1511.6	1510.0	1508.4	1506.9	1505.3	1505.6
162.5°	1524.1	1525.6	1527.2	1528.8	1530.3	1530.2	1528.4	1526.6	1524.7	1522.9	1523.2
165°	1539.3	1541.2	1543.0	1544.8	1546.6	1546.5	1544.4	1542.3	1540.2	1538.2	1538.4
167.5°	1551.1	1553.2	1555.2	1557.3	1559.4	1559.4	1557.3	1555.2	1553.2	1551.1	1551.1
170°	1561.6	1563.7	1565.8	1567.9	1570.0	1570.0	1567.9	1565.8	1563.7	1561.6	1561.6
172.5°	1567.5	1569.8	1572.2	1574.5	1576.9	1577.0	1574.9	1572.8	1570.8	1568.7	1568.4
175°	1573.4	1575.4	1577.5	1579.6	1581.7	1581.8	1580.0	1578.2	1576.4	1574.5	1574.3
177.5°	1574.5	1577.1	1579.7	1582.4	1585.0	1585.2	1583.1	1581.0	1579.0	1576.9	1576.6
180°	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1
2.5°	2383.2	2377.0	2354.3	2331.5	2305.7	2279.8	2260.7	2241.6	2213.1	2184.7	2161.4
5°	2582.8	2553.8	2505.7	2457.7	2392.5	2327.4	2283.4	2239.5	2180.6	2121.6	2074.6
7.5°	2740.9	2691.3	2624.1	2556.9	2471.6	2386.3	2305.7	2225.0	2135.1	2045.1	1971.7
10°	2841.8	2808.2	2730.6	2653.1	2538.8	2424.6	2311.9	2199.2	2083.4	1967.6	1870.4
12.5°	2851.6	2854.7	2783.3	2712.0	2582.8	2453.5	2316.5	2179.5	2033.7	1888.0	1774.7
15°	2765.2	2818.5	2779.2	2739.9	2609.6	2479.4	2310.8	2142.3	1974.3	1806.3	1675.5
17.5°	2605.0	2719.2	2724.9	2730.6	2600.3	2470.1	2283.4	2096.8	1906.6	1716.3	1578.8
20°	2386.3	2554.8	2612.7	2670.6	2564.7	2458.7	2258.1	2057.5	1844.5	1631.5	1487.3
22.5°	2163.0	2367.7	2473.7	2579.7	2501.1	2422.5	2209.0	1995.5	1770.6	1545.7	1399.4
25°	1908.6	2132.0	2294.8	2457.7	2409.6	2361.5	2151.1	1940.7	1701.3	1462.0	1312.6
27.5°	1686.9	1913.8	2110.3	2306.7	2296.4	2286.0	2077.2	1868.3	1623.3	1378.2	1234.0
30°	1489.4	1700.8	1920.5	2140.2	2165.6	2190.9	1989.3	1787.7	1542.1	1296.5	1157.5
32.5°	1314.6	1499.2	1734.9	1970.7	2020.3	2069.9	1888.0	1706.0	1463.0	1220.0	1086.1
35°	1171.4	1338.9	1574.7	1810.4	1872.4	1934.5	1776.3	1618.1	1381.3	1144.6	1016.9
37.5°	1044.8	1184.9	1414.9	1645.0	1721.0	1797.0	1655.3	1513.7	1291.9	1070.1	952.8
40°	939.8	1052.5	1264.0	1475.4	1563.3	1651.2	1534.4	1417.5	1207.1	996.7	888.7
42.5°	852.0	952.2	1144.0	1335.8	1420.1	1504.4	1405.6	1306.9	1119.7	932.6	833.9
45°	777.0	857.1	1031.3	1205.6	1285.7	1365.8	1281.0	1196.3	1031.3	866.4	774.4
47.5°	706.7	775.4	924.3	1073.2	1144.6	1215.9	1149.7	1083.6	944.0	804.4	721.2
50°	643.6	698.9	829.2	959.5	1021.5	1083.6	1025.1	966.7	852.0	737.2	664.8
52.5°	588.8	633.8	742.9	852.0	905.2	958.5	908.3	858.2	767.2	676.2	613.1
55°	534.5	572.8	667.4	762.0	798.2	834.4	795.6	756.8	683.4	610.0	556.8
57.5°	483.9	518.0	595.5	673.1	701.0	728.9	693.8	658.6	603.3	548.0	503.5
60°	434.3	462.2	526.8	591.4	608.5	625.5	597.1	568.7	529.9	491.1	451.3
62.5°	388.2	413.6	461.6	509.7	521.1	532.5	510.8	489.0	459.6	430.1	399.1
65°	340.7	359.8	399.1	438.4	445.6	452.9	433.7	414.6	392.4	370.1	347.4
67.5°	296.7	310.2	342.2	374.3	374.8	375.3	359.8	344.3	331.9	319.5	301.4
70°	253.8	266.8	287.9	309.1	309.7	310.2	297.8	285.4	276.1	266.8	253.3
72.5°	209.9	219.2	235.2	251.2	250.2	249.2	241.4	233.7	226.4	219.2	209.4
75°	170.1	177.8	188.7	199.5	196.4	193.3	189.2	185.1	178.9	172.7	166.5
77.5°	133.9	138.5	144.8	151.0	148.9	146.8	143.2	139.6	134.9	130.3	127.7
80°	98.2	100.3	104.4	108.6	107.5	106.5	102.4	98.2	97.2	96.2	92.5
82.5°	66.7	69.3	70.3	71.3	70.8	70.3	67.2	64.1	63.1	62.0	61.5
85°	39.8	40.3	40.8	41.4	39.8	38.3	37.2	36.2	36.2	36.2	35.7
87.5°	18.1	18.6	18.6	18.6	18.1	17.6	16.5	15.5	16.0	16.5	16.5
90°	21.4	18.0	14.6	11.6	9.0	6.4	3.8	1.2	3.8	6.4	9.0
92.5°	25.8	23.5	21.1	20.7	22.3	23.9	25.4	27.0	25.4	23.9	22.3
95°	30.6	27.8	24.9	28.8	39.5	50.2	60.9	71.6	60.9	50.2	39.5
97.5°	64.1	77.4	90.7	101.0	108.3	115.6	122.9	130.2	122.9	115.6	108.3
100°	120.1	160.7	201.4	219.1	213.9	208.7	203.5	198.3	203.5	208.7	213.9
102.5°	177.6	222.9	268.3	289.3	285.9	282.5	279.1	275.7	279.1	282.5	285.9
105°	303.9	327.3	350.8	361.1	358.2	355.4	352.5	349.6	352.5	355.4	358.2
107.5°	448.6	444.7	440.8	437.6	435.3	432.9	430.6	428.2	430.6	432.9	435.3
110°	523.4	520.5	517.7	515.2	513.1	511.0	508.9	506.9	508.9	511.0	513.1





TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	597.3	594.5	591.6	589.2	587.4	585.6	583.8	581.9	583.8	585.6	587.4
115°	668.8	666.4	664.1	662.1	660.6	659.0	657.4	655.9	657.4	659.0	660.6
117.5°	740.1	738.8	737.5	735.9	734.1	732.3	730.4	728.6	730.4	732.3	734.1
120°	808.0	807.2	806.4	804.9	802.5	800.2	797.8	795.5	797.8	800.2	802.5
122.5°	874.3	873.3	872.3	870.8	869.0	867.2	865.4	863.5	865.4	867.2	869.0
125°	936.5	935.5	934.4	932.9	930.8	928.7	926.6	924.5	926.6	928.7	930.8
127.5°	998.2	996.9	995.6	993.9	991.8	989.7	987.6	985.5	987.6	989.7	991.8
130°	1053.9	1052.8	1051.8	1050.2	1048.1	1046.0	1044.0	1041.9	1044.0	1046.0	1048.1
132.5°	1107.2	1106.4	1105.6	1104.2	1102.1	1100.0	1097.9	1095.8	1097.9	1100.0	1102.1
135°	1160.6	1159.6	1158.5	1157.2	1155.7	1154.1	1152.5	1151.0	1152.5	1154.1	1155.7
137.5°	1208.6	1208.1	1207.6	1206.3	1204.2	1202.1	1200.0	1197.9	1200.0	1202.1	1204.2
140°	1253.8	1253.1	1252.3	1251.1	1249.5	1248.0	1246.4	1244.8	1246.4	1248.0	1249.5
142.5°	1297.2	1296.5	1295.7	1294.5	1292.9	1291.4	1289.8	1288.3	1289.8	1291.4	1292.9
145°	1337.7	1337.1	1336.6	1335.4	1333.6	1331.8	1330.0	1328.1	1330.0	1331.8	1333.6
147.5°	1374.0	1373.5	1373.0	1372.1	1370.8	1369.5	1368.2	1366.9	1368.2	1369.5	1370.8
150°	1406.9	1406.4	1405.8	1405.2	1404.4	1403.6	1402.8	1402.1	1402.8	1403.6	1404.4
152.5°	1435.6	1435.3	1435.0	1434.8	1434.5	1434.3	1434.0	1433.7	1434.0	1434.3	1434.5
155°	1461.4	1461.1	1460.9	1461.0	1461.5	1462.0	1462.5	1463.1	1462.5	1462.0	1461.5
157.5°	1485.9	1486.1	1486.4	1486.5	1486.5	1486.5	1486.5	1486.5	1486.5	1486.5	1486.5
160°	1505.8	1506.1	1506.4	1506.6	1506.9	1507.1	1507.4	1507.7	1507.4	1507.1	1506.9
162.5°	1523.4	1523.7	1523.9	1524.5	1525.3	1526.0	1526.8	1527.6	1526.8	1526.0	1525.3
165°	1538.7	1538.9	1539.2	1539.7	1540.5	1541.3	1542.1	1542.9	1542.1	1541.3	1540.5
167.5°	1551.1	1551.1	1551.1	1551.6	1552.6	1553.7	1554.7	1555.8	1554.7	1553.7	1552.6
170°	1561.6	1561.6	1561.6	1562.1	1563.2	1564.2	1565.3	1566.3	1565.3	1564.2	1563.2
172.5°	1568.1	1567.9	1567.6	1568.1	1569.4	1570.8	1572.1	1573.4	1572.1	1570.8	1569.4
175°	1574.0	1573.7	1573.5	1574.0	1575.3	1576.6	1577.9	1579.2	1577.9	1576.6	1575.3
177.5°	1576.4	1576.1	1575.8	1576.4	1577.7	1579.0	1580.3	1581.6	1580.3	1579.0	1577.7
180°	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1	2228.1
2.5°	2138.2	2118.0	2097.8	2082.3	2066.8	2040.5	2014.1	2007.9	2001.7	1992.9	1984.1
5°	2027.5	1977.9	1928.3	1883.8	1839.4	1804.7	1770.1	1747.3	1724.6	1708.1	1691.5
7.5°	1898.3	1823.9	1749.4	1696.7	1643.9	1593.8	1543.7	1527.6	1511.6	1489.9	1468.2
10°	1773.2	1691.0	1608.8	1540.0	1471.3	1422.2	1373.1	1353.4	1333.8	1306.4	1279.0
12.5°	1661.5	1571.6	1481.6	1412.3	1343.1	1295.5	1248.0	1219.5	1191.1	1175.6	1160.1
15°	1544.7	1448.5	1352.4	1288.3	1224.2	1181.3	1138.4	1113.5	1088.7	1073.7	1058.7
17.5°	1441.3	1346.2	1251.1	1189.5	1128.0	1088.7	1049.4	1027.7	1006.0	994.6	983.3
20°	1343.1	1250.0	1157.0	1097.0	1037.0	1005.0	972.9	959.0	945.0	935.7	926.4
22.5°	1253.1	1161.6	1070.1	1018.9	967.8	941.9	916.1	906.2	896.4	888.7	880.9
25°	1163.2	1081.5	999.8	956.4	913.0	891.8	870.6	860.7	850.9	843.2	835.4
27.5°	1089.8	1011.7	933.6	896.4	859.2	842.7	826.1	818.4	810.6	803.4	796.1
30°	1018.4	948.6	878.8	846.8	814.7	799.7	784.8	777.0	769.2	762.5	755.8
32.5°	952.2	892.3	832.3	802.8	773.4	761.0	748.6	739.3	730.0	724.8	719.6
35°	889.2	835.4	781.7	757.4	733.1	720.6	708.2	700.5	692.7	688.6	684.5
37.5°	835.4	787.3	739.3	716.0	692.7	680.8	669.0	662.2	655.5	654.0	652.4
40°	780.6	739.3	697.9	675.2	652.4	642.1	631.7	627.6	623.5	622.4	621.4
42.5°	735.1	694.8	654.5	633.8	613.1	604.3	595.5	593.5	591.4	593.0	594.5
45°	682.4	648.8	615.2	596.1	576.9	569.7	562.5	560.9	559.4	562.5	565.6
47.5°	637.9	606.9	575.9	557.8	539.7	534.5	529.4	528.9	528.3	532.5	536.6
50°	592.4	562.5	532.5	518.0	503.5	498.9	494.2	495.8	497.3	504.0	510.8
52.5°	550.1	522.1	494.2	480.8	467.3	464.2	461.1	464.8	468.4	475.6	482.8
55°	503.5	478.2	452.9	442.5	432.2	429.1	426.0	433.2	440.5	447.2	453.9
57.5°	459.1	436.8	414.6	405.3	396.0	395.5	395.0	401.7	408.4	415.6	422.9
60°	411.5	392.9	374.3	367.0	359.8	360.8	361.9	369.6	377.4	383.1	388.8
62.5°	368.1	352.6	337.1	330.3	323.6	326.2	328.8	336.5	344.3	351.0	357.7
65°	324.7	311.7	298.8	294.2	289.5	293.1	296.7	303.5	310.2	314.8	319.5
67.5°	283.3	272.4	261.6	258.0	254.3	258.0	261.6	268.3	275.0	279.7	284.3
70°	239.9	231.1	222.3	219.7	217.1	221.3	225.4	231.1	236.8	241.4	246.1
72.5°	199.5	192.8	186.1	185.6	185.1	188.7	192.3	198.0	203.7	206.8	209.9
75°	160.3	156.6	153.0	152.5	152.0	155.6	159.2	162.3	165.4	168.0	170.6
77.5°	125.1	122.0	118.9	119.4	119.9	122.5	125.1	128.2	131.3	132.9	134.4
80°	88.9	87.9	86.9	87.9	88.9	91.0	93.1	95.1	97.2	98.2	99.3
82.5°	61.0	60.0	58.9	60.5	62.0	63.6	65.1	66.7	68.2	68.8	69.3
85°	35.2	36.7	38.3	38.3	38.3	38.8	39.3	39.8	40.3	39.8	39.3
87.5°	16.5	17.1	17.6	17.6	17.6	18.1	18.6	18.6	18.6	18.1	17.6
90°	11.6	14.6	18.0	21.4	24.8	28.2	29.2	30.2	31.3	32.3	33.1
92.5°	20.7	21.1	23.5	25.8	28.2	30.5	32.3	34.2	36.0	37.8	38.8
95°	28.8	24.9	27.8	30.6	33.5	36.4	38.2	40.0	41.8	43.7	44.6
97.5°	101.0	90.7	77.4	64.1	50.8	37.5	39.6	41.7	43.8	45.9	47.1
100°	219.1	201.4	160.7	120.1	79.4	38.7	40.8	42.9	45.0	47.1	48.2
102.5°	289.3	268.3	222.9	177.6	132.2	86.8	78.2	69.6	61.0	52.4	48.4
105°	361.1	350.8	327.3	303.9	280.4	256.9	210.8	164.6	118.5	72.4	49.5
107.5°	437.6	440.8	444.7	448.6	452.5	456.4	416.3	376.1	335.9	295.8	258.6
110°	515.2	517.7	520.5	523.4	526.3	529.1	520.5	511.9	503.3	494.7	471.8



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	589.2	591.6	594.5	597.3	600.2	603.1	605.4	607.8	610.1	612.4	613.4
115°	662.1	664.1	666.4	668.8	671.1	673.5	676.1	678.7	681.3	683.9	685.7
117.5°	735.9	737.5	738.8	740.1	741.4	742.7	744.8	746.9	748.9	751.0	752.2
120°	804.9	806.4	807.2	808.0	808.8	809.6	811.6	813.7	815.8	817.9	818.9
122.5°	870.8	872.3	873.3	874.3	875.4	876.4	877.7	879.0	880.3	881.6	882.4
125°	932.9	934.4	935.5	936.5	937.6	938.6	939.1	939.7	940.2	940.7	941.2
127.5°	993.9	995.6	996.9	998.2	999.5	1000.8	1001.6	1002.4	1003.1	1003.9	1004.1
130°	1050.2	1051.8	1052.8	1053.9	1054.9	1055.9	1057.0	1058.0	1059.1	1060.1	1060.4
132.5°	1104.2	1105.6	1106.4	1107.2	1108.0	1108.7	1109.8	1110.8	1111.9	1112.9	1113.0
135°	1157.2	1158.5	1159.6	1160.6	1161.7	1162.7	1163.5	1164.3	1165.1	1165.8	1165.8
137.5°	1206.3	1207.6	1208.1	1208.6	1209.1	1209.6	1210.9	1212.3	1213.6	1214.9	1215.2
140°	1251.1	1252.3	1253.1	1253.8	1254.6	1255.4	1256.4	1257.5	1258.5	1259.6	1259.8
142.5°	1294.5	1295.7	1296.5	1297.2	1298.0	1298.8	1299.6	1300.4	1301.2	1301.9	1301.9
145°	1335.4	1336.6	1337.1	1337.7	1338.2	1338.7	1339.2	1339.7	1340.3	1340.8	1341.0
147.5°	1372.1	1373.0	1373.5	1374.0	1374.6	1375.1	1375.6	1376.1	1376.6	1377.2	1376.8
150°	1405.2	1405.8	1406.4	1406.9	1407.4	1407.9	1408.4	1409.0	1409.5	1410.0	1409.9
152.5°	1434.8	1435.0	1435.3	1435.6	1435.8	1436.1	1437.1	1438.2	1439.2	1440.3	1440.1
155°	1461.0	1460.9	1461.1	1461.4	1461.6	1461.9	1463.2	1464.5	1465.8	1467.1	1467.0
157.5°	1486.5	1486.4	1486.1	1485.9	1485.6	1485.4	1486.9	1488.5	1490.1	1491.6	1491.4
160°	1506.6	1506.4	1506.1	1505.8	1505.6	1505.3	1506.9	1508.4	1510.0	1511.6	1511.4
162.5°	1524.5	1523.9	1523.7	1523.4	1523.2	1522.9	1524.7	1526.6	1528.4	1530.2	1530.3
165°	1539.7	1539.2	1538.9	1538.7	1538.4	1538.2	1540.2	1542.3	1544.4	1546.5	1546.6
167.5°	1551.6	1551.1	1551.1	1551.1	1551.1	1551.1	1553.2	1555.2	1557.3	1559.4	1559.4
170°	1562.1	1561.6	1561.6	1561.6	1561.6	1561.6	1563.7	1565.8	1567.9	1570.0	1570.0
172.5°	1568.1	1567.6	1567.9	1568.1	1568.4	1568.7	1570.8	1572.8	1574.9	1577.0	1576.9
175°	1574.0	1573.5	1573.7	1574.0	1574.3	1574.5	1576.4	1578.2	1580.0	1581.8	1581.7
177.5°	1576.4	1575.8	1576.1	1576.4	1576.6	1576.9	1579.0	1581.0	1583.1	1585.2	1585.0
180°	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	2228.1	2228.1	2228.1	2228.1
2.5°	1980.5	1976.9	1962.4	1947.9
5°	1679.1	1666.7	1662.6	1658.4
7.5°	1467.1	1466.1	1444.4	1422.7
10°	1280.5	1282.1	1262.4	1242.8
12.5°	1147.1	1134.2	1132.7	1131.1
15°	1046.9	1035.0	1032.9	1030.8
17.5°	976.0	968.8	966.7	964.7
20°	922.3	918.1	914.5	910.9
22.5°	875.7	870.6	867.5	864.4
25°	830.8	826.1	825.1	824.0
27.5°	790.4	784.8	784.8	784.8
30°	752.2	748.6	747.0	745.5
32.5°	716.5	713.4	713.4	713.4
35°	682.9	681.4	679.3	677.2
37.5°	652.4	652.4	651.4	650.3
40°	622.9	624.5	624.5	624.5
42.5°	596.1	597.6	597.6	597.6
45°	568.1	570.7	571.8	572.8
47.5°	540.7	544.9	545.9	546.9
50°	513.9	517.0	517.5	518.0
52.5°	486.5	490.1	492.7	495.3
55°	457.5	461.1	462.7	464.2
57.5°	426.5	430.1	430.6	431.1
60°	392.4	396.0	397.0	398.1
62.5°	359.8	361.9	362.9	363.9
65°	322.6	325.7	327.8	329.8
67.5°	286.9	289.5	289.5	289.5
70°	247.1	248.1	249.7	251.2
72.5°	210.4	210.9	210.9	210.9
75°	171.6	172.7	173.2	173.7
77.5°	134.9	135.4	135.4	135.4
80°	98.7	98.2	98.2	98.2
82.5°	67.7	66.2	66.2	66.2
85°	38.8	38.3	38.8	39.3
87.5°	17.6	17.6	17.6	17.6
90°	33.6	34.2	34.7	35.2
92.5°	39.1	39.4	39.6	39.9
95°	44.6	44.6	44.6	44.6
97.5°	47.3	47.6	47.8	48.1
100°	48.5	48.8	49.0	49.3
102.5°	48.9	49.4	49.9	50.5
105°	50.1	50.6	51.1	51.6
107.5°	224.5	190.3	156.2	122.0
110°	434.5	397.2	359.9	322.6



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	612.8	612.3	611.8	611.3
115°	686.8	687.8	688.8	689.9
117.5°	752.5	752.7	753.0	753.2
120°	818.9	818.9	818.9	818.9
122.5°	882.7	883.0	883.2	883.5
125°	941.7	942.3	942.8	943.3
127.5°	1003.5	1003.0	1002.5	1002.0
130°	1059.9	1059.3	1058.8	1058.3
132.5°	1112.3	1111.5	1110.7	1109.9
135°	1165.1	1164.3	1163.5	1162.7
137.5°	1214.7	1214.2	1213.7	1213.2
140°	1259.3	1258.8	1258.3	1257.7
142.5°	1301.2	1300.4	1299.6	1298.8
145°	1341.0	1341.0	1341.0	1341.0
147.5°	1375.5	1374.2	1372.9	1371.6
150°	1409.1	1408.3	1407.5	1406.8
152.5°	1438.8	1437.5	1436.2	1434.9
155°	1465.4	1463.9	1462.3	1460.7
157.5°	1489.3	1487.2	1485.1	1483.0
160°	1509.6	1507.8	1506.0	1504.1
162.5°	1528.8	1527.2	1525.6	1524.1
165°	1544.8	1543.0	1541.2	1539.3
167.5°	1557.3	1555.2	1553.2	1551.1
170°	1567.9	1565.8	1563.7	1561.6
172.5°	1574.5	1572.2	1569.8	1567.5
175°	1579.6	1577.5	1575.4	1573.4
177.5°	1582.4	1579.7	1577.1	1574.5
180°	1579.2	1579.2	1579.2	1579.2



TEST NUMBER: P831618

CATALOG NUMBER: S123DIP-S775D1195U840-4F0-1E-UDD-G

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.88	14.65	14.91	15.68	17.05	16.12	16.89	17.14	17.92	19.29
	3H	15.52	16.21	16.56	17.25	18.64	17.54	18.23	18.57	19.26	20.66
	4H	16.10	16.75	17.14	17.79	19.19	17.98	18.64	19.03	19.67	21.08
	6H	16.46	17.06	17.52	18.11	19.52	18.25	18.85	19.31	19.90	21.31
	8H	16.56	17.13	17.62	18.19	19.60	18.31	18.89	19.38	19.94	21.35
	12H	16.60	17.14	17.66	18.19	19.63	18.33	18.87	19.40	19.93	21.36
4H	2H	14.45	15.10	15.50	16.14	17.54	16.27	16.92	17.33	17.96	19.37
	3H	16.27	16.81	17.33	17.88	19.29	17.88	18.43	18.94	19.49	20.91
	4H	16.96	17.46	18.03	18.52	19.95	18.46	18.96	19.53	20.02	21.46
	6H	17.43	17.86	18.51	18.94	20.37	18.86	19.29	19.94	20.37	21.80
	8H	17.57	17.97	18.64	19.04	20.49	18.97	19.37	20.05	20.44	21.89
	12H	17.63	17.99	18.72	19.08	20.53	19.01	19.37	20.11	20.46	21.91
8H	4H	17.22	17.62	18.30	18.69	20.14	18.56	18.96	19.64	20.03	21.48
	6H	17.81	18.14	18.91	19.25	20.70	19.06	19.39	20.16	20.51	21.95
	8H	18.01	18.30	19.12	19.40	20.86	19.24	19.53	20.35	20.63	22.09
	12H	18.13	18.39	19.24	19.48	20.98	19.34	19.59	20.45	20.69	22.19
12H	4H	17.22	17.58	18.31	18.67	20.12	18.53	18.89	19.63	19.98	21.43
	6H	17.86	18.15	18.96	19.24	20.71	19.07	19.36	20.18	20.46	21.93
	8H	18.09	18.34	19.20	19.43	20.94	19.27	19.52	20.38	20.62	22.12