

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331955-840

Luminaire Tested: **S123DIP-S775D365U840-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331955-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D365U840-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4759.6 lumens
Efficiency: N/A
Efficacy: 136.0 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

Luminous Intensity Polar Plot

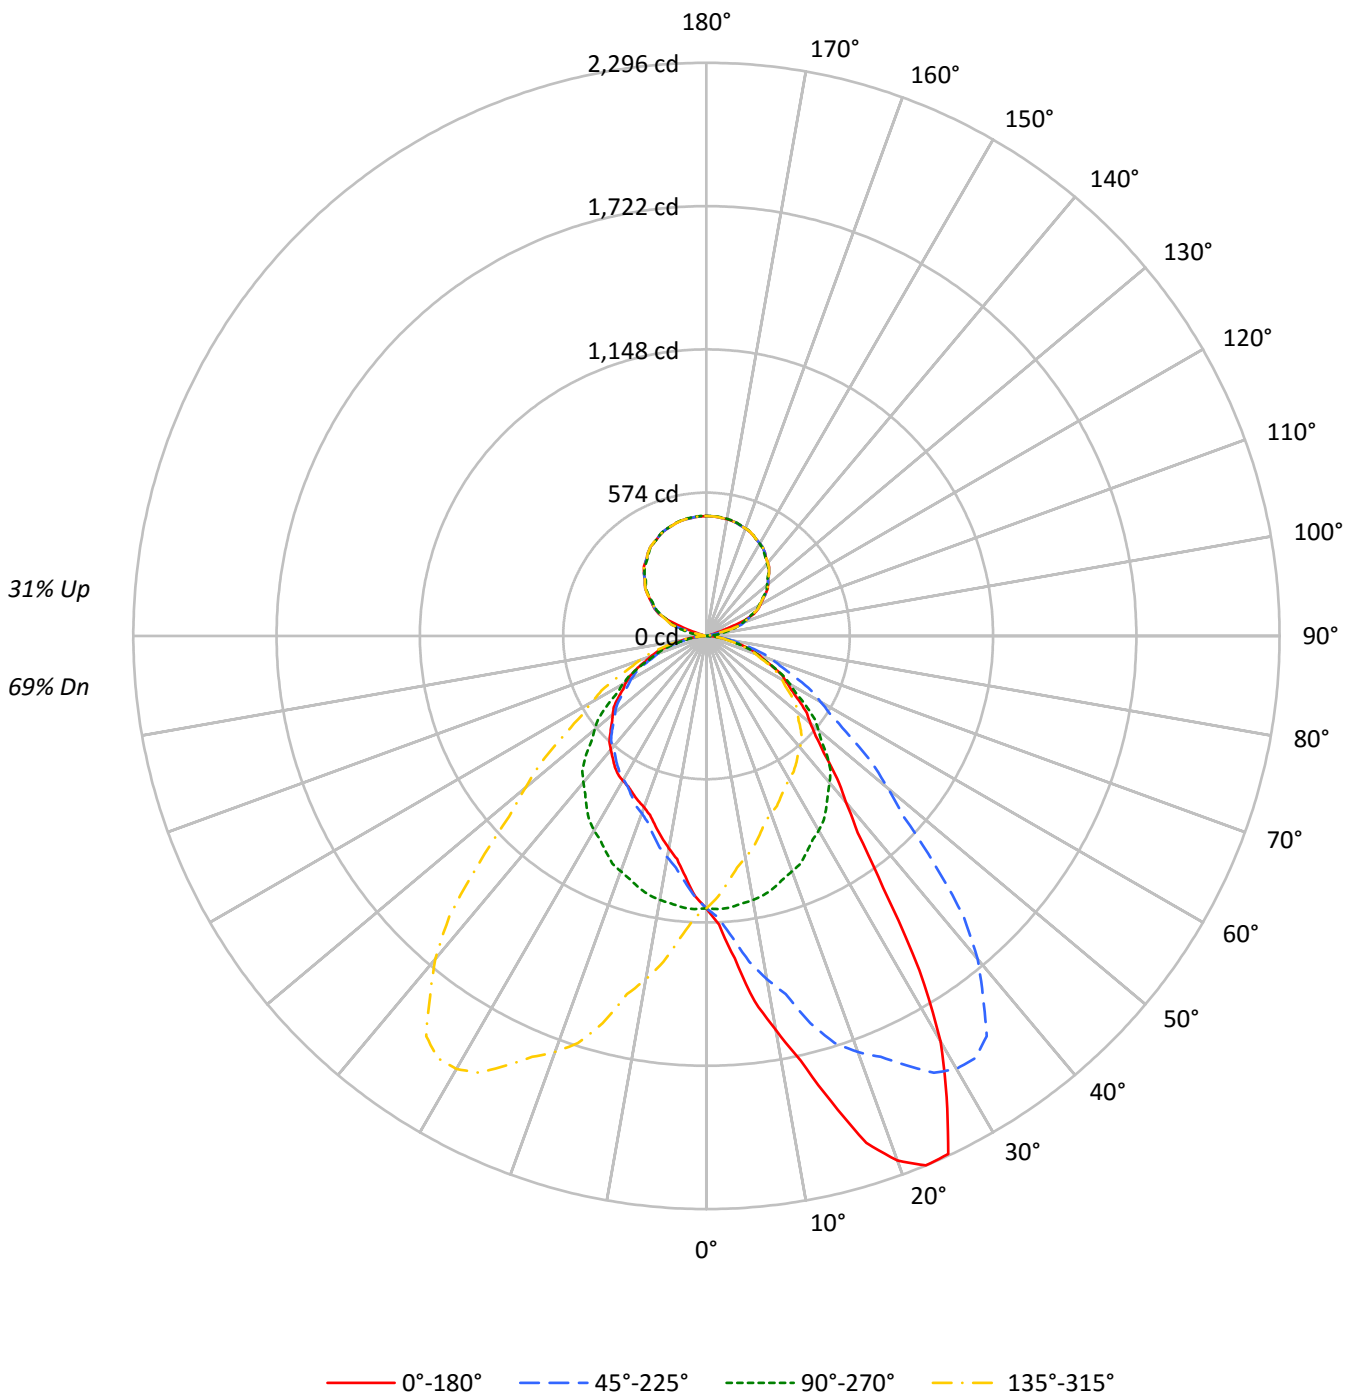



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	106	106	106	106	94	94	94	83	83	83	74	74	74	69
1	102	98	94	91	97	93	90	86	83	81	78	74	72	70	66	64	63	59
2	94	86	80	75	88	82	76	72	73	69	65	66	62	59	58	56	54	50
3	86	76	69	63	81	72	66	60	65	60	55	58	54	51	52	49	46	43
4	79	68	60	53	74	64	57	51	58	52	48	52	47	44	47	43	40	37
5	72	60	52	46	68	58	50	44	52	46	41	47	42	38	42	38	35	32
6	67	54	46	40	63	52	44	39	47	41	36	43	37	34	38	34	31	28
7	62	49	41	36	58	47	40	34	43	37	32	39	34	30	35	31	28	25
8	57	45	37	32	54	43	36	31	39	33	29	36	30	27	32	28	25	23
9	54	41	33	28	51	39	32	27	36	30	26	33	28	24	30	25	22	20
10	50	38	30	25	47	36	29	25	33	27	23	30	25	22	28	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	11746	11746	11746	11746
5°	14008	11797	10454	11797
10°	17533	11737	9441	11737
15°	21504	11642	8790	11642
20°	25616	11494	8369	11494
25°	27201	11315	8276	11315
30°	23313	11184	8319	11184
35°	16215	10997	8406	10997
40°	12213	10779	8379	10779
45°	10140	10455	8273	10455
50°	9083	9791	8199	9791
55°	8492	9077	8096	9077
60°	7967	8331	8013	8331
65°	7488	7595	7755	7595
70°	7021	6754	7386	6754
75°	6288	5914	6771	5914
80°	5511	4854	5833	4854
85°	4310	3532	3915	3532



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	107.5	2.3
10°-20°	344.7	7.2
20°-30°	578.5	12.2
30°-40°	655.0	13.8
40°-50°	587.4	12.3
50°-60°	474.0	10.0
60°-70°	330.3	6.9
70°-80°	173.6	3.6
80°-90°	43.8	0.9
90°-100°	17.5	0.4
100°-110°	83.2	1.7
110°-120°	199.9	4.2
120°-130°	254.6	5.3
130°-140°	272.0	5.7
140°-150°	254.4	5.3
150°-160°	205.2	4.3
160°-170°	132.4	2.8
170°-180°	45.6	1.0
0°-30°	1030.6	21.7
0°-40°	1685.7	35.4
0°-60°	2747.1	57.7
0°-90°	3294.8	69.2
90°-120°	300.6	6.3
90°-150°	1081.5	22.7
90°-180°	1465.0	30.8
0°-180°	4759.6	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1091	1091	1091	1091	1091	
5°	1296	1092	968	1092	1296	134
15°	1930	1045	789	1045	1930	557
25°	2290	953	697	953	2290	1004
35°	1234	837	640	837	1234	802
45°	666	687	544	687	666	527
55°	452	484	431	484	452	406
65°	294	298	304	298	294	293
75°	151	142	163	142	151	162
85°	35	29	32	29	35	42
90°	11	0	11	0	11	7
95°	14	22	14	22	14	11
105°	16	106	16	106	16	36
115°	210	199	210	199	210	194
125°	287	281	287	281	287	256
135°	354	350	354	350	354	273
145°	408	404	408	404	408	255
155°	444	445	444	445	444	205
165°	468	469	468	469	468	132
175°	479	480	479	480	479	46
180°	480	480	480	480	480	



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2
2.5°	1158.0	1157.2	1155.1	1156.8	1153.4	1148.7	1148.3	1144.1	1131.8	1130.9	1127.6
5°	1296.4	1292.1	1291.6	1291.0	1283.6	1273.6	1254.6	1252.9	1227.6	1214.9	1199.6
7.5°	1475.4	1477.6	1470.0	1463.2	1440.6	1425.6	1405.2	1379.1	1348.0	1316.4	1295.3
10°	1604.1	1621.4	1599.8	1585.0	1571.2	1545.3	1515.2	1477.6	1440.2	1396.2	1362.9
12.5°	1741.9	1750.5	1746.2	1732.2	1710.8	1671.4	1618.0	1576.6	1542.1	1468.9	1439.5
15°	1929.7	1962.0	1941.4	1893.7	1894.8	1857.2	1787.5	1710.8	1670.1	1606.1	1518.9
17.5°	2129.7	2133.7	2125.0	2085.4	2058.9	2007.3	1942.9	1869.5	1787.0	1709.5	1617.0
20°	2236.3	2233.1	2214.6	2194.0	2148.6	2108.4	2038.1	1956.1	1850.4	1774.2	1673.2
22.5°	2295.5	2290.3	2281.5	2264.2	2226.3	2183.2	2120.1	2030.5	1930.0	1825.0	1708.4
25°	2290.3	2297.1	2298.1	2293.4	2280.2	2254.3	2204.6	2133.2	2032.8	1897.9	1776.4
27.5°	2083.0	2092.7	2121.0	2146.1	2174.0	2202.6	2198.8	2163.3	2089.0	1972.7	1823.9
30°	1875.7	1854.6	1906.9	1973.1	2018.0	2097.3	2141.7	2144.3	2102.5	2002.7	1857.7
32.5°	1588.1	1611.4	1634.6	1715.9	1814.1	1903.2	1991.6	2062.8	2070.8	2004.4	1877.6
35°	1234.0	1263.0	1305.4	1347.6	1453.4	1544.3	1699.7	1835.0	1942.9	1957.2	1879.5
37.5°	994.3	1008.8	1035.5	1077.8	1147.0	1254.9	1375.1	1546.2	1702.4	1818.7	1823.7
40°	869.2	873.4	903.5	935.7	991.8	1080.7	1189.0	1340.2	1527.3	1689.7	1757.4
42.5°	775.3	784.6	797.4	828.3	872.9	939.8	1040.6	1165.5	1337.1	1523.9	1656.3
45°	666.1	676.7	684.7	705.3	737.0	781.9	852.2	966.4	1097.0	1290.0	1468.1
47.5°	594.0	594.9	600.8	616.3	637.9	671.7	721.3	794.8	914.6	1071.1	1254.1
50°	542.4	550.9	553.0	565.1	582.1	606.9	648.1	710.5	808.9	946.3	1114.5
52.5°	506.0	508.6	514.5	523.3	538.1	557.4	593.2	642.1	719.2	836.4	991.0
55°	452.5	452.5	458.4	465.2	473.7	491.1	514.9	550.9	609.6	700.5	828.5
57.5°	403.0	405.7	409.8	411.9	419.1	430.7	450.5	477.9	521.6	591.6	693.3
60°	370.1	374.9	374.4	378.5	384.9	393.8	410.8	433.0	472.1	528.2	613.8
62.5°	341.3	341.0	340.9	346.0	352.3	360.9	371.8	391.1	424.3	474.0	546.9
65°	294.0	292.9	296.6	299.7	301.8	308.2	316.7	333.6	355.8	392.8	449.4
67.5°	251.9	248.8	250.9	251.9	255.5	260.4	268.3	278.8	296.5	326.2	368.8
70°	223.1	220.5	219.9	221.0	224.2	227.8	233.7	243.7	260.1	283.9	315.1
72.5°	193.5	191.7	191.6	193.9	195.4	197.8	202.0	211.2	224.2	242.1	271.1
75°	151.2	151.2	151.2	151.7	153.3	155.4	158.6	163.4	173.4	186.1	205.6
77.5°	113.3	113.2	112.6	112.5	114.8	115.8	116.5	121.0	126.5	135.1	149.4
80°	88.9	86.1	87.3	88.9	89.9	90.4	92.0	93.0	97.9	102.6	112.6
82.5°	65.9	63.7	63.9	66.4	66.7	67.2	68.8	70.2	72.0	76.3	81.7
85°	34.9	34.9	35.4	35.4	36.0	35.4	37.0	37.6	37.6	40.2	43.3
87.5°	14.8	13.9	14.3	14.7	14.2	14.6	15.0	15.3	15.8	16.1	16.4
90°	10.7	10.5	10.4	10.2	10.1	9.8	9.5	9.2	8.9	8.6	7.6
92.5°	11.8	11.7	11.6	11.5	11.5	11.2	10.7	10.2	9.6	9.1	8.4
95°	13.5	13.5	13.5	13.5	13.5	13.3	12.7	12.2	11.6	11.1	10.2
97.5°	14.7	14.6	14.5	14.4	14.3	14.0	13.4	12.7	12.1	11.5	17.2
100°	14.9	14.9	14.8	14.7	14.6	14.3	13.6	13.0	12.4	11.8	24.1
102.5°	15.2	15.1	14.9	14.8	14.7	15.7	17.6	19.6	21.5	23.5	37.0
105°	15.7	15.6	15.3	15.2	15.0	22.0	36.1	50.1	64.1	78.2	85.3
107.5°	49.3	59.9	70.5	81.1	91.6	102.1	112.4	122.7	132.9	143.2	142.1
110°	98.2	109.5	120.8	132.2	143.5	150.5	153.1	155.7	158.3	161.0	160.1



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	168.3	170.8	173.2	175.5	177.9	179.2	179.0	179.0	178.9	178.9	178.0
115°	209.8	209.5	209.2	208.8	208.5	208.0	207.2	206.4	205.6	204.8	204.1
117.5°	233.1	233.1	233.0	232.9	232.9	232.5	231.9	231.3	230.6	229.9	229.6
120°	249.1	249.1	249.1	249.1	249.1	248.7	248.1	247.5	246.9	246.2	246.0
122.5°	264.8	264.7	264.7	264.6	264.5	264.3	263.9	263.4	263.0	262.5	262.2
125°	286.9	286.8	286.6	286.4	286.3	286.1	286.0	285.8	285.7	285.5	285.2
127.5°	308.2	308.3	308.5	308.6	308.8	308.8	308.5	308.2	308.0	307.7	307.4
130°	321.8	322.0	322.2	322.3	322.6	322.4	322.1	321.8	321.4	321.1	320.8
132.5°	334.5	334.7	334.9	335.1	335.4	335.3	335.0	334.7	334.4	334.1	333.8
135°	353.7	353.9	354.2	354.4	354.6	354.6	354.4	354.2	353.9	353.7	353.4
137.5°	371.7	371.8	372.0	372.1	372.3	372.2	371.8	371.4	371.1	370.7	370.5
140°	382.5	382.7	382.8	383.0	383.1	383.1	382.7	382.4	382.1	381.8	381.6
142.5°	392.5	392.7	392.9	393.2	393.4	393.4	393.1	392.9	392.6	392.4	392.1
145°	407.9	407.9	407.9	407.9	407.9	407.8	407.7	407.5	407.4	407.2	407.0
147.5°	419.3	419.7	420.0	420.4	420.8	420.9	420.7	420.5	420.4	420.2	420.1
150°	427.9	428.1	428.4	428.6	428.8	428.9	428.7	428.6	428.4	428.2	428.1
152.5°	434.7	435.0	435.5	435.9	436.2	436.3	436.0	435.7	435.4	435.0	434.9
155°	444.2	444.7	445.2	445.8	446.2	446.3	445.9	445.5	445.0	444.6	444.5
157.5°	452.3	452.9	453.6	454.2	454.8	454.9	454.4	453.9	453.4	453.0	453.0
160°	457.5	458.1	458.6	459.2	459.7	459.8	459.3	458.8	458.3	457.9	458.0
162.5°	462.3	462.8	463.3	463.8	464.3	464.2	463.7	463.2	462.6	462.1	462.2
165°	468.2	468.8	469.3	469.9	470.4	470.4	469.8	469.1	468.5	467.9	467.9
167.5°	472.4	473.0	473.6	474.3	474.9	474.9	474.3	473.6	473.0	472.4	472.4
170°	474.9	475.6	476.3	476.9	477.5	477.5	476.9	476.3	475.6	474.9	474.9
172.5°	476.4	477.1	477.8	478.5	479.2	479.2	478.6	478.0	477.4	476.7	476.7
175°	478.6	479.2	479.8	480.5	481.1	481.1	480.6	480.0	479.5	478.9	478.8
177.5°	479.2	479.8	480.5	481.1	481.7	481.8	481.3	480.8	480.3	479.8	479.7
180°	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2
2.5°	1125.0	1121.7	1118.2	1112.4	1107.3	1100.0	1097.9	1095.4	1087.8	1081.1	1076.0
5°	1193.8	1181.0	1162.6	1145.7	1132.0	1113.4	1102.9	1091.8	1075.9	1061.6	1050.0
7.5°	1265.7	1240.7	1211.9	1180.8	1151.9	1124.0	1101.5	1081.4	1059.1	1038.1	1021.8
10°	1322.7	1286.8	1246.7	1203.3	1166.3	1130.3	1100.1	1073.8	1045.2	1020.4	999.8
12.5°	1387.9	1334.6	1279.2	1226.6	1182.8	1132.9	1096.4	1062.8	1030.4	1000.5	977.3
15°	1465.0	1397.4	1331.7	1259.3	1192.8	1130.3	1087.0	1044.7	1007.1	976.4	946.8
17.5°	1535.2	1458.5	1372.1	1284.0	1203.7	1129.7	1069.0	1021.2	974.2	936.8	907.3
20°	1575.0	1487.7	1389.9	1298.5	1209.6	1127.1	1060.6	1003.4	952.7	913.0	879.7
22.5°	1609.2	1507.1	1405.9	1308.2	1209.2	1120.3	1044.9	986.1	931.1	892.3	856.9
25°	1644.8	1522.6	1421.1	1306.4	1195.9	1103.9	1019.3	952.7	897.7	852.2	815.8
27.5°	1675.2	1521.6	1401.1	1277.7	1175.0	1082.8	992.4	921.0	862.6	813.2	776.2
30°	1695.5	1523.7	1380.4	1258.3	1154.7	1059.4	971.7	899.8	838.5	788.3	753.4
32.5°	1708.2	1522.4	1361.4	1231.2	1122.5	1038.3	949.3	874.8	811.8	762.4	728.8
35°	1715.6	1513.1	1328.6	1175.3	1070.6	988.7	914.1	836.9	770.8	724.8	686.8
37.5°	1700.8	1493.5	1290.5	1121.4	1006.7	926.0	863.3	797.6	734.4	683.7	651.0
40°	1677.5	1480.9	1260.9	1083.3	962.7	885.0	831.6	767.1	704.7	656.6	625.9
42.5°	1633.1	1455.0	1228.3	1041.0	917.1	839.3	790.2	736.3	677.2	632.1	601.5
45°	1524.7	1398.9	1179.5	977.5	849.6	769.2	725.9	686.8	633.4	589.5	563.0
47.5°	1374.3	1314.4	1108.8	910.6	779.2	701.9	656.8	625.3	586.3	550.9	525.5
50°	1269.9	1245.1	1061.1	864.9	732.3	656.6	613.3	584.7	556.7	521.3	498.1
52.5°	1149.3	1164.7	1005.2	817.6	684.4	610.1	569.3	546.6	521.2	492.1	471.8
55°	979.7	1035.1	908.8	738.0	613.3	542.4	503.8	483.7	469.0	447.3	429.8
57.5°	820.7	891.4	804.6	656.1	543.4	482.3	445.2	423.3	413.8	402.5	388.8
60°	726.4	796.2	730.1	601.1	496.4	438.3	405.5	387.0	377.5	369.5	357.9
62.5°	642.3	712.9	657.3	545.3	450.3	396.4	367.9	349.8	342.3	338.2	328.3
65°	526.5	587.3	550.4	458.4	384.4	336.8	310.8	298.2	291.3	289.7	283.4
67.5°	428.6	474.8	447.9	380.2	321.9	280.8	258.8	248.0	242.8	242.3	237.5
70°	364.3	407.6	387.0	325.7	275.5	243.2	224.2	214.6	211.5	211.0	208.3
72.5°	314.4	344.6	328.2	277.0	238.2	208.9	195.0	185.0	181.5	182.2	180.4
75°	232.6	255.4	245.8	210.5	179.3	160.2	148.6	142.2	139.1	140.7	138.6
77.5°	167.3	181.8	173.2	148.7	129.5	115.6	107.1	103.2	100.4	100.3	99.3
80°	126.3	134.8	130.1	115.2	99.4	87.8	80.9	78.3	76.6	76.1	75.6
82.5°	90.0	97.1	91.6	81.4	70.6	63.6	59.8	56.2	55.1	55.4	54.8
85°	45.4	48.1	45.9	39.7	35.4	32.2	30.1	28.6	27.5	28.0	27.0
87.5°	17.0	17.2	15.7	13.8	12.8	11.4	11.2	10.2	9.5	9.7	9.4
90°	6.5	5.5	4.4	3.5	2.7	1.9	1.1	0.4	1.1	1.9	2.7
92.5°	7.6	6.8	6.1	5.8	6.0	6.2	6.5	6.7	6.5	6.2	6.0
95°	9.3	8.5	7.6	8.8	12.0	15.2	18.5	21.8	18.5	15.2	12.0
97.5°	22.9	28.6	34.3	37.9	39.4	40.8	42.3	43.7	42.3	40.8	39.4
100°	36.6	48.9	61.3	66.7	65.0	63.5	61.9	60.3	61.9	63.5	65.0
102.5°	50.5	64.0	77.6	83.7	82.6	81.4	80.3	79.2	80.3	81.4	82.6
105°	92.4	99.6	106.7	109.9	109.0	108.1	107.2	106.3	107.2	108.1	109.0
107.5°	141.0	139.9	138.8	137.8	137.1	136.4	135.7	135.0	135.7	136.4	137.1
110°	159.2	158.3	157.4	156.7	156.0	155.4	154.8	154.2	154.8	155.4	156.0



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	177.2	176.3	175.4	174.7	174.1	173.6	173.0	172.4	173.0	173.6	174.1
115°	203.4	202.7	202.0	201.4	200.9	200.5	200.0	199.4	200.0	200.5	200.9
117.5°	229.2	228.8	228.5	228.0	227.4	226.8	226.3	225.7	226.3	226.8	227.4
120°	245.8	245.5	245.3	244.8	244.1	243.4	242.7	242.0	242.7	243.4	244.1
122.5°	261.9	261.6	261.3	260.8	260.2	259.6	259.1	258.5	259.1	259.6	260.2
125°	284.9	284.6	284.2	283.8	283.1	282.5	281.9	281.2	281.9	282.5	283.1
127.5°	307.0	306.6	306.2	305.7	305.1	304.5	303.9	303.2	303.9	304.5	305.1
130°	320.5	320.2	319.9	319.4	318.8	318.1	317.5	316.9	317.5	318.1	318.8
132.5°	333.6	333.3	333.0	332.5	331.9	331.3	330.6	330.0	330.6	331.3	331.9
135°	353.0	352.6	352.3	351.9	351.5	351.0	350.5	350.1	350.5	351.0	351.5
137.5°	370.3	370.2	370.0	369.6	369.0	368.4	367.8	367.2	367.8	368.4	369.0
140°	381.3	381.1	380.9	380.5	380.0	379.6	379.1	378.6	379.1	379.6	380.0
142.5°	391.9	391.7	391.4	391.1	390.6	390.1	389.7	389.2	389.7	390.1	390.6
145°	406.9	406.7	406.6	406.2	405.7	405.1	404.6	403.9	404.6	405.1	405.7
147.5°	419.9	419.8	419.6	419.3	419.0	418.6	418.3	417.9	418.3	418.6	419.0
150°	427.9	427.8	427.6	427.4	427.2	426.9	426.7	426.5	426.7	426.9	427.2
152.5°	434.8	434.7	434.7	434.5	434.4	434.3	434.2	434.1	434.2	434.3	434.4
155°	444.4	444.4	444.3	444.3	444.5	444.6	444.8	445.0	444.8	444.6	444.5
157.5°	453.1	453.2	453.3	453.3	453.3	453.4	453.4	453.4	453.4	453.4	453.3
160°	458.0	458.1	458.2	458.3	458.3	458.4	458.5	458.6	458.5	458.4	458.3
162.5°	462.3	462.3	462.4	462.6	462.8	463.0	463.2	463.4	463.2	463.0	462.8
165°	468.0	468.1	468.2	468.3	468.6	468.8	469.0	469.3	469.0	468.8	468.6
167.5°	472.4	472.4	472.4	472.5	472.9	473.2	473.5	473.8	473.5	473.2	472.9
170°	474.9	474.9	474.9	475.1	475.4	475.7	476.1	476.4	476.1	475.7	475.4
172.5°	476.6	476.5	476.5	476.6	477.0	477.4	477.8	478.1	477.8	477.4	477.0
175°	478.8	478.7	478.6	478.8	479.2	479.5	479.9	480.3	479.9	479.5	479.2
177.5°	479.6	479.6	479.5	479.6	480.0	480.3	480.6	480.9	480.6	480.3	480.0
180°	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2
2.5°	1073.0	1070.1	1065.8	1059.4	1054.4	1046.3	1046.3	1047.6	1047.6	1047.2	1046.3
5°	1040.5	1032.5	1023.0	1011.9	1000.3	988.7	986.5	982.3	979.2	977.0	974.3
7.5°	1006.1	992.0	978.2	962.6	948.5	936.8	928.6	921.8	917.5	912.8	909.5
10°	982.8	965.3	949.0	932.6	914.6	900.4	891.4	885.0	880.3	876.1	873.9
12.5°	955.3	935.3	917.3	901.7	882.0	867.4	858.8	855.9	850.2	841.3	836.7
15°	915.1	896.7	874.9	851.2	841.6	823.6	813.6	808.9	805.7	798.8	796.7
17.5°	880.8	856.6	832.2	814.5	796.8	782.2	776.6	770.7	766.5	760.8	759.2
20°	853.3	831.6	809.4	790.4	771.8	756.0	751.2	747.0	742.8	740.1	738.0
22.5°	825.4	803.8	785.3	767.5	747.8	737.4	732.3	727.6	724.6	722.9	720.7
25°	786.2	767.1	746.5	730.6	714.8	707.9	704.7	702.1	699.9	697.3	696.8
27.5°	751.0	730.3	713.6	698.8	687.4	681.7	678.6	677.3	677.8	678.7	679.3
30°	724.8	705.8	692.1	679.3	668.8	663.5	663.0	663.0	665.1	665.6	666.7
32.5°	700.7	685.1	671.4	659.0	651.1	647.4	649.4	649.4	651.2	652.5	654.4
35°	665.6	651.9	641.3	630.8	623.9	625.4	626.5	627.5	630.2	633.4	635.5
37.5°	632.1	620.2	609.2	600.9	597.7	600.6	603.1	605.3	608.4	610.9	613.0
40°	607.9	599.0	588.4	581.0	582.1	583.7	585.8	588.4	591.1	592.7	594.8
42.5°	585.5	576.1	568.2	562.0	563.5	565.5	566.7	568.2	571.2	574.0	575.3
45°	551.4	544.0	536.6	532.9	534.0	535.0	536.0	537.7	540.3	542.4	543.0
47.5°	513.0	507.9	502.9	499.3	501.0	500.6	501.9	505.3	506.1	507.5	510.4
50°	488.5	483.7	478.0	476.9	476.9	476.9	477.4	481.6	481.6	483.7	485.8
52.5°	461.4	458.4	454.6	452.7	451.9	451.9	454.1	456.3	457.1	460.1	462.2
55°	421.3	418.2	415.1	413.4	412.3	413.4	417.7	418.7	421.3	422.9	424.5
57.5°	379.6	377.2	374.7	373.8	373.5	375.0	377.3	380.4	381.1	386.0	388.4
60°	352.1	348.4	346.3	346.3	345.3	350.0	348.9	354.3	355.3	358.4	362.1
62.5°	323.8	318.8	317.9	317.9	319.4	320.8	322.2	324.6	327.4	331.3	334.3
65°	278.1	275.5	279.1	278.6	277.5	280.7	280.7	283.4	286.5	290.2	296.1
67.5°	234.8	233.5	233.8	233.8	235.4	237.2	238.6	241.0	244.8	248.7	252.5
70°	205.6	207.2	204.6	206.7	208.3	208.8	209.8	213.1	217.3	219.9	224.2
72.5°	177.3	177.2	177.5	178.3	180.0	180.9	182.0	185.6	190.3	192.5	195.8
75°	136.4	135.8	137.4	137.4	140.1	141.2	142.2	143.8	148.0	151.2	153.8
77.5°	99.6	100.3	99.9	101.7	101.0	101.2	104.4	106.0	106.4	112.7	114.1
80°	75.0	76.1	76.6	77.2	77.8	76.6	80.4	81.9	81.9	85.6	88.3
82.5°	53.9	54.5	55.9	56.5	56.6	57.7	58.0	59.1	60.4	62.0	65.4
85°	27.0	28.6	29.1	28.6	29.1	28.0	29.6	30.1	30.7	30.7	30.7
87.5°	9.2	9.8	9.6	10.2	10.0	10.6	10.7	9.9	9.9	11.3	9.6
90°	3.5	4.4	5.5	6.5	7.6	8.6	8.9	9.2	9.5	9.8	10.1
92.5°	5.8	6.1	6.8	7.6	8.4	9.1	9.6	10.2	10.7	11.2	11.5
95°	8.8	7.6	8.5	9.3	10.2	11.1	11.6	12.2	12.7	13.3	13.5
97.5°	37.9	34.3	28.6	22.9	17.2	11.5	12.1	12.7	13.4	14.0	14.3
100°	66.7	61.3	48.9	36.6	24.1	11.8	12.4	13.0	13.6	14.3	14.6
102.5°	83.7	77.6	64.0	50.5	37.0	23.5	21.5	19.6	17.6	15.7	14.7
105°	109.9	106.7	99.6	92.4	85.3	78.2	64.1	50.1	36.1	22.0	15.0
107.5°	137.8	138.8	139.9	141.0	142.1	143.2	132.9	122.7	112.4	102.1	91.6
110°	156.7	157.4	158.3	159.2	160.1	161.0	158.3	155.7	153.1	150.5	143.5



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	174.7	175.4	176.3	177.2	178.0	178.9	178.9	179.0	179.0	179.2	177.9
115°	201.4	202.0	202.7	203.4	204.1	204.8	205.6	206.4	207.2	208.0	208.5
117.5°	228.0	228.5	228.8	229.2	229.6	229.9	230.6	231.3	231.9	232.5	232.9
120°	244.8	245.3	245.5	245.8	246.0	246.2	246.9	247.5	248.1	248.7	249.1
122.5°	260.8	261.3	261.6	261.9	262.2	262.5	263.0	263.4	263.9	264.3	264.5
125°	283.8	284.2	284.6	284.9	285.2	285.5	285.7	285.8	286.0	286.1	286.3
127.5°	305.7	306.2	306.6	307.0	307.4	307.7	308.0	308.2	308.5	308.8	308.8
130°	319.4	319.9	320.2	320.5	320.8	321.1	321.4	321.8	322.1	322.4	322.6
132.5°	332.5	333.0	333.3	333.6	333.8	334.1	334.4	334.7	335.0	335.3	335.4
135°	351.9	352.3	352.6	353.0	353.4	353.7	353.9	354.2	354.4	354.6	354.6
137.5°	369.6	370.0	370.2	370.3	370.5	370.7	371.1	371.4	371.8	372.2	372.3
140°	380.5	380.9	381.1	381.3	381.6	381.8	382.1	382.4	382.7	383.1	383.1
142.5°	391.1	391.4	391.7	391.9	392.1	392.4	392.6	392.9	393.1	393.4	393.4
145°	406.2	406.6	406.7	406.9	407.0	407.2	407.4	407.5	407.7	407.8	407.9
147.5°	419.3	419.6	419.8	419.9	420.1	420.2	420.4	420.5	420.7	420.9	420.8
150°	427.4	427.6	427.8	427.9	428.1	428.2	428.4	428.6	428.7	428.9	428.8
152.5°	434.5	434.7	434.7	434.8	434.9	435.0	435.4	435.7	436.0	436.3	436.2
155°	444.3	444.3	444.4	444.4	444.5	444.6	445.0	445.5	445.9	446.3	446.2
157.5°	453.3	453.3	453.2	453.1	453.0	453.0	453.4	453.9	454.4	454.9	454.8
160°	458.3	458.2	458.1	458.0	458.0	457.9	458.3	458.8	459.3	459.8	459.7
162.5°	462.6	462.4	462.3	462.3	462.2	462.1	462.6	463.2	463.7	464.2	464.3
165°	468.3	468.2	468.1	468.0	467.9	467.9	468.5	469.1	469.8	470.4	470.4
167.5°	472.5	472.4	472.4	472.4	472.4	472.4	473.0	473.6	474.3	474.9	474.9
170°	475.1	474.9	474.9	474.9	474.9	474.9	475.6	476.3	476.9	477.5	477.5
172.5°	476.6	476.5	476.5	476.6	476.7	476.7	477.4	478.0	478.6	479.2	479.2
175°	478.8	478.6	478.7	478.8	478.8	478.9	479.5	480.0	480.6	481.1	481.1
177.5°	479.6	479.5	479.6	479.6	479.7	479.8	480.3	480.8	481.3	481.8	481.7
180°	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2
2.5°	1043.4	1043.0	1045.9	1043.8	1045.9	1043.0	1043.4	1046.3	1047.2	1047.6	1047.6
5°	971.2	972.8	967.5	967.5	967.5	972.8	971.2	974.3	977.0	979.2	982.3
7.5°	906.9	904.5	904.7	901.9	904.7	904.5	906.9	909.5	912.8	917.5	921.8
10°	867.6	864.4	863.3	863.8	863.3	864.4	867.6	873.9	876.1	880.3	885.0
12.5°	835.0	834.4	827.4	827.5	827.4	834.4	835.0	836.7	841.3	850.2	855.9
15°	796.7	786.7	785.6	788.8	785.6	786.7	796.7	796.7	798.8	805.7	808.9
17.5°	758.3	753.1	753.4	751.7	753.4	753.1	758.3	759.2	760.8	766.5	770.7
20°	738.0	734.9	734.4	730.6	734.4	734.9	738.0	738.0	740.1	742.8	747.0
22.5°	719.4	718.4	718.7	714.6	718.7	718.4	719.4	720.7	722.9	724.6	727.6
25°	696.3	698.9	696.8	696.8	696.8	698.9	696.3	696.8	697.3	699.9	702.1
27.5°	680.6	680.5	679.4	679.4	679.4	680.5	680.6	679.3	678.7	677.8	677.3
30°	668.8	668.2	669.3	669.3	669.3	668.2	668.8	666.7	665.6	665.1	663.0
32.5°	656.9	657.7	657.9	658.3	657.9	657.7	656.9	654.4	652.5	651.2	649.4
35°	638.6	639.1	640.8	639.7	640.8	639.1	638.6	635.5	633.4	630.2	627.5
37.5°	613.9	616.3	615.8	616.6	615.8	616.3	613.9	613.0	610.9	608.4	605.3
40°	595.3	596.9	596.3	596.3	596.3	596.9	595.3	594.8	592.7	591.1	588.4
42.5°	576.2	577.4	576.0	575.2	576.0	577.4	576.2	575.3	574.0	571.2	568.2
45°	545.0	544.0	545.6	543.5	545.6	544.0	545.0	543.0	542.4	540.3	537.7
47.5°	510.2	511.2	511.7	513.2	511.7	511.2	510.2	510.4	507.5	506.1	505.3
50°	487.0	490.1	490.1	489.6	490.1	490.1	487.0	485.8	483.7	481.6	481.6
52.5°	464.0	465.5	467.7	467.6	467.7	465.5	464.0	462.2	460.1	457.1	456.3
55°	428.8	429.8	430.9	431.4	430.9	429.8	428.8	424.5	422.9	421.3	418.7
57.5°	392.1	391.7	394.3	395.1	394.3	391.7	392.1	388.4	386.0	381.1	380.4
60°	366.4	366.4	370.6	372.2	370.6	366.4	366.4	362.1	358.4	355.3	354.3
62.5°	338.9	340.6	344.8	342.5	344.8	340.6	338.9	334.3	331.3	327.4	324.6
65°	298.7	303.0	302.5	304.5	302.5	303.0	298.7	296.1	290.2	286.5	283.4
67.5°	256.7	259.3	263.2	263.5	263.2	259.3	256.7	252.5	248.7	244.8	241.0
70°	228.4	231.1	233.2	234.7	233.2	231.1	228.4	224.2	219.9	217.3	213.1
72.5°	200.9	202.3	207.3	205.1	207.3	202.3	200.9	195.8	192.5	190.3	185.6
75°	157.5	161.3	164.4	162.8	164.4	161.3	157.5	153.8	151.2	148.0	143.8
77.5°	116.5	120.2	121.7	120.4	121.7	120.2	116.5	114.1	112.7	106.4	106.0
80°	92.0	91.5	94.6	94.1	94.6	91.5	92.0	88.3	85.6	81.9	81.9
82.5°	67.5	67.0	68.4	68.8	68.4	67.0	67.5	65.4	62.0	60.4	59.1
85°	32.8	34.3	32.2	31.7	32.2	34.3	32.8	30.7	30.7	30.7	30.1
87.5°	9.7	9.7	9.3	8.9	9.3	9.7	9.7	9.6	11.3	9.9	9.9
90°	10.2	10.4	10.5	10.7	10.5	10.4	10.2	10.1	9.8	9.5	9.2
92.5°	11.5	11.6	11.7	11.8	11.7	11.6	11.5	11.5	11.2	10.7	10.2
95°	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.5	13.3	12.7	12.2
97.5°	14.4	14.5	14.6	14.7	14.6	14.5	14.4	14.3	14.0	13.4	12.7
100°	14.7	14.8	14.9	14.9	14.9	14.8	14.7	14.6	14.3	13.6	13.0
102.5°	14.8	14.9	15.1	15.2	15.1	14.9	14.8	14.7	15.7	17.6	19.6
105°	15.2	15.3	15.6	15.7	15.6	15.3	15.2	15.0	22.0	36.1	50.1
107.5°	81.1	70.5	59.9	49.3	59.9	70.5	81.1	91.6	102.1	112.4	122.7
110°	132.2	120.8	109.5	98.2	109.5	120.8	132.2	143.5	150.5	153.1	155.7



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	175.5	173.2	170.8	168.3	170.8	173.2	175.5	177.9	179.2	179.0	179.0
115°	208.8	209.2	209.5	209.8	209.5	209.2	208.8	208.5	208.0	207.2	206.4
117.5°	232.9	233.0	233.1	233.1	233.1	233.0	232.9	232.9	232.5	231.9	231.3
120°	249.1	249.1	249.1	249.1	249.1	249.1	249.1	249.1	248.7	248.1	247.5
122.5°	264.6	264.7	264.7	264.8	264.7	264.7	264.6	264.5	264.3	263.9	263.4
125°	286.4	286.6	286.8	286.9	286.8	286.6	286.4	286.3	286.1	286.0	285.8
127.5°	308.6	308.5	308.3	308.2	308.3	308.5	308.6	308.8	308.8	308.5	308.2
130°	322.3	322.2	322.0	321.8	322.0	322.2	322.3	322.6	322.4	322.1	321.8
132.5°	335.1	334.9	334.7	334.5	334.7	334.9	335.1	335.4	335.3	335.0	334.7
135°	354.4	354.2	353.9	353.7	353.9	354.2	354.4	354.6	354.6	354.4	354.2
137.5°	372.1	372.0	371.8	371.7	371.8	372.0	372.1	372.3	372.2	371.8	371.4
140°	383.0	382.8	382.7	382.5	382.7	382.8	383.0	383.1	383.1	382.7	382.4
142.5°	393.2	392.9	392.7	392.5	392.7	392.9	393.2	393.4	393.4	393.1	392.9
145°	407.9	407.9	407.9	407.9	407.9	407.9	407.9	407.9	407.8	407.7	407.5
147.5°	420.4	420.0	419.7	419.3	419.7	420.0	420.4	420.8	420.9	420.7	420.5
150°	428.6	428.4	428.1	427.9	428.1	428.4	428.6	428.8	428.9	428.7	428.6
152.5°	435.9	435.5	435.0	434.7	435.0	435.5	435.9	436.2	436.3	436.0	435.7
155°	445.8	445.2	444.7	444.2	444.7	445.2	445.8	446.2	446.3	445.9	445.5
157.5°	454.2	453.6	452.9	452.3	452.9	453.6	454.2	454.8	454.9	454.4	453.9
160°	459.2	458.6	458.1	457.5	458.1	458.6	459.2	459.7	459.8	459.3	458.8
162.5°	463.8	463.3	462.8	462.3	462.8	463.3	463.8	464.3	464.2	463.7	463.2
165°	469.9	469.3	468.8	468.2	468.8	469.3	469.9	470.4	470.4	469.8	469.1
167.5°	474.3	473.6	473.0	472.4	473.0	473.6	474.3	474.9	474.9	474.3	473.6
170°	476.9	476.3	475.6	474.9	475.6	476.3	476.9	477.5	477.5	476.9	476.3
172.5°	478.5	477.8	477.1	476.4	477.1	477.8	478.5	479.2	479.2	478.6	478.0
175°	480.5	479.8	479.2	478.6	479.2	479.8	480.5	481.1	481.1	480.6	480.0
177.5°	481.1	480.5	479.8	479.2	479.8	480.5	481.1	481.7	481.8	481.3	480.8
180°	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2
2.5°	1046.3	1046.3	1054.4	1059.4	1065.8	1070.1	1073.0	1076.0	1081.1	1087.8	1095.4
5°	986.5	988.7	1000.3	1011.9	1023.0	1032.5	1040.5	1050.0	1061.6	1075.9	1091.8
7.5°	928.6	936.8	948.5	962.6	978.2	992.0	1006.1	1021.8	1038.1	1059.1	1081.4
10°	891.4	900.4	914.6	932.6	949.0	965.3	982.8	999.8	1020.4	1045.2	1073.8
12.5°	858.8	867.4	882.0	901.7	917.3	935.3	955.3	977.3	1000.5	1030.4	1062.8
15°	813.6	823.6	841.6	851.2	874.9	896.7	915.1	946.8	976.4	1007.1	1044.7
17.5°	776.6	782.2	796.8	814.5	832.2	856.6	880.8	907.3	936.8	974.2	1021.2
20°	751.2	756.0	771.8	790.4	809.4	831.6	853.3	879.7	913.0	952.7	1003.4
22.5°	732.3	737.4	747.8	767.5	785.3	803.8	825.4	856.9	892.3	931.1	986.1
25°	704.7	707.9	714.8	730.6	746.5	767.1	786.2	815.8	852.2	897.7	952.7
27.5°	678.6	681.7	687.4	698.8	713.6	730.3	751.0	776.2	813.2	862.6	921.0
30°	663.0	663.5	668.8	679.3	692.1	705.8	724.8	753.4	788.3	838.5	899.8
32.5°	649.4	647.4	651.1	659.0	671.4	685.1	700.7	728.8	762.4	811.8	874.8
35°	626.5	625.4	623.9	630.8	641.3	651.9	665.6	686.8	724.8	770.8	836.9
37.5°	603.1	600.6	597.7	600.9	609.2	620.2	632.1	651.0	683.7	734.4	797.6
40°	585.8	583.7	582.1	581.0	588.4	599.0	607.9	625.9	656.6	704.7	767.1
42.5°	566.7	565.5	563.5	562.0	568.2	576.1	585.5	601.5	632.1	677.2	736.3
45°	536.0	535.0	534.0	532.9	536.6	544.0	551.4	563.0	589.5	633.4	686.8
47.5°	501.9	500.6	501.0	499.3	502.9	507.9	513.0	525.5	550.9	586.3	625.3
50°	477.4	476.9	476.9	476.9	478.0	483.7	488.5	498.1	521.3	556.7	584.7
52.5°	454.1	451.9	451.9	452.7	454.6	458.4	461.4	471.8	492.1	521.2	546.6
55°	417.7	413.4	412.3	413.4	415.1	418.2	421.3	429.8	447.3	469.0	483.7
57.5°	377.3	375.0	373.5	373.8	374.7	377.2	379.6	388.8	402.5	413.8	423.3
60°	348.9	350.0	345.3	346.3	346.3	348.4	352.1	357.9	369.5	377.5	387.0
62.5°	322.2	320.8	319.4	317.9	317.9	318.8	323.8	328.3	338.2	342.3	349.8
65°	280.7	280.7	277.5	278.6	279.1	275.5	278.1	283.4	289.7	291.3	298.2
67.5°	238.6	237.2	235.4	233.8	233.8	233.5	234.8	237.5	242.3	242.8	248.0
70°	209.8	208.8	208.3	206.7	204.6	207.2	205.6	208.3	211.0	211.5	214.6
72.5°	182.0	180.9	180.0	178.3	177.5	177.2	177.3	180.4	182.2	181.5	185.0
75°	142.2	141.2	140.1	137.4	137.4	135.8	136.4	138.6	140.7	139.1	142.2
77.5°	104.4	101.2	101.0	101.7	99.9	100.3	99.6	99.3	100.3	100.4	103.2
80°	80.4	76.6	77.8	77.2	76.6	76.1	75.0	75.6	76.1	76.6	78.3
82.5°	58.0	57.7	56.6	56.5	55.9	54.5	53.9	54.8	55.4	55.1	56.2
85°	29.6	28.0	29.1	28.6	29.1	28.6	27.0	27.0	28.0	27.5	28.6
87.5°	10.7	10.6	10.0	10.2	9.6	9.8	9.2	9.4	9.7	9.5	10.2
90°	8.9	8.6	7.6	6.5	5.5	4.4	3.5	2.7	1.9	1.1	0.4
92.5°	9.6	9.1	8.4	7.6	6.8	6.1	5.8	6.0	6.2	6.5	6.7
95°	11.6	11.1	10.2	9.3	8.5	7.6	8.8	12.0	15.2	18.5	21.8
97.5°	12.1	11.5	17.2	22.9	28.6	34.3	37.9	39.4	40.8	42.3	43.7
100°	12.4	11.8	24.1	36.6	48.9	61.3	66.7	65.0	63.5	61.9	60.3
102.5°	21.5	23.5	37.0	50.5	64.0	77.6	83.7	82.6	81.4	80.3	79.2
105°	64.1	78.2	85.3	92.4	99.6	106.7	109.9	109.0	108.1	107.2	106.3
107.5°	132.9	143.2	142.1	141.0	139.9	138.8	137.8	137.1	136.4	135.7	135.0
110°	158.3	161.0	160.1	159.2	158.3	157.4	156.7	156.0	155.4	154.8	154.2



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	178.9	178.9	178.0	177.2	176.3	175.4	174.7	174.1	173.6	173.0	172.4
115°	205.6	204.8	204.1	203.4	202.7	202.0	201.4	200.9	200.5	200.0	199.4
117.5°	230.6	229.9	229.6	229.2	228.8	228.5	228.0	227.4	226.8	226.3	225.7
120°	246.9	246.2	246.0	245.8	245.5	245.3	244.8	244.1	243.4	242.7	242.0
122.5°	263.0	262.5	262.2	261.9	261.6	261.3	260.8	260.2	259.6	259.1	258.5
125°	285.7	285.5	285.2	284.9	284.6	284.2	283.8	283.1	282.5	281.9	281.2
127.5°	308.0	307.7	307.4	307.0	306.6	306.2	305.7	305.1	304.5	303.9	303.2
130°	321.4	321.1	320.8	320.5	320.2	319.9	319.4	318.8	318.1	317.5	316.9
132.5°	334.4	334.1	333.8	333.6	333.3	333.0	332.5	331.9	331.3	330.6	330.0
135°	353.9	353.7	353.4	353.0	352.6	352.3	351.9	351.5	351.0	350.5	350.1
137.5°	371.1	370.7	370.5	370.3	370.2	370.0	369.6	369.0	368.4	367.8	367.2
140°	382.1	381.8	381.6	381.3	381.1	380.9	380.5	380.0	379.6	379.1	378.6
142.5°	392.6	392.4	392.1	391.9	391.7	391.4	391.1	390.6	390.1	389.7	389.2
145°	407.4	407.2	407.0	406.9	406.7	406.6	406.2	405.7	405.1	404.6	403.9
147.5°	420.4	420.2	420.1	419.9	419.8	419.6	419.3	419.0	418.6	418.3	417.9
150°	428.4	428.2	428.1	427.9	427.8	427.6	427.4	427.2	426.9	426.7	426.5
152.5°	435.4	435.0	434.9	434.8	434.7	434.7	434.5	434.4	434.3	434.2	434.1
155°	445.0	444.6	444.5	444.4	444.4	444.3	444.3	444.5	444.6	444.8	445.0
157.5°	453.4	453.0	453.0	453.1	453.2	453.3	453.3	453.3	453.4	453.4	453.4
160°	458.3	457.9	458.0	458.0	458.1	458.2	458.3	458.3	458.4	458.5	458.6
162.5°	462.6	462.1	462.2	462.3	462.3	462.4	462.6	462.8	463.0	463.2	463.4
165°	468.5	467.9	467.9	468.0	468.1	468.2	468.3	468.6	468.8	469.0	469.3
167.5°	473.0	472.4	472.4	472.4	472.4	472.4	472.5	472.9	473.2	473.5	473.8
170°	475.6	474.9	474.9	474.9	474.9	474.9	475.1	475.4	475.7	476.1	476.4
172.5°	477.4	476.7	476.7	476.6	476.5	476.5	476.6	477.0	477.4	477.8	478.1
175°	479.5	478.9	478.8	478.8	478.7	478.6	478.8	479.2	479.5	479.9	480.3
177.5°	480.3	479.8	479.7	479.6	479.6	479.5	479.6	480.0	480.3	480.6	480.9
180°	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2
2.5°	1097.9	1100.0	1107.3	1112.4	1118.2	1121.7	1125.0	1127.6	1130.9	1131.8	1144.1
5°	1102.9	1113.4	1132.0	1145.7	1162.6	1181.0	1193.8	1199.6	1214.9	1227.6	1252.9
7.5°	1101.5	1124.0	1151.9	1180.8	1211.9	1240.7	1265.7	1295.3	1316.4	1348.0	1379.1
10°	1100.1	1130.3	1166.3	1203.3	1246.7	1286.8	1322.7	1362.9	1396.2	1440.2	1477.6
12.5°	1096.4	1132.9	1182.8	1226.6	1279.2	1334.6	1387.9	1439.5	1468.9	1542.1	1576.6
15°	1087.0	1130.3	1192.8	1259.3	1331.7	1397.4	1465.0	1518.9	1606.1	1670.1	1710.8
17.5°	1069.0	1129.7	1203.7	1284.0	1372.1	1458.5	1535.2	1617.0	1709.5	1787.0	1869.5
20°	1060.6	1127.1	1209.6	1298.5	1389.9	1487.7	1575.0	1673.2	1774.2	1850.4	1956.1
22.5°	1044.9	1120.3	1209.2	1308.2	1405.9	1507.1	1609.2	1708.4	1825.0	1930.0	2030.5
25°	1019.3	1103.9	1195.9	1306.4	1421.1	1522.6	1644.8	1776.4	1897.9	2032.8	2133.2
27.5°	992.4	1082.8	1175.0	1277.7	1401.1	1521.6	1675.2	1823.9	1972.7	2089.0	2163.3
30°	971.7	1059.4	1154.7	1258.3	1380.4	1523.7	1695.5	1857.7	2002.7	2102.5	2144.3
32.5°	949.3	1038.3	1122.5	1231.2	1361.4	1522.4	1708.2	1877.6	2004.4	2070.8	2062.8
35°	914.1	988.7	1070.6	1175.3	1328.6	1513.1	1715.6	1879.5	1957.2	1942.9	1835.0
37.5°	863.3	926.0	1006.7	1121.4	1290.5	1493.5	1700.8	1823.7	1818.7	1702.4	1546.2
40°	831.6	885.0	962.7	1083.3	1260.9	1480.9	1677.5	1757.4	1689.7	1527.3	1340.2
42.5°	790.2	839.3	917.1	1041.0	1228.3	1455.0	1633.1	1656.3	1523.9	1337.1	1165.5
45°	725.9	769.2	849.6	977.5	1179.5	1398.9	1524.7	1468.1	1290.0	1097.0	966.4
47.5°	656.8	701.9	779.2	910.6	1108.8	1314.4	1374.3	1254.1	1071.1	914.6	794.8
50°	613.3	656.6	732.3	864.9	1061.1	1245.1	1269.9	1114.5	946.3	808.9	710.5
52.5°	569.3	610.1	684.4	817.6	1005.2	1164.7	1149.3	991.0	836.4	719.2	642.1
55°	503.8	542.4	613.3	738.0	908.8	1035.1	979.7	828.5	700.5	609.6	550.9
57.5°	445.2	482.3	543.4	656.1	804.6	891.4	820.7	693.3	591.6	521.6	477.9
60°	405.5	438.3	496.4	601.1	730.1	796.2	726.4	613.8	528.2	472.1	433.0
62.5°	367.9	396.4	450.3	545.3	657.3	712.9	642.3	546.9	474.0	424.3	391.1
65°	310.8	336.8	384.4	458.4	550.4	587.3	526.5	449.4	392.8	355.8	333.6
67.5°	258.8	280.8	321.9	380.2	447.9	474.8	428.6	368.8	326.2	296.5	278.8
70°	224.2	243.2	275.5	325.7	387.0	407.6	364.3	315.1	283.9	260.1	243.7
72.5°	195.0	208.9	238.2	277.0	328.2	344.6	314.4	271.1	242.1	224.2	211.2
75°	148.6	160.2	179.3	210.5	245.8	255.4	232.6	205.6	186.1	173.4	163.4
77.5°	107.1	115.6	129.5	148.7	173.2	181.8	167.3	149.4	135.1	126.5	121.0
80°	80.9	87.8	99.4	115.2	130.1	134.8	126.3	112.6	102.6	97.9	93.0
82.5°	59.8	63.6	70.6	81.4	91.6	97.1	90.0	81.7	76.3	72.0	70.2
85°	30.1	32.2	35.4	39.7	45.9	48.1	45.4	43.3	40.2	37.6	37.6
87.5°	11.2	11.4	12.8	13.8	15.7	17.2	17.0	16.4	16.1	15.8	15.3
90°	1.1	1.9	2.7	3.5	4.4	5.5	6.5	7.6	8.6	8.9	9.2
92.5°	6.5	6.2	6.0	5.8	6.1	6.8	7.6	8.4	9.1	9.6	10.2
95°	18.5	15.2	12.0	8.8	7.6	8.5	9.3	10.2	11.1	11.6	12.2
97.5°	42.3	40.8	39.4	37.9	34.3	28.6	22.9	17.2	11.5	12.1	12.7
100°	61.9	63.5	65.0	66.7	61.3	48.9	36.6	24.1	11.8	12.4	13.0
102.5°	80.3	81.4	82.6	83.7	77.6	64.0	50.5	37.0	23.5	21.5	19.6
105°	107.2	108.1	109.0	109.9	106.7	99.6	92.4	85.3	78.2	64.1	50.1
107.5°	135.7	136.4	137.1	137.8	138.8	139.9	141.0	142.1	143.2	132.9	122.7
110°	154.8	155.4	156.0	156.7	157.4	158.3	159.2	160.1	161.0	158.3	155.7



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	173.0	173.6	174.1	174.7	175.4	176.3	177.2	178.0	178.9	178.9	179.0
115°	200.0	200.5	200.9	201.4	202.0	202.7	203.4	204.1	204.8	205.6	206.4
117.5°	226.3	226.8	227.4	228.0	228.5	228.8	229.2	229.6	229.9	230.6	231.3
120°	242.7	243.4	244.1	244.8	245.3	245.5	245.8	246.0	246.2	246.9	247.5
122.5°	259.1	259.6	260.2	260.8	261.3	261.6	261.9	262.2	262.5	263.0	263.4
125°	281.9	282.5	283.1	283.8	284.2	284.6	284.9	285.2	285.5	285.7	285.8
127.5°	303.9	304.5	305.1	305.7	306.2	306.6	307.0	307.4	307.7	308.0	308.2
130°	317.5	318.1	318.8	319.4	319.9	320.2	320.5	320.8	321.1	321.4	321.8
132.5°	330.6	331.3	331.9	332.5	333.0	333.3	333.6	333.8	334.1	334.4	334.7
135°	350.5	351.0	351.5	351.9	352.3	352.6	353.0	353.4	353.7	353.9	354.2
137.5°	367.8	368.4	369.0	369.6	370.0	370.2	370.3	370.5	370.7	371.1	371.4
140°	379.1	379.6	380.0	380.5	380.9	381.1	381.3	381.6	381.8	382.1	382.4
142.5°	389.7	390.1	390.6	391.1	391.4	391.7	391.9	392.1	392.4	392.6	392.9
145°	404.6	405.1	405.7	406.2	406.6	406.7	406.9	407.0	407.2	407.4	407.5
147.5°	418.3	418.6	419.0	419.3	419.6	419.8	419.9	420.1	420.2	420.4	420.5
150°	426.7	426.9	427.2	427.4	427.6	427.8	427.9	428.1	428.2	428.4	428.6
152.5°	434.2	434.3	434.4	434.5	434.7	434.7	434.8	434.9	435.0	435.4	435.7
155°	444.8	444.6	444.5	444.3	444.3	444.4	444.4	444.5	444.6	445.0	445.5
157.5°	453.4	453.4	453.3	453.3	453.3	453.2	453.1	453.0	453.0	453.4	453.9
160°	458.5	458.4	458.3	458.3	458.2	458.1	458.0	458.0	457.9	458.3	458.8
162.5°	463.2	463.0	462.8	462.6	462.4	462.3	462.3	462.2	462.1	462.6	463.2
165°	469.0	468.8	468.6	468.3	468.2	468.1	468.0	467.9	467.9	468.5	469.1
167.5°	473.5	473.2	472.9	472.5	472.4	472.4	472.4	472.4	472.4	473.0	473.6
170°	476.1	475.7	475.4	475.1	474.9	474.9	474.9	474.9	474.9	475.6	476.3
172.5°	477.8	477.4	477.0	476.6	476.5	476.5	476.6	476.7	476.7	477.4	478.0
175°	479.9	479.5	479.2	478.8	478.6	478.7	478.8	478.8	478.9	479.5	480.0
177.5°	480.6	480.3	480.0	479.6	479.5	479.6	479.6	479.7	479.8	480.3	480.8
180°	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3	480.3



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2	1091.2
2.5°	1148.3	1148.7	1153.4	1156.8	1155.1	1157.2	1158.0
5°	1254.6	1273.6	1283.6	1291.0	1291.6	1292.1	1296.4
7.5°	1405.2	1425.6	1440.6	1463.2	1470.0	1477.6	1475.4
10°	1515.2	1545.3	1571.2	1585.0	1599.8	1621.4	1604.1
12.5°	1618.0	1671.4	1710.8	1732.2	1746.2	1750.5	1741.9
15°	1787.5	1857.2	1894.8	1893.7	1941.4	1962.0	1929.7
17.5°	1942.9	2007.3	2058.9	2085.4	2125.0	2133.7	2129.7
20°	2038.1	2108.4	2148.6	2194.0	2214.6	2233.1	2236.3
22.5°	2120.1	2183.2	2226.3	2264.2	2281.5	2290.3	2295.5
25°	2204.6	2254.3	2280.2	2293.4	2298.1	2297.1	2290.3
27.5°	2198.8	2202.6	2174.0	2146.1	2121.0	2092.7	2083.0
30°	2141.7	2097.3	2018.0	1973.1	1906.9	1854.6	1875.7
32.5°	1991.6	1903.2	1814.1	1715.9	1634.6	1611.4	1588.1
35°	1699.7	1544.3	1453.4	1347.6	1305.4	1263.0	1234.0
37.5°	1375.1	1254.9	1147.0	1077.8	1035.5	1008.8	994.3
40°	1189.0	1080.7	991.8	935.7	903.5	873.4	869.2
42.5°	1040.6	939.8	872.9	828.3	797.4	784.6	775.3
45°	852.2	781.9	737.0	705.3	684.7	676.7	666.1
47.5°	721.3	671.7	637.9	616.3	600.8	594.9	594.0
50°	648.1	606.9	582.1	565.1	553.0	550.9	542.4
52.5°	593.2	557.4	538.1	523.3	514.5	508.6	506.0
55°	514.9	491.1	473.7	465.2	458.4	452.5	452.5
57.5°	450.5	430.7	419.1	411.9	409.8	405.7	403.0
60°	410.8	393.8	384.9	378.5	374.4	374.9	370.1
62.5°	371.8	360.9	352.3	346.0	340.9	341.0	341.3
65°	316.7	308.2	301.8	299.7	296.6	292.9	294.0
67.5°	268.3	260.4	255.5	251.9	250.9	248.8	251.9
70°	233.7	227.8	224.2	221.0	219.9	220.5	223.1
72.5°	202.0	197.8	195.4	193.9	191.6	191.7	193.5
75°	158.6	155.4	153.3	151.7	151.2	151.2	151.2
77.5°	116.5	115.8	114.8	112.5	112.6	113.2	113.3
80°	92.0	90.4	89.9	88.9	87.3	86.1	88.9
82.5°	68.8	67.2	66.7	66.4	63.9	63.7	65.9
85°	37.0	35.4	36.0	35.4	35.4	34.9	34.9
87.5°	15.0	14.6	14.2	14.7	14.3	13.9	14.8
90°	9.5	9.8	10.1	10.2	10.4	10.5	10.7
92.5°	10.7	11.2	11.5	11.5	11.6	11.7	11.8
95°	12.7	13.3	13.5	13.5	13.5	13.5	13.5
97.5°	13.4	14.0	14.3	14.4	14.5	14.6	14.7
100°	13.6	14.3	14.6	14.7	14.8	14.9	14.9
102.5°	17.6	15.7	14.7	14.8	14.9	15.1	15.2
105°	36.1	22.0	15.0	15.2	15.3	15.6	15.7
107.5°	112.4	102.1	91.6	81.1	70.5	59.9	49.3
110°	153.1	150.5	143.5	132.2	120.8	109.5	98.2



TEST NUMBER: P331955-840

CATALOG NUMBER: S123DIP-S775D365U840-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	179.0	179.2	177.9	175.5	173.2	170.8	168.3
115°	207.2	208.0	208.5	208.8	209.2	209.5	209.8
117.5°	231.9	232.5	232.9	232.9	233.0	233.1	233.1
120°	248.1	248.7	249.1	249.1	249.1	249.1	249.1
122.5°	263.9	264.3	264.5	264.6	264.7	264.7	264.8
125°	286.0	286.1	286.3	286.4	286.6	286.8	286.9
127.5°	308.5	308.8	308.8	308.6	308.5	308.3	308.2
130°	322.1	322.4	322.6	322.3	322.2	322.0	321.8
132.5°	335.0	335.3	335.4	335.1	334.9	334.7	334.5
135°	354.4	354.6	354.6	354.4	354.2	353.9	353.7
137.5°	371.8	372.2	372.3	372.1	372.0	371.8	371.7
140°	382.7	383.1	383.1	383.0	382.8	382.7	382.5
142.5°	393.1	393.4	393.4	393.2	392.9	392.7	392.5
145°	407.7	407.8	407.9	407.9	407.9	407.9	407.9
147.5°	420.7	420.9	420.8	420.4	420.0	419.7	419.3
150°	428.7	428.9	428.8	428.6	428.4	428.1	427.9
152.5°	436.0	436.3	436.2	435.9	435.5	435.0	434.7
155°	445.9	446.3	446.2	445.8	445.2	444.7	444.2
157.5°	454.4	454.9	454.8	454.2	453.6	452.9	452.3
160°	459.3	459.8	459.7	459.2	458.6	458.1	457.5
162.5°	463.7	464.2	464.3	463.8	463.3	462.8	462.3
165°	469.8	470.4	470.4	469.9	469.3	468.8	468.2
167.5°	474.3	474.9	474.9	474.3	473.6	473.0	472.4
170°	476.9	477.5	477.5	476.9	476.3	475.6	474.9
172.5°	478.6	479.2	479.2	478.5	477.8	477.1	476.4
175°	480.6	481.1	481.1	480.5	479.8	479.2	478.6
177.5°	481.3	481.8	481.7	481.1	480.5	479.8	479.2
180°	480.3	480.3	480.3	480.3	480.3	480.3	480.3

(END OF REPORT)