

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332352-840

Luminaire Tested: **S123RDIP-S1000D1025U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332352-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 7387.8 lumens
Efficiency: N/A
Efficacy: 122.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332352-840

CATALOG NUMBER: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

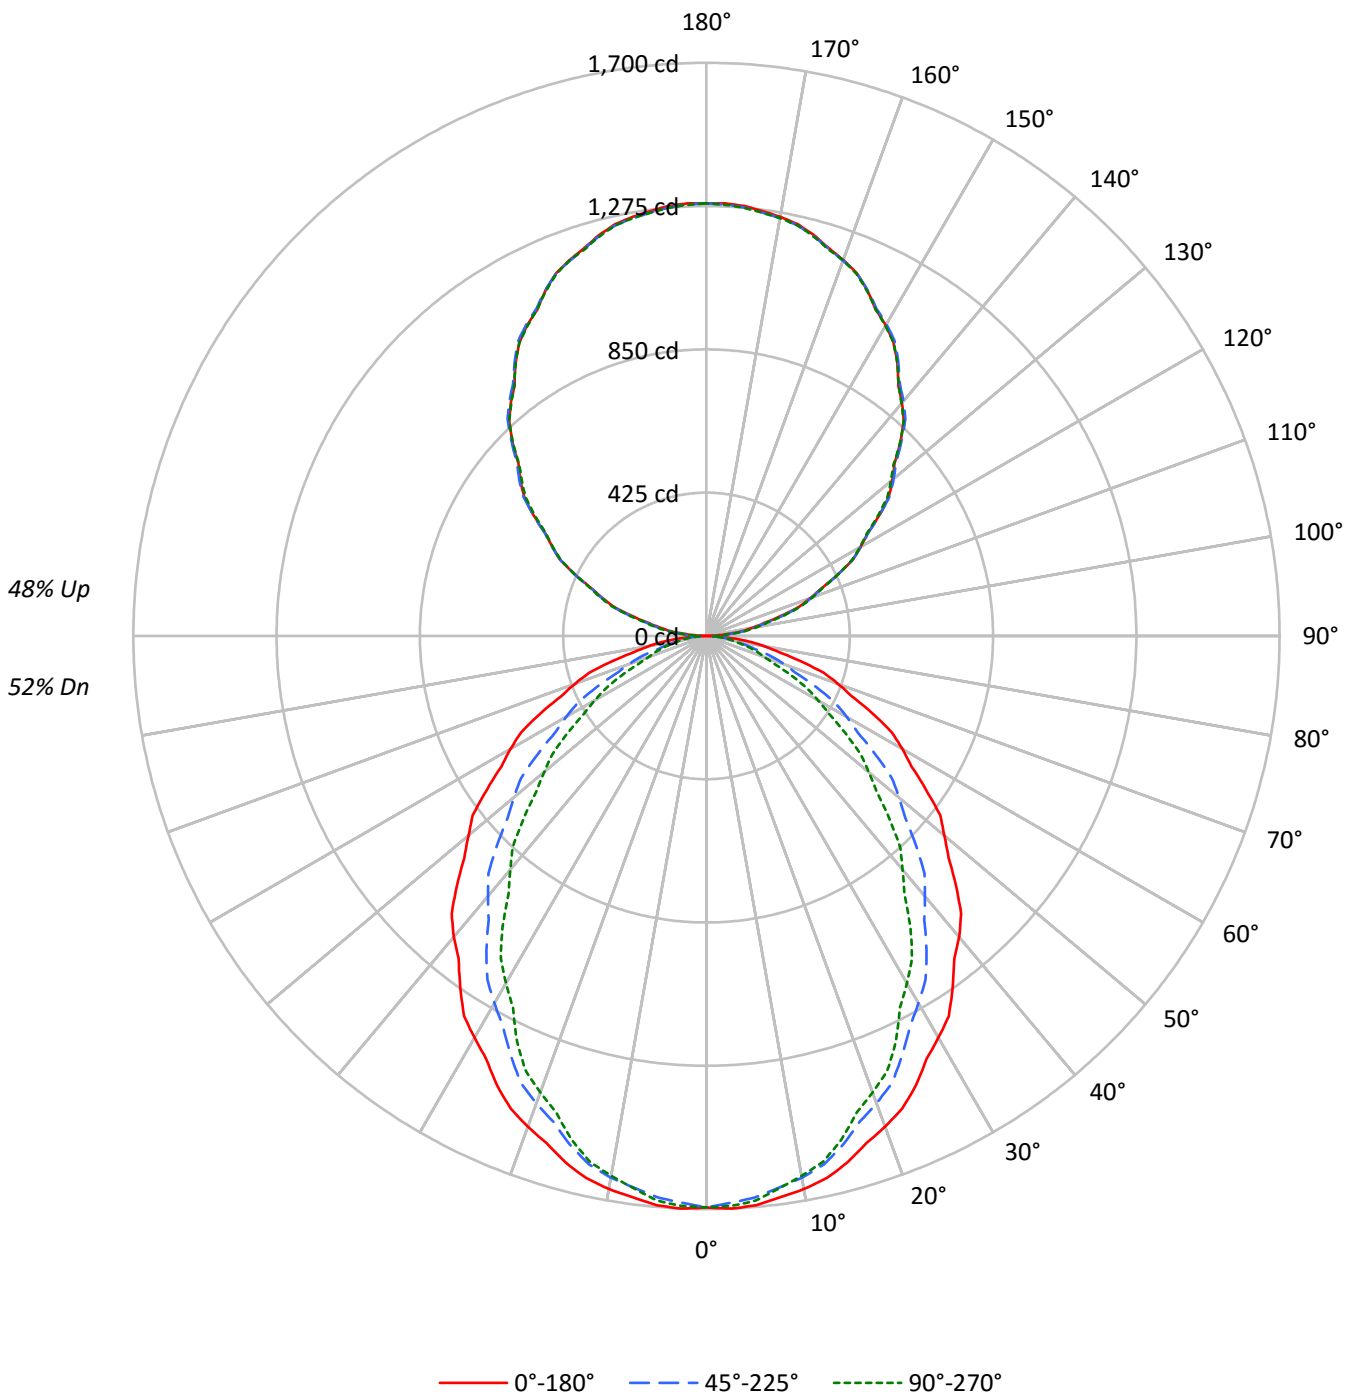



TEST NUMBER: P332352-840

CATALOG NUMBER: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	99	99	99	99	84	84	84	71	71	71	58	58	58	52
1	99	94	91	87	91	87	84	81	74	72	70	63	61	59	52	51	50	44
2	90	83	77	72	83	77	72	67	66	62	58	55	53	50	46	44	42	38
3	82	73	66	60	76	68	62	57	58	53	50	49	46	43	41	38	36	32
4	75	65	57	51	70	60	54	48	52	47	42	44	40	37	37	34	32	28
5	69	58	50	44	64	54	47	42	47	41	37	40	35	32	33	30	28	24
6	64	52	44	38	59	49	41	36	42	36	32	36	32	28	30	27	24	22
7	59	47	39	34	55	44	37	32	38	33	29	33	28	25	28	24	22	19
8	55	43	35	30	51	40	33	28	35	29	25	30	26	23	26	22	20	17
9	51	39	32	27	47	37	30	25	32	27	23	28	23	20	24	20	18	16
10	48	36	29	24	44	34	27	23	30	24	21	26	21	18	22	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18243	18243	18243
5°	18312	18058	18163
10°	18208	17832	17772
15°	18013	17415	17231
20°	17743	16893	16501
25°	17467	16308	15785
30°	17100	15632	14777
35°	16724	14954	13853
40°	16378	14155	12708
45°	15923	13370	11676
50°	15421	12476	10518
55°	14910	11453	9439
60°	14441	10357	8254
65°	13827	9172	7070
70°	13064	7701	5712
75°	11948	6059	5373
80°	10649	5362	4940
85°	8991	4755	4409



TEST NUMBER: P332352-840

CATALOG NUMBER: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.1	2.2
10°-20°	442.8	6.0
20°-30°	637.6	8.6
30°-40°	718.2	9.7
40°-50°	687.1	9.3
50°-60°	562.6	7.6
60°-70°	379.6	5.1
70°-80°	191.0	2.6
80°-90°	54.3	0.7
90°-100°	83.6	1.1
100°-110°	250.2	3.4
110°-120°	425.6	5.8
120°-130°	559.8	7.6
130°-140°	629.2	8.5
140°-150°	618.5	8.4
150°-160°	520.7	7.0
160°-170°	346.6	4.7
170°-180°	121.4	1.6
0°-30°	1239.5	16.8
0°-40°	1957.7	26.5
0°-60°	3207.4	43.4
0°-90°	3832.3	51.9
90°-120°	759.4	10.3
90°-150°	2566.9	34.7
90°-180°	3555.0	48.1
0°-180°	7387.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1695	1695	1695	1695	1695	
5°	1695	1687	1671	1683	1681	161
15°	1616	1600	1563	1556	1546	455
25°	1471	1435	1373	1345	1329	676
35°	1273	1221	1138	1081	1054	796
45°	1046	982	878	802	767	807
55°	794	724	610	533	503	712
65°	543	466	360	296	278	537
75°	287	221	146	133	129	306
85°	73	44	38	36	36	82
90°	1	11	24	28	30	7
95°	60	67	75	78	79	67
105°	227	229	238	238	240	243
115°	428	431	429	430	429	424
125°	627	630	628	624	620	559
135°	814	819	818	815	812	627
145°	987	989	992	991	987	616
155°	1130	1130	1131	1134	1128	520
165°	1231	1228	1228	1233	1227	347
175°	1280	1276	1276	1282	1275	122
180°	1283	1283	1283	1283	1283	



TEST NUMBER: P332352-840

CATALOG NUMBER: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8
2.5°	1700.2	1699.2	1698.3	1697.3	1696.3	1694.4	1691.4	1688.5	1685.6	1682.6	1685.3
5°	1694.8	1693.1	1691.6	1690.1	1688.6	1686.0	1682.3	1678.7	1675.1	1671.3	1674.1
7.5°	1679.0	1677.4	1675.8	1674.1	1672.4	1669.2	1664.5	1659.7	1655.0	1650.2	1651.7
10°	1665.9	1663.8	1661.5	1659.4	1657.3	1653.5	1648.0	1642.4	1637.0	1631.5	1631.8
12.5°	1647.2	1644.8	1642.4	1640.0	1637.6	1633.1	1626.4	1619.6	1613.0	1606.2	1606.0
15°	1616.4	1613.1	1609.6	1606.3	1603.0	1597.0	1588.4	1579.8	1571.3	1562.8	1561.3
17.5°	1577.6	1573.7	1569.8	1565.9	1562.0	1554.6	1543.7	1532.9	1522.0	1511.1	1507.8
20°	1549.0	1544.2	1539.2	1534.4	1529.4	1521.3	1509.6	1498.0	1486.4	1474.8	1470.9
22.5°	1517.1	1511.6	1505.9	1500.3	1494.7	1485.7	1473.3	1461.0	1448.7	1436.3	1431.4
25°	1470.7	1463.1	1455.4	1447.7	1440.2	1429.3	1415.2	1401.2	1387.2	1373.1	1366.7
27.5°	1414.3	1405.9	1397.5	1389.1	1380.6	1368.6	1352.9	1337.3	1321.6	1306.1	1297.1
30°	1375.8	1366.7	1357.6	1348.4	1339.2	1326.1	1309.0	1291.8	1274.8	1257.7	1247.3
32.5°	1337.4	1327.0	1316.6	1306.2	1295.9	1281.6	1263.5	1245.5	1227.3	1209.2	1197.9
35°	1272.7	1261.7	1250.7	1239.8	1228.8	1213.8	1194.9	1175.9	1157.0	1138.0	1124.9
37.5°	1207.3	1195.1	1182.9	1170.6	1158.4	1142.3	1122.1	1101.8	1081.6	1061.4	1046.4
40°	1165.6	1152.2	1138.6	1125.2	1111.8	1094.2	1072.6	1050.9	1029.2	1007.4	991.6
42.5°	1118.2	1104.8	1091.4	1077.9	1064.5	1046.6	1024.2	1001.8	979.4	956.9	939.6
45°	1046.0	1032.2	1018.4	1004.7	991.0	972.4	948.9	925.3	901.8	878.3	860.9
47.5°	973.7	958.6	943.5	928.4	913.3	894.0	870.5	847.0	823.4	799.9	781.0
50°	920.9	906.6	892.2	877.9	863.4	843.9	819.2	794.5	769.7	745.0	726.0
52.5°	873.6	858.1	842.4	826.9	811.3	791.2	766.8	742.3	717.8	693.3	673.6
55°	794.5	779.5	764.5	749.5	734.6	714.1	688.1	662.2	636.2	610.3	592.6
57.5°	721.3	705.0	688.7	672.4	656.1	634.9	608.7	582.7	556.6	530.6	513.8
60°	670.8	654.0	637.1	620.4	603.5	582.5	557.1	531.8	506.4	481.1	464.5
62.5°	620.2	603.4	586.5	569.8	553.0	531.9	506.5	481.2	455.9	430.5	415.0
65°	542.9	526.1	509.3	492.5	475.7	455.4	431.6	407.8	384.0	360.1	345.2
67.5°	465.6	448.7	431.7	414.8	397.8	377.8	355.0	332.1	309.3	286.4	275.3
70°	415.1	398.6	382.1	365.6	349.1	330.2	308.8	287.4	266.0	244.7	234.0
72.5°	364.5	348.3	332.0	315.8	299.5	281.7	262.3	242.9	223.4	204.0	195.2
75°	287.3	272.6	257.9	243.3	228.6	212.9	196.1	179.3	162.5	145.7	142.6
77.5°	216.9	203.6	190.4	177.1	163.9	151.8	141.0	130.2	119.4	108.6	106.9
80°	171.8	159.3	146.7	134.2	121.7	112.3	105.8	99.4	93.0	86.5	85.6
82.5°	129.0	118.2	107.3	96.4	85.6	78.8	75.7	72.8	69.8	66.8	65.8
85°	72.8	66.1	59.4	52.7	45.9	42.1	41.2	40.3	39.4	38.5	37.9
87.5°	26.6	24.3	22.1	19.9	17.7	16.8	17.4	18.0	18.6	19.1	19.1
90°	1.0	3.2	5.5	7.8	10.0	12.5	15.5	18.4	21.3	24.2	25.0
92.5°	24.4	26.0	27.5	29.0	30.5	32.1	33.7	35.3	37.1	38.7	39.4
95°	59.5	61.0	62.6	64.2	65.7	67.5	69.2	71.0	72.8	74.6	75.5
97.5°	105.6	106.8	108.0	109.2	110.3	111.5	112.8	114.1	115.4	116.7	117.8
100°	137.1	138.5	139.8	141.1	142.5	143.7	144.8	145.9	147.0	148.1	148.9
102.5°	173.4	174.2	175.0	175.8	176.6	177.7	179.3	180.7	182.2	183.7	184.3
105°	226.8	227.2	227.7	228.1	228.6	229.8	231.9	233.9	235.9	237.9	237.9
107.5°	288.9	289.2	289.4	289.7	290.0	290.5	291.3	292.2	293.0	293.8	294.5
110°	327.6	328.1	328.5	328.9	329.4	329.8	330.3	330.7	331.2	331.6	332.5



TEST NUMBER: P332352-840

CATALOG NUMBER: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	367.9	368.2	368.5	368.7	369.0	369.2	369.3	369.4	369.5	369.5	370.6
115°	428.4	429.1	429.8	430.4	431.1	431.2	430.8	430.3	429.9	429.4	429.7
117.5°	489.3	489.8	490.2	490.7	491.1	491.0	490.5	489.9	489.3	488.7	488.7
120°	527.3	528.6	529.9	531.3	532.6	532.7	531.6	530.5	529.4	528.3	528.0
122.5°	566.7	567.7	568.7	569.7	570.7	570.9	570.3	569.7	569.2	568.6	567.9
125°	627.0	627.7	628.3	629.0	629.7	629.9	629.3	628.9	628.4	628.0	627.1
127.5°	682.7	684.1	685.5	686.9	688.4	688.8	688.3	687.9	687.4	686.9	685.6
130°	719.7	721.5	723.4	725.1	726.9	727.5	726.8	726.1	725.5	724.8	723.9
132.5°	756.9	758.6	760.4	762.2	764.1	764.7	764.2	763.7	763.2	762.7	761.6
135°	813.5	814.9	816.2	817.5	818.9	819.4	819.2	819.0	818.8	818.5	817.7
137.5°	866.0	867.1	868.2	869.3	870.4	871.2	871.8	872.4	873.0	873.5	872.6
140°	902.2	903.3	904.4	905.5	906.7	907.4	907.6	907.8	908.1	908.3	908.1
142.5°	935.2	936.3	937.6	938.7	939.8	940.5	940.9	941.3	941.7	942.1	941.9
145°	986.8	987.3	987.7	988.3	988.7	989.3	989.9	990.6	991.3	991.9	991.7
147.5°	1032.1	1032.9	1033.7	1034.5	1035.3	1036.0	1036.6	1037.2	1037.8	1038.5	1038.5
150°	1063.5	1064.0	1064.4	1064.8	1065.3	1065.7	1066.2	1066.6	1067.1	1067.5	1067.5
152.5°	1089.3	1089.9	1090.6	1091.2	1091.8	1092.3	1092.6	1092.8	1093.1	1093.4	1093.7
155°	1130.0	1130.0	1130.0	1130.0	1130.0	1130.1	1130.3	1130.5	1130.8	1131.0	1132.0
157.5°	1164.7	1164.5	1164.2	1163.9	1163.7	1163.6	1163.8	1164.0	1164.2	1164.3	1165.3
160°	1186.5	1186.0	1185.6	1185.2	1184.7	1184.5	1184.5	1184.5	1184.5	1184.5	1185.6
162.5°	1205.9	1205.2	1204.6	1204.0	1203.4	1203.2	1203.3	1203.5	1203.7	1203.9	1205.0
165°	1230.8	1230.1	1229.5	1228.8	1228.2	1227.8	1227.8	1227.8	1227.8	1227.8	1229.1
167.5°	1250.8	1249.9	1249.0	1248.1	1247.2	1246.9	1247.1	1247.2	1247.4	1247.6	1249.0
170°	1262.1	1261.2	1260.3	1259.4	1258.5	1258.1	1258.1	1258.1	1258.1	1258.1	1259.6
172.5°	1270.9	1270.1	1269.2	1268.3	1267.4	1266.9	1266.9	1266.9	1266.9	1266.9	1268.3
175°	1280.2	1279.3	1278.4	1277.6	1276.7	1276.2	1276.2	1276.2	1276.2	1276.2	1277.6
177.5°	1284.0	1283.3	1282.6	1281.9	1281.2	1280.8	1280.8	1280.8	1280.8	1280.8	1281.9
180°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2



TEST NUMBER: P332352-840

CATALOG NUMBER: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8
2.5°	1688.0	1690.7	1693.3	1694.5	1693.9	1693.5	1693.0	1692.5
5°	1676.9	1679.6	1682.3	1683.4	1682.8	1682.2	1681.6	1681.0
7.5°	1653.3	1654.8	1656.3	1656.6	1655.5	1654.5	1653.5	1652.3
10°	1632.1	1632.4	1632.7	1632.1	1630.5	1629.0	1627.5	1626.0
12.5°	1605.8	1605.7	1605.5	1604.5	1602.8	1600.9	1599.2	1597.4
15°	1559.7	1558.2	1556.7	1554.8	1552.7	1550.5	1548.4	1546.3
17.5°	1504.6	1501.4	1498.1	1494.9	1491.8	1488.5	1485.4	1482.2
20°	1466.8	1462.9	1459.0	1455.1	1451.5	1447.7	1444.1	1440.5
22.5°	1426.4	1421.5	1416.5	1412.3	1409.0	1405.5	1402.1	1398.7
25°	1360.3	1353.8	1347.5	1342.5	1339.2	1335.8	1332.5	1329.1
27.5°	1288.2	1279.3	1270.3	1263.3	1258.2	1253.0	1247.9	1242.8
30°	1236.9	1226.5	1216.1	1208.5	1203.6	1198.7	1193.8	1188.9
32.5°	1186.5	1175.2	1163.8	1155.6	1150.4	1145.3	1140.1	1135.0
35°	1111.8	1098.6	1085.5	1076.2	1070.8	1065.2	1059.8	1054.2
37.5°	1031.6	1016.6	1001.8	990.9	984.1	977.3	970.6	963.8
40°	975.7	959.9	943.9	932.5	925.4	918.5	911.4	904.4
42.5°	922.2	904.8	887.5	875.7	869.4	863.1	856.8	850.5
45°	843.4	826.1	808.6	796.3	788.9	781.6	774.3	767.0
47.5°	762.0	743.2	724.2	711.4	704.9	698.4	691.9	685.3
50°	707.1	688.1	669.2	656.2	649.2	642.2	635.2	628.1
52.5°	654.0	634.3	614.6	601.6	595.3	589.1	582.8	576.4
55°	574.8	557.1	539.4	527.5	521.4	515.2	509.2	503.0
57.5°	497.1	480.3	463.6	452.6	447.5	442.2	437.1	431.8
60°	448.1	431.6	415.1	404.2	399.1	393.8	388.7	383.4
62.5°	399.4	384.0	368.4	357.9	352.5	347.1	341.6	336.2
65°	330.2	315.2	300.2	291.0	287.7	284.4	281.0	277.6
67.5°	264.1	252.9	241.8	234.3	230.8	227.1	223.5	219.9
70°	223.3	212.6	201.9	194.9	191.5	188.1	184.8	181.5
72.5°	186.5	177.7	169.1	164.0	162.6	161.2	159.8	158.3
75°	139.6	136.5	133.5	131.7	131.1	130.4	129.8	129.2
77.5°	105.3	103.6	102.0	100.9	100.3	99.7	99.1	98.5
80°	84.7	83.8	82.9	82.2	81.6	81.0	80.3	79.7
82.5°	64.9	64.0	63.1	62.6	62.5	62.4	62.2	62.1
85°	37.3	36.7	36.1	35.7	35.7	35.7	35.7	35.7
87.5°	19.0	19.0	18.9	18.8	18.6	18.5	18.3	18.2
90°	26.0	26.9	27.8	28.5	28.9	29.4	29.8	30.2
92.5°	40.2	40.9	41.6	41.8	41.5	41.3	41.0	40.7
95°	76.3	77.3	78.2	78.7	78.7	78.7	78.7	78.7
97.5°	118.8	119.9	120.9	121.3	121.3	121.2	121.1	121.0
100°	149.6	150.2	150.9	151.5	151.9	152.3	152.8	153.2
102.5°	185.0	185.7	186.3	186.6	186.5	186.4	186.4	186.3
105°	237.9	237.9	237.9	238.1	238.5	239.0	239.4	239.9
107.5°	295.2	295.9	296.6	296.8	296.6	296.3	296.0	295.8
110°	333.5	334.4	335.3	335.5	335.0	334.6	334.2	333.7



TEST NUMBER: P332352-840

CATALOG NUMBER: S123RDIP-S1000D1025U840-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	371.7	372.7	373.9	374.4	374.3	374.2	374.1	374.0
115°	429.9	430.1	430.3	430.3	430.1	429.9	429.7	429.4
117.5°	488.6	488.6	488.6	488.2	487.6	487.0	486.4	485.6
120°	527.8	527.6	527.4	526.9	526.5	526.1	525.6	525.2
122.5°	567.3	566.8	566.2	565.6	565.0	564.3	563.7	563.1
125°	626.2	625.3	624.4	623.5	622.7	621.8	620.9	620.0
127.5°	684.4	683.2	681.9	680.8	679.7	678.6	677.6	676.6
130°	723.0	722.1	721.2	719.9	718.4	716.8	715.3	713.7
132.5°	760.5	759.5	758.4	757.3	756.1	754.9	753.7	752.5
135°	816.8	815.9	815.0	814.3	813.9	813.3	812.9	812.5
137.5°	871.7	870.8	869.8	868.9	868.1	867.2	866.4	865.6
140°	907.8	907.6	907.4	906.5	904.9	903.3	901.8	900.2
142.5°	941.7	941.5	941.2	940.5	939.3	938.1	936.9	935.6
145°	991.5	991.3	991.0	990.5	989.6	988.7	987.7	986.8
147.5°	1038.5	1038.5	1038.5	1037.8	1036.5	1035.1	1033.8	1032.5
150°	1067.5	1067.5	1067.5	1066.8	1065.5	1064.2	1062.8	1061.5
152.5°	1094.1	1094.4	1094.8	1094.4	1093.2	1092.1	1090.9	1089.7
155°	1132.9	1133.8	1134.6	1134.3	1132.8	1131.1	1129.5	1128.0
157.5°	1166.2	1167.1	1168.1	1167.9	1166.7	1165.4	1164.2	1162.9
160°	1186.7	1187.8	1188.9	1189.0	1188.2	1187.3	1186.4	1185.5
162.5°	1206.1	1207.2	1208.3	1208.1	1206.7	1205.3	1203.9	1202.4
165°	1230.5	1231.8	1233.1	1233.0	1231.5	1229.9	1228.4	1226.8
167.5°	1250.3	1251.7	1253.1	1253.1	1251.7	1250.3	1249.0	1247.6
170°	1261.2	1262.7	1264.4	1264.4	1262.7	1261.2	1259.6	1258.1
172.5°	1269.7	1271.1	1272.4	1272.4	1270.8	1269.3	1267.7	1266.1
175°	1278.9	1280.2	1281.6	1281.4	1279.9	1278.3	1276.8	1275.2
177.5°	1283.0	1284.0	1285.2	1285.1	1283.8	1282.5	1281.3	1280.0
180°	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2	1283.2

(END OF REPORT)