

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332357-840

Luminaire Tested: **S123RDIP-S1000D1195U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332357-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D1195U840-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8648.8 lumens
Efficiency: N/A
Efficacy: 132.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 65.4
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332357-840

CATALOG NUMBER: S123RDIP-S1000D1195U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

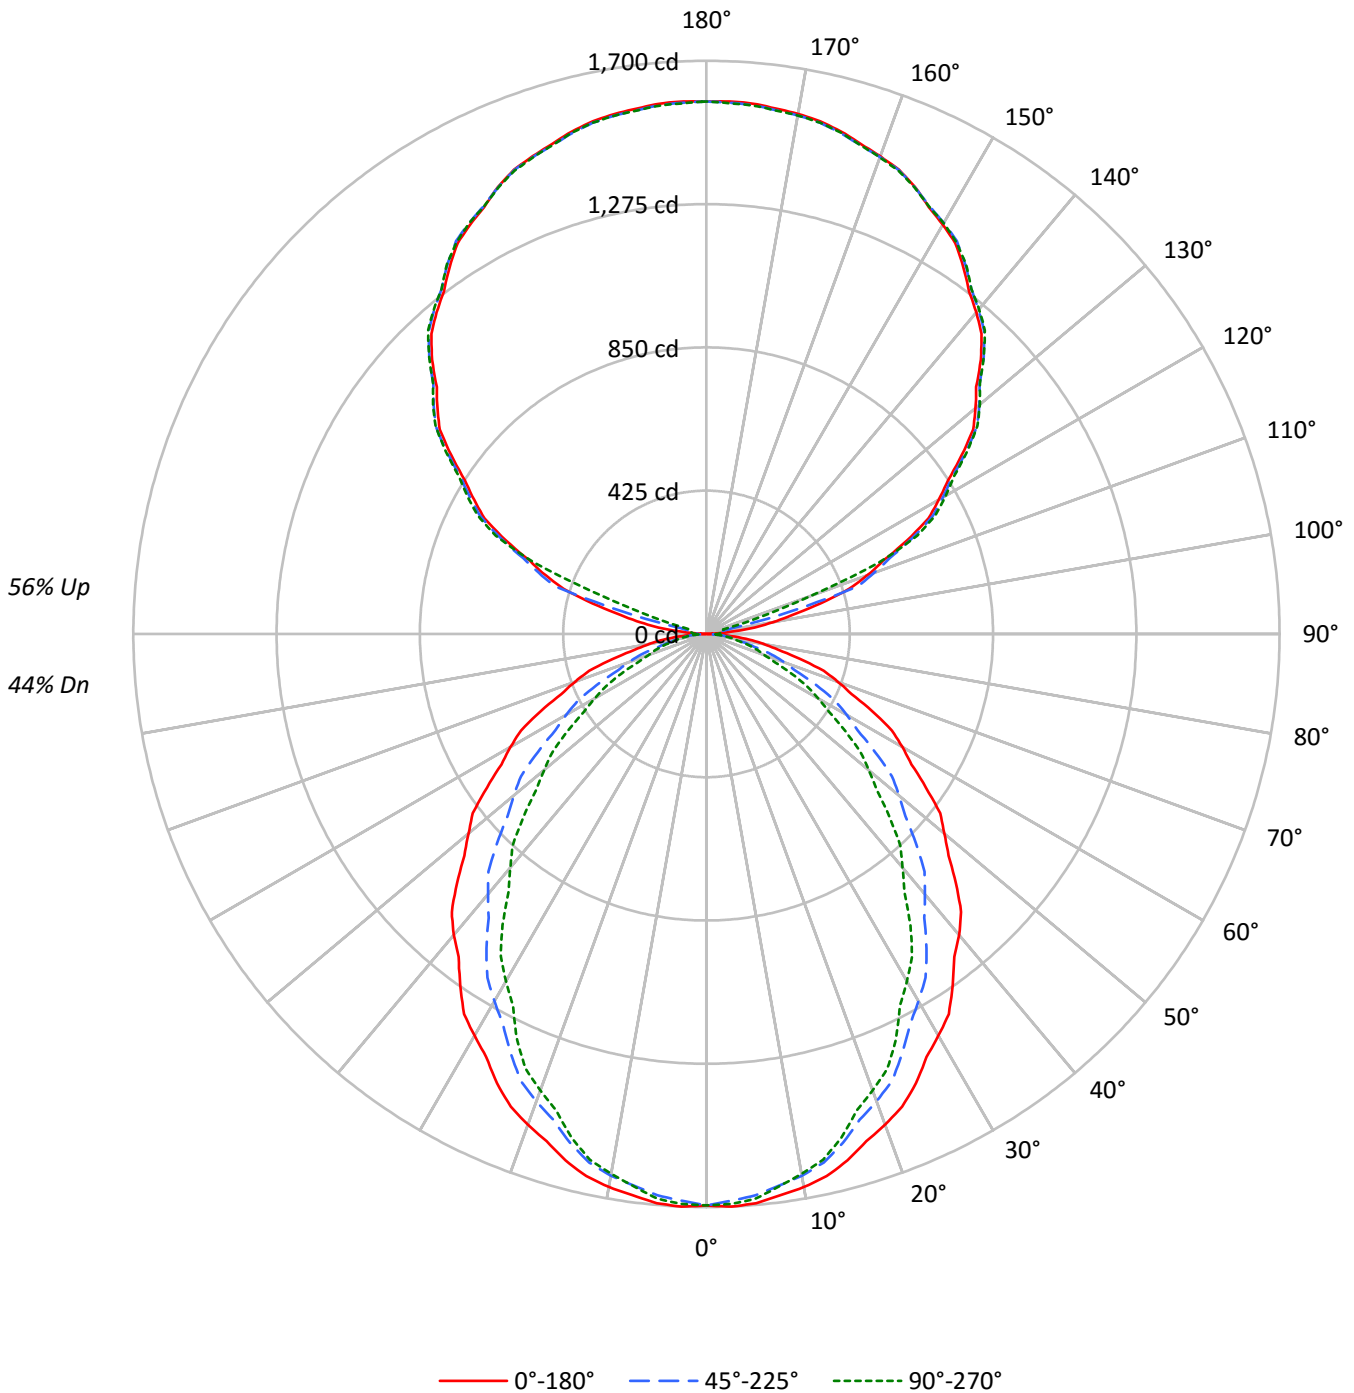



TEST NUMBER: P332357-840

CATALOG NUMBER: S123RDIP-S1000D1195U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44				
1	97	93	89	85	89	85	82	79	71	68	66	58	56	55	45	44	44	38				
2	88	81	75	70	81	75	70	65	62	59	55	51	48	46	40	39	37	32				
3	81	72	64	59	74	66	60	55	55	51	47	45	42	39	36	34	32	28				
4	74	63	56	50	68	59	52	47	49	44	40	40	37	34	32	30	28	24				
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	29	26	24	21				
6	63	51	43	37	57	47	40	35	40	34	30	33	29	26	27	24	21	18				
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19	16				
8	54	42	34	29	49	39	32	27	33	28	24	27	23	21	22	19	17	15				
9	50	38	31	26	46	35	29	24	30	25	21	25	21	18	21	18	16	13				
10	47	35	28	23	43	33	26	22	28	23	19	23	19	17	19	16	14	12				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	18243	18243	18243
5°	18312	18058	18163
10°	18208	17832	17772
15°	18013	17415	17231
20°	17743	16893	16501
25°	17467	16308	15785
30°	17100	15632	14777
35°	16724	14954	13853
40°	16378	14155	12708
45°	15923	13370	11676
50°	15421	12476	10518
55°	14910	11453	9439
60°	14441	10357	8254
65°	13827	9172	7070
70°	13064	7701	5712
75°	11948	6059	5373
80°	10649	5362	4940
85°	8991	4755	4409



TEST NUMBER: P332357-840

CATALOG NUMBER: S123RDIP-S1000D1195U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	159.1	1.8
10°-20°	442.8	5.1
20°-30°	637.6	7.4
30°-40°	718.2	8.3
40°-50°	687.1	7.9
50°-60°	562.6	6.5
60°-70°	379.6	4.4
70°-80°	191.0	2.2
80°-90°	54.9	0.6
90°-100°	57.4	0.7
100°-110°	273.6	3.2
110°-120°	657.3	7.6
120°-130°	837.0	9.7
130°-140°	894.3	10.3
140°-150°	836.3	9.7
150°-160°	674.6	7.8
160°-170°	435.4	5.0
170°-180°	150.0	1.7
0°-30°	1239.5	14.3
0°-40°	1957.7	22.6
0°-60°	3207.4	37.1
0°-90°	3832.9	44.3
90°-120°	988.3	11.4
90°-150°	3555.9	41.1
90°-180°	4816.0	55.7
0°-180°	8648.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1695	1695	1695	1695	1695	
5°	1695	1687	1671	1683	1681	161
15°	1616	1600	1563	1556	1546	455
25°	1471	1435	1373	1345	1329	676
35°	1273	1221	1138	1081	1054	796
45°	1046	982	878	802	767	807
55°	794	724	610	533	503	712
65°	543	466	360	296	278	537
75°	287	221	146	133	129	306
85°	73	44	38	36	36	82
90°	1	13	28	33	35	7
95°	72	27	36	44	44	88
105°	350	356	257	61	52	371
115°	656	663	674	685	690	647
125°	924	934	939	941	943	825
135°	1151	1158	1163	1166	1163	886
145°	1328	1336	1339	1341	1341	831
155°	1463	1461	1462	1467	1461	674
165°	1543	1539	1538	1547	1539	436
175°	1579	1574	1574	1582	1573	150
180°	1579	1579	1579	1579	1579	



TEST NUMBER: P332357-840

CATALOG NUMBER: S123RDIP-S1000D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8
2.5°	1700.2	1699.2	1698.3	1697.3	1696.3	1694.4	1691.4	1688.5	1685.6	1682.6	1685.3
5°	1694.8	1693.1	1691.6	1690.1	1688.6	1686.0	1682.3	1678.7	1675.1	1671.3	1674.1
7.5°	1679.0	1677.4	1675.8	1674.1	1672.4	1669.2	1664.5	1659.7	1655.0	1650.2	1651.7
10°	1665.9	1663.8	1661.5	1659.4	1657.3	1653.5	1648.0	1642.4	1637.0	1631.5	1631.8
12.5°	1647.2	1644.8	1642.4	1640.0	1637.6	1633.1	1626.4	1619.6	1613.0	1606.2	1606.0
15°	1616.4	1613.1	1609.6	1606.3	1603.0	1597.0	1588.4	1579.8	1571.3	1562.8	1561.3
17.5°	1577.6	1573.7	1569.8	1565.9	1562.0	1554.6	1543.7	1532.9	1522.0	1511.1	1507.8
20°	1549.0	1544.2	1539.2	1534.4	1529.4	1521.3	1509.6	1498.0	1486.4	1474.8	1470.9
22.5°	1517.1	1511.6	1505.9	1500.3	1494.7	1485.7	1473.3	1461.0	1448.7	1436.3	1431.4
25°	1470.7	1463.1	1455.4	1447.7	1440.2	1429.3	1415.2	1401.2	1387.2	1373.1	1366.7
27.5°	1414.3	1405.9	1397.5	1389.1	1380.6	1368.6	1352.9	1337.3	1321.6	1306.1	1297.1
30°	1375.8	1366.7	1357.6	1348.4	1339.2	1326.1	1309.0	1291.8	1274.8	1257.7	1247.3
32.5°	1337.4	1327.0	1316.6	1306.2	1295.9	1281.6	1263.5	1245.5	1227.3	1209.2	1197.9
35°	1272.7	1261.7	1250.7	1239.8	1228.8	1213.8	1194.9	1175.9	1157.0	1138.0	1124.9
37.5°	1207.3	1195.1	1182.9	1170.6	1158.4	1142.3	1122.1	1101.8	1081.6	1061.4	1046.4
40°	1165.6	1152.2	1138.6	1125.2	1111.8	1094.2	1072.6	1050.9	1029.2	1007.4	991.6
42.5°	1118.2	1104.8	1091.4	1077.9	1064.5	1046.6	1024.2	1001.8	979.4	956.9	939.6
45°	1046.0	1032.2	1018.4	1004.7	991.0	972.4	948.9	925.3	901.8	878.3	860.9
47.5°	973.7	958.6	943.5	928.4	913.3	894.0	870.5	847.0	823.4	799.9	781.0
50°	920.9	906.6	892.2	877.9	863.4	843.9	819.2	794.5	769.7	745.0	726.0
52.5°	873.6	858.1	842.4	826.9	811.3	791.2	766.8	742.3	717.8	693.3	673.6
55°	794.5	779.5	764.5	749.5	734.6	714.1	688.1	662.2	636.2	610.3	592.6
57.5°	721.3	705.0	688.7	672.4	656.1	634.9	608.7	582.7	556.6	530.6	513.8
60°	670.8	654.0	637.1	620.4	603.5	582.5	557.1	531.8	506.4	481.1	464.5
62.5°	620.2	603.4	586.5	569.8	553.0	531.9	506.5	481.2	455.9	430.5	415.0
65°	542.9	526.1	509.3	492.5	475.7	455.4	431.6	407.8	384.0	360.1	345.2
67.5°	465.6	448.7	431.7	414.8	397.8	377.8	355.0	332.1	309.3	286.4	275.3
70°	415.1	398.6	382.1	365.6	349.1	330.2	308.8	287.4	266.0	244.7	234.0
72.5°	364.5	348.3	332.0	315.8	299.5	281.7	262.3	242.9	223.4	204.0	195.2
75°	287.3	272.6	257.9	243.3	228.6	212.9	196.1	179.3	162.5	145.7	142.6
77.5°	216.9	203.6	190.4	177.1	163.9	151.8	141.0	130.2	119.4	108.6	106.9
80°	171.8	159.3	146.7	134.2	121.7	112.3	105.8	99.4	93.0	86.5	85.6
82.5°	129.0	118.2	107.3	96.4	85.6	78.8	75.7	72.8	69.8	66.8	65.8
85°	72.8	66.1	59.4	52.7	45.9	42.1	41.2	40.3	39.4	38.5	37.9
87.5°	26.7	24.4	22.3	20.1	18.0	17.2	17.9	18.6	19.3	19.9	19.9
90°	1.2	3.7	6.4	9.0	11.6	14.6	18.0	21.4	24.7	28.2	29.2
92.5°	21.8	21.1	20.4	19.6	18.9	19.8	22.4	24.9	27.5	30.0	31.7
95°	71.6	60.9	50.2	39.5	28.8	24.9	27.8	30.6	33.5	36.4	38.2
97.5°	143.8	139.1	134.2	129.5	124.6	112.9	94.1	75.3	56.6	37.8	39.9
100°	198.2	203.5	208.7	213.9	219.1	201.4	160.8	120.1	79.4	38.7	40.8
102.5°	260.2	264.0	267.7	271.5	275.3	254.9	210.5	166.0	121.6	77.2	70.7
105°	349.6	352.5	355.4	358.2	361.1	350.8	327.3	303.9	280.4	256.9	210.8
107.5°	443.9	446.3	448.6	450.8	453.1	456.2	459.9	463.5	467.3	471.0	437.1
110°	506.9	509.0	511.0	513.1	515.2	517.7	520.6	523.4	526.2	529.2	520.6



TEST NUMBER: P332357-840

CATALOG NUMBER: S123RDIP-S1000D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	566.9	568.8	570.7	572.6	574.4	576.8	579.7	582.6	585.4	588.2	588.4
115°	655.9	657.4	658.9	660.6	662.1	664.1	666.4	668.7	671.2	673.5	676.1
117.5°	741.9	743.9	745.8	747.8	749.7	751.2	752.5	753.7	754.9	756.1	758.1
120°	795.5	797.8	800.2	802.5	804.9	806.5	807.2	808.0	808.8	809.5	811.6
122.5°	849.9	851.8	853.7	855.7	857.7	859.1	860.1	861.1	862.0	863.0	864.5
125°	924.5	926.7	928.7	930.8	932.9	934.4	935.4	936.5	937.6	938.6	939.2
127.5°	996.8	998.9	1001.0	1003.1	1005.1	1006.8	1008.0	1009.4	1010.6	1011.8	1012.7
130°	1041.9	1044.0	1046.0	1048.1	1050.2	1051.8	1052.8	1053.9	1054.9	1055.9	1057.0
132.5°	1085.0	1087.1	1089.2	1091.3	1093.4	1094.8	1095.7	1096.5	1097.3	1098.2	1099.2
135°	1150.9	1152.6	1154.1	1155.7	1157.2	1158.5	1159.6	1160.6	1161.6	1162.8	1163.5
137.5°	1207.3	1209.3	1211.2	1213.3	1215.3	1216.5	1217.1	1217.7	1218.2	1218.8	1220.0
140°	1244.9	1246.4	1248.0	1249.5	1251.1	1252.2	1253.0	1253.8	1254.7	1255.4	1256.5
142.5°	1279.6	1281.1	1282.7	1284.2	1285.9	1287.0	1287.8	1288.6	1289.4	1290.1	1291.0
145°	1328.2	1330.0	1331.8	1333.6	1335.4	1336.7	1337.2	1337.7	1338.2	1338.7	1339.2
147.5°	1373.9	1375.1	1376.3	1377.5	1378.7	1379.6	1380.1	1380.6	1381.1	1381.6	1382.2
150°	1402.1	1402.8	1403.6	1404.4	1405.2	1405.8	1406.3	1406.8	1407.4	1408.0	1408.5
152.5°	1427.4	1427.7	1428.2	1428.5	1428.9	1429.2	1429.5	1429.9	1430.2	1430.5	1431.4
155°	1463.1	1462.6	1462.0	1461.5	1461.0	1460.9	1461.1	1461.4	1461.7	1461.9	1463.2
157.5°	1490.8	1490.7	1490.7	1490.6	1490.6	1490.4	1490.2	1489.9	1489.7	1489.3	1491.0
160°	1507.6	1507.4	1507.1	1506.9	1506.6	1506.3	1506.1	1505.8	1505.6	1505.3	1506.9
162.5°	1523.6	1523.0	1522.3	1521.6	1520.9	1520.5	1520.1	1519.9	1519.6	1519.3	1521.2
165°	1542.9	1542.1	1541.3	1540.5	1539.7	1539.2	1538.9	1538.6	1538.4	1538.1	1540.2
167.5°	1557.9	1556.8	1555.8	1554.8	1553.7	1553.2	1553.2	1553.2	1553.2	1553.2	1555.3
170°	1566.3	1565.3	1564.3	1563.2	1562.2	1561.7	1561.7	1561.7	1561.7	1561.7	1563.7
172.5°	1572.0	1570.7	1569.4	1568.2	1566.9	1566.4	1566.6	1566.8	1567.0	1567.2	1569.3
175°	1579.2	1577.9	1576.6	1575.3	1574.0	1573.5	1573.8	1574.0	1574.3	1574.5	1576.4
177.5°	1581.1	1580.0	1579.0	1578.0	1576.9	1576.5	1576.7	1576.9	1577.1	1577.3	1579.0
180°	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2



TEST NUMBER: P332357-840

CATALOG NUMBER: S123RDIP-S1000D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8	1694.8
2.5°	1688.0	1690.7	1693.3	1694.5	1693.9	1693.5	1693.0	1692.5
5°	1676.9	1679.6	1682.3	1683.4	1682.8	1682.2	1681.6	1681.0
7.5°	1653.3	1654.8	1656.3	1656.6	1655.5	1654.5	1653.5	1652.3
10°	1632.1	1632.4	1632.7	1632.1	1630.5	1629.0	1627.5	1626.0
12.5°	1605.8	1605.7	1605.5	1604.5	1602.8	1600.9	1599.2	1597.4
15°	1559.7	1558.2	1556.7	1554.8	1552.7	1550.5	1548.4	1546.3
17.5°	1504.6	1501.4	1498.1	1494.9	1491.8	1488.5	1485.4	1482.2
20°	1466.8	1462.9	1459.0	1455.1	1451.5	1447.7	1444.1	1440.5
22.5°	1426.4	1421.5	1416.5	1412.3	1409.0	1405.5	1402.1	1398.7
25°	1360.3	1353.8	1347.5	1342.5	1339.2	1335.8	1332.5	1329.1
27.5°	1288.2	1279.3	1270.3	1263.3	1258.2	1253.0	1247.9	1242.8
30°	1236.9	1226.5	1216.1	1208.5	1203.6	1198.7	1193.8	1188.9
32.5°	1186.5	1175.2	1163.8	1155.6	1150.4	1145.3	1140.1	1135.0
35°	1111.8	1098.6	1085.5	1076.2	1070.8	1065.2	1059.8	1054.2
37.5°	1031.6	1016.6	1001.8	990.9	984.1	977.3	970.6	963.8
40°	975.7	959.9	943.9	932.5	925.4	918.5	911.4	904.4
42.5°	922.2	904.8	887.5	875.7	869.4	863.1	856.8	850.5
45°	843.4	826.1	808.6	796.3	788.9	781.6	774.3	767.0
47.5°	762.0	743.2	724.2	711.4	704.9	698.4	691.9	685.3
50°	707.1	688.1	669.2	656.2	649.2	642.2	635.2	628.1
52.5°	654.0	634.3	614.6	601.6	595.3	589.1	582.8	576.4
55°	574.8	557.1	539.4	527.5	521.4	515.2	509.2	503.0
57.5°	497.1	480.3	463.6	452.6	447.5	442.2	437.1	431.8
60°	448.1	431.6	415.1	404.2	399.1	393.8	388.7	383.4
62.5°	399.4	384.0	368.4	357.9	352.5	347.1	341.6	336.2
65°	330.2	315.2	300.2	291.0	287.7	284.4	281.0	277.6
67.5°	264.1	252.9	241.8	234.3	230.8	227.1	223.5	219.9
70°	223.3	212.6	201.9	194.9	191.5	188.1	184.8	181.5
72.5°	186.5	177.7	169.1	164.0	162.6	161.2	159.8	158.3
75°	139.6	136.5	133.5	131.7	131.1	130.4	129.8	129.2
77.5°	105.3	103.6	102.0	100.9	100.3	99.7	99.1	98.5
80°	84.7	83.8	82.9	82.2	81.6	81.0	80.3	79.7
82.5°	64.9	64.0	63.1	62.6	62.5	62.4	62.2	62.1
85°	37.3	36.7	36.1	35.7	35.7	35.7	35.7	35.7
87.5°	19.9	19.8	19.8	19.7	19.6	19.4	19.3	19.1
90°	30.2	31.3	32.3	33.1	33.6	34.1	34.6	35.2
92.5°	33.3	35.0	36.8	37.7	38.0	38.4	38.7	39.0
95°	40.0	41.8	43.6	44.5	44.5	44.5	44.5	44.5
97.5°	41.9	44.0	46.2	47.3	47.6	47.9	48.1	48.4
100°	42.9	44.9	47.1	48.3	48.5	48.8	49.0	49.3
102.5°	64.2	57.8	51.3	48.4	48.8	49.3	49.8	50.2
105°	164.6	118.5	72.3	49.6	50.1	50.6	51.1	51.6
107.5°	403.2	369.4	335.6	301.2	266.5	231.7	196.9	162.2
110°	511.9	503.3	494.7	471.8	434.5	397.2	359.9	322.7



TEST NUMBER: P332357-840

CATALOG NUMBER: S123RDIP-S1000D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	588.5	588.8	589.0	585.0	577.1	569.3	561.4	553.5
115°	678.6	681.3	683.9	685.7	686.7	687.8	688.8	689.8
117.5°	760.2	762.3	764.4	765.6	765.8	766.0	766.2	766.4
120°	813.7	815.8	817.9	818.9	818.9	818.9	818.9	818.9
122.5°	866.0	867.5	868.9	869.7	869.9	870.1	870.4	870.6
125°	939.7	940.2	940.7	941.2	941.7	942.3	942.8	943.3
127.5°	1013.5	1014.3	1015.1	1015.3	1014.8	1014.3	1013.8	1013.2
130°	1058.0	1059.0	1060.2	1060.4	1059.9	1059.3	1058.8	1058.3
132.5°	1100.2	1101.4	1102.4	1102.5	1101.8	1101.1	1100.3	1099.5
135°	1164.3	1165.1	1165.9	1165.9	1165.1	1164.3	1163.5	1162.8
137.5°	1221.3	1222.5	1223.8	1224.2	1223.7	1223.1	1222.6	1222.0
140°	1257.5	1258.5	1259.6	1259.8	1259.3	1258.8	1258.3	1257.8
142.5°	1291.8	1292.6	1293.4	1293.5	1292.8	1292.0	1291.3	1290.6
145°	1339.8	1340.3	1340.8	1341.0	1341.0	1341.0	1341.0	1341.0
147.5°	1382.7	1383.2	1383.7	1383.4	1382.2	1381.0	1379.8	1378.6
150°	1409.0	1409.5	1410.0	1409.9	1409.1	1408.4	1407.5	1406.7
152.5°	1432.3	1433.3	1434.2	1434.1	1432.9	1431.7	1430.5	1429.3
155°	1464.5	1465.8	1467.1	1466.9	1465.4	1463.9	1462.3	1460.8
157.5°	1492.5	1494.0	1495.6	1495.4	1493.4	1491.3	1489.2	1487.2
160°	1508.4	1510.0	1511.6	1511.5	1509.6	1507.8	1505.9	1504.1
162.5°	1523.0	1524.7	1526.5	1526.5	1524.9	1523.3	1521.7	1520.0
165°	1542.4	1544.4	1546.5	1546.6	1544.8	1543.0	1541.2	1539.3
167.5°	1557.3	1559.4	1561.6	1561.6	1559.4	1557.3	1555.3	1553.2
170°	1565.8	1567.9	1569.9	1569.9	1567.9	1565.8	1563.7	1561.7
172.5°	1571.5	1573.5	1575.6	1575.5	1573.2	1570.9	1568.6	1566.3
175°	1578.2	1580.0	1581.9	1581.7	1579.6	1577.5	1575.5	1573.4
177.5°	1580.6	1582.4	1584.0	1583.8	1581.8	1579.6	1577.5	1575.5
180°	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2

(END OF REPORT)