

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332343-840

Luminaire Tested: **S123RDIP-S1000D805U840-4F0-1E-UDD-A1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332343-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D805U840-4F0-1E-UDD-A1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6784.9 lumens
Efficiency: N/A
Efficacy: 124.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

Luminous Intensity Polar Plot

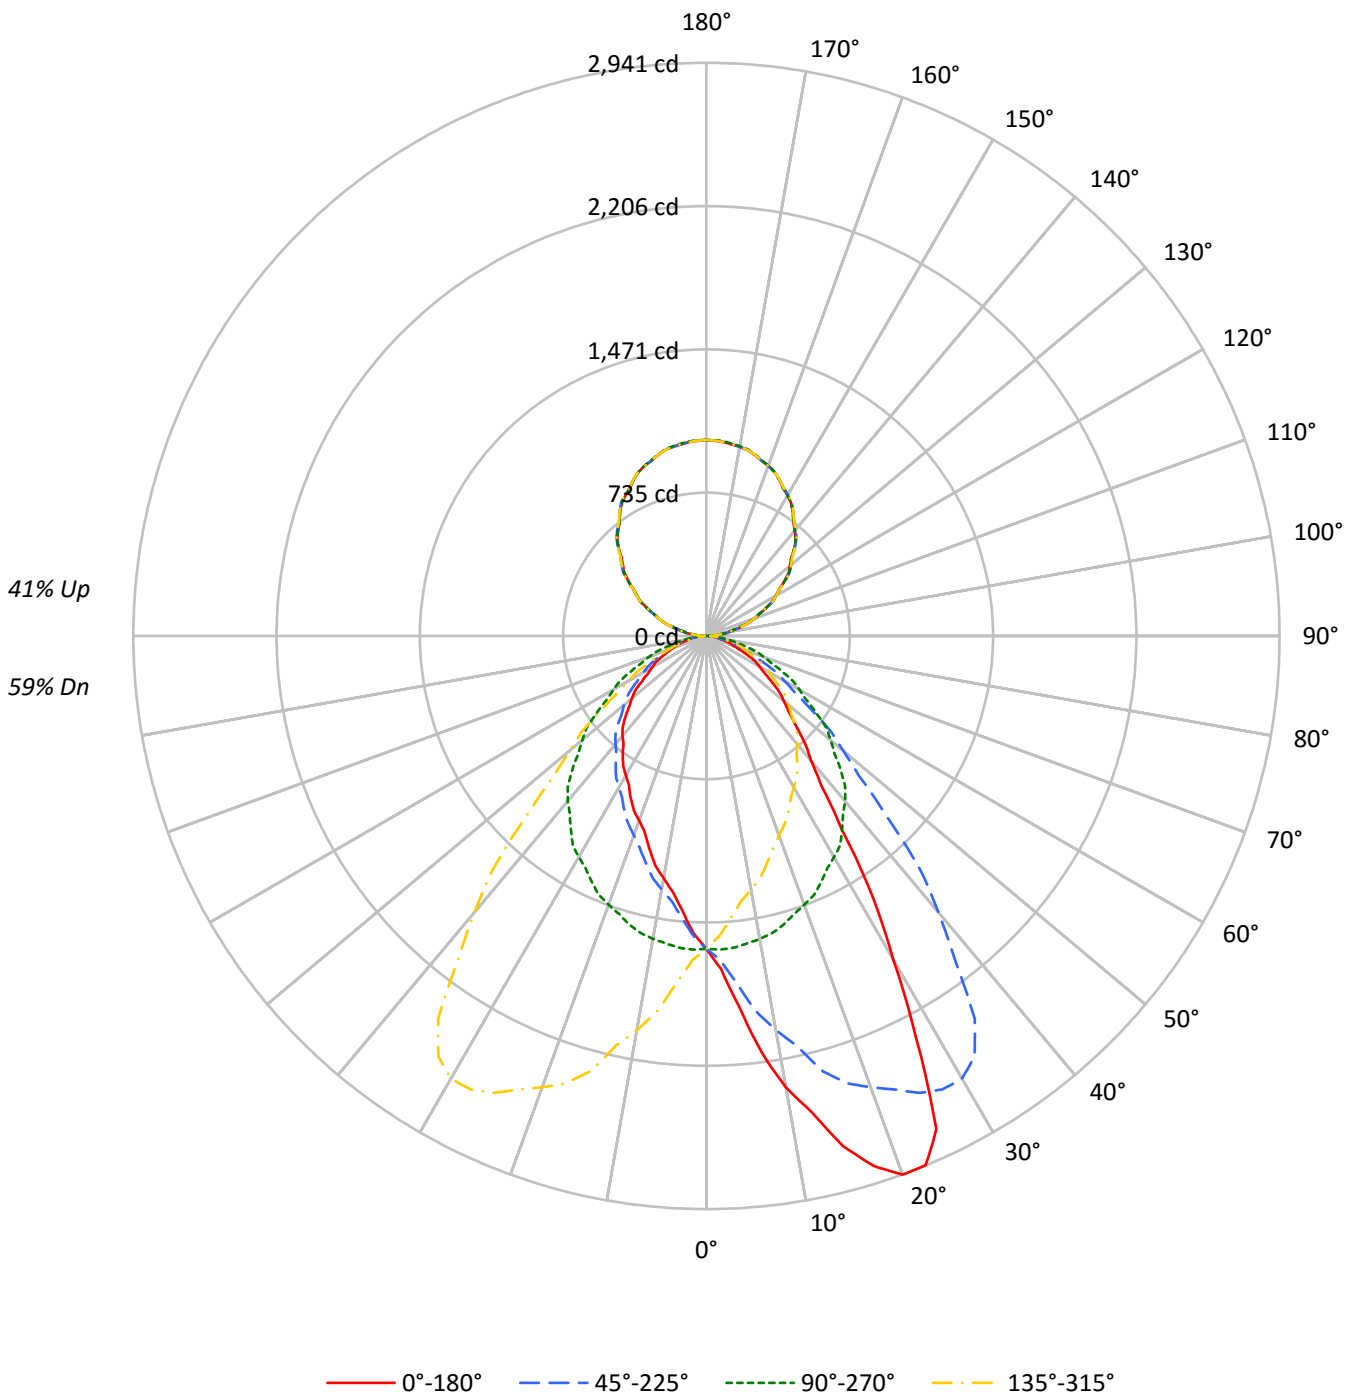



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	109	109	109	109	102	102	102	102	88	88	88	76	76	76	64	64	64	59																												
1	100	96	93	89	94	90	87	84	79	76	74	68	66	65	58	57	56	51																												
2	92	85	79	74	86	80	74	70	70	66	62	60	58	55	52	50	48	44																												
3	84	75	68	63	79	71	64	59	62	57	53	54	50	47	47	44	42	38																												
4	78	67	59	54	72	63	56	51	56	50	46	49	44	41	42	39	36	33																												
5	72	60	52	46	67	57	50	44	50	44	40	44	40	36	38	35	32	29																												
6	66	54	46	41	62	51	44	39	45	40	35	40	35	32	35	31	29	26																												
7	61	49	41	36	57	47	39	34	41	36	31	37	32	29	32	28	26	23																												
8	57	45	37	32	53	42	36	31	38	32	28	34	29	26	30	26	23	21																												
9	53	41	34	29	50	39	32	28	35	29	25	31	26	23	27	24	21	19																												
10	50	38	31	26	47	36	29	25	32	27	23	29	24	21	25	22	19	17																												

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	17280	17280	17280	17280
5°	20599	17354	15282	17354
10°	25719	17254	13806	17254
15°	30190	17079	12590	17079
20°	33693	16814	11557	16814
25°	33155	16537	10922	16537
30°	23832	16281	10268	16281
35°	15912	15948	9843	15948
40°	11724	15548	9405	15548
45°	9834	14845	8977	14845
50°	8678	13924	8378	13924
55°	7610	12872	7557	12872
60°	6777	11866	6923	11866
65°	5952	10781	6441	10781
70°	4674	9819	5882	9819
75°	4117	8576	5373	8576
80°	3583	7283	5281	7283
85°	2878	5866	5595	5866



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	157.9	2.3
10°-20°	493.2	7.3
20°-30°	774.9	11.4
30°-40°	808.4	11.9
40°-50°	691.8	10.2
50°-60°	527.3	7.8
60°-70°	338.0	5.0
70°-80°	162.6	2.4
80°-90°	46.0	0.7
90°-100°	65.5	1.0
100°-110°	196.0	2.9
110°-120°	333.3	4.9
120°-130°	438.5	6.5
130°-140°	492.8	7.3
140°-150°	484.4	7.1
150°-160°	407.8	6.0
160°-170°	271.5	4.0
170°-180°	95.1	1.4
0°-30°	1426.0	21.0
0°-40°	2234.4	32.9
0°-60°	3453.6	50.9
0°-90°	4000.2	59.0
90°-120°	594.8	8.8
90°-150°	2010.5	29.6
90°-180°	2785.0	41.0
0°-180°	6784.9	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1605	1605	1605	1605	1605	
5°	1906	1606	1414	1606	1906	197
15°	2709	1533	1130	1533	2709	768
25°	2792	1392	920	1392	2792	1200
35°	1211	1214	749	1214	1211	794
45°	646	975	590	975	646	508
55°	406	686	403	686	406	367
65°	234	423	253	423	234	230
75°	99	206	129	206	99	106
85°	23	48	45	48	23	27
90°	24	1	24	1	24	12
95°	62	47	62	47	62	63
105°	188	178	188	178	188	199
115°	336	336	336	336	336	333
125°	486	491	486	491	486	434
135°	636	637	636	637	636	489
145°	773	773	773	773	773	482
155°	884	885	884	885	884	407
165°	961	964	961	964	961	271
175°	999	1003	999	1003	999	95
180°	1005	1005	1005	1005	1005	



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4
2.5°	1709.9	1712.0	1705.0	1703.8	1695.6	1693.3	1693.3	1681.8	1674.7	1665.4	1659.8
5°	1906.4	1917.4	1911.9	1899.6	1879.0	1874.1	1861.1	1840.5	1817.1	1788.2	1774.4
7.5°	2151.9	2166.9	2161.1	2142.0	2120.4	2102.9	2066.2	2031.9	1984.0	1941.9	1905.9
10°	2353.1	2337.3	2324.9	2306.4	2286.4	2254.1	2215.6	2162.7	2101.6	2053.5	1999.9
12.5°	2503.8	2501.1	2485.5	2466.4	2438.2	2407.5	2360.3	2295.8	2224.7	2155.3	2093.9
15°	2709.2	2713.2	2702.9	2683.0	2643.1	2588.9	2517.4	2490.6	2388.8	2313.3	2237.7
17.5°	2851.3	2850.4	2849.0	2821.5	2780.8	2742.1	2675.8	2605.4	2513.3	2406.7	2304.9
20°	2941.4	2934.6	2935.9	2905.0	2874.8	2830.0	2765.5	2663.1	2587.5	2464.5	2359.3
22.5°	2939.2	2937.8	2943.0	2932.4	2910.5	2876.3	2825.4	2739.0	2642.4	2518.3	2400.0
25°	2791.6	2786.1	2818.4	2827.3	2862.4	2868.5	2853.5	2806.0	2714.6	2586.8	2440.4
27.5°	2336.3	2333.3	2393.3	2468.3	2563.4	2637.4	2708.9	2743.4	2714.6	2623.1	2476.4
30°	1917.4	1982.1	2012.3	2120.8	2241.8	2386.1	2512.5	2632.8	2662.4	2622.5	2502.2
32.5°	1592.0	1648.3	1673.5	1766.8	1879.5	2048.5	2238.3	2408.5	2528.8	2559.3	2486.9
35°	1210.9	1211.6	1269.3	1310.6	1415.0	1588.9	1773.1	2001.2	2228.1	2399.8	2417.7
37.5°	966.2	969.7	1004.6	1045.7	1124.1	1216.0	1378.2	1567.9	1829.9	2093.7	2248.3
40°	834.4	840.5	866.7	907.2	963.5	1032.9	1159.4	1338.1	1556.6	1850.1	2089.9
42.5°	749.6	759.7	773.2	804.4	839.3	904.2	1006.5	1144.6	1343.3	1620.8	1897.5
45°	646.0	651.5	661.9	676.2	707.8	753.3	821.9	914.7	1079.6	1303.0	1579.9
47.5°	569.9	566.9	577.8	589.6	610.6	641.5	687.5	763.3	880.9	1060.2	1295.1
50°	518.2	517.5	525.0	534.0	553.9	576.6	614.4	671.5	764.9	913.3	1128.4
52.5°	469.8	472.4	477.8	488.9	503.3	521.6	555.5	596.6	676.9	805.1	984.4
55°	405.5	407.6	415.1	421.3	431.6	450.1	471.4	505.8	560.8	650.2	797.9
57.5°	351.0	350.1	357.4	358.9	370.5	385.7	402.1	428.9	468.7	535.1	634.6
60°	314.8	312.7	318.9	323.7	329.9	342.2	356.0	382.1	413.7	462.5	547.8
62.5°	281.8	280.8	285.4	290.1	295.3	306.5	318.1	338.1	363.1	404.2	471.9
65°	233.7	235.7	237.8	239.8	242.6	249.4	260.4	274.2	291.3	320.2	369.0
67.5°	183.6	185.7	186.4	190.7	196.5	200.9	207.5	219.7	231.8	256.1	283.9
70°	148.5	147.7	148.5	150.5	158.0	165.6	174.6	183.5	191.1	208.2	231.6
72.5°	127.5	126.3	128.2	128.6	132.2	134.3	140.0	148.3	158.0	169.8	186.5
75°	99.0	99.0	99.0	99.0	101.7	103.1	105.1	107.2	110.7	116.1	128.6
77.5°	73.1	73.2	74.2	74.9	75.4	76.2	77.6	79.6	80.8	83.7	89.1
80°	57.8	58.4	57.8	58.4	58.4	59.8	60.5	62.5	63.2	66.7	68.8
82.5°	43.4	43.0	43.4	44.1	44.1	45.5	45.6	47.2	47.3	49.1	51.1
85°	23.3	22.0	23.3	22.7	24.0	22.7	23.3	24.7	24.7	25.4	28.2
87.5°	10.2	11.3	10.1	10.6	10.5	10.9	10.8	10.7	11.6	10.9	11.0
90°	23.7	23.3	23.0	22.6	22.3	21.7	21.0	20.4	19.7	19.0	16.7
92.5°	31.9	32.1	32.3	32.5	32.7	32.5	32.0	31.4	30.9	30.3	29.0
95°	61.6	61.6	61.6	61.6	61.6	61.2	60.5	59.8	59.2	58.5	57.1
97.5°	94.7	94.8	94.9	94.9	95.0	94.6	93.8	93.0	92.2	91.4	90.4
100°	120.0	119.7	119.3	119.0	118.7	118.2	117.6	117.1	116.6	116.0	115.2
102.5°	145.9	146.0	146.0	146.1	146.2	145.9	145.4	144.9	144.4	143.9	142.7
105°	187.9	187.5	187.2	186.8	186.5	186.3	186.3	186.3	186.3	186.3	184.8
107.5°	231.7	231.9	232.1	232.3	232.5	232.4	231.8	231.2	230.7	230.0	229.4
110°	261.4	261.7	262.1	262.4	262.8	262.6	261.9	261.2	260.4	259.7	259.4



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	293.0	293.0	293.1	293.2	293.2	292.9	292.0	291.1	290.3	289.4	289.4
115°	336.4	336.5	336.7	336.9	337.1	337.1	336.9	336.7	336.5	336.4	336.7
117.5°	380.4	380.9	381.4	381.9	382.3	382.6	382.6	382.7	382.7	382.7	383.2
120°	411.3	411.7	412.0	412.4	412.7	413.0	413.2	413.3	413.5	413.7	414.7
122.5°	441.0	441.5	442.0	442.5	443.0	443.5	443.9	444.4	444.8	445.4	445.8
125°	485.5	486.3	487.0	487.7	488.4	489.1	489.8	490.5	491.2	491.9	492.2
127.5°	530.0	530.8	531.6	532.4	533.2	534.1	535.0	536.0	537.0	538.0	538.4
130°	559.0	560.3	561.5	562.7	563.9	564.9	565.6	566.3	566.9	567.6	568.3
132.5°	589.4	590.3	591.2	592.2	593.1	594.0	594.8	595.7	596.5	597.3	597.7
135°	636.4	636.7	637.1	637.4	637.8	638.3	639.0	639.7	640.5	641.2	641.3
137.5°	677.9	678.6	679.2	679.9	680.5	681.3	682.1	682.8	683.5	684.2	683.8
140°	705.1	706.3	707.5	708.7	710.0	710.6	710.8	711.0	711.2	711.3	711.2
142.5°	732.9	733.8	734.8	735.7	736.7	737.2	737.4	737.6	737.7	737.9	737.6
145°	773.0	773.7	774.4	775.1	775.8	776.2	776.4	776.6	776.8	776.9	776.4
147.5°	808.7	809.7	810.7	811.8	812.8	813.4	813.4	813.4	813.4	813.4	812.9
150°	831.4	832.4	833.5	834.6	835.7	836.2	836.2	836.2	836.2	836.2	835.8
152.5°	853.5	854.4	855.4	856.3	857.2	857.5	857.2	856.9	856.7	856.4	856.2
155°	883.5	884.7	886.0	887.2	888.4	888.7	888.0	887.3	886.6	885.9	885.8
157.5°	910.8	911.8	912.8	913.8	914.7	914.8	914.1	913.4	912.7	911.9	911.8
160°	928.5	929.2	929.9	930.6	931.3	931.2	930.4	929.5	928.6	927.8	927.8
162.5°	941.8	942.9	944.0	945.1	946.2	946.4	945.5	944.6	943.7	942.9	942.7
165°	960.9	962.1	963.3	964.6	965.8	965.9	964.8	963.8	962.7	961.7	961.7
167.5°	977.1	978.3	979.4	980.4	981.5	981.5	980.4	979.4	978.3	977.1	977.0
170°	985.3	986.6	987.8	989.1	990.3	990.3	989.1	987.8	986.6	985.3	985.3
172.5°	991.7	992.9	994.1	995.3	996.6	996.6	995.6	994.5	993.4	992.3	992.3
175°	998.8	1000.0	1001.3	1002.5	1003.7	1003.8	1002.7	1001.7	1000.7	999.6	999.6
177.5°	1002.6	1003.6	1004.5	1005.5	1006.5	1006.5	1005.7	1004.9	1004.0	1003.2	1003.2
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4
2.5°	1657.6	1656.0	1648.3	1639.5	1627.9	1620.2	1614.2	1610.9	1601.0	1588.9	1580.6
5°	1760.0	1739.4	1717.5	1690.6	1665.9	1640.4	1624.7	1606.1	1583.4	1558.0	1540.1
7.5°	1869.8	1829.3	1785.7	1740.8	1696.4	1656.6	1621.3	1591.2	1555.1	1518.6	1493.1
10°	1953.9	1894.7	1833.6	1771.0	1713.9	1660.4	1619.1	1578.6	1535.3	1493.4	1461.8
12.5°	2030.2	1952.5	1882.0	1805.1	1732.1	1668.1	1608.7	1561.0	1508.9	1464.2	1428.3
15°	2127.0	2047.3	1962.1	1845.2	1748.4	1667.3	1595.1	1532.6	1469.4	1414.3	1379.3
17.5°	2217.5	2097.5	1983.0	1885.5	1759.6	1658.3	1570.2	1495.4	1426.0	1367.8	1324.6
20°	2254.8	2138.7	2014.3	1890.0	1766.3	1652.8	1550.4	1467.9	1395.8	1329.8	1290.0
22.5°	2277.3	2145.9	2014.9	1881.2	1749.7	1631.9	1530.7	1440.0	1361.7	1299.0	1249.8
25°	2303.6	2147.0	2002.7	1870.7	1736.7	1608.8	1488.5	1392.4	1307.9	1241.1	1188.9
27.5°	2321.0	2136.7	1966.1	1819.4	1683.4	1556.2	1445.9	1343.9	1258.2	1187.7	1131.7
30°	2324.3	2128.4	1938.0	1779.3	1641.1	1524.3	1407.4	1309.9	1219.2	1144.3	1092.1
32.5°	2328.6	2108.1	1900.1	1731.4	1590.0	1474.3	1368.5	1275.3	1182.3	1108.5	1055.2
35°	2310.6	2096.8	1842.5	1648.7	1507.1	1395.1	1299.6	1213.7	1122.3	1050.8	996.5
37.5°	2232.4	2052.1	1782.8	1555.5	1407.4	1303.7	1225.9	1151.0	1067.1	990.1	938.9
40°	2153.8	2008.1	1736.7	1498.8	1344.2	1237.7	1167.6	1106.5	1025.4	953.2	898.3
42.5°	2036.7	1948.2	1692.7	1439.5	1272.7	1170.1	1111.0	1053.7	982.5	909.2	857.6
45°	1821.9	1833.6	1602.7	1344.9	1173.8	1070.8	1015.0	975.2	912.0	851.5	798.6
47.5°	1552.5	1661.7	1496.9	1244.2	1069.4	972.7	924.0	889.3	846.7	787.3	739.0
50°	1376.5	1532.6	1412.3	1176.6	1004.1	907.9	859.7	831.5	794.5	747.7	701.7
52.5°	1214.4	1381.9	1310.0	1101.3	933.1	845.2	798.2	775.0	745.5	701.6	659.8
55°	990.3	1160.0	1143.6	987.5	826.8	747.7	712.0	685.9	665.9	633.0	600.0
57.5°	801.0	962.0	970.5	861.1	733.1	654.9	624.2	604.5	591.5	566.5	536.0
60°	681.8	829.5	858.4	775.9	665.9	597.2	566.9	551.2	540.9	520.9	497.6
62.5°	582.8	708.5	741.2	681.9	601.6	537.2	513.6	498.4	491.4	474.2	453.6
65°	446.1	550.5	582.1	549.1	507.2	455.7	436.4	423.3	417.2	407.6	392.4
67.5°	335.4	411.5	446.2	422.9	407.8	375.3	363.0	356.0	350.5	343.9	331.2
70°	269.4	325.8	361.5	355.3	343.0	325.8	316.8	312.0	306.5	301.0	290.0
72.5°	216.6	255.4	288.9	292.1	282.0	278.5	270.6	268.6	265.3	258.7	252.7
75°	143.6	170.5	193.8	202.8	206.8	210.3	206.8	206.2	205.5	200.0	196.5
77.5°	94.1	108.6	123.3	138.6	145.0	149.7	150.8	153.3	151.5	148.6	146.9
80°	72.2	75.6	85.9	99.0	109.3	113.4	116.1	117.5	116.8	116.1	113.4
82.5°	52.4	55.2	60.1	69.3	78.0	84.8	86.4	86.1	87.7	88.1	85.9
85°	28.2	28.9	30.2	31.6	36.5	44.0	46.0	47.5	48.8	48.8	44.6
87.5°	11.7	10.7	11.3	10.9	12.2	12.4	15.3	17.8	18.7	16.8	17.2
90°	14.3	12.1	9.8	7.8	6.1	4.3	2.5	0.8	2.5	4.3	6.1
92.5°	27.8	26.5	25.1	23.8	22.7	21.5	20.3	19.1	20.3	21.5	22.7
95°	55.6	54.2	52.8	51.5	50.3	49.1	47.8	46.6	47.8	49.1	50.3
97.5°	89.4	88.4	87.4	86.4	85.4	84.5	83.6	82.7	83.6	84.5	85.4
100°	114.3	113.4	112.6	111.6	110.6	109.5	108.5	107.3	108.5	109.5	110.6
102.5°	141.6	140.4	139.3	138.4	137.7	137.0	136.4	135.8	136.4	137.0	137.7
105°	183.2	181.6	180.1	179.0	178.7	178.3	178.0	177.6	178.0	178.3	178.7
107.5°	228.8	228.2	227.5	227.1	226.9	226.7	226.5	226.3	226.5	226.7	226.9
110°	259.0	258.7	258.3	258.0	257.6	257.3	256.9	256.6	256.9	257.3	257.6



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	289.3	289.2	289.1	289.0	288.8	288.6	288.4	288.2	288.4	288.6	288.8
115°	337.1	337.4	337.8	337.7	337.1	336.6	336.1	335.6	336.1	336.6	337.1
117.5°	383.6	384.2	384.6	384.7	384.3	384.0	383.6	383.2	383.6	384.0	384.3
120°	415.5	416.4	417.3	417.2	416.1	415.1	413.9	412.9	413.9	415.1	416.1
122.5°	446.3	446.7	447.2	447.0	446.2	445.5	444.6	443.9	444.6	445.5	446.2
125°	492.6	492.9	493.3	493.2	492.7	492.1	491.6	491.1	491.6	492.1	492.7
127.5°	538.8	539.2	539.6	539.2	538.1	536.9	535.8	534.7	535.8	536.9	538.1
130°	568.8	569.3	569.8	569.4	567.9	566.5	565.1	563.7	565.1	566.5	567.9
132.5°	598.1	598.5	599.0	598.4	597.0	595.6	594.2	592.8	594.2	595.6	597.0
135°	641.5	641.7	641.9	641.4	640.4	639.2	638.2	637.1	638.2	639.2	640.4
137.5°	683.3	682.9	682.4	681.8	680.9	679.9	679.1	678.2	679.1	679.9	680.9
140°	711.0	710.8	710.6	710.1	709.3	708.4	707.5	706.6	707.5	708.4	709.3
142.5°	737.3	737.0	736.7	736.1	735.2	734.3	733.5	732.6	733.5	734.3	735.2
145°	775.9	775.4	774.8	774.4	774.1	773.7	773.4	773.0	773.4	773.7	774.1
147.5°	812.4	811.9	811.4	810.9	810.2	809.6	809.0	808.4	809.0	809.6	810.2
150°	835.5	835.1	834.8	834.4	834.0	833.6	833.3	832.9	833.3	833.6	834.0
152.5°	856.0	855.8	855.6	855.2	854.6	854.1	853.6	853.2	853.6	854.1	854.6
155°	885.6	885.3	885.1	885.0	885.0	885.0	885.0	885.0	885.0	885.0	885.0
157.5°	911.7	911.5	911.4	911.4	911.6	911.8	912.0	912.2	912.0	911.8	911.6
160°	927.8	927.8	927.8	927.9	928.3	928.6	929.0	929.3	929.0	928.6	928.3
162.5°	942.6	942.5	942.3	942.5	943.0	943.5	944.0	944.4	944.0	943.5	943.0
165°	961.7	961.7	961.7	961.9	962.5	963.0	963.5	964.0	963.5	963.0	962.5
167.5°	976.8	976.7	976.6	976.8	977.5	978.3	979.0	979.7	979.0	978.3	977.5
170°	985.3	985.3	985.3	985.7	986.4	987.1	987.8	988.6	987.8	987.1	986.4
172.5°	992.3	992.3	992.3	992.7	993.4	994.1	994.8	995.4	994.8	994.1	993.4
175°	999.6	999.6	999.6	1000.0	1000.7	1001.4	1002.0	1002.7	1002.0	1001.4	1000.7
177.5°	1003.2	1003.2	1003.2	1003.5	1004.0	1004.6	1005.2	1005.7	1005.2	1004.6	1004.0
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4
2.5°	1577.9	1570.7	1565.8	1554.8	1547.7	1539.9	1532.3	1537.2	1536.7	1536.1	1536.1
5°	1525.0	1509.1	1494.8	1476.2	1464.5	1450.1	1439.1	1437.7	1440.5	1430.9	1425.3
7.5°	1472.5	1450.9	1430.5	1410.0	1388.3	1370.9	1360.1	1354.9	1348.0	1342.0	1335.8
10°	1435.6	1410.3	1390.3	1364.8	1341.5	1320.9	1307.9	1298.9	1294.0	1289.3	1280.3
12.5°	1397.8	1372.8	1347.5	1318.7	1296.5	1272.5	1262.7	1252.7	1243.5	1238.1	1225.9
15°	1342.2	1309.9	1283.1	1252.8	1228.1	1204.8	1191.0	1171.0	1168.3	1161.4	1149.1
17.5°	1286.6	1251.4	1214.5	1192.1	1164.2	1139.8	1118.9	1112.3	1092.6	1085.2	1074.4
20°	1242.5	1210.2	1182.0	1152.6	1112.0	1089.2	1072.8	1063.9	1048.0	1038.4	1031.6
22.5°	1204.6	1171.7	1139.2	1104.7	1071.3	1045.8	1033.8	1019.9	1011.2	997.7	990.3
25°	1150.4	1114.7	1075.5	1038.4	1014.4	995.1	975.9	963.5	951.2	944.9	931.2
27.5°	1087.5	1050.2	1013.5	985.3	955.8	936.9	919.4	908.4	893.5	883.1	875.6
30°	1052.9	1008.9	977.2	951.8	914.0	896.2	883.1	869.4	858.4	847.4	839.8
32.5°	1012.7	972.6	942.6	911.2	882.1	862.6	845.8	833.6	824.3	813.9	806.3
35°	949.8	916.1	885.1	853.5	832.2	812.3	792.4	782.0	773.2	763.6	756.7
37.5°	892.8	861.4	832.0	802.0	775.6	759.4	743.4	735.5	723.4	716.9	709.9
40°	857.7	826.8	795.2	766.3	738.8	726.4	712.0	700.3	689.3	684.5	676.9
42.5°	819.2	788.3	761.6	730.5	708.0	691.3	677.9	665.1	656.9	649.8	645.6
45°	762.1	734.7	708.5	677.6	656.3	641.9	626.7	615.1	607.5	602.7	595.1
47.5°	706.8	679.2	652.8	625.8	605.2	588.7	573.6	565.4	555.4	549.6	544.4
50°	666.6	641.9	613.7	589.0	568.4	551.9	539.5	529.2	520.3	512.7	509.3
52.5°	629.8	603.4	579.1	556.0	534.2	515.5	504.3	493.4	486.8	478.1	474.0
55°	569.1	543.6	523.0	500.3	479.0	463.2	449.5	439.8	432.9	423.3	417.9
57.5°	512.0	489.2	464.5	444.9	422.9	409.6	398.2	385.2	376.8	369.2	363.9
60°	473.5	447.4	426.1	407.6	388.3	371.1	360.8	350.5	341.5	334.0	329.2
62.5°	433.3	410.6	390.3	370.1	352.5	337.6	325.6	317.0	309.1	304.3	299.5
65°	371.8	354.0	333.4	316.8	300.3	289.3	279.7	272.2	266.6	263.2	259.1
67.5°	315.2	297.8	279.8	263.7	252.7	244.3	237.9	231.5	228.7	224.3	221.6
70°	278.3	260.4	244.7	232.3	221.3	215.1	211.0	206.2	203.4	197.9	195.2
72.5°	238.2	225.3	213.9	203.7	194.9	189.2	184.0	178.1	173.7	167.6	164.9
75°	187.6	175.9	167.0	160.2	154.6	147.0	139.5	133.3	131.3	129.2	128.6
77.5°	139.0	131.6	125.1	119.3	112.4	106.9	105.3	103.9	103.5	102.4	102.4
80°	109.3	102.4	97.6	90.7	86.5	86.5	86.5	85.2	85.9	85.9	85.9
82.5°	81.2	74.9	72.3	69.8	69.0	69.6	69.6	69.8	69.4	70.5	70.0
85°	41.9	42.6	44.0	43.3	44.0	44.0	45.3	44.6	45.3	44.0	45.3
87.5°	17.0	19.0	20.0	21.0	22.0	21.9	22.6	22.7	23.4	23.6	23.7
90°	7.8	9.8	12.1	14.3	16.7	19.0	19.7	20.4	21.0	21.7	22.3
92.5°	23.8	25.1	26.5	27.8	29.0	30.3	30.9	31.4	32.0	32.5	32.7
95°	51.5	52.8	54.2	55.6	57.1	58.5	59.2	59.8	60.5	61.2	61.6
97.5°	86.4	87.4	88.4	89.4	90.4	91.4	92.2	93.0	93.8	94.6	95.0
100°	111.6	112.6	113.4	114.3	115.2	116.0	116.6	117.1	117.6	118.2	118.7
102.5°	138.4	139.3	140.4	141.6	142.7	143.9	144.4	144.9	145.4	145.9	146.2
105°	179.0	180.1	181.6	183.2	184.8	186.3	186.3	186.3	186.3	186.3	186.5
107.5°	227.1	227.5	228.2	228.8	229.4	230.0	230.7	231.2	231.8	232.4	232.5
110°	258.0	258.3	258.7	259.0	259.4	259.7	260.4	261.2	261.9	262.6	262.8



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	289.0	289.1	289.2	289.3	289.4	289.4	290.3	291.1	292.0	292.9	293.2
115°	337.7	337.8	337.4	337.1	336.7	336.4	336.5	336.7	336.9	337.1	337.1
117.5°	384.7	384.6	384.2	383.6	383.2	382.7	382.7	382.7	382.6	382.6	382.3
120°	417.2	417.3	416.4	415.5	414.7	413.7	413.5	413.3	413.2	413.0	412.7
122.5°	447.0	447.2	446.7	446.3	445.8	445.4	444.8	444.4	443.9	443.5	443.0
125°	493.2	493.3	492.9	492.6	492.2	491.9	491.2	490.5	489.8	489.1	488.4
127.5°	539.2	539.6	539.2	538.8	538.4	538.0	537.0	536.0	535.0	534.1	533.2
130°	569.4	569.8	569.3	568.8	568.3	567.6	566.9	566.3	565.6	564.9	563.9
132.5°	598.4	599.0	598.5	598.1	597.7	597.3	596.5	595.7	594.8	594.0	593.1
135°	641.4	641.9	641.7	641.5	641.3	641.2	640.5	639.7	639.0	638.3	637.8
137.5°	681.8	682.4	682.9	683.3	683.8	684.2	683.5	682.8	682.1	681.3	680.5
140°	710.1	710.6	710.8	711.0	711.2	711.3	711.2	711.0	710.8	710.6	710.0
142.5°	736.1	736.7	737.0	737.3	737.6	737.9	737.7	737.6	737.4	737.2	736.7
145°	774.4	774.8	775.4	775.9	776.4	776.9	776.8	776.6	776.4	776.2	775.8
147.5°	810.9	811.4	811.9	812.4	812.9	813.4	813.4	813.4	813.4	813.4	812.8
150°	834.4	834.8	835.1	835.5	835.8	836.2	836.2	836.2	836.2	836.2	835.7
152.5°	855.2	855.6	855.8	856.0	856.2	856.4	856.7	856.9	857.2	857.5	857.2
155°	885.0	885.1	885.3	885.6	885.8	885.9	886.6	887.3	888.0	888.7	888.4
157.5°	911.4	911.4	911.5	911.7	911.8	911.9	912.7	913.4	914.1	914.8	914.7
160°	927.9	927.8	927.8	927.8	927.8	927.8	928.6	929.5	930.4	931.2	931.3
162.5°	942.5	942.3	942.5	942.6	942.7	942.9	943.7	944.6	945.5	946.4	946.2
165°	961.9	961.7	961.7	961.7	961.7	961.7	962.7	963.8	964.8	965.9	965.8
167.5°	976.8	976.6	976.7	976.8	977.0	977.1	978.3	979.4	980.4	981.5	981.5
170°	985.7	985.3	985.3	985.3	985.3	985.3	986.6	987.8	989.1	990.3	990.3
172.5°	992.7	992.3	992.3	992.3	992.3	992.3	993.4	994.5	995.6	996.6	996.6
175°	1000.0	999.6	999.6	999.6	999.6	999.6	1000.7	1001.7	1002.7	1003.8	1003.7
177.5°	1003.5	1003.2	1003.2	1003.2	1003.2	1003.2	1004.0	1004.9	1005.7	1006.5	1006.5
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4
2.5°	1529.5	1528.9	1529.5	1527.3	1529.5	1528.9	1529.5	1536.1	1536.1	1536.7	1537.2
5°	1423.3	1422.6	1420.6	1414.3	1420.6	1422.6	1423.3	1425.3	1430.9	1440.5	1437.7
7.5°	1330.5	1329.6	1323.5	1323.6	1323.5	1329.6	1330.5	1335.8	1342.0	1348.0	1354.9
10°	1275.6	1276.2	1268.0	1263.1	1268.0	1276.2	1275.6	1280.3	1289.3	1294.0	1298.9
12.5°	1222.2	1219.0	1212.4	1207.1	1212.4	1219.0	1222.2	1225.9	1238.1	1243.5	1252.7
15°	1151.9	1145.0	1128.4	1129.8	1128.4	1145.0	1151.9	1149.1	1161.4	1168.3	1171.0
17.5°	1068.9	1063.9	1063.6	1054.0	1063.6	1063.9	1068.9	1074.4	1085.2	1092.6	1112.3
20°	1020.6	1017.1	1018.4	1008.9	1018.4	1017.1	1020.6	1031.6	1038.4	1048.0	1063.9
22.5°	982.6	979.2	973.4	970.4	973.4	979.2	982.6	990.3	997.7	1011.2	1019.9
25°	927.1	921.6	916.1	919.6	916.1	921.6	927.1	931.2	944.9	951.2	963.5
27.5°	871.6	867.5	861.9	861.2	861.9	867.5	871.6	875.6	883.1	893.5	908.4
30°	836.4	832.2	829.5	826.1	829.5	832.2	836.4	839.8	847.4	858.4	869.4
32.5°	800.6	799.8	794.9	794.2	794.9	799.8	800.6	806.3	813.9	824.3	833.6
35°	753.9	749.8	748.4	749.1	748.4	749.8	753.9	756.7	763.6	773.2	782.0
37.5°	709.5	704.0	701.6	699.0	701.6	704.0	709.5	709.9	716.9	723.4	735.5
40°	677.6	672.2	670.8	669.3	670.8	672.2	677.6	676.9	684.5	689.3	700.3
42.5°	641.9	639.6	638.8	636.4	638.8	639.6	641.9	645.6	649.8	656.9	665.1
45°	593.1	592.4	588.2	589.7	588.2	592.4	593.1	595.1	602.7	607.5	615.1
47.5°	541.7	538.7	535.7	537.7	535.7	538.7	541.7	544.4	549.6	555.4	565.4
50°	506.5	505.1	499.0	500.3	499.0	505.1	506.5	509.3	512.7	520.3	529.2
52.5°	471.3	466.1	463.7	462.9	463.7	466.1	471.3	474.0	478.1	486.8	493.4
55°	413.0	406.9	404.1	402.7	404.1	406.9	413.0	417.9	423.3	432.9	439.8
57.5°	355.9	354.2	352.0	353.6	352.0	354.2	355.9	363.9	369.2	376.8	385.2
60°	322.3	322.3	322.3	321.6	322.3	322.3	322.3	329.2	334.0	341.5	350.5
62.5°	296.5	294.8	294.3	295.3	294.3	294.8	296.5	299.5	304.3	309.1	317.0
65°	257.0	256.3	253.6	252.9	253.6	256.3	257.0	259.1	263.2	266.6	272.2
67.5°	219.7	217.3	216.5	215.5	216.5	217.3	219.7	221.6	224.3	228.7	231.5
70°	191.8	190.4	186.2	186.9	186.2	190.4	191.8	195.2	197.9	203.4	206.2
72.5°	161.5	160.2	159.3	158.3	159.3	160.2	161.5	164.9	167.6	173.7	178.1
75°	127.8	127.1	126.4	129.2	126.4	127.1	127.8	128.6	129.2	131.3	133.3
77.5°	102.4	102.4	102.8	101.7	102.8	102.4	102.4	102.4	102.4	103.5	103.9
80°	85.9	85.9	85.2	85.2	85.2	85.9	85.9	85.9	85.9	85.9	85.2
82.5°	68.9	69.4	69.8	68.8	69.8	69.4	68.9	70.0	70.5	69.4	69.8
85°	45.3	44.6	46.0	45.3	46.0	44.6	45.3	45.3	44.0	45.3	44.6
87.5°	24.8	23.8	23.9	24.5	23.9	23.8	24.8	23.7	23.6	23.4	22.7
90°	22.6	23.0	23.3	23.7	23.3	23.0	22.6	22.3	21.7	21.0	20.4
92.5°	32.5	32.3	32.1	31.9	32.1	32.3	32.5	32.7	32.5	32.0	31.4
95°	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.6	61.2	60.5	59.8
97.5°	94.9	94.9	94.8	94.7	94.8	94.9	94.9	95.0	94.6	93.8	93.0
100°	119.0	119.3	119.7	120.0	119.7	119.3	119.0	118.7	118.2	117.6	117.1
102.5°	146.1	146.0	146.0	145.9	146.0	146.0	146.1	146.2	145.9	145.4	144.9
105°	186.8	187.2	187.5	187.9	187.5	187.2	186.8	186.5	186.3	186.3	186.3
107.5°	232.3	232.1	231.9	231.7	231.9	232.1	232.3	232.5	232.4	231.8	231.2
110°	262.4	262.1	261.7	261.4	261.7	262.1	262.4	262.8	262.6	261.9	261.2



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	293.2	293.1	293.0	293.0	293.0	293.1	293.2	293.2	292.9	292.0	291.1
115°	336.9	336.7	336.5	336.4	336.5	336.7	336.9	337.1	337.1	336.9	336.7
117.5°	381.9	381.4	380.9	380.4	380.9	381.4	381.9	382.3	382.6	382.6	382.7
120°	412.4	412.0	411.7	411.3	411.7	412.0	412.4	412.7	413.0	413.2	413.3
122.5°	442.5	442.0	441.5	441.0	441.5	442.0	442.5	443.0	443.5	443.9	444.4
125°	487.7	487.0	486.3	485.5	486.3	487.0	487.7	488.4	489.1	489.8	490.5
127.5°	532.4	531.6	530.8	530.0	530.8	531.6	532.4	533.2	534.1	535.0	536.0
130°	562.7	561.5	560.3	559.0	560.3	561.5	562.7	563.9	564.9	565.6	566.3
132.5°	592.2	591.2	590.3	589.4	590.3	591.2	592.2	593.1	594.0	594.8	595.7
135°	637.4	637.1	636.7	636.4	636.7	637.1	637.4	637.8	638.3	639.0	639.7
137.5°	679.9	679.2	678.6	677.9	678.6	679.2	679.9	680.5	681.3	682.1	682.8
140°	708.7	707.5	706.3	705.1	706.3	707.5	708.7	710.0	710.6	710.8	711.0
142.5°	735.7	734.8	733.8	732.9	733.8	734.8	735.7	736.7	737.2	737.4	737.6
145°	775.1	774.4	773.7	773.0	773.7	774.4	775.1	775.8	776.2	776.4	776.6
147.5°	811.8	810.7	809.7	808.7	809.7	810.7	811.8	812.8	813.4	813.4	813.4
150°	834.6	833.5	832.4	831.4	832.4	833.5	834.6	835.7	836.2	836.2	836.2
152.5°	856.3	855.4	854.4	853.5	854.4	855.4	856.3	857.2	857.5	857.2	856.9
155°	887.2	886.0	884.7	883.5	884.7	886.0	887.2	888.4	888.7	888.0	887.3
157.5°	913.8	912.8	911.8	910.8	911.8	912.8	913.8	914.7	914.8	914.1	913.4
160°	930.6	929.9	929.2	928.5	929.2	929.9	930.6	931.3	931.2	930.4	929.5
162.5°	945.1	944.0	942.9	941.8	942.9	944.0	945.1	946.2	946.4	945.5	944.6
165°	964.6	963.3	962.1	960.9	962.1	963.3	964.6	965.8	965.9	964.8	963.8
167.5°	980.4	979.4	978.3	977.1	978.3	979.4	980.4	981.5	981.5	980.4	979.4
170°	989.1	987.8	986.6	985.3	986.6	987.8	989.1	990.3	990.3	989.1	987.8
172.5°	995.3	994.1	992.9	991.7	992.9	994.1	995.3	996.6	996.6	995.6	994.5
175°	1002.5	1001.3	1000.0	998.8	1000.0	1001.3	1002.5	1003.7	1003.8	1002.7	1001.7
177.5°	1005.5	1004.5	1003.6	1002.6	1003.6	1004.5	1005.5	1006.5	1006.5	1005.7	1004.9
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4
2.5°	1532.3	1539.9	1547.7	1554.8	1565.8	1570.7	1577.9	1580.6	1588.9	1601.0	1610.9
5°	1439.1	1450.1	1464.5	1476.2	1494.8	1509.1	1525.0	1540.1	1558.0	1583.4	1606.1
7.5°	1360.1	1370.9	1388.3	1410.0	1430.5	1450.9	1472.5	1493.1	1518.6	1555.1	1591.2
10°	1307.9	1320.9	1341.5	1364.8	1390.3	1410.3	1435.6	1461.8	1493.4	1535.3	1578.6
12.5°	1262.7	1272.5	1296.5	1318.7	1347.5	1372.8	1397.8	1428.3	1464.2	1508.9	1561.0
15°	1191.0	1204.8	1228.1	1252.8	1283.1	1309.9	1342.2	1379.3	1414.3	1469.4	1532.6
17.5°	1118.9	1139.8	1164.2	1192.1	1214.5	1251.4	1286.6	1324.6	1367.8	1426.0	1495.4
20°	1072.8	1089.2	1112.0	1152.6	1182.0	1210.2	1242.5	1290.0	1329.8	1395.8	1467.9
22.5°	1033.8	1045.8	1071.3	1104.7	1139.2	1171.7	1204.6	1249.8	1299.0	1361.7	1440.0
25°	975.9	995.1	1014.4	1038.4	1075.5	1114.7	1150.4	1188.9	1241.1	1307.9	1392.4
27.5°	919.4	936.9	955.8	985.3	1013.5	1050.2	1087.5	1131.7	1187.7	1258.2	1343.9
30°	883.1	896.2	914.0	951.8	977.2	1008.9	1052.9	1092.1	1144.3	1219.2	1309.9
32.5°	845.8	862.6	882.1	911.2	942.6	972.6	1012.7	1055.2	1108.5	1182.3	1275.3
35°	792.4	812.3	832.2	853.5	885.1	916.1	949.8	996.5	1050.8	1122.3	1213.7
37.5°	743.4	759.4	775.6	802.0	832.0	861.4	892.8	938.9	990.1	1067.1	1151.0
40°	712.0	726.4	738.8	766.3	795.2	826.8	857.7	898.3	953.2	1025.4	1106.5
42.5°	677.9	691.3	708.0	730.5	761.6	788.3	819.2	857.6	909.2	982.5	1053.7
45°	626.7	641.9	656.3	677.6	708.5	734.7	762.1	798.6	851.5	912.0	975.2
47.5°	573.6	588.7	605.2	625.8	652.8	679.2	706.8	739.0	787.3	846.7	889.3
50°	539.5	551.9	568.4	589.0	613.7	641.9	666.6	701.7	747.7	794.5	831.5
52.5°	504.3	515.5	534.2	556.0	579.1	603.4	629.8	659.8	701.6	745.5	775.0
55°	449.5	463.2	479.0	500.3	523.0	543.6	569.1	600.0	633.0	665.9	685.9
57.5°	398.2	409.6	422.9	444.9	464.5	489.2	512.0	536.0	566.5	591.5	604.5
60°	360.8	371.1	388.3	407.6	426.1	447.4	473.5	497.6	520.9	540.9	551.2
62.5°	325.6	337.6	352.5	370.1	390.3	410.6	433.3	453.6	474.2	491.4	498.4
65°	279.7	289.3	300.3	316.8	333.4	354.0	371.8	392.4	407.6	417.2	423.3
67.5°	237.9	244.3	252.7	263.7	279.8	297.8	315.2	331.2	343.9	350.5	356.0
70°	211.0	215.1	221.3	232.3	244.7	260.4	278.3	290.0	301.0	306.5	312.0
72.5°	184.0	189.2	194.9	203.7	213.9	225.3	238.2	252.7	258.7	265.3	268.6
75°	139.5	147.0	154.6	160.2	167.0	175.9	187.6	196.5	200.0	205.5	206.2
77.5°	105.3	106.9	112.4	119.3	125.1	131.6	139.0	146.9	148.6	151.5	153.3
80°	86.5	86.5	86.5	90.7	97.6	102.4	109.3	113.4	116.1	116.8	117.5
82.5°	69.6	69.6	69.0	69.8	72.3	74.9	81.2	85.9	88.1	87.7	86.1
85°	45.3	44.0	44.0	43.3	44.0	42.6	41.9	44.6	48.8	48.8	47.5
87.5°	22.6	21.9	22.0	21.0	20.0	19.0	17.0	17.2	16.8	18.7	17.8
90°	19.7	19.0	16.7	14.3	12.1	9.8	7.8	6.1	4.3	2.5	0.8
92.5°	30.9	30.3	29.0	27.8	26.5	25.1	23.8	22.7	21.5	20.3	19.1
95°	59.2	58.5	57.1	55.6	54.2	52.8	51.5	50.3	49.1	47.8	46.6
97.5°	92.2	91.4	90.4	89.4	88.4	87.4	86.4	85.4	84.5	83.6	82.7
100°	116.6	116.0	115.2	114.3	113.4	112.6	111.6	110.6	109.5	108.5	107.3
102.5°	144.4	143.9	142.7	141.6	140.4	139.3	138.4	137.7	137.0	136.4	135.8
105°	186.3	186.3	184.8	183.2	181.6	180.1	179.0	178.7	178.3	178.0	177.6
107.5°	230.7	230.0	229.4	228.8	228.2	227.5	227.1	226.9	226.7	226.5	226.3
110°	260.4	259.7	259.4	259.0	258.7	258.3	258.0	257.6	257.3	256.9	256.6



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	290.3	289.4	289.4	289.3	289.2	289.1	289.0	288.8	288.6	288.4	288.2
115°	336.5	336.4	336.7	337.1	337.4	337.8	337.7	337.1	336.6	336.1	335.6
117.5°	382.7	382.7	383.2	383.6	384.2	384.6	384.7	384.3	384.0	383.6	383.2
120°	413.5	413.7	414.7	415.5	416.4	417.3	417.2	416.1	415.1	413.9	412.9
122.5°	444.8	445.4	445.8	446.3	446.7	447.2	447.0	446.2	445.5	444.6	443.9
125°	491.2	491.9	492.2	492.6	492.9	493.3	493.2	492.7	492.1	491.6	491.1
127.5°	537.0	538.0	538.4	538.8	539.2	539.6	539.2	538.1	536.9	535.8	534.7
130°	566.9	567.6	568.3	568.8	569.3	569.8	569.4	567.9	566.5	565.1	563.7
132.5°	596.5	597.3	597.7	598.1	598.5	599.0	598.4	597.0	595.6	594.2	592.8
135°	640.5	641.2	641.3	641.5	641.7	641.9	641.4	640.4	639.2	638.2	637.1
137.5°	683.5	684.2	683.8	683.3	682.9	682.4	681.8	680.9	679.9	679.1	678.2
140°	711.2	711.3	711.2	711.0	710.8	710.6	710.1	709.3	708.4	707.5	706.6
142.5°	737.7	737.9	737.6	737.3	737.0	736.7	736.1	735.2	734.3	733.5	732.6
145°	776.8	776.9	776.4	775.9	775.4	774.8	774.4	774.1	773.7	773.4	773.0
147.5°	813.4	813.4	812.9	812.4	811.9	811.4	810.9	810.2	809.6	809.0	808.4
150°	836.2	836.2	835.8	835.5	835.1	834.8	834.4	834.0	833.6	833.3	832.9
152.5°	856.7	856.4	856.2	856.0	855.8	855.6	855.2	854.6	854.1	853.6	853.2
155°	886.6	885.9	885.8	885.6	885.3	885.1	885.0	885.0	885.0	885.0	885.0
157.5°	912.7	911.9	911.8	911.7	911.5	911.4	911.4	911.6	911.8	912.0	912.2
160°	928.6	927.8	927.8	927.8	927.8	927.8	927.9	928.3	928.6	929.0	929.3
162.5°	943.7	942.9	942.7	942.6	942.5	942.3	942.5	943.0	943.5	944.0	944.4
165°	962.7	961.7	961.7	961.7	961.7	961.7	961.9	962.5	963.0	963.5	964.0
167.5°	978.3	977.1	977.0	976.8	976.7	976.6	976.8	977.5	978.3	979.0	979.7
170°	986.6	985.3	985.3	985.3	985.3	985.3	985.7	986.4	987.1	987.8	988.6
172.5°	993.4	992.3	992.3	992.3	992.3	992.3	992.7	993.4	994.1	994.8	995.4
175°	1000.7	999.6	999.6	999.6	999.6	999.6	1000.0	1000.7	1001.4	1002.0	1002.7
177.5°	1004.0	1003.2	1003.2	1003.2	1003.2	1003.2	1003.5	1004.0	1004.6	1005.2	1005.7
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4
2.5°	1614.2	1620.2	1627.9	1639.5	1648.3	1656.0	1657.6	1659.8	1665.4	1674.7	1681.8
5°	1624.7	1640.4	1665.9	1690.6	1717.5	1739.4	1760.0	1774.4	1788.2	1817.1	1840.5
7.5°	1621.3	1656.6	1696.4	1740.8	1785.7	1829.3	1869.8	1905.9	1941.9	1984.0	2031.9
10°	1619.1	1660.4	1713.9	1771.0	1833.6	1894.7	1953.9	1999.9	2053.5	2101.6	2162.7
12.5°	1608.7	1668.1	1732.1	1805.1	1882.0	1952.5	2030.2	2093.9	2155.3	2224.7	2295.8
15°	1595.1	1667.3	1748.4	1845.2	1962.1	2047.3	2127.0	2237.7	2313.3	2388.8	2490.6
17.5°	1570.2	1658.3	1759.6	1885.5	1983.0	2097.5	2217.5	2304.9	2406.7	2513.3	2605.4
20°	1550.4	1652.8	1766.3	1890.0	2014.3	2138.7	2254.8	2359.3	2464.5	2587.5	2663.1
22.5°	1530.7	1631.9	1749.7	1881.2	2014.9	2145.9	2277.3	2400.0	2518.3	2642.4	2739.0
25°	1488.5	1608.8	1736.7	1870.7	2002.7	2147.0	2303.6	2440.4	2586.8	2714.6	2806.0
27.5°	1445.9	1556.2	1683.4	1819.4	1966.1	2136.7	2321.0	2476.4	2623.1	2714.6	2743.4
30°	1407.4	1524.3	1641.1	1779.3	1938.0	2128.4	2324.3	2502.2	2622.5	2662.4	2632.8
32.5°	1368.5	1474.3	1590.0	1731.4	1900.1	2108.1	2328.6	2486.9	2559.3	2528.8	2408.5
35°	1299.6	1395.1	1507.1	1648.7	1842.5	2096.8	2310.6	2417.7	2399.8	2228.1	2001.2
37.5°	1225.9	1303.7	1407.4	1555.5	1782.8	2052.1	2232.4	2248.3	2093.7	1829.9	1567.9
40°	1167.6	1237.7	1344.2	1498.8	1736.7	2008.1	2153.8	2089.9	1850.1	1556.6	1338.1
42.5°	1111.0	1170.1	1272.7	1439.5	1692.7	1948.2	2036.7	1897.5	1620.8	1343.3	1144.6
45°	1015.0	1070.8	1173.8	1344.9	1602.7	1833.6	1821.9	1579.9	1303.0	1079.6	914.7
47.5°	924.0	972.7	1069.4	1244.2	1496.9	1661.7	1552.5	1295.1	1060.2	880.9	763.3
50°	859.7	907.9	1004.1	1176.6	1412.3	1532.6	1376.5	1128.4	913.3	764.9	671.5
52.5°	798.2	845.2	933.1	1101.3	1310.0	1381.9	1214.4	984.4	805.1	676.9	596.6
55°	712.0	747.7	826.8	987.5	1143.6	1160.0	990.3	797.9	650.2	560.8	505.8
57.5°	624.2	654.9	733.1	861.1	970.5	962.0	801.0	634.6	535.1	468.7	428.9
60°	566.9	597.2	665.9	775.9	858.4	829.5	681.8	547.8	462.5	413.7	382.1
62.5°	513.6	537.2	601.6	681.9	741.2	708.5	582.8	471.9	404.2	363.1	338.1
65°	436.4	455.7	507.2	549.1	582.1	550.5	446.1	369.0	320.2	291.3	274.2
67.5°	363.0	375.3	407.8	422.9	446.2	411.5	335.4	283.9	256.1	231.8	219.7
70°	316.8	325.8	343.0	355.3	361.5	325.8	269.4	231.6	208.2	191.1	183.5
72.5°	270.6	278.5	282.0	292.1	288.9	255.4	216.6	186.5	169.8	158.0	148.3
75°	206.8	210.3	206.8	202.8	193.8	170.5	143.6	128.6	116.1	110.7	107.2
77.5°	150.8	149.7	145.0	138.6	123.3	108.6	94.1	89.1	83.7	80.8	79.6
80°	116.1	113.4	109.3	99.0	85.9	75.6	72.2	68.8	66.7	63.2	62.5
82.5°	86.4	84.8	78.0	69.3	60.1	55.2	52.4	51.1	49.1	47.3	47.2
85°	46.0	44.0	36.5	31.6	30.2	28.9	28.2	28.2	25.4	24.7	24.7
87.5°	15.3	12.4	12.2	10.9	11.3	10.7	11.7	11.0	10.9	11.6	10.7
90°	2.5	4.3	6.1	7.8	9.8	12.1	14.3	16.7	19.0	19.7	20.4
92.5°	20.3	21.5	22.7	23.8	25.1	26.5	27.8	29.0	30.3	30.9	31.4
95°	47.8	49.1	50.3	51.5	52.8	54.2	55.6	57.1	58.5	59.2	59.8
97.5°	83.6	84.5	85.4	86.4	87.4	88.4	89.4	90.4	91.4	92.2	93.0
100°	108.5	109.5	110.6	111.6	112.6	113.4	114.3	115.2	116.0	116.6	117.1
102.5°	136.4	137.0	137.7	138.4	139.3	140.4	141.6	142.7	143.9	144.4	144.9
105°	178.0	178.3	178.7	179.0	180.1	181.6	183.2	184.8	186.3	186.3	186.3
107.5°	226.5	226.7	226.9	227.1	227.5	228.2	228.8	229.4	230.0	230.7	231.2
110°	256.9	257.3	257.6	258.0	258.3	258.7	259.0	259.4	259.7	260.4	261.2



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	288.4	288.6	288.8	289.0	289.1	289.2	289.3	289.4	289.4	290.3	291.1
115°	336.1	336.6	337.1	337.7	337.8	337.4	337.1	336.7	336.4	336.5	336.7
117.5°	383.6	384.0	384.3	384.7	384.6	384.2	383.6	383.2	382.7	382.7	382.7
120°	413.9	415.1	416.1	417.2	417.3	416.4	415.5	414.7	413.7	413.5	413.3
122.5°	444.6	445.5	446.2	447.0	447.2	446.7	446.3	445.8	445.4	444.8	444.4
125°	491.6	492.1	492.7	493.2	493.3	492.9	492.6	492.2	491.9	491.2	490.5
127.5°	535.8	536.9	538.1	539.2	539.6	539.2	538.8	538.4	538.0	537.0	536.0
130°	565.1	566.5	567.9	569.4	569.8	569.3	568.8	568.3	567.6	566.9	566.3
132.5°	594.2	595.6	597.0	598.4	599.0	598.5	598.1	597.7	597.3	596.5	595.7
135°	638.2	639.2	640.4	641.4	641.9	641.7	641.5	641.3	641.2	640.5	639.7
137.5°	679.1	679.9	680.9	681.8	682.4	682.9	683.3	683.8	684.2	683.5	682.8
140°	707.5	708.4	709.3	710.1	710.6	710.8	711.0	711.2	711.3	711.2	711.0
142.5°	733.5	734.3	735.2	736.1	736.7	737.0	737.3	737.6	737.9	737.7	737.6
145°	773.4	773.7	774.1	774.4	774.8	775.4	775.9	776.4	776.9	776.8	776.6
147.5°	809.0	809.6	810.2	810.9	811.4	811.9	812.4	812.9	813.4	813.4	813.4
150°	833.3	833.6	834.0	834.4	834.8	835.1	835.5	835.8	836.2	836.2	836.2
152.5°	853.6	854.1	854.6	855.2	855.6	855.8	856.0	856.2	856.4	856.7	856.9
155°	885.0	885.0	885.0	885.0	885.1	885.3	885.6	885.8	885.9	886.6	887.3
157.5°	912.0	911.8	911.6	911.4	911.4	911.5	911.7	911.8	911.9	912.7	913.4
160°	929.0	928.6	928.3	927.9	927.8	927.8	927.8	927.8	927.8	928.6	929.5
162.5°	944.0	943.5	943.0	942.5	942.3	942.5	942.6	942.7	942.9	943.7	944.6
165°	963.5	963.0	962.5	961.9	961.7	961.7	961.7	961.7	961.7	962.7	963.8
167.5°	979.0	978.3	977.5	976.8	976.6	976.7	976.8	977.0	977.1	978.3	979.4
170°	987.8	987.1	986.4	985.7	985.3	985.3	985.3	985.3	985.3	986.6	987.8
172.5°	994.8	994.1	993.4	992.7	992.3	992.3	992.3	992.3	992.3	993.4	994.5
175°	1002.0	1001.4	1000.7	1000.0	999.6	999.6	999.6	999.6	999.6	1000.7	1001.7
177.5°	1005.2	1004.6	1004.0	1003.5	1003.2	1003.2	1003.2	1003.2	1003.2	1004.0	1004.9
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4	1605.4
2.5°	1693.3	1693.3	1695.6	1703.8	1705.0	1712.0	1709.9
5°	1861.1	1874.1	1879.0	1899.6	1911.9	1917.4	1906.4
7.5°	2066.2	2102.9	2120.4	2142.0	2161.1	2166.9	2151.9
10°	2215.6	2254.1	2286.4	2306.4	2324.9	2337.3	2353.1
12.5°	2360.3	2407.5	2438.2	2466.4	2485.5	2501.1	2503.8
15°	2517.4	2588.9	2643.1	2683.0	2702.9	2713.2	2709.2
17.5°	2675.8	2742.1	2780.8	2821.5	2849.0	2850.4	2851.3
20°	2765.5	2830.0	2874.8	2905.0	2935.9	2934.6	2941.4
22.5°	2825.4	2876.3	2910.5	2932.4	2943.0	2937.8	2939.2
25°	2853.5	2868.5	2862.4	2827.3	2818.4	2786.1	2791.6
27.5°	2708.9	2637.4	2563.4	2468.3	2393.3	2333.3	2336.3
30°	2512.5	2386.1	2241.8	2120.8	2012.3	1982.1	1917.4
32.5°	2238.3	2048.5	1879.5	1766.8	1673.5	1648.3	1592.0
35°	1773.1	1588.9	1415.0	1310.6	1269.3	1211.6	1210.9
37.5°	1378.2	1216.0	1124.1	1045.7	1004.6	969.7	966.2
40°	1159.4	1032.9	963.5	907.2	866.7	840.5	834.4
42.5°	1006.5	904.2	839.3	804.4	773.2	759.7	749.6
45°	821.9	753.3	707.8	676.2	661.9	651.5	646.0
47.5°	687.5	641.5	610.6	589.6	577.8	566.9	569.9
50°	614.4	576.6	553.9	534.0	525.0	517.5	518.2
52.5°	555.5	521.6	503.3	488.9	477.8	472.4	469.8
55°	471.4	450.1	431.6	421.3	415.1	407.6	405.5
57.5°	402.1	385.7	370.5	358.9	357.4	350.1	351.0
60°	356.0	342.2	329.9	323.7	318.9	312.7	314.8
62.5°	318.1	306.5	295.3	290.1	285.4	280.8	281.8
65°	260.4	249.4	242.6	239.8	237.8	235.7	233.7
67.5°	207.5	200.9	196.5	190.7	186.4	185.7	183.6
70°	174.6	165.6	158.0	150.5	148.5	147.7	148.5
72.5°	140.0	134.3	132.2	128.6	128.2	126.3	127.5
75°	105.1	103.1	101.7	99.0	99.0	99.0	99.0
77.5°	77.6	76.2	75.4	74.9	74.2	73.2	73.1
80°	60.5	59.8	58.4	58.4	57.8	58.4	57.8
82.5°	45.6	45.5	44.1	44.1	43.4	43.0	43.4
85°	23.3	22.7	24.0	22.7	23.3	22.0	23.3
87.5°	10.8	10.9	10.5	10.6	10.1	11.3	10.2
90°	21.0	21.7	22.3	22.6	23.0	23.3	23.7
92.5°	32.0	32.5	32.7	32.5	32.3	32.1	31.9
95°	60.5	61.2	61.6	61.6	61.6	61.6	61.6
97.5°	93.8	94.6	95.0	94.9	94.9	94.8	94.7
100°	117.6	118.2	118.7	119.0	119.3	119.7	120.0
102.5°	145.4	145.9	146.2	146.1	146.0	146.0	145.9
105°	186.3	186.3	186.5	186.8	187.2	187.5	187.9
107.5°	231.8	232.4	232.5	232.3	232.1	231.9	231.7
110°	261.9	262.6	262.8	262.4	262.1	261.7	261.4



TEST NUMBER: P332343-840

CATALOG NUMBER: S123RDIP-S1000D805U840-4F0-1E-UDD-A1

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	292.0	292.9	293.2	293.2	293.1	293.0	293.0
115°	336.9	337.1	337.1	336.9	336.7	336.5	336.4
117.5°	382.6	382.6	382.3	381.9	381.4	380.9	380.4
120°	413.2	413.0	412.7	412.4	412.0	411.7	411.3
122.5°	443.9	443.5	443.0	442.5	442.0	441.5	441.0
125°	489.8	489.1	488.4	487.7	487.0	486.3	485.5
127.5°	535.0	534.1	533.2	532.4	531.6	530.8	530.0
130°	565.6	564.9	563.9	562.7	561.5	560.3	559.0
132.5°	594.8	594.0	593.1	592.2	591.2	590.3	589.4
135°	639.0	638.3	637.8	637.4	637.1	636.7	636.4
137.5°	682.1	681.3	680.5	679.9	679.2	678.6	677.9
140°	710.8	710.6	710.0	708.7	707.5	706.3	705.1
142.5°	737.4	737.2	736.7	735.7	734.8	733.8	732.9
145°	776.4	776.2	775.8	775.1	774.4	773.7	773.0
147.5°	813.4	813.4	812.8	811.8	810.7	809.7	808.7
150°	836.2	836.2	835.7	834.6	833.5	832.4	831.4
152.5°	857.2	857.5	857.2	856.3	855.4	854.4	853.5
155°	888.0	888.7	888.4	887.2	886.0	884.7	883.5
157.5°	914.1	914.8	914.7	913.8	912.8	911.8	910.8
160°	930.4	931.2	931.3	930.6	929.9	929.2	928.5
162.5°	945.5	946.4	946.2	945.1	944.0	942.9	941.8
165°	964.8	965.9	965.8	964.6	963.3	962.1	960.9
167.5°	980.4	981.5	981.5	980.4	979.4	978.3	977.1
170°	989.1	990.3	990.3	989.1	987.8	986.6	985.3
172.5°	995.6	996.6	996.6	995.3	994.1	992.9	991.7
175°	1002.7	1003.8	1003.7	1002.5	1001.3	1000.0	998.8
177.5°	1005.7	1006.5	1006.5	1005.5	1004.5	1003.6	1002.6
180°	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1	1005.1

(END OF REPORT)