

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332383-840

Luminaire Tested: **S123RDIP-S1165D1025U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332383-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8172.0 lumens
Efficiency: N/A
Efficacy: 122.3 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332383-840

CATALOG NUMBER: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

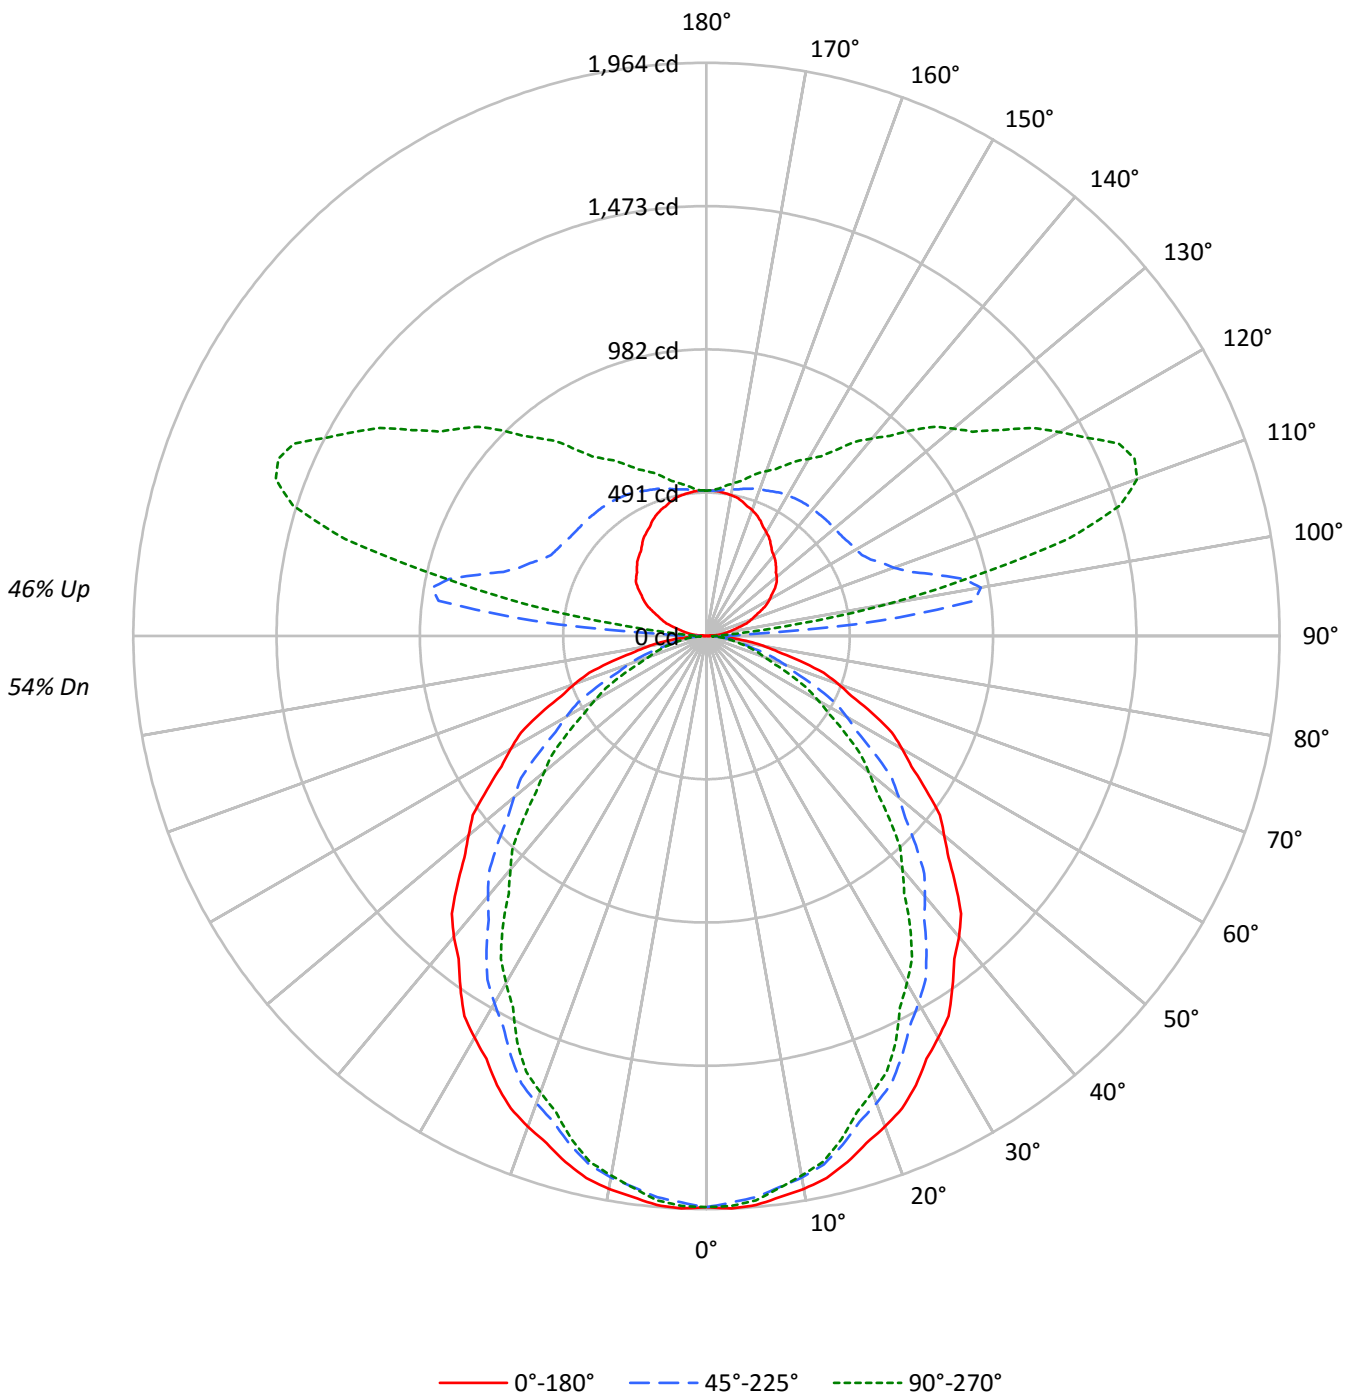



TEST NUMBER: P332383-840

CATALOG NUMBER: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	54	52	51	46
2	90	83	77	72	84	77	72	68	67	63	59	57	54	51	48	46	44	39
3	83	73	66	61	77	68	62	57	59	54	50	50	47	44	42	40	38	34
4	76	65	57	51	70	61	54	49	53	47	43	45	41	38	38	35	33	29
5	70	58	50	44	65	55	47	42	47	42	37	41	36	33	34	31	29	26
6	64	52	44	39	60	49	42	37	43	37	33	37	32	29	31	28	25	23
7	60	47	40	34	55	45	37	32	39	33	29	34	29	26	29	25	23	20
8	55	43	35	30	51	41	34	29	36	30	26	31	26	23	26	23	20	18
9	52	40	32	27	48	37	30	26	33	27	23	28	24	21	24	21	19	16
10	48	36	29	24	45	34	28	23	30	25	21	26	22	19	23	19	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	21068	21068	21068
5°	21149	20857	20977
10°	21029	20595	20525
15°	20803	20113	19900
20°	20492	19511	19057
25°	20173	18834	18231
30°	19750	18053	17066
35°	19316	17270	16000
40°	18916	16350	14677
45°	18389	15440	13484
50°	17811	14408	12149
55°	17220	13226	10903
60°	16678	11961	9535
65°	15969	10593	8166
70°	15087	8894	6593
75°	13795	6995	6209
80°	12298	6199	5709
85°	10387	5483	5101



TEST NUMBER: P332383-840

CATALOG NUMBER: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	183.8	2.2
10°-20°	511.4	6.3
20°-30°	736.4	9.0
30°-40°	829.4	10.1
40°-50°	793.5	9.7
50°-60°	649.8	8.0
60°-70°	438.4	5.4
70°-80°	220.6	2.7
80°-90°	62.2	0.8
90°-100°	277.1	3.4
100°-110°	784.7	9.6
110°-120°	771.9	9.4
120°-130°	615.7	7.5
130°-140°	485.5	5.9
140°-150°	362.3	4.4
150°-160°	252.5	3.1
160°-170°	148.4	1.8
170°-180°	48.3	0.6
0°-30°	1431.6	17.5
0°-40°	2261.0	27.7
0°-60°	3704.3	45.3
0°-90°	4425.5	54.2
90°-120°	1833.8	22.4
90°-150°	3297.3	40.3
90°-180°	3746.0	45.8
0°-180°	8172.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1957	1957	1957	1957	1957	
5°	1957	1949	1930	1944	1941	186
15°	1867	1848	1805	1797	1786	526
25°	1698	1657	1586	1553	1535	781
35°	1470	1411	1314	1248	1218	920
45°	1208	1134	1014	927	886	932
55°	918	837	705	616	581	822
65°	627	538	416	342	321	620
75°	332	255	168	153	149	354
85°	84	51	44	41	41	95
90°	2	12	25	28	29	6
95°	34	111	598	174	117	37
105°	117	173	810	1417	1282	124
115°	207	258	620	1359	1559	205
125°	287	339	579	1048	1230	255
135°	337	402	571	863	997	260
145°	384	440	564	708	779	241
155°	436	471	545	620	646	201
165°	477	490	522	554	564	134
175°	497	498	501	508	507	47
180°	498	498	498	498	498	



TEST NUMBER: P332383-840

CATALOG NUMBER: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1963.7	1962.5	1961.4	1960.2	1959.1	1956.8	1953.5	1950.0	1946.7	1943.3	1946.4
5°	1957.3	1955.5	1953.8	1952.0	1950.3	1947.2	1943.0	1938.7	1934.5	1930.3	1933.5
7.5°	1939.1	1937.3	1935.4	1933.5	1931.6	1927.8	1922.4	1916.8	1911.4	1905.8	1907.6
10°	1924.0	1921.5	1919.0	1916.5	1914.1	1909.7	1903.3	1896.9	1890.6	1884.3	1884.6
12.5°	1902.4	1899.7	1896.8	1894.1	1891.4	1886.1	1878.3	1870.6	1862.8	1855.0	1854.8
15°	1866.8	1862.9	1859.1	1855.1	1851.3	1844.4	1834.5	1824.6	1814.7	1804.9	1803.1
17.5°	1822.0	1817.6	1813.0	1808.5	1804.0	1795.4	1782.9	1770.3	1757.8	1745.2	1741.5
20°	1789.0	1783.4	1777.8	1772.1	1766.5	1757.0	1743.5	1730.1	1716.7	1703.3	1698.7
22.5°	1752.2	1745.7	1739.2	1732.7	1726.3	1715.9	1701.6	1687.4	1673.1	1658.8	1653.1
25°	1698.5	1689.7	1680.9	1672.0	1663.2	1650.7	1634.5	1618.3	1602.0	1585.8	1578.4
27.5°	1633.5	1623.8	1614.0	1604.3	1594.5	1580.6	1562.6	1544.5	1526.4	1508.3	1498.0
30°	1589.0	1578.4	1567.8	1557.2	1546.7	1531.5	1511.8	1492.0	1472.3	1452.5	1440.5
32.5°	1544.6	1532.6	1520.6	1508.5	1496.6	1480.2	1459.3	1438.4	1417.4	1396.6	1383.5
35°	1470.0	1457.2	1444.5	1431.9	1419.2	1401.9	1380.0	1358.2	1336.3	1314.3	1299.2
37.5°	1394.4	1380.3	1366.1	1352.0	1338.0	1319.2	1295.9	1272.5	1249.2	1225.8	1208.6
40°	1346.2	1330.6	1315.0	1299.6	1284.0	1263.7	1238.7	1213.7	1188.6	1163.6	1145.2
42.5°	1291.5	1276.0	1260.5	1245.0	1229.4	1208.7	1182.9	1156.9	1131.0	1105.2	1085.1
45°	1208.0	1192.1	1176.3	1160.4	1144.5	1123.0	1095.8	1068.6	1041.5	1014.3	994.2
47.5°	1124.5	1107.1	1089.6	1072.3	1054.8	1032.5	1005.3	978.2	951.0	923.9	902.0
50°	1063.6	1047.0	1030.4	1013.8	997.2	974.7	946.1	917.6	889.0	860.4	838.5
52.5°	1009.0	991.0	973.0	955.0	937.0	913.8	885.6	857.3	829.0	800.7	778.0
55°	917.6	900.2	882.9	865.7	848.4	824.8	794.8	764.8	734.8	704.8	684.4
57.5°	833.0	814.3	795.4	776.6	757.7	733.3	703.2	673.0	642.9	612.8	593.4
60°	774.7	755.3	735.9	716.5	697.0	672.7	643.4	614.2	584.9	555.6	536.5
62.5°	716.2	696.8	677.4	658.0	638.6	614.3	585.0	555.7	526.4	497.2	479.3
65°	627.0	607.6	588.2	568.9	549.5	525.9	498.5	470.9	443.4	415.9	398.6
67.5°	537.9	518.2	498.6	479.0	459.4	436.4	410.0	383.5	357.2	330.8	317.9
70°	479.4	460.4	441.3	422.2	403.2	381.3	356.7	331.9	307.3	282.6	270.2
72.5°	421.0	402.2	383.4	364.7	345.9	325.3	302.9	280.4	258.0	235.6	225.5
75°	331.7	314.9	297.9	280.9	264.1	245.9	226.5	207.0	187.6	168.2	164.7
77.5°	250.4	235.2	219.8	204.6	189.2	175.3	162.9	150.4	137.8	125.4	123.5
80°	198.4	184.0	169.5	155.0	140.6	129.7	122.2	114.8	107.4	100.0	99.0
82.5°	148.9	136.4	123.9	111.4	99.0	91.0	87.6	84.0	80.6	77.2	76.0
85°	84.1	76.3	68.6	60.9	53.1	48.7	47.7	46.6	45.5	44.4	43.7
87.5°	30.9	28.2	25.4	23.0	20.3	19.1	19.7	20.3	20.9	21.5	21.1
90°	2.0	4.0	6.1	9.1	11.1	13.1	16.2	19.2	22.2	25.2	24.2
92.5°	12.5	18.6	27.1	34.8	43.3	58.3	84.6	128.1	170.6	155.0	116.9
95°	34.2	37.3	48.4	65.5	91.7	131.1	216.7	366.9	532.2	597.7	484.8
97.5°	58.5	59.5	68.2	83.0	108.9	151.4	233.3	402.6	678.2	926.3	991.1
100°	74.6	75.6	82.7	96.7	121.0	160.3	230.9	380.0	645.1	954.6	1153.2
102.5°	91.5	93.3	99.6	112.9	134.7	170.8	234.1	360.6	596.7	902.2	1161.2
105°	116.9	120.0	126.0	138.1	157.2	188.5	243.0	346.8	537.2	810.4	1099.7
107.5°	143.9	146.9	152.8	164.7	182.7	211.7	259.4	345.8	499.4	729.4	992.1
110°	163.3	166.3	171.4	182.5	199.5	227.8	273.2	349.8	484.8	683.5	924.3



TEST NUMBER: P332383-840

CATALOG NUMBER: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	181.1	184.1	189.1	200.2	217.3	244.8	286.9	357.9	476.8	652.8	865.5
115°	206.6	210.7	216.7	226.8	244.0	271.1	309.4	370.9	473.7	620.0	794.4
117.5°	232.3	236.9	242.0	251.2	270.3	295.6	333.5	388.3	475.5	600.6	751.3
120°	249.9	253.0	258.0	268.1	287.3	312.5	348.8	401.2	478.8	591.7	728.8
122.5°	265.3	268.3	273.4	284.3	302.7	329.4	364.9	413.3	484.4	586.0	710.2
125°	287.3	289.3	295.4	306.4	325.6	352.8	388.1	432.4	492.9	578.7	686.5
127.5°	304.1	307.0	314.5	325.8	347.0	374.2	408.3	448.2	502.6	575.0	665.5
130°	314.5	317.5	326.6	338.7	359.8	387.1	420.3	458.7	509.1	572.6	654.2
132.5°	322.6	326.4	336.3	350.8	371.9	398.4	430.8	468.4	513.9	571.8	643.7
135°	336.7	340.7	351.8	366.9	388.1	415.3	446.6	480.8	521.2	570.6	630.1
137.5°	350.0	354.3	365.1	381.2	402.2	427.4	457.5	490.1	525.9	568.4	618.1
140°	358.9	363.9	374.0	390.1	410.3	435.5	464.7	494.9	529.2	567.5	610.9
142.5°	368.5	372.7	383.6	398.2	418.3	441.9	470.4	499.8	531.6	565.9	604.4
145°	384.1	387.1	396.2	411.3	428.4	451.6	477.8	505.0	533.2	563.5	595.7
147.5°	399.8	401.6	410.5	423.5	440.1	459.9	483.8	508.3	533.2	559.7	587.2
150°	410.3	411.3	419.3	432.4	446.6	464.7	487.9	509.1	533.2	556.4	581.6
152.5°	420.7	420.9	429.0	440.5	453.0	470.4	490.3	510.7	530.8	552.4	575.2
155°	436.5	436.5	442.5	452.6	463.7	477.8	494.9	511.1	528.2	545.3	565.5
157.5°	449.0	449.8	454.6	463.5	472.9	483.8	497.6	512.1	524.8	539.1	554.6
160°	458.7	458.7	462.7	470.7	477.8	487.9	500.0	512.1	523.2	534.2	547.3
162.5°	466.0	466.0	469.2	475.5	481.8	490.3	500.8	511.3	520.0	529.4	540.1
165°	476.8	475.7	477.8	482.8	486.9	493.9	502.0	509.1	515.1	522.2	530.2
167.5°	485.0	483.8	484.8	488.7	491.5	495.9	501.8	507.5	510.3	514.9	520.8
170°	489.9	487.9	488.9	491.9	493.9	495.9	501.0	505.0	507.1	510.1	515.1
172.5°	493.1	491.9	492.1	494.3	495.5	496.8	501.0	504.2	504.6	506.0	509.5
175°	497.0	495.9	494.9	497.0	497.0	498.0	500.0	502.0	501.0	501.0	503.0
177.5°	498.8	498.0	497.2	498.0	498.0	498.0	498.8	500.4	498.8	498.0	498.8
180°	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0



TEST NUMBER: P332383-840

CATALOG NUMBER: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1949.5	1952.7	1955.7	1957.0	1956.4	1955.9	1955.3	1954.7
5°	1936.6	1939.8	1943.0	1944.2	1943.5	1942.8	1942.1	1941.4
7.5°	1909.4	1911.2	1912.9	1913.2	1912.0	1910.8	1909.6	1908.3
10°	1885.0	1885.3	1885.7	1885.0	1883.2	1881.5	1879.7	1877.9
12.5°	1854.6	1854.4	1854.2	1853.1	1851.1	1849.0	1846.9	1844.9
15°	1801.4	1799.6	1797.9	1795.7	1793.2	1790.8	1788.3	1785.8
17.5°	1737.8	1733.9	1730.2	1726.6	1722.8	1719.2	1715.6	1711.8
20°	1694.1	1689.5	1685.0	1680.5	1676.3	1672.0	1667.9	1663.7
22.5°	1647.4	1641.7	1636.0	1631.1	1627.2	1623.3	1619.3	1615.4
25°	1571.0	1563.6	1556.2	1550.5	1546.7	1542.8	1538.9	1535.0
27.5°	1487.7	1477.4	1467.1	1459.1	1453.1	1447.2	1441.3	1435.3
30°	1428.5	1416.5	1404.5	1395.7	1390.1	1384.4	1378.8	1373.1
32.5°	1370.4	1357.3	1344.1	1334.6	1328.7	1322.7	1316.9	1310.9
35°	1284.0	1268.9	1253.7	1242.9	1236.6	1230.2	1223.9	1217.6
37.5°	1191.3	1174.2	1156.9	1144.4	1136.6	1128.7	1121.0	1113.1
40°	1126.9	1108.5	1090.3	1077.0	1068.8	1060.8	1052.7	1044.5
42.5°	1065.1	1045.0	1025.0	1011.4	1004.1	996.8	989.6	982.3
45°	974.1	954.0	933.9	919.7	911.2	902.7	894.2	885.8
47.5°	880.1	858.3	836.4	821.7	814.2	806.6	799.0	791.5
50°	816.7	794.8	772.8	757.9	749.8	741.6	733.6	725.5
52.5°	755.3	732.6	709.8	694.8	687.5	680.3	673.1	665.8
55°	663.9	643.4	623.0	609.3	602.2	595.1	588.0	581.0
57.5°	574.1	554.7	535.4	522.7	516.7	510.8	504.7	498.8
60°	517.5	498.5	479.4	466.9	460.9	454.8	448.9	442.9
62.5°	461.3	443.4	425.5	413.4	407.1	400.8	394.6	388.3
65°	381.3	364.1	346.8	336.2	332.3	328.4	324.6	320.6
67.5°	305.0	292.1	279.1	270.6	266.5	262.3	258.1	254.0
70°	257.8	245.5	233.2	225.1	221.2	217.3	213.4	209.5
72.5°	215.4	205.3	195.2	189.3	187.7	186.1	184.5	182.9
75°	161.2	157.6	154.1	152.1	151.4	150.7	150.0	149.3
77.5°	121.6	119.7	117.8	116.4	115.7	115.0	114.3	113.6
80°	97.9	96.8	95.7	94.9	94.2	93.5	92.8	92.1
82.5°	75.0	74.0	72.9	72.3	72.2	72.0	71.9	71.8
85°	43.0	42.3	41.6	41.3	41.3	41.3	41.3	41.3
87.5°	21.0	20.9	20.8	20.9	20.5	20.4	20.3	19.8
90°	25.2	26.3	27.3	29.2	28.2	29.2	30.2	29.2
92.5°	84.8	67.4	59.5	54.2	52.4	49.4	50.4	48.6
95°	362.8	246.0	192.6	156.2	137.1	128.1	121.0	116.9
97.5°	904.6	724.6	594.5	473.9	399.6	354.3	327.0	318.3
100°	1188.5	1106.8	988.9	845.8	744.0	670.3	631.1	632.1
102.5°	1282.8	1280.2	1211.4	1120.7	1041.5	983.2	950.4	927.2
105°	1310.4	1411.3	1430.4	1404.2	1357.8	1319.5	1287.3	1282.2
107.5°	1231.0	1394.7	1483.0	1518.9	1519.7	1506.8	1495.9	1486.6
110°	1155.2	1340.7	1467.6	1538.2	1566.5	1574.6	1572.6	1570.5



TEST NUMBER: P332383-840

CATALOG NUMBER: S123RDIP-S1165D1025U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1080.2	1269.7	1412.0	1502.8	1554.4	1579.3	1587.0	1587.4
115°	980.8	1156.2	1304.3	1414.2	1489.9	1534.2	1554.4	1559.4
117.5°	908.9	1060.3	1193.3	1304.7	1383.6	1434.4	1463.5	1470.3
120°	870.9	1007.0	1128.0	1229.8	1309.4	1365.8	1390.1	1396.1
122.5°	841.1	964.3	1076.4	1170.9	1241.7	1292.5	1319.1	1326.8
125°	801.4	911.3	1008.0	1088.6	1153.2	1197.5	1222.7	1229.8
127.5°	766.7	864.6	952.0	1025.3	1082.8	1120.7	1143.5	1149.9
130°	745.0	835.7	917.3	985.8	1039.3	1075.6	1096.7	1104.8
132.5°	724.8	808.2	884.2	949.6	999.8	1036.0	1054.8	1060.5
135°	697.5	769.1	834.7	892.1	941.5	971.7	989.9	996.9
137.5°	672.8	731.4	787.9	837.7	879.2	909.9	925.1	929.8
140°	658.2	709.6	758.0	801.4	839.7	867.9	884.0	883.0
142.5°	644.5	688.7	730.6	768.3	801.0	826.0	840.5	839.5
145°	628.0	661.3	693.5	722.8	747.9	769.1	777.2	779.2
147.5°	614.5	640.9	666.9	687.7	706.8	721.1	728.8	729.6
150°	604.8	628.0	649.1	668.3	683.5	694.5	700.5	700.5
152.5°	595.9	615.9	634.7	650.6	662.5	672.8	676.4	676.4
155°	582.6	598.7	613.9	626.0	635.1	643.1	645.1	646.1
157.5°	568.6	582.0	593.7	603.2	611.1	617.1	618.7	618.5
160°	560.5	571.6	581.6	588.7	595.7	601.8	601.8	600.8
162.5°	550.8	560.3	569.6	575.8	580.5	585.6	585.6	584.6
165°	538.3	544.3	551.4	556.4	560.5	564.5	563.5	563.5
167.5°	527.4	532.0	536.0	539.7	541.5	544.3	543.3	543.3
170°	520.2	523.2	527.1	529.2	530.2	532.2	531.2	531.2
172.5°	513.7	515.9	519.2	520.4	520.6	522.6	520.8	520.0
175°	505.0	506.0	508.1	508.1	508.1	509.1	508.1	507.1
177.5°	499.6	500.4	501.2	501.2	500.4	501.2	499.6	499.6
180°	498.0	498.0	498.0	498.0	498.0	498.0	498.0	498.0

(END OF REPORT)