

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332387-840

Luminaire Tested: **S123RDIP-S1165D1195U840-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332387-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D1195U840-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 9242.0 lumens
Efficiency: N/A
Efficacy: 128.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332387-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F

Luminous Intensity Polar Plot

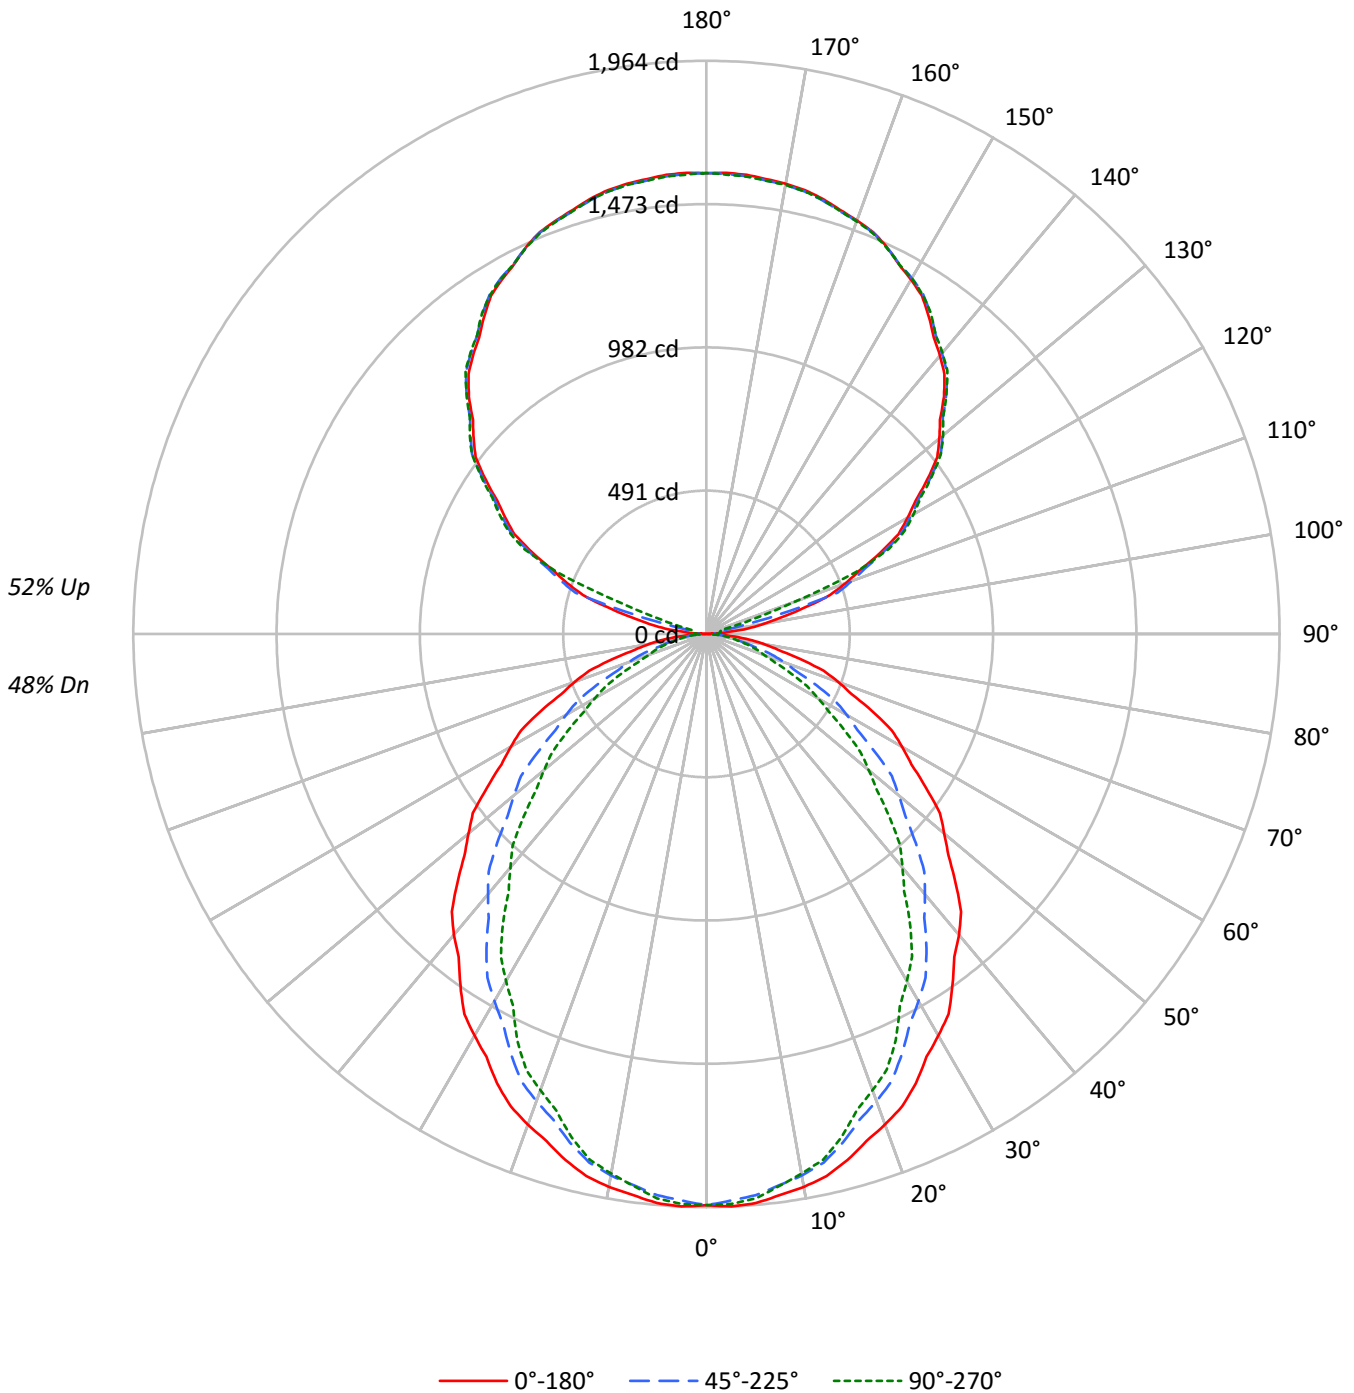



TEST NUMBER: P332387-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48
1	98	93	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	40	35
3	81	72	65	59	75	67	61	56	57	52	48	47	44	41	38	36	34	30
4	75	64	56	51	68	59	53	47	50	45	41	42	38	35	34	32	29	26
5	69	57	49	43	63	53	46	41	45	40	36	38	34	31	31	28	26	23
6	63	51	43	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20
7	59	47	39	33	54	43	36	31	37	32	28	31	27	24	26	23	20	18
8	54	42	35	29	50	39	33	28	34	28	25	29	25	21	24	21	18	16
9	51	39	31	26	47	36	29	25	31	26	22	26	22	19	22	19	17	15
10	47	35	28	24	44	33	27	22	29	24	20	24	20	18	20	17	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	21068	21068	21068
5°	21149	20857	20977
10°	21029	20595	20525
15°	20803	20113	19900
20°	20492	19511	19057
25°	20173	18834	18231
30°	19750	18053	17066
35°	19316	17270	16000
40°	18916	16350	14677
45°	18389	15440	13484
50°	17811	14408	12149
55°	17220	13226	10903
60°	16678	11961	9535
65°	15969	10593	8166
70°	15087	8894	6593
75°	13795	6995	6209
80°	12298	6199	5709
85°	10387	5483	5101



TEST NUMBER: P332387-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	183.8	2.0
10°-20°	511.4	5.5
20°-30°	736.4	8.0
30°-40°	829.4	9.0
40°-50°	793.5	8.6
50°-60°	649.8	7.0
60°-70°	438.4	4.7
70°-80°	220.6	2.4
80°-90°	62.8	0.7
90°-100°	57.4	0.6
100°-110°	273.6	3.0
110°-120°	657.3	7.1
120°-130°	837.0	9.1
130°-140°	894.3	9.7
140°-150°	836.3	9.0
150°-160°	674.6	7.3
160°-170°	435.4	4.7
170°-180°	150.0	1.6
0°-30°	1431.6	15.5
0°-40°	2261.0	24.5
0°-60°	3704.3	40.1
0°-90°	4426.1	47.9
90°-120°	988.3	10.7
90°-150°	3555.9	38.5
90°-180°	4816.0	52.1
0°-180°	9242.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1957	1957	1957	1957	1957	
5°	1957	1949	1930	1944	1941	186
15°	1867	1848	1805	1797	1786	526
25°	1698	1657	1586	1553	1535	781
35°	1470	1411	1314	1248	1218	920
45°	1208	1134	1014	927	886	932
55°	918	837	705	616	581	822
65°	627	538	416	342	321	620
75°	332	255	168	153	149	354
85°	84	51	44	41	41	94
90°	1	13	28	33	35	8
95°	72	27	36	44	44	88
105°	350	356	257	61	52	371
115°	656	663	674	685	690	647
125°	924	934	939	941	943	825
135°	1151	1158	1163	1166	1163	886
145°	1328	1336	1339	1341	1341	831
155°	1463	1461	1462	1467	1461	674
165°	1543	1539	1538	1547	1539	436
175°	1579	1574	1574	1582	1573	150
180°	1579	1579	1579	1579	1579	



TEST NUMBER: P332387-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1963.7	1962.5	1961.4	1960.2	1959.1	1956.8	1953.5	1950.0	1946.7	1943.3	1946.4
5°	1957.3	1955.5	1953.8	1952.0	1950.3	1947.2	1943.0	1938.7	1934.5	1930.3	1933.5
7.5°	1939.1	1937.3	1935.4	1933.5	1931.6	1927.8	1922.4	1916.8	1911.4	1905.8	1907.6
10°	1924.0	1921.5	1919.0	1916.5	1914.1	1909.7	1903.3	1896.9	1890.6	1884.3	1884.6
12.5°	1902.4	1899.7	1896.8	1894.1	1891.4	1886.1	1878.3	1870.6	1862.8	1855.0	1854.8
15°	1866.8	1862.9	1859.1	1855.1	1851.3	1844.4	1834.5	1824.6	1814.7	1804.9	1803.1
17.5°	1822.0	1817.6	1813.0	1808.5	1804.0	1795.4	1782.9	1770.3	1757.8	1745.2	1741.5
20°	1789.0	1783.4	1777.8	1772.1	1766.5	1757.0	1743.5	1730.1	1716.7	1703.3	1698.7
22.5°	1752.2	1745.7	1739.2	1732.7	1726.3	1715.9	1701.6	1687.4	1673.1	1658.8	1653.1
25°	1698.5	1689.7	1680.9	1672.0	1663.2	1650.7	1634.5	1618.3	1602.0	1585.8	1578.4
27.5°	1633.5	1623.8	1614.0	1604.3	1594.5	1580.6	1562.6	1544.5	1526.4	1508.3	1498.0
30°	1589.0	1578.4	1567.8	1557.2	1546.7	1531.5	1511.8	1492.0	1472.3	1452.5	1440.5
32.5°	1544.6	1532.6	1520.6	1508.5	1496.6	1480.2	1459.3	1438.4	1417.4	1396.6	1383.5
35°	1470.0	1457.2	1444.5	1431.9	1419.2	1401.9	1380.0	1358.2	1336.3	1314.3	1299.2
37.5°	1394.4	1380.3	1366.1	1352.0	1338.0	1319.2	1295.9	1272.5	1249.2	1225.8	1208.6
40°	1346.2	1330.6	1315.0	1299.6	1284.0	1263.7	1238.7	1213.7	1188.6	1163.6	1145.2
42.5°	1291.5	1276.0	1260.5	1245.0	1229.4	1208.7	1182.9	1156.9	1131.0	1105.2	1085.1
45°	1208.0	1192.1	1176.3	1160.4	1144.5	1123.0	1095.8	1068.6	1041.5	1014.3	994.2
47.5°	1124.5	1107.1	1089.6	1072.3	1054.8	1032.5	1005.3	978.2	951.0	923.9	902.0
50°	1063.6	1047.0	1030.4	1013.8	997.2	974.7	946.1	917.6	889.0	860.4	838.5
52.5°	1009.0	991.0	973.0	955.0	937.0	913.8	885.6	857.3	829.0	800.7	778.0
55°	917.6	900.2	882.9	865.7	848.4	824.8	794.8	764.8	734.8	704.8	684.4
57.5°	833.0	814.3	795.4	776.6	757.7	733.3	703.2	673.0	642.9	612.8	593.4
60°	774.7	755.3	735.9	716.5	697.0	672.7	643.4	614.2	584.9	555.6	536.5
62.5°	716.2	696.8	677.4	658.0	638.6	614.3	585.0	555.7	526.4	497.2	479.3
65°	627.0	607.6	588.2	568.9	549.5	525.9	498.5	470.9	443.4	415.9	398.6
67.5°	537.9	518.2	498.6	479.0	459.4	436.4	410.0	383.5	357.2	330.8	317.9
70°	479.4	460.4	441.3	422.2	403.2	381.3	356.7	331.9	307.3	282.6	270.2
72.5°	421.0	402.2	383.4	364.7	345.9	325.3	302.9	280.4	258.0	235.6	225.5
75°	331.7	314.9	297.9	280.9	264.1	245.9	226.5	207.0	187.6	168.2	164.7
77.5°	250.4	235.2	219.8	204.6	189.2	175.3	162.9	150.4	137.8	125.4	123.5
80°	198.4	184.0	169.5	155.0	140.6	129.7	122.2	114.8	107.4	100.0	99.0
82.5°	148.9	136.4	123.9	111.4	99.0	91.0	87.6	84.0	80.6	77.2	76.0
85°	84.1	76.3	68.6	60.9	53.1	48.7	47.7	46.6	45.5	44.4	43.7
87.5°	30.7	28.2	25.5	22.9	20.4	19.4	20.1	20.8	21.5	22.1	22.1
90°	1.2	3.7	6.4	9.0	11.6	14.6	18.0	21.4	24.7	28.2	29.2
92.5°	21.8	21.1	20.4	19.6	18.9	19.8	22.4	24.9	27.5	30.0	31.7
95°	71.6	60.9	50.2	39.5	28.8	24.9	27.8	30.6	33.5	36.4	38.2
97.5°	143.8	139.1	134.2	129.5	124.6	112.9	94.1	75.3	56.6	37.8	39.9
100°	198.2	203.5	208.7	213.9	219.1	201.4	160.8	120.1	79.4	38.7	40.8
102.5°	260.2	264.0	267.7	271.5	275.3	254.9	210.5	166.0	121.6	77.2	70.7
105°	349.6	352.5	355.4	358.2	361.1	350.8	327.3	303.9	280.4	256.9	210.8
107.5°	443.9	446.3	448.6	450.8	453.1	456.2	459.9	463.5	467.3	471.0	437.1
110°	506.9	509.0	511.0	513.1	515.2	517.7	520.6	523.4	526.2	529.2	520.6



TEST NUMBER: P332387-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	566.9	568.8	570.7	572.6	574.4	576.8	579.7	582.6	585.4	588.2	588.4
115°	655.9	657.4	658.9	660.6	662.1	664.1	666.4	668.7	671.2	673.5	676.1
117.5°	741.9	743.9	745.8	747.8	749.7	751.2	752.5	753.7	754.9	756.1	758.1
120°	795.5	797.8	800.2	802.5	804.9	806.5	807.2	808.0	808.8	809.5	811.6
122.5°	849.9	851.8	853.7	855.7	857.7	859.1	860.1	861.1	862.0	863.0	864.5
125°	924.5	926.7	928.7	930.8	932.9	934.4	935.4	936.5	937.6	938.6	939.2
127.5°	996.8	998.9	1001.0	1003.1	1005.1	1006.8	1008.0	1009.4	1010.6	1011.8	1012.7
130°	1041.9	1044.0	1046.0	1048.1	1050.2	1051.8	1052.8	1053.9	1054.9	1055.9	1057.0
132.5°	1085.0	1087.1	1089.2	1091.3	1093.4	1094.8	1095.7	1096.5	1097.3	1098.2	1099.2
135°	1150.9	1152.6	1154.1	1155.7	1157.2	1158.5	1159.6	1160.6	1161.6	1162.8	1163.5
137.5°	1207.3	1209.3	1211.2	1213.3	1215.3	1216.5	1217.1	1217.7	1218.2	1218.8	1220.0
140°	1244.9	1246.4	1248.0	1249.5	1251.1	1252.2	1253.0	1253.8	1254.7	1255.4	1256.5
142.5°	1279.6	1281.1	1282.7	1284.2	1285.9	1287.0	1287.8	1288.6	1289.4	1290.1	1291.0
145°	1328.2	1330.0	1331.8	1333.6	1335.4	1336.7	1337.2	1337.7	1338.2	1338.7	1339.2
147.5°	1373.9	1375.1	1376.3	1377.5	1378.7	1379.6	1380.1	1380.6	1381.1	1381.6	1382.2
150°	1402.1	1402.8	1403.6	1404.4	1405.2	1405.8	1406.3	1406.8	1407.4	1408.0	1408.5
152.5°	1427.4	1427.7	1428.2	1428.5	1428.9	1429.2	1429.5	1429.9	1430.2	1430.5	1431.4
155°	1463.1	1462.6	1462.0	1461.5	1461.0	1460.9	1461.1	1461.4	1461.7	1461.9	1463.2
157.5°	1490.8	1490.7	1490.7	1490.6	1490.6	1490.4	1490.2	1489.9	1489.7	1489.3	1491.0
160°	1507.6	1507.4	1507.1	1506.9	1506.6	1506.3	1506.1	1505.8	1505.6	1505.3	1506.9
162.5°	1523.6	1523.0	1522.3	1521.6	1520.9	1520.5	1520.1	1519.9	1519.6	1519.3	1521.2
165°	1542.9	1542.1	1541.3	1540.5	1539.7	1539.2	1538.9	1538.6	1538.4	1538.1	1540.2
167.5°	1557.9	1556.8	1555.8	1554.8	1553.7	1553.2	1553.2	1553.2	1553.2	1553.2	1555.3
170°	1566.3	1565.3	1564.3	1563.2	1562.2	1561.7	1561.7	1561.7	1561.7	1561.7	1563.7
172.5°	1572.0	1570.7	1569.4	1568.2	1566.9	1566.4	1566.6	1566.8	1567.0	1567.2	1569.3
175°	1579.2	1577.9	1576.6	1575.3	1574.0	1573.5	1573.8	1574.0	1574.3	1574.5	1576.4
177.5°	1581.1	1580.0	1579.0	1578.0	1576.9	1576.5	1576.7	1576.9	1577.1	1577.3	1579.0
180°	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2



TEST NUMBER: P332387-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1949.5	1952.7	1955.7	1957.0	1956.4	1955.9	1955.3	1954.7
5°	1936.6	1939.8	1943.0	1944.2	1943.5	1942.8	1942.1	1941.4
7.5°	1909.4	1911.2	1912.9	1913.2	1912.0	1910.8	1909.6	1908.3
10°	1885.0	1885.3	1885.7	1885.0	1883.2	1881.5	1879.7	1877.9
12.5°	1854.6	1854.4	1854.2	1853.1	1851.1	1849.0	1846.9	1844.9
15°	1801.4	1799.6	1797.9	1795.7	1793.2	1790.8	1788.3	1785.8
17.5°	1737.8	1733.9	1730.2	1726.6	1722.8	1719.2	1715.6	1711.8
20°	1694.1	1689.5	1685.0	1680.5	1676.3	1672.0	1667.9	1663.7
22.5°	1647.4	1641.7	1636.0	1631.1	1627.2	1623.3	1619.3	1615.4
25°	1571.0	1563.6	1556.2	1550.5	1546.7	1542.8	1538.9	1535.0
27.5°	1487.7	1477.4	1467.1	1459.1	1453.1	1447.2	1441.3	1435.3
30°	1428.5	1416.5	1404.5	1395.7	1390.1	1384.4	1378.8	1373.1
32.5°	1370.4	1357.3	1344.1	1334.6	1328.7	1322.7	1316.9	1310.9
35°	1284.0	1268.9	1253.7	1242.9	1236.6	1230.2	1223.9	1217.6
37.5°	1191.3	1174.2	1156.9	1144.4	1136.6	1128.7	1121.0	1113.1
40°	1126.9	1108.5	1090.3	1077.0	1068.8	1060.8	1052.7	1044.5
42.5°	1065.1	1045.0	1025.0	1011.4	1004.1	996.8	989.6	982.3
45°	974.1	954.0	933.9	919.7	911.2	902.7	894.2	885.8
47.5°	880.1	858.3	836.4	821.7	814.2	806.6	799.0	791.5
50°	816.7	794.8	772.8	757.9	749.8	741.6	733.6	725.5
52.5°	755.3	732.6	709.8	694.8	687.5	680.3	673.1	665.8
55°	663.9	643.4	623.0	609.3	602.2	595.1	588.0	581.0
57.5°	574.1	554.7	535.4	522.7	516.7	510.8	504.7	498.8
60°	517.5	498.5	479.4	466.9	460.9	454.8	448.9	442.9
62.5°	461.3	443.4	425.5	413.4	407.1	400.8	394.6	388.3
65°	381.3	364.1	346.8	336.2	332.3	328.4	324.6	320.6
67.5°	305.0	292.1	279.1	270.6	266.5	262.3	258.1	254.0
70°	257.8	245.5	233.2	225.1	221.2	217.3	213.4	209.5
72.5°	215.4	205.3	195.2	189.3	187.7	186.1	184.5	182.9
75°	161.2	157.6	154.1	152.1	151.4	150.7	150.0	149.3
77.5°	121.6	119.7	117.8	116.4	115.7	115.0	114.3	113.6
80°	97.9	96.8	95.7	94.9	94.2	93.5	92.8	92.1
82.5°	75.0	74.0	72.9	72.3	72.2	72.0	71.9	71.8
85°	43.0	42.3	41.6	41.3	41.3	41.3	41.3	41.3
87.5°	22.0	21.9	21.8	21.7	21.5	21.4	21.2	21.0
90°	30.2	31.3	32.3	33.1	33.6	34.1	34.6	35.2
92.5°	33.3	35.0	36.8	37.7	38.0	38.4	38.7	39.0
95°	40.0	41.8	43.6	44.5	44.5	44.5	44.5	44.5
97.5°	41.9	44.0	46.2	47.3	47.6	47.9	48.1	48.4
100°	42.9	44.9	47.1	48.3	48.5	48.8	49.0	49.3
102.5°	64.2	57.8	51.3	48.4	48.8	49.3	49.8	50.2
105°	164.6	118.5	72.3	49.6	50.1	50.6	51.1	51.6
107.5°	403.2	369.4	335.6	301.2	266.5	231.7	196.9	162.2
110°	511.9	503.3	494.7	471.8	434.5	397.2	359.9	322.7



TEST NUMBER: P332387-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	588.5	588.8	589.0	585.0	577.1	569.3	561.4	553.5
115°	678.6	681.3	683.9	685.7	686.7	687.8	688.8	689.8
117.5°	760.2	762.3	764.4	765.6	765.8	766.0	766.2	766.4
120°	813.7	815.8	817.9	818.9	818.9	818.9	818.9	818.9
122.5°	866.0	867.5	868.9	869.7	869.9	870.1	870.4	870.6
125°	939.7	940.2	940.7	941.2	941.7	942.3	942.8	943.3
127.5°	1013.5	1014.3	1015.1	1015.3	1014.8	1014.3	1013.8	1013.2
130°	1058.0	1059.0	1060.2	1060.4	1059.9	1059.3	1058.8	1058.3
132.5°	1100.2	1101.4	1102.4	1102.5	1101.8	1101.1	1100.3	1099.5
135°	1164.3	1165.1	1165.9	1165.9	1165.1	1164.3	1163.5	1162.8
137.5°	1221.3	1222.5	1223.8	1224.2	1223.7	1223.1	1222.6	1222.0
140°	1257.5	1258.5	1259.6	1259.8	1259.3	1258.8	1258.3	1257.8
142.5°	1291.8	1292.6	1293.4	1293.5	1292.8	1292.0	1291.3	1290.6
145°	1339.8	1340.3	1340.8	1341.0	1341.0	1341.0	1341.0	1341.0
147.5°	1382.7	1383.2	1383.7	1383.4	1382.2	1381.0	1379.8	1378.6
150°	1409.0	1409.5	1410.0	1409.9	1409.1	1408.4	1407.5	1406.7
152.5°	1432.3	1433.3	1434.2	1434.1	1432.9	1431.7	1430.5	1429.3
155°	1464.5	1465.8	1467.1	1466.9	1465.4	1463.9	1462.3	1460.8
157.5°	1492.5	1494.0	1495.6	1495.4	1493.4	1491.3	1489.2	1487.2
160°	1508.4	1510.0	1511.6	1511.5	1509.6	1507.8	1505.9	1504.1
162.5°	1523.0	1524.7	1526.5	1526.5	1524.9	1523.3	1521.7	1520.0
165°	1542.4	1544.4	1546.5	1546.6	1544.8	1543.0	1541.2	1539.3
167.5°	1557.3	1559.4	1561.6	1561.6	1559.4	1557.3	1555.3	1553.2
170°	1565.8	1567.9	1569.9	1569.9	1567.9	1565.8	1563.7	1561.7
172.5°	1571.5	1573.5	1575.6	1575.5	1573.2	1570.9	1568.6	1566.3
175°	1578.2	1580.0	1581.9	1581.7	1579.6	1577.5	1575.5	1573.4
177.5°	1580.6	1582.4	1584.0	1583.8	1581.8	1579.6	1577.5	1575.5
180°	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2	1579.2

(END OF REPORT)