

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332389-840

Luminaire Tested: **S123RDIP-S1165D1195U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332389-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1195 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8786.9 lumens
Efficiency: N/A
Efficacy: 122.6 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 71.7
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332389-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

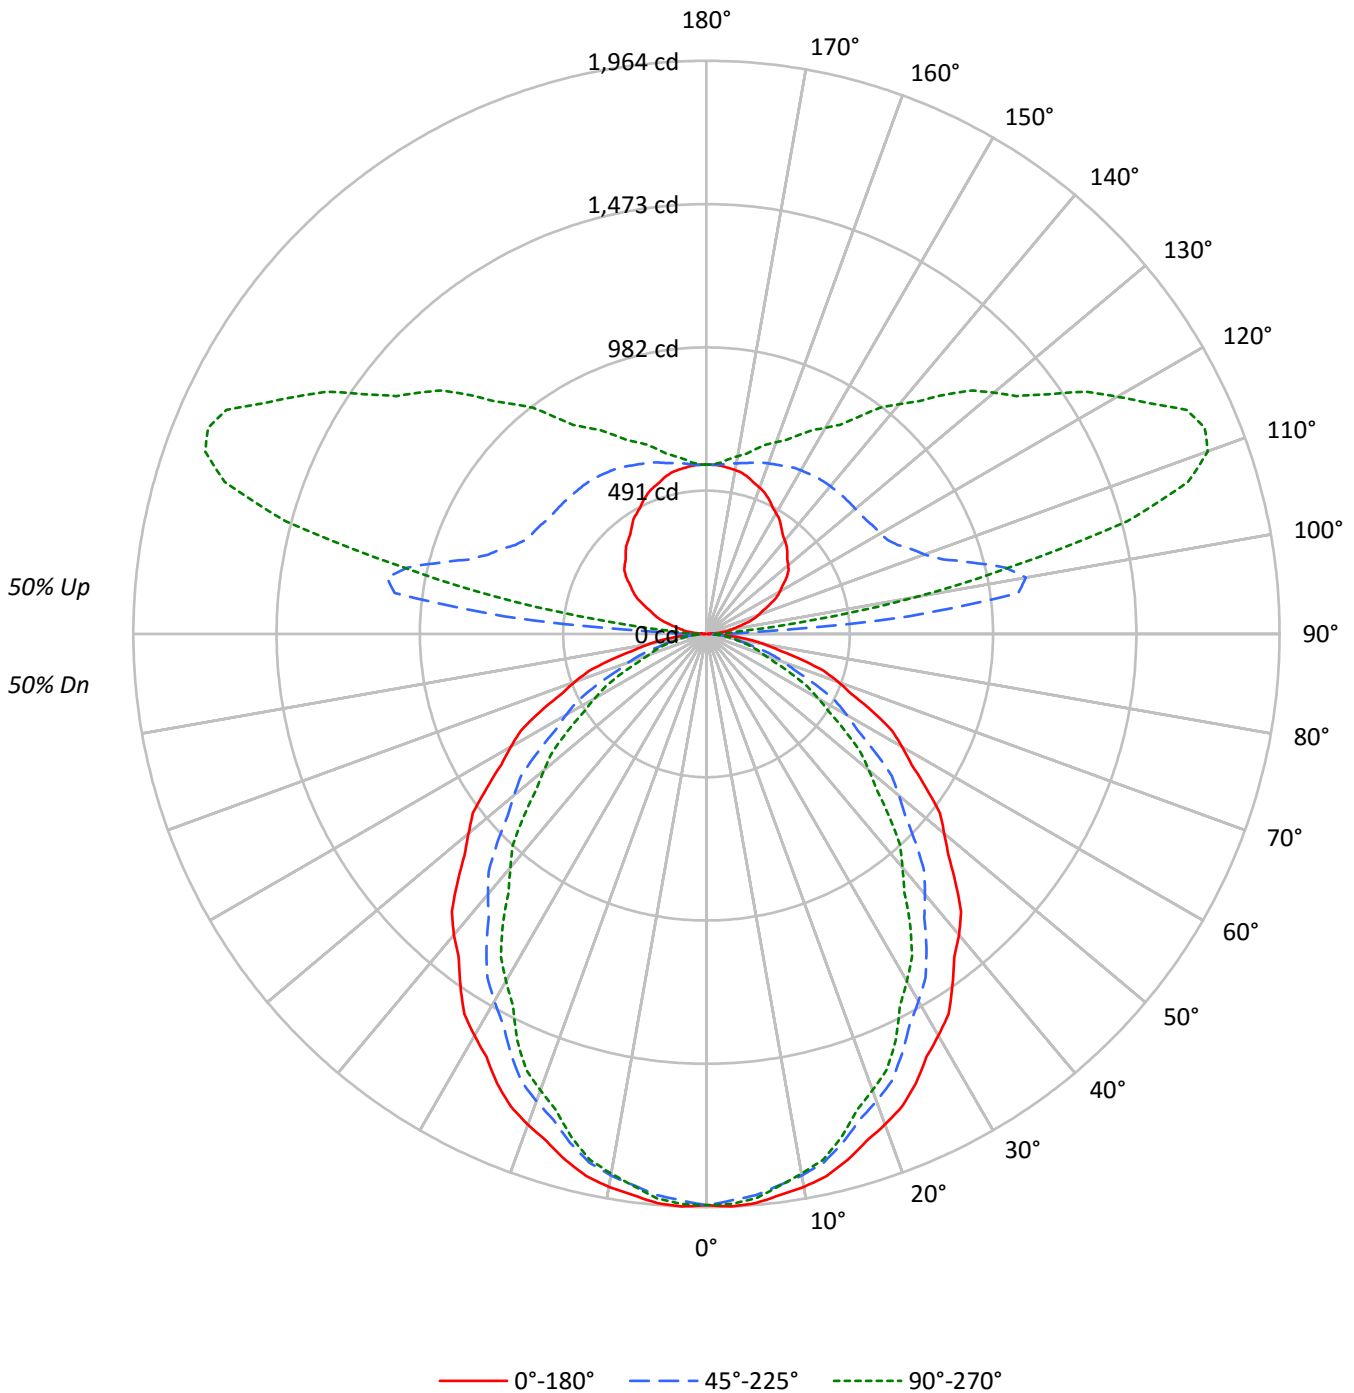



TEST NUMBER: P332389-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	84	84	84	69	69	69	56	56	56	50
1	98	94	90	87	91	87	84	81	74	71	69	62	60	58	50	49	48	43
2	90	82	76	71	83	76	71	67	65	61	58	54	52	49	45	43	41	37
3	82	73	66	60	75	67	61	56	58	53	49	48	45	42	40	37	35	31
4	75	65	57	51	69	60	53	48	51	46	42	43	39	36	36	33	31	27
5	69	58	50	44	64	54	47	41	46	41	36	39	35	32	32	29	27	24
6	64	52	44	38	59	48	41	36	42	36	32	35	31	28	30	26	24	21
7	59	47	39	34	54	44	37	32	38	32	28	32	28	25	27	24	21	19
8	55	43	35	30	51	40	33	28	35	29	25	30	25	22	25	22	19	17
9	51	39	32	27	47	36	30	25	32	26	23	27	23	20	23	20	17	15
10	48	36	29	24	44	34	27	23	29	24	20	25	21	18	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	21068	21068	21068
5°	21149	20857	20977
10°	21029	20595	20525
15°	20803	20113	19900
20°	20492	19511	19057
25°	20173	18834	18231
30°	19750	18053	17066
35°	19316	17270	16000
40°	18916	16350	14677
45°	18389	15440	13484
50°	17811	14408	12149
55°	17220	13226	10903
60°	16678	11961	9535
65°	15969	10593	8166
70°	15087	8894	6593
75°	13795	6995	6209
80°	12298	6199	5709
85°	10387	5483	5101



TEST NUMBER: P332389-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	183.8	2.1
10°-20°	511.4	5.8
20°-30°	736.4	8.4
30°-40°	829.4	9.4
40°-50°	793.5	9.0
50°-60°	649.8	7.4
60°-70°	438.4	5.0
70°-80°	220.6	2.5
80°-90°	62.8	0.7
90°-100°	322.6	3.7
100°-110°	913.4	10.4
110°-120°	898.5	10.2
120°-130°	716.7	8.2
130°-140°	565.1	6.4
140°-150°	421.7	4.8
150°-160°	294.0	3.3
160°-170°	172.7	2.0
170°-180°	56.2	0.6
0°-30°	1431.6	16.3
0°-40°	2261.0	25.7
0°-60°	3704.3	42.2
0°-90°	4426.2	50.4
90°-120°	2134.4	24.3
90°-150°	3837.9	43.7
90°-180°	4361.0	49.6
0°-180°	8786.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1957	1957	1957	1957	1957	
5°	1957	1949	1930	1944	1941	186
15°	1867	1848	1805	1797	1786	526
25°	1698	1657	1586	1553	1535	781
35°	1470	1411	1314	1248	1218	920
45°	1208	1134	1014	927	886	932
55°	918	837	705	616	581	822
65°	627	538	416	342	321	620
75°	332	255	168	153	149	354
85°	84	51	44	41	41	95
90°	2	14	29	33	34	7
95°	40	130	696	203	136	43
105°	136	201	943	1650	1492	145
115°	240	300	722	1582	1815	238
125°	334	395	674	1220	1432	297
135°	392	468	664	1005	1160	303
145°	447	512	656	824	907	280
155°	508	548	635	722	752	234
165°	555	571	608	645	656	156
175°	578	579	583	591	590	55
180°	580	580	580	580	580	



TEST NUMBER: P332389-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1963.7	1962.5	1961.4	1960.2	1959.1	1956.8	1953.5	1950.0	1946.7	1943.3	1946.4
5°	1957.3	1955.5	1953.8	1952.0	1950.3	1947.2	1943.0	1938.7	1934.5	1930.3	1933.5
7.5°	1939.1	1937.3	1935.4	1933.5	1931.6	1927.8	1922.4	1916.8	1911.4	1905.8	1907.6
10°	1924.0	1921.5	1919.0	1916.5	1914.1	1909.7	1903.3	1896.9	1890.6	1884.3	1884.6
12.5°	1902.4	1899.7	1896.8	1894.1	1891.4	1886.1	1878.3	1870.6	1862.8	1855.0	1854.8
15°	1866.8	1862.9	1859.1	1855.1	1851.3	1844.4	1834.5	1824.6	1814.7	1804.9	1803.1
17.5°	1822.0	1817.6	1813.0	1808.5	1804.0	1795.4	1782.9	1770.3	1757.8	1745.2	1741.5
20°	1789.0	1783.4	1777.8	1772.1	1766.5	1757.0	1743.5	1730.1	1716.7	1703.3	1698.7
22.5°	1752.2	1745.7	1739.2	1732.7	1726.3	1715.9	1701.6	1687.4	1673.1	1658.8	1653.1
25°	1698.5	1689.7	1680.9	1672.0	1663.2	1650.7	1634.5	1618.3	1602.0	1585.8	1578.4
27.5°	1633.5	1623.8	1614.0	1604.3	1594.5	1580.6	1562.6	1544.5	1526.4	1508.3	1498.0
30°	1589.0	1578.4	1567.8	1557.2	1546.7	1531.5	1511.8	1492.0	1472.3	1452.5	1440.5
32.5°	1544.6	1532.6	1520.6	1508.5	1496.6	1480.2	1459.3	1438.4	1417.4	1396.6	1383.5
35°	1470.0	1457.2	1444.5	1431.9	1419.2	1401.9	1380.0	1358.2	1336.3	1314.3	1299.2
37.5°	1394.4	1380.3	1366.1	1352.0	1338.0	1319.2	1295.9	1272.5	1249.2	1225.8	1208.6
40°	1346.2	1330.6	1315.0	1299.6	1284.0	1263.7	1238.7	1213.7	1188.6	1163.6	1145.2
42.5°	1291.5	1276.0	1260.5	1245.0	1229.4	1208.7	1182.9	1156.9	1131.0	1105.2	1085.1
45°	1208.0	1192.1	1176.3	1160.4	1144.5	1123.0	1095.8	1068.6	1041.5	1014.3	994.2
47.5°	1124.5	1107.1	1089.6	1072.3	1054.8	1032.5	1005.3	978.2	951.0	923.9	902.0
50°	1063.6	1047.0	1030.4	1013.8	997.2	974.7	946.1	917.6	889.0	860.4	838.5
52.5°	1009.0	991.0	973.0	955.0	937.0	913.8	885.6	857.3	829.0	800.7	778.0
55°	917.6	900.2	882.9	865.7	848.4	824.8	794.8	764.8	734.8	704.8	684.4
57.5°	833.0	814.3	795.4	776.6	757.7	733.3	703.2	673.0	642.9	612.8	593.4
60°	774.7	755.3	735.9	716.5	697.0	672.7	643.4	614.2	584.9	555.6	536.5
62.5°	716.2	696.8	677.4	658.0	638.6	614.3	585.0	555.7	526.4	497.2	479.3
65°	627.0	607.6	588.2	568.9	549.5	525.9	498.5	470.9	443.4	415.9	398.6
67.5°	537.9	518.2	498.6	479.0	459.4	436.4	410.0	383.5	357.2	330.8	317.9
70°	479.4	460.4	441.3	422.2	403.2	381.3	356.7	331.9	307.3	282.6	270.2
72.5°	421.0	402.2	383.4	364.7	345.9	325.3	302.9	280.4	258.0	235.6	225.5
75°	331.7	314.9	297.9	280.9	264.1	245.9	226.5	207.0	187.6	168.2	164.7
77.5°	250.4	235.2	219.8	204.6	189.2	175.3	162.9	150.4	137.8	125.4	123.5
80°	198.4	184.0	169.5	155.0	140.6	129.7	122.2	114.8	107.4	100.0	99.0
82.5°	148.9	136.4	123.9	111.4	99.0	91.0	87.6	84.0	80.6	77.2	76.0
85°	84.1	76.3	68.6	60.9	53.1	48.7	47.7	46.6	45.5	44.4	43.7
87.5°	30.9	28.3	25.7	23.3	20.6	19.6	20.3	21.0	21.7	22.4	21.8
90°	2.3	4.6	7.1	10.6	12.9	15.2	18.8	22.3	25.9	29.3	28.2
92.5°	14.5	21.6	31.4	40.6	50.5	67.9	98.6	149.1	198.5	180.5	136.1
95°	39.9	43.4	56.4	76.2	106.7	152.5	252.3	427.1	619.6	695.8	564.3
97.5°	68.1	69.2	79.3	96.6	126.7	176.2	271.6	468.6	789.4	1078.2	1153.6
100°	86.8	88.0	96.2	112.6	140.8	186.5	268.7	442.3	750.9	1111.2	1342.3
102.5°	106.5	108.7	115.9	131.4	156.7	198.7	272.5	419.8	694.6	1050.2	1351.6
105°	136.1	139.7	146.6	160.8	183.0	219.4	282.8	403.6	625.4	943.3	1280.1
107.5°	167.5	171.1	177.8	191.7	212.6	246.4	302.1	402.4	581.3	849.0	1154.8
110°	190.1	193.6	199.4	212.4	232.3	265.2	318.0	407.2	564.3	795.5	1075.9



TEST NUMBER: P332389-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	210.8	214.3	220.2	233.0	253.0	284.9	334.0	416.6	555.0	759.8	1007.4
115°	240.5	245.2	252.3	264.0	284.0	315.6	360.2	431.8	551.5	721.5	924.5
117.5°	270.3	275.7	281.6	292.4	314.7	344.1	388.1	451.9	553.6	699.0	874.5
120°	290.9	294.5	300.3	312.1	334.4	363.8	406.0	467.0	557.3	688.7	848.3
122.5°	308.8	312.4	318.2	330.8	352.2	383.4	424.7	481.1	563.9	682.2	826.7
125°	334.4	336.8	343.8	356.7	379.0	410.6	451.7	503.3	573.7	673.5	799.0
127.5°	353.9	357.4	366.1	379.2	403.8	435.6	475.1	521.7	585.0	669.2	774.7
130°	366.1	369.6	380.1	394.3	418.9	450.5	489.3	533.8	592.5	666.4	761.4
132.5°	375.5	379.9	391.4	408.3	432.9	463.7	501.5	545.1	598.1	665.5	749.3
135°	391.9	396.6	409.5	427.1	451.7	483.4	519.8	559.7	606.6	664.1	733.4
137.5°	407.4	412.3	425.0	443.7	468.2	497.5	532.4	570.5	612.3	661.5	719.4
140°	417.7	423.5	435.3	454.0	477.6	506.9	540.9	576.1	616.0	660.6	711.0
142.5°	429.0	433.9	446.6	463.4	487.0	514.4	547.4	581.7	618.8	658.7	703.5
145°	447.1	450.5	461.1	478.7	498.7	525.6	556.1	587.8	620.7	655.9	693.5
147.5°	465.3	467.5	477.8	493.0	512.3	535.2	563.2	591.6	620.7	651.5	683.6
150°	477.6	478.7	488.1	503.3	519.8	540.9	567.8	592.5	620.7	647.6	677.0
152.5°	489.8	490.0	499.4	512.7	527.3	547.4	570.7	594.4	617.8	643.0	669.5
155°	508.1	508.1	515.1	526.8	539.7	556.1	576.1	594.9	614.8	634.8	658.2
157.5°	522.6	523.5	529.2	539.5	550.5	563.2	579.2	596.0	610.9	627.5	645.5
160°	533.8	533.8	538.6	548.0	556.1	567.8	582.0	596.0	608.9	621.9	637.1
162.5°	542.3	542.3	546.0	553.6	560.9	570.7	582.9	595.1	605.2	616.2	628.6
165°	555.0	553.8	556.1	562.0	566.7	574.9	584.3	592.5	599.6	607.7	617.1
167.5°	564.6	563.2	564.3	568.9	572.1	577.2	584.1	590.7	593.9	599.4	606.1
170°	570.3	567.8	569.1	572.6	574.9	577.2	583.1	587.8	590.2	593.7	599.6
172.5°	574.0	572.6	572.8	575.4	576.8	578.2	583.1	586.9	587.3	589.0	593.0
175°	578.5	577.2	576.1	578.5	578.5	579.7	582.0	584.3	583.1	583.1	585.5
177.5°	580.6	579.7	578.7	579.7	579.7	579.7	580.6	582.4	580.6	579.7	580.6
180°	579.7	579.7	579.7	579.7	579.7	579.7	579.7	579.7	579.7	579.7	579.7



TEST NUMBER: P332389-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1949.5	1952.7	1955.7	1957.0	1956.4	1955.9	1955.3	1954.7
5°	1936.6	1939.8	1943.0	1944.2	1943.5	1942.8	1942.1	1941.4
7.5°	1909.4	1911.2	1912.9	1913.2	1912.0	1910.8	1909.6	1908.3
10°	1885.0	1885.3	1885.7	1885.0	1883.2	1881.5	1879.7	1877.9
12.5°	1854.6	1854.4	1854.2	1853.1	1851.1	1849.0	1846.9	1844.9
15°	1801.4	1799.6	1797.9	1795.7	1793.2	1790.8	1788.3	1785.8
17.5°	1737.8	1733.9	1730.2	1726.6	1722.8	1719.2	1715.6	1711.8
20°	1694.1	1689.5	1685.0	1680.5	1676.3	1672.0	1667.9	1663.7
22.5°	1647.4	1641.7	1636.0	1631.1	1627.2	1623.3	1619.3	1615.4
25°	1571.0	1563.6	1556.2	1550.5	1546.7	1542.8	1538.9	1535.0
27.5°	1487.7	1477.4	1467.1	1459.1	1453.1	1447.2	1441.3	1435.3
30°	1428.5	1416.5	1404.5	1395.7	1390.1	1384.4	1378.8	1373.1
32.5°	1370.4	1357.3	1344.1	1334.6	1328.7	1322.7	1316.9	1310.9
35°	1284.0	1268.9	1253.7	1242.9	1236.6	1230.2	1223.9	1217.6
37.5°	1191.3	1174.2	1156.9	1144.4	1136.6	1128.7	1121.0	1113.1
40°	1126.9	1108.5	1090.3	1077.0	1068.8	1060.8	1052.7	1044.5
42.5°	1065.1	1045.0	1025.0	1011.4	1004.1	996.8	989.6	982.3
45°	974.1	954.0	933.9	919.7	911.2	902.7	894.2	885.8
47.5°	880.1	858.3	836.4	821.7	814.2	806.6	799.0	791.5
50°	816.7	794.8	772.8	757.9	749.8	741.6	733.6	725.5
52.5°	755.3	732.6	709.8	694.8	687.5	680.3	673.1	665.8
55°	663.9	643.4	623.0	609.3	602.2	595.1	588.0	581.0
57.5°	574.1	554.7	535.4	522.7	516.7	510.8	504.7	498.8
60°	517.5	498.5	479.4	466.9	460.9	454.8	448.9	442.9
62.5°	461.3	443.4	425.5	413.4	407.1	400.8	394.6	388.3
65°	381.3	364.1	346.8	336.2	332.3	328.4	324.6	320.6
67.5°	305.0	292.1	279.1	270.6	266.5	262.3	258.1	254.0
70°	257.8	245.5	233.2	225.1	221.2	217.3	213.4	209.5
72.5°	215.4	205.3	195.2	189.3	187.7	186.1	184.5	182.9
75°	161.2	157.6	154.1	152.1	151.4	150.7	150.0	149.3
77.5°	121.6	119.7	117.8	116.4	115.7	115.0	114.3	113.6
80°	97.9	96.8	95.7	94.9	94.2	93.5	92.8	92.1
82.5°	75.0	74.0	72.9	72.3	72.2	72.0	71.9	71.8
85°	43.0	42.3	41.6	41.3	41.3	41.3	41.3	41.3
87.5°	21.8	21.8	21.7	21.9	21.4	21.3	21.3	20.8
90°	29.3	30.5	31.7	34.0	32.8	34.0	35.2	34.0
92.5°	98.8	78.4	69.2	63.1	61.0	57.5	58.7	56.6
95°	422.4	286.3	224.1	181.9	159.6	149.1	140.8	136.1
97.5°	1052.9	843.3	692.1	551.7	465.1	412.3	380.6	370.5
100°	1383.3	1288.3	1151.0	984.4	865.9	780.2	734.5	735.7
102.5°	1493.2	1490.1	1410.1	1304.4	1212.2	1144.5	1106.2	1079.2
105°	1525.3	1642.6	1665.0	1634.5	1580.4	1535.9	1498.3	1492.5
107.5°	1432.8	1623.4	1726.2	1768.0	1768.9	1753.8	1741.2	1730.4
110°	1344.6	1560.5	1708.4	1790.5	1823.3	1832.7	1830.4	1828.1



TEST NUMBER: P332389-840

CATALOG NUMBER: S123RDIP-S1165D1195U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	1257.3	1477.9	1643.6	1749.2	1809.3	1838.4	1847.2	1847.8
115°	1141.7	1345.7	1518.2	1646.2	1734.1	1785.7	1809.3	1815.1
117.5°	1057.8	1234.1	1389.0	1518.7	1610.5	1669.6	1703.4	1711.4
120°	1013.7	1172.2	1312.9	1431.5	1524.1	1589.8	1618.0	1625.1
122.5°	979.0	1122.4	1252.8	1362.9	1445.3	1504.4	1535.4	1544.3
125°	932.8	1060.7	1173.3	1267.2	1342.3	1393.9	1423.2	1431.5
127.5°	892.4	1006.4	1108.0	1193.5	1260.4	1304.4	1331.0	1338.5
130°	867.1	972.7	1067.7	1147.5	1209.7	1251.9	1276.6	1286.0
132.5°	843.6	940.8	1029.3	1105.3	1163.7	1205.9	1227.8	1234.4
135°	811.9	895.2	971.5	1038.3	1095.9	1131.0	1152.2	1160.4
137.5°	783.0	851.3	917.1	975.0	1023.4	1059.0	1076.8	1082.3
140°	766.2	826.0	882.3	932.8	977.3	1010.3	1029.0	1027.8
142.5°	750.2	801.6	850.4	894.3	932.3	961.4	978.3	977.1
145°	730.9	769.7	807.3	841.2	870.6	895.2	904.6	907.0
147.5°	715.3	746.0	776.3	800.4	822.7	839.4	848.3	849.2
150°	704.0	730.9	755.6	777.9	795.5	808.4	815.5	815.5
152.5°	693.7	716.9	738.7	757.3	771.1	783.0	787.3	787.3
155°	678.1	696.9	714.6	728.6	739.2	748.6	750.9	752.0
157.5°	661.8	677.5	691.1	702.1	711.2	718.3	720.1	719.9
160°	652.4	665.3	677.0	685.2	693.5	700.4	700.4	699.3
162.5°	641.1	652.2	662.9	670.1	675.6	681.7	681.7	680.5
165°	626.5	633.6	641.8	647.6	652.4	657.0	655.9	655.9
167.5°	613.9	619.2	624.0	628.2	630.3	633.6	632.4	632.4
170°	605.4	608.9	613.6	616.0	617.1	619.6	618.3	618.3
172.5°	597.9	600.5	604.3	605.6	605.9	608.2	606.1	605.2
175°	587.8	589.0	591.4	591.4	591.4	592.5	591.4	590.2
177.5°	581.5	582.4	583.4	583.4	582.4	583.4	581.5	581.5
180°	579.7	579.7	579.7	579.7	579.7	579.7	579.7	579.7

(END OF REPORT)