

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332370-840

Luminaire Tested: **S123RDIP-S1165D585U840-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332370-840  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1165D585U840-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 585 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 6455.5 lumens  
Efficiency: N/A  
Efficacy: 117.2 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 55.1  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332370-840

CATALOG NUMBER: S123RDIP-S1165D585U840-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

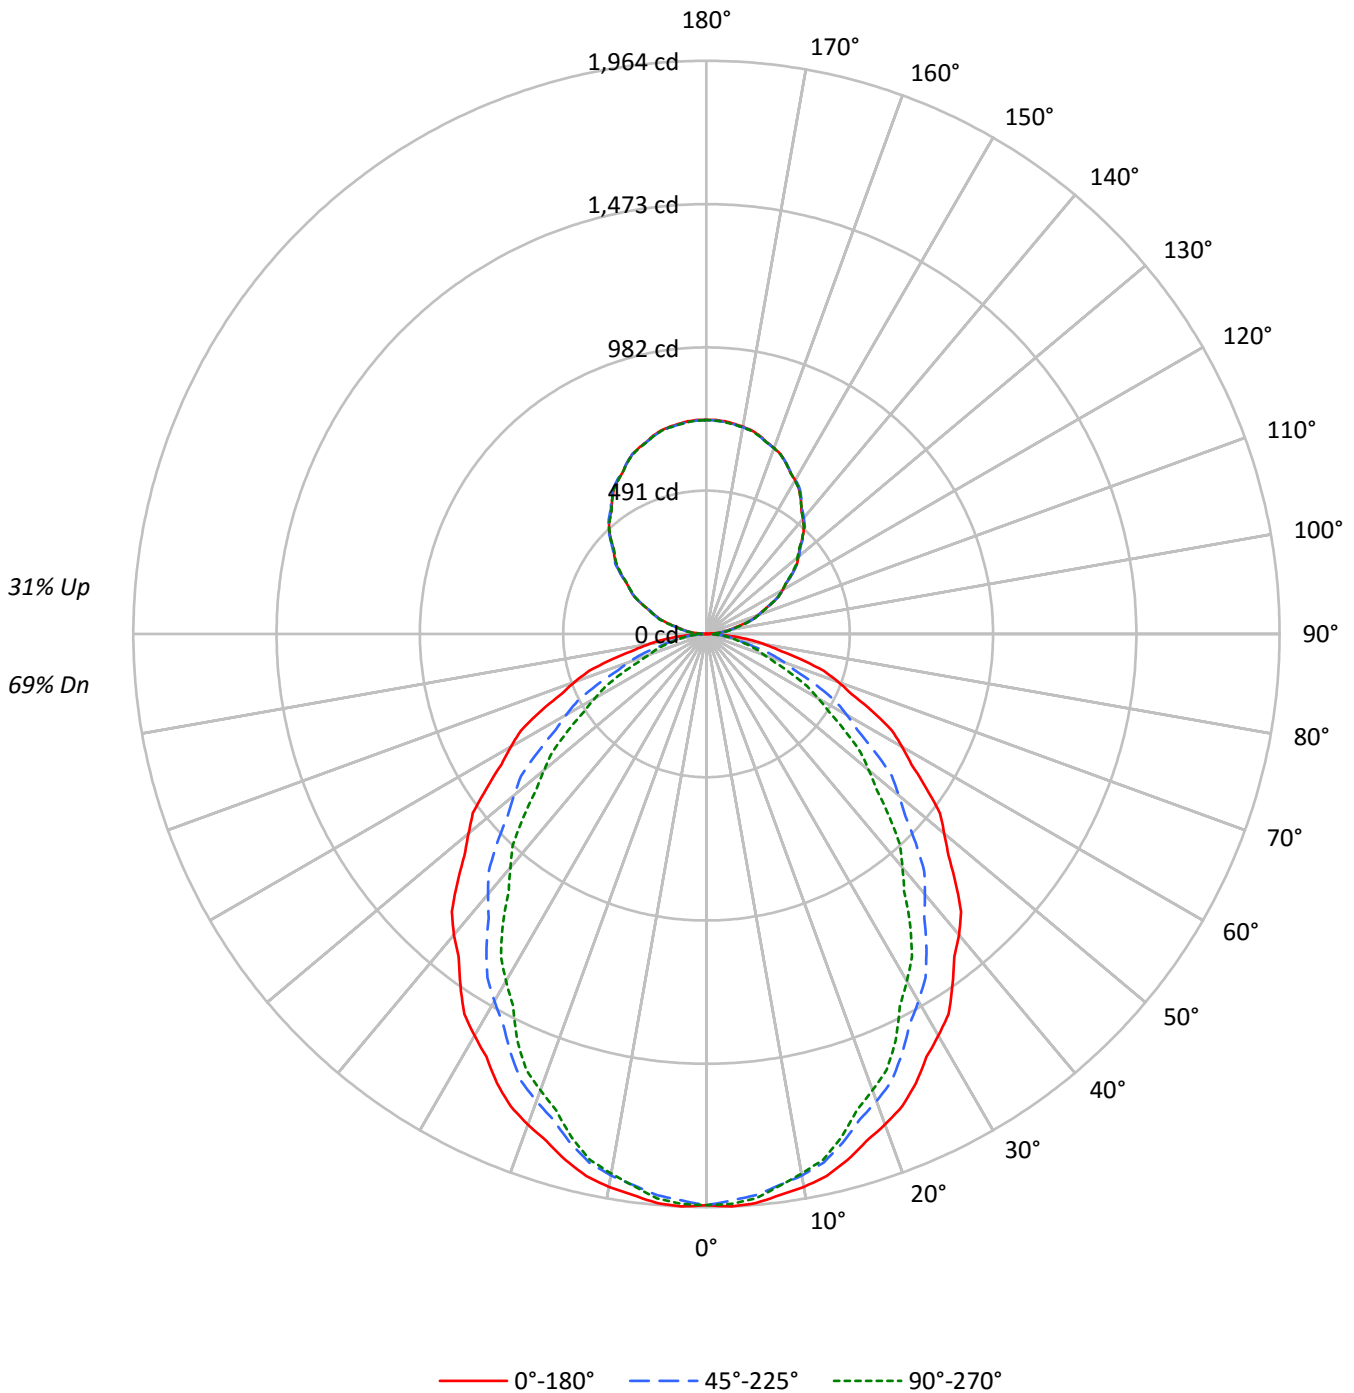



TEST NUMBER: P332370-840

CATALOG NUMBER: S123RDIP-S1165D585U840-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	73	73	73	69				
1	102	98	94	91	97	93	89	86	83	80	78	74	72	70	65	64	63	59				
2	94	86	80	75	88	82	76	72	73	69	65	65	62	59	58	56	53	50				
3	86	76	69	63	81	72	66	60	65	60	55	58	54	51	52	49	46	43				
4	79	68	60	54	74	64	57	52	58	52	48	52	48	44	47	43	40	37				
5	72	61	53	46	68	58	50	45	52	46	42	47	42	38	42	38	35	32				
6	67	55	47	41	63	52	45	39	47	41	37	43	38	34	38	34	31	29				
7	62	50	42	36	59	47	40	35	43	37	32	39	34	30	35	31	28	26				
8	58	45	37	32	55	43	36	31	39	33	29	36	31	27	32	28	25	23				
9	54	42	34	29	51	40	33	28	36	30	26	33	28	24	30	26	23	21				
10	51	38	31	26	48	37	30	25	34	28	24	31	26	22	28	24	21	19				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	21068	21068	21068
5°	21149	20857	20977
10°	21029	20595	20525
15°	20803	20113	19900
20°	20492	19511	19057
25°	20173	18834	18231
30°	19750	18053	17066
35°	19316	17270	16000
40°	18916	16350	14677
45°	18389	15440	13484
50°	17811	14408	12149
55°	17220	13226	10903
60°	16678	11961	9535
65°	15969	10593	8166
70°	15087	8894	6593
75°	13795	6995	6209
80°	12298	6199	5709
85°	10387	5483	5101



TEST NUMBER: P332370-840

CATALOG NUMBER: S123RDIP-S1165D585U840-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	183.8	2.8
10°-20°	511.4	7.9
20°-30°	736.4	11.4
30°-40°	829.4	12.8
40°-50°	793.5	12.3
50°-60°	649.8	10.1
60°-70°	438.4	6.8
70°-80°	220.6	3.4
80°-90°	60.5	0.9
90°-100°	47.8	0.7
100°-110°	143.0	2.2
110°-120°	243.2	3.8
120°-130°	319.9	5.0
130°-140°	359.5	5.6
140°-150°	353.4	5.5
150°-160°	297.5	4.6
160°-170°	198.0	3.1
170°-180°	69.3	1.1
0°-30°	1431.6	22.2
0°-40°	2261.0	35.0
0°-60°	3704.3	57.4
0°-90°	4423.8	68.5
90°-120°	433.9	6.7
90°-150°	1466.7	22.7
90°-180°	2032.0	31.5
0°-180°	6455.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1957	1957	1957	1957	1957	
5°	1957	1949	1930	1944	1941	186
15°	1867	1848	1805	1797	1786	526
25°	1698	1657	1586	1553	1535	781
35°	1470	1411	1314	1248	1218	920
45°	1208	1134	1014	927	886	932
55°	918	837	705	616	581	822
65°	627	538	416	342	321	620
75°	332	255	168	153	149	354
85°	84	51	44	41	41	94
90°	1	6	14	16	17	6
95°	34	38	43	45	45	38
105°	130	131	136	136	137	139
115°	245	246	245	246	245	242
125°	358	360	359	357	354	319
135°	465	468	468	465	464	358
145°	564	565	567	566	564	352
155°	646	646	646	648	645	297
165°	703	702	702	705	701	198
175°	732	729	729	732	729	69
180°	733	733	733	733	733	



TEST NUMBER: P332370-840

CATALOG NUMBER: S123RDIP-S1165D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1963.7	1962.5	1961.4	1960.2	1959.1	1956.8	1953.5	1950.0	1946.7	1943.3	1946.4
5°	1957.3	1955.5	1953.8	1952.0	1950.3	1947.2	1943.0	1938.7	1934.5	1930.3	1933.5
7.5°	1939.1	1937.3	1935.4	1933.5	1931.6	1927.8	1922.4	1916.8	1911.4	1905.8	1907.6
10°	1924.0	1921.5	1919.0	1916.5	1914.1	1909.7	1903.3	1896.9	1890.6	1884.3	1884.6
12.5°	1902.4	1899.7	1896.8	1894.1	1891.4	1886.1	1878.3	1870.6	1862.8	1855.0	1854.8
15°	1866.8	1862.9	1859.1	1855.1	1851.3	1844.4	1834.5	1824.6	1814.7	1804.9	1803.1
17.5°	1822.0	1817.6	1813.0	1808.5	1804.0	1795.4	1782.9	1770.3	1757.8	1745.2	1741.5
20°	1789.0	1783.4	1777.8	1772.1	1766.5	1757.0	1743.5	1730.1	1716.7	1703.3	1698.7
22.5°	1752.2	1745.7	1739.2	1732.7	1726.3	1715.9	1701.6	1687.4	1673.1	1658.8	1653.1
25°	1698.5	1689.7	1680.9	1672.0	1663.2	1650.7	1634.5	1618.3	1602.0	1585.8	1578.4
27.5°	1633.5	1623.8	1614.0	1604.3	1594.5	1580.6	1562.6	1544.5	1526.4	1508.3	1498.0
30°	1589.0	1578.4	1567.8	1557.2	1546.7	1531.5	1511.8	1492.0	1472.3	1452.5	1440.5
32.5°	1544.6	1532.6	1520.6	1508.5	1496.6	1480.2	1459.3	1438.4	1417.4	1396.6	1383.5
35°	1470.0	1457.2	1444.5	1431.9	1419.2	1401.9	1380.0	1358.2	1336.3	1314.3	1299.2
37.5°	1394.4	1380.3	1366.1	1352.0	1338.0	1319.2	1295.9	1272.5	1249.2	1225.8	1208.6
40°	1346.2	1330.6	1315.0	1299.6	1284.0	1263.7	1238.7	1213.7	1188.6	1163.6	1145.2
42.5°	1291.5	1276.0	1260.5	1245.0	1229.4	1208.7	1182.9	1156.9	1131.0	1105.2	1085.1
45°	1208.0	1192.1	1176.3	1160.4	1144.5	1123.0	1095.8	1068.6	1041.5	1014.3	994.2
47.5°	1124.5	1107.1	1089.6	1072.3	1054.8	1032.5	1005.3	978.2	951.0	923.9	902.0
50°	1063.6	1047.0	1030.4	1013.8	997.2	974.7	946.1	917.6	889.0	860.4	838.5
52.5°	1009.0	991.0	973.0	955.0	937.0	913.8	885.6	857.3	829.0	800.7	778.0
55°	917.6	900.2	882.9	865.7	848.4	824.8	794.8	764.8	734.8	704.8	684.4
57.5°	833.0	814.3	795.4	776.6	757.7	733.3	703.2	673.0	642.9	612.8	593.4
60°	774.7	755.3	735.9	716.5	697.0	672.7	643.4	614.2	584.9	555.6	536.5
62.5°	716.2	696.8	677.4	658.0	638.6	614.3	585.0	555.7	526.4	497.2	479.3
65°	627.0	607.6	588.2	568.9	549.5	525.9	498.5	470.9	443.4	415.9	398.6
67.5°	537.9	518.2	498.6	479.0	459.4	436.4	410.0	383.5	357.2	330.8	317.9
70°	479.4	460.4	441.3	422.2	403.2	381.3	356.7	331.9	307.3	282.6	270.2
72.5°	421.0	402.2	383.4	364.7	345.9	325.3	302.9	280.4	258.0	235.6	225.5
75°	331.7	314.9	297.9	280.9	264.1	245.9	226.5	207.0	187.6	168.2	164.7
77.5°	250.4	235.2	219.8	204.6	189.2	175.3	162.9	150.4	137.8	125.4	123.5
80°	198.4	184.0	169.5	155.0	140.6	129.7	122.2	114.8	107.4	100.0	99.0
82.5°	148.9	136.4	123.9	111.4	99.0	91.0	87.6	84.0	80.6	77.2	76.0
85°	84.1	76.3	68.6	60.9	53.1	48.7	47.7	46.6	45.5	44.4	43.7
87.5°	30.6	27.8	24.9	22.0	19.2	18.0	18.3	18.6	19.0	19.3	19.1
90°	0.6	1.8	3.1	4.4	5.7	7.2	8.8	10.5	12.1	13.8	14.3
92.5°	13.9	14.8	15.7	16.6	17.5	18.4	19.3	20.2	21.2	22.1	22.5
95°	34.0	34.8	35.7	36.7	37.6	38.6	39.6	40.6	41.6	42.6	43.1
97.5°	60.4	61.0	61.7	62.4	63.0	63.7	64.4	65.2	65.9	66.8	67.3
100°	78.4	79.1	79.9	80.7	81.4	82.1	82.7	83.4	84.0	84.6	85.0
102.5°	99.1	99.6	100.0	100.5	100.9	101.6	102.4	103.3	104.1	104.9	105.3
105°	129.6	129.9	130.1	130.4	130.7	131.3	132.5	133.6	134.8	135.9	135.9
107.5°	165.1	165.2	165.4	165.5	165.7	166.0	166.4	166.9	167.4	167.8	168.2
110°	187.2	187.4	187.7	187.9	188.2	188.4	188.7	189.0	189.2	189.6	190.1



TEST NUMBER: P332370-840

CATALOG NUMBER: S123RDIP-S1165D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	210.3	210.4	210.6	210.7	210.9	211.0	211.1	211.1	211.2	211.2	211.8
115°	244.8	245.2	245.6	246.0	246.3	246.4	246.1	245.9	245.6	245.4	245.5
117.5°	279.6	279.8	280.1	280.3	280.6	280.5	280.2	279.9	279.6	279.2	279.2
120°	301.2	302.1	302.8	303.6	304.4	304.4	303.8	303.2	302.5	301.8	301.7
122.5°	323.9	324.4	325.0	325.5	326.1	326.2	325.9	325.6	325.2	324.9	324.6
125°	358.3	358.7	359.0	359.4	359.8	359.9	359.6	359.4	359.1	358.9	358.3
127.5°	390.1	390.9	391.7	392.5	393.3	393.6	393.3	393.0	392.7	392.5	391.8
130°	411.3	412.3	413.3	414.3	415.4	415.7	415.4	415.0	414.5	414.1	413.6
132.5°	432.4	433.5	434.5	435.6	436.6	437.0	436.7	436.4	436.1	435.9	435.2
135°	464.8	465.6	466.4	467.2	467.9	468.3	468.1	468.0	467.9	467.8	467.3
137.5°	494.8	495.4	496.0	496.8	497.4	497.9	498.2	498.5	498.9	499.2	498.7
140°	515.5	516.1	516.8	517.5	518.1	518.5	518.6	518.8	518.9	519.0	518.9
142.5°	534.4	535.0	535.7	536.3	536.9	537.5	537.7	537.9	538.2	538.4	538.3
145°	563.9	564.2	564.4	564.7	564.9	565.2	565.6	566.0	566.4	566.8	566.6
147.5°	589.8	590.2	590.7	591.1	591.6	592.0	592.4	592.7	593.1	593.4	593.4
150°	607.7	607.9	608.2	608.4	608.7	608.9	609.3	609.5	609.8	610.0	610.0
152.5°	622.5	622.8	623.2	623.5	623.9	624.1	624.3	624.4	624.6	624.7	624.9
155°	645.7	645.7	645.7	645.7	645.7	645.8	645.9	646.0	646.2	646.3	646.8
157.5°	665.5	665.4	665.2	665.1	664.9	664.9	665.0	665.1	665.2	665.3	665.8
160°	677.9	677.7	677.4	677.2	676.9	676.8	676.8	676.8	676.8	676.8	677.4
162.5°	689.0	688.6	688.3	687.9	687.6	687.5	687.6	687.7	687.8	687.9	688.5
165°	703.3	703.0	702.6	702.2	701.8	701.6	701.6	701.6	701.6	701.6	702.4
167.5°	714.7	714.2	713.7	713.2	712.7	712.5	712.6	712.7	712.8	712.9	713.7
170°	721.1	720.6	720.1	719.6	719.1	718.8	718.8	718.8	718.8	718.8	719.7
172.5°	726.2	725.7	725.2	724.7	724.2	724.0	724.0	724.0	724.0	724.0	724.8
175°	731.5	731.0	730.5	730.0	729.5	729.2	729.2	729.2	729.2	729.2	730.0
177.5°	733.8	733.4	733.0	732.5	732.1	731.8	731.8	731.8	731.8	731.8	732.5
180°	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3



TEST NUMBER: P332370-840

CATALOG NUMBER: S123RDIP-S1165D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3	1957.3
2.5°	1949.5	1952.7	1955.7	1957.0	1956.4	1955.9	1955.3	1954.7
5°	1936.6	1939.8	1943.0	1944.2	1943.5	1942.8	1942.1	1941.4
7.5°	1909.4	1911.2	1912.9	1913.2	1912.0	1910.8	1909.6	1908.3
10°	1885.0	1885.3	1885.7	1885.0	1883.2	1881.5	1879.7	1877.9
12.5°	1854.6	1854.4	1854.2	1853.1	1851.1	1849.0	1846.9	1844.9
15°	1801.4	1799.6	1797.9	1795.7	1793.2	1790.8	1788.3	1785.8
17.5°	1737.8	1733.9	1730.2	1726.6	1722.8	1719.2	1715.6	1711.8
20°	1694.1	1689.5	1685.0	1680.5	1676.3	1672.0	1667.9	1663.7
22.5°	1647.4	1641.7	1636.0	1631.1	1627.2	1623.3	1619.3	1615.4
25°	1571.0	1563.6	1556.2	1550.5	1546.7	1542.8	1538.9	1535.0
27.5°	1487.7	1477.4	1467.1	1459.1	1453.1	1447.2	1441.3	1435.3
30°	1428.5	1416.5	1404.5	1395.7	1390.1	1384.4	1378.8	1373.1
32.5°	1370.4	1357.3	1344.1	1334.6	1328.7	1322.7	1316.9	1310.9
35°	1284.0	1268.9	1253.7	1242.9	1236.6	1230.2	1223.9	1217.6
37.5°	1191.3	1174.2	1156.9	1144.4	1136.6	1128.7	1121.0	1113.1
40°	1126.9	1108.5	1090.3	1077.0	1068.8	1060.8	1052.7	1044.5
42.5°	1065.1	1045.0	1025.0	1011.4	1004.1	996.8	989.6	982.3
45°	974.1	954.0	933.9	919.7	911.2	902.7	894.2	885.8
47.5°	880.1	858.3	836.4	821.7	814.2	806.6	799.0	791.5
50°	816.7	794.8	772.8	757.9	749.8	741.6	733.6	725.5
52.5°	755.3	732.6	709.8	694.8	687.5	680.3	673.1	665.8
55°	663.9	643.4	623.0	609.3	602.2	595.1	588.0	581.0
57.5°	574.1	554.7	535.4	522.7	516.7	510.8	504.7	498.8
60°	517.5	498.5	479.4	466.9	460.9	454.8	448.9	442.9
62.5°	461.3	443.4	425.5	413.4	407.1	400.8	394.6	388.3
65°	381.3	364.1	346.8	336.2	332.3	328.4	324.6	320.6
67.5°	305.0	292.1	279.1	270.6	266.5	262.3	258.1	254.0
70°	257.8	245.5	233.2	225.1	221.2	217.3	213.4	209.5
72.5°	215.4	205.3	195.2	189.3	187.7	186.1	184.5	182.9
75°	161.2	157.6	154.1	152.1	151.4	150.7	150.0	149.3
77.5°	121.6	119.7	117.8	116.4	115.7	115.0	114.3	113.6
80°	97.9	96.8	95.7	94.9	94.2	93.5	92.8	92.1
82.5°	75.0	74.0	72.9	72.3	72.2	72.0	71.9	71.8
85°	43.0	42.3	41.6	41.3	41.3	41.3	41.3	41.3
87.5°	18.9	18.8	18.6	18.4	18.1	17.9	17.7	17.5
90°	14.8	15.3	15.9	16.3	16.6	16.8	17.1	17.3
92.5°	22.9	23.3	23.7	23.9	23.7	23.5	23.4	23.2
95°	43.6	44.1	44.6	44.9	44.9	44.9	44.9	44.9
97.5°	67.9	68.5	69.1	69.3	69.3	69.2	69.2	69.1
100°	85.4	85.8	86.2	86.5	86.7	87.1	87.3	87.6
102.5°	105.7	106.1	106.4	106.6	106.6	106.5	106.5	106.4
105°	135.9	135.9	135.9	136.0	136.3	136.5	136.8	137.1
107.5°	168.6	169.1	169.5	169.7	169.5	169.4	169.2	169.1
110°	190.6	191.1	191.6	191.7	191.5	191.2	191.0	190.7





TEST NUMBER: P332370-840

CATALOG NUMBER: S123RDIP-S1165D585U840-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	212.4	213.0	213.6	213.9	213.9	213.8	213.8	213.7
115°	245.6	245.8	245.9	245.9	245.8	245.6	245.5	245.4
117.5°	279.2	279.1	279.1	278.9	278.6	278.2	277.9	277.5
120°	301.5	301.4	301.3	301.1	300.8	300.6	300.3	300.1
122.5°	324.2	323.9	323.6	323.2	322.9	322.4	322.1	321.7
125°	357.8	357.3	356.8	356.3	355.8	355.3	354.8	354.3
127.5°	391.0	390.3	389.6	389.0	388.4	387.8	387.2	386.6
130°	413.1	412.6	412.1	411.4	410.5	409.6	408.7	407.8
132.5°	434.5	433.9	433.3	432.7	432.0	431.3	430.6	429.9
135°	466.7	466.2	465.6	465.2	465.0	464.7	464.5	464.2
137.5°	498.1	497.6	497.1	496.6	496.0	495.5	495.0	494.5
140°	518.8	518.6	518.5	518.0	517.1	516.1	515.2	514.4
142.5°	538.1	538.0	537.9	537.5	536.7	536.0	535.3	534.6
145°	566.5	566.4	566.3	565.9	565.4	564.9	564.4	563.9
147.5°	593.4	593.4	593.4	593.0	592.3	591.5	590.8	590.0
150°	610.0	610.0	610.0	609.7	608.8	608.0	607.3	606.5
152.5°	625.2	625.4	625.6	625.3	624.7	624.0	623.4	622.7
155°	647.3	647.8	648.3	648.1	647.2	646.3	645.5	644.6
157.5°	666.4	666.9	667.4	667.3	666.6	665.9	665.2	664.5
160°	678.1	678.7	679.3	679.4	678.9	678.4	677.9	677.4
162.5°	689.1	689.8	690.4	690.3	689.5	688.7	687.9	687.1
165°	703.2	703.9	704.7	704.6	703.7	702.8	702.0	701.0
167.5°	714.5	715.3	716.1	716.1	715.3	714.5	713.7	712.9
170°	720.6	721.5	722.5	722.5	721.5	720.6	719.7	718.8
172.5°	725.5	726.3	727.1	727.1	726.2	725.3	724.4	723.5
175°	730.7	731.5	732.4	732.3	731.3	730.4	729.5	728.6
177.5°	733.2	733.8	734.4	734.3	733.6	732.9	732.2	731.4
180°	733.3	733.3	733.3	733.3	733.3	733.3	733.3	733.3

(END OF REPORT)