

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332317-840

Luminaire Tested: **S123RDIP-S775D805U840-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332317-840
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S775D805U840-4F0-1E-UDD-F4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5882.8 lumens
Efficiency: N/A
Efficacy: 128.2 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 45.9
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332317-840

CATALOG NUMBER: S123RDIP-S775D805U840-4F0-1E-UDD-F4

Luminous Intensity Polar Plot

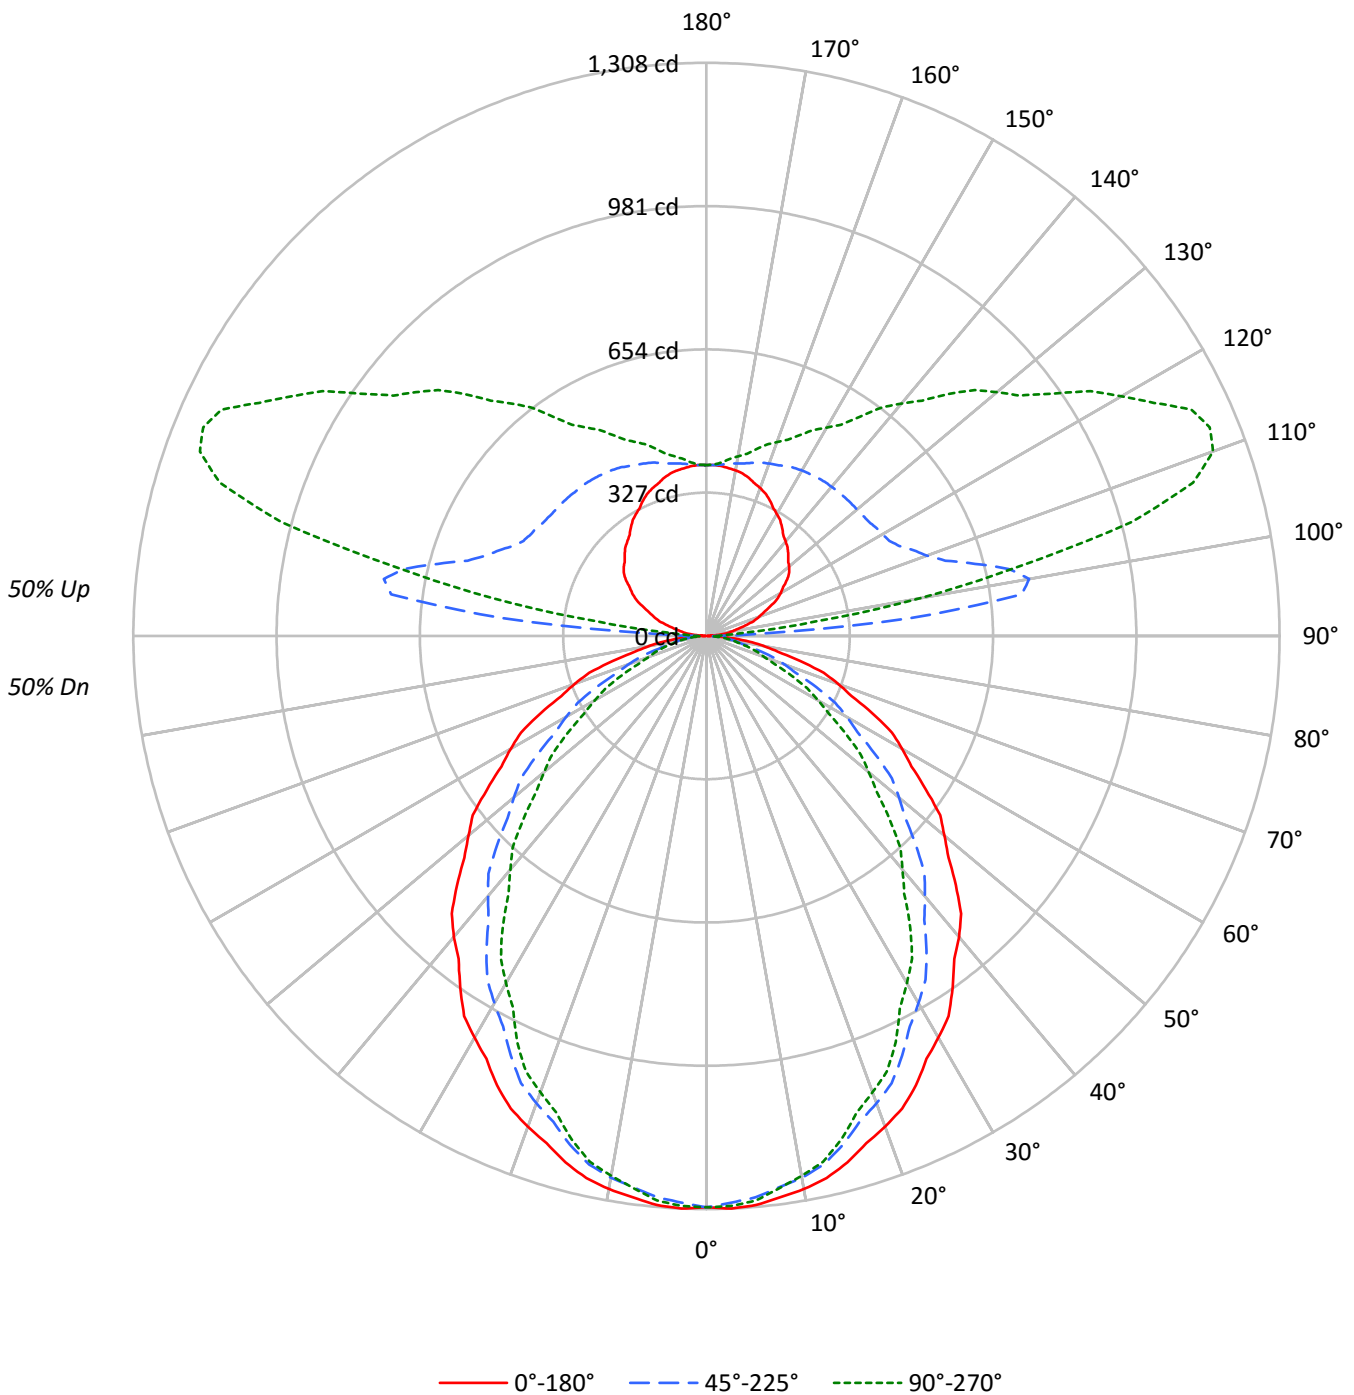



TEST NUMBER: P332317-840

CATALOG NUMBER: S123RDIP-S775D805U840-4F0-1E-UDD-F4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	50
1	98	94	90	87	90	87	84	81	74	71	69	61	60	58	50	49	48	43
2	90	82	76	71	82	76	71	67	65	61	58	54	52	49	45	43	41	36
3	82	73	66	60	75	67	61	56	57	53	49	48	45	42	40	37	35	31
4	75	65	57	51	69	60	53	48	51	46	42	43	39	36	36	33	31	27
5	69	58	50	44	64	54	47	41	46	41	36	39	35	32	32	29	27	24
6	64	52	44	38	59	48	41	36	42	36	32	35	31	28	29	26	24	21
7	59	47	39	34	54	44	37	32	38	32	28	32	28	25	27	24	21	19
8	55	43	35	30	51	40	33	28	34	29	25	29	25	22	25	22	19	17
9	51	39	32	27	47	36	30	25	32	26	23	27	23	20	23	20	17	15
10	48	36	29	24	44	34	27	23	29	24	20	25	21	18	21	18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	14034	14034	14034
5°	14088	13894	13973
10°	14008	13719	13672
15°	13857	13397	13256
20°	13651	12997	12693
25°	13438	12545	12144
30°	13155	12026	11368
35°	12867	11506	10657
40°	12600	10891	9777
45°	12250	10286	8983
50°	11863	9597	8092
55°	11470	8811	7263
60°	11108	7967	6351
65°	10639	7055	5440
70°	10049	5923	4393
75°	9191	4662	4134
80°	8195	4135	3800
85°	6916	3656	3396



TEST NUMBER: P332317-840

CATALOG NUMBER: S123RDIP-S775D805U840-4F0-1E-UDD-F4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.4	2.1
10°-20°	340.6	5.8
20°-30°	490.5	8.3
30°-40°	552.5	9.4
40°-50°	528.6	9.0
50°-60°	432.9	7.4
60°-70°	292.0	5.0
70°-80°	146.9	2.5
80°-90°	41.9	0.7
90°-100°	217.1	3.7
100°-110°	614.6	10.4
110°-120°	604.6	10.3
120°-130°	482.3	8.2
130°-140°	380.2	6.5
140°-150°	283.8	4.8
150°-160°	197.8	3.4
160°-170°	116.2	2.0
170°-180°	37.8	0.6
0°-30°	953.6	16.2
0°-40°	1506.1	25.6
0°-60°	2467.5	41.9
0°-90°	2948.4	50.1
90°-120°	1436.3	24.4
90°-150°	2582.6	43.9
90°-180°	2934.0	49.9
0°-180°	5882.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1304	1304	1304	1304	1304	
5°	1304	1298	1286	1295	1293	124
15°	1244	1231	1202	1197	1190	350
25°	1132	1104	1056	1035	1022	520
35°	979	940	876	832	811	613
45°	805	755	676	617	590	621
55°	611	557	470	410	387	548
65°	418	358	277	227	214	413
75°	221	170	112	102	99	236
85°	56	34	30	28	28	63
90°	2	10	20	22	23	5
95°	27	87	468	137	92	29
105°	92	135	635	1110	1004	97
115°	162	202	486	1065	1221	160
125°	225	266	453	821	963	200
135°	264	315	447	676	781	204
145°	301	345	441	555	610	189
155°	342	369	427	486	506	157
165°	373	384	409	434	441	105
175°	389	390	392	398	397	37
180°	390	390	390	390	390	



TEST NUMBER: P332317-840

CATALOG NUMBER: S123RDIP-S775D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8
2.5°	1308.0	1307.3	1306.5	1305.8	1305.0	1303.5	1301.2	1299.0	1296.8	1294.4	1296.6
5°	1303.8	1302.6	1301.4	1300.3	1299.1	1297.1	1294.2	1291.4	1288.6	1285.9	1287.9
7.5°	1291.7	1290.5	1289.2	1287.9	1286.7	1284.1	1280.5	1276.9	1273.2	1269.5	1270.7
10°	1281.6	1279.9	1278.3	1276.7	1275.0	1272.0	1267.8	1263.6	1259.4	1255.2	1255.4
12.5°	1267.2	1265.4	1263.5	1261.7	1259.9	1256.4	1251.2	1246.1	1240.8	1235.7	1235.6
15°	1243.5	1240.9	1238.3	1235.8	1233.1	1228.6	1222.0	1215.5	1208.8	1202.2	1201.1
17.5°	1213.7	1210.7	1207.7	1204.7	1201.6	1196.0	1187.6	1179.2	1170.8	1162.6	1160.0
20°	1191.7	1187.9	1184.2	1180.4	1176.7	1170.3	1161.3	1152.5	1143.6	1134.6	1131.6
22.5°	1167.2	1162.9	1158.5	1154.2	1149.8	1143.0	1133.5	1124.0	1114.5	1105.0	1101.2
25°	1131.5	1125.6	1119.6	1113.8	1107.9	1099.5	1088.7	1077.9	1067.1	1056.3	1051.4
27.5°	1088.0	1081.6	1075.1	1068.6	1062.2	1052.9	1040.9	1028.9	1016.7	1004.7	997.8
30°	1058.4	1051.4	1044.4	1037.3	1030.3	1020.2	1007.0	993.8	980.7	967.6	959.6
32.5°	1028.9	1020.9	1012.9	1004.9	996.9	985.9	972.0	958.2	944.2	930.3	921.6
35°	979.2	970.7	962.2	953.8	945.3	933.8	919.3	904.6	890.1	875.6	865.5
37.5°	928.9	919.4	910.0	900.6	891.2	878.8	863.2	847.7	832.1	816.6	805.1
40°	896.7	886.4	876.0	865.7	855.4	841.8	825.2	808.5	791.7	775.1	762.9
42.5°	860.3	850.0	839.6	829.3	819.0	805.2	787.9	770.6	753.5	736.2	722.9
45°	804.7	794.2	783.6	773.0	762.3	748.1	729.9	711.9	693.8	675.7	662.3
47.5°	749.1	737.5	725.9	714.3	702.7	687.8	669.7	651.6	633.5	615.4	600.9
50°	708.4	697.4	686.4	675.3	664.3	649.2	630.3	611.2	592.2	573.1	558.6
52.5°	672.1	660.1	648.1	636.1	624.2	608.7	589.9	571.1	552.2	533.3	518.3
55°	611.2	599.7	588.1	576.6	565.1	549.4	529.4	509.5	489.5	469.5	455.9
57.5°	554.9	542.4	529.9	517.3	504.7	488.5	468.4	448.3	428.2	408.2	395.3
60°	516.0	503.1	490.2	477.3	464.3	448.1	428.6	409.1	389.6	370.1	357.4
62.5°	477.1	464.1	451.2	438.3	425.5	409.2	389.7	370.2	350.7	331.1	319.2
65°	417.7	404.8	391.8	378.9	366.0	350.3	332.0	313.7	295.4	277.0	265.5
67.5°	358.3	345.2	332.1	319.0	306.0	290.6	273.1	255.5	237.9	220.4	211.8
70°	319.3	306.7	294.0	281.2	268.6	254.0	237.5	221.2	204.7	188.2	180.0
72.5°	280.4	267.9	255.4	242.9	230.5	216.7	201.8	186.8	171.9	156.9	150.2
75°	221.0	209.7	198.4	187.1	175.9	163.8	150.9	137.9	125.0	112.1	109.8
77.5°	166.8	156.6	146.4	136.2	126.0	116.8	108.5	100.2	91.9	83.5	82.3
80°	132.2	122.5	112.9	103.3	93.6	86.3	81.4	76.4	71.6	66.7	65.9
82.5°	99.2	90.9	82.5	74.2	65.9	60.6	58.3	55.9	53.7	51.4	50.7
85°	56.0	50.9	45.7	40.5	35.3	32.4	31.7	31.0	30.3	29.6	29.2
87.5°	20.6	18.9	17.1	15.6	13.7	13.0	13.5	14.0	14.4	14.9	14.6
90°	1.6	3.1	4.7	7.1	8.7	10.3	12.6	15.0	17.4	19.7	19.0
92.5°	9.8	14.5	21.2	27.4	33.9	45.6	66.3	100.3	133.6	121.4	91.6
95°	26.9	29.2	37.9	51.3	71.8	102.6	169.8	287.4	416.9	468.2	379.8
97.5°	45.7	46.6	53.4	65.0	85.2	118.6	182.7	315.4	531.2	725.6	776.3
100°	58.5	59.2	64.7	75.8	94.7	125.5	180.8	297.6	505.3	747.7	903.2
102.5°	71.7	73.1	78.0	88.5	105.5	133.7	183.3	282.5	467.4	706.6	909.6
105°	91.6	93.9	98.7	108.2	123.2	147.6	190.3	271.6	420.8	634.8	861.4
107.5°	112.7	115.1	119.7	129.0	143.1	165.8	203.2	270.8	391.1	571.3	777.1
110°	127.9	130.3	134.2	142.9	156.3	178.4	214.0	274.0	379.8	535.3	724.0



TEST NUMBER: P332317-840

CATALOG NUMBER: S123RDIP-S775D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	141.8	144.2	148.1	156.8	170.3	191.7	224.7	280.2	373.4	511.3	677.9
115°	161.9	165.0	169.8	177.6	191.1	212.4	242.4	290.5	371.1	485.5	622.2
117.5°	181.9	185.5	189.5	196.7	211.8	231.5	261.2	304.2	372.5	470.4	588.5
120°	195.8	198.1	202.1	210.1	225.0	244.8	273.2	314.3	375.1	463.4	570.9
122.5°	207.8	210.2	214.1	222.7	237.0	258.0	285.8	323.7	379.4	459.1	556.3
125°	225.0	226.6	231.4	240.0	255.0	276.3	304.0	338.7	386.1	453.2	537.7
127.5°	238.1	240.4	246.3	255.2	271.8	293.1	319.7	351.0	393.6	450.4	521.3
130°	246.3	248.7	255.8	265.3	281.9	303.2	329.2	359.2	398.7	448.5	512.4
132.5°	252.7	255.7	263.4	274.8	291.3	312.0	337.4	366.8	402.5	447.8	504.2
135°	263.7	266.9	275.6	287.4	304.0	325.3	349.7	376.6	408.2	446.9	493.4
137.5°	274.1	277.4	286.0	298.6	315.0	334.8	358.3	383.8	412.0	445.1	484.1
140°	281.0	285.0	293.0	305.6	321.3	341.0	364.0	387.7	414.5	444.5	478.5
142.5°	288.6	292.0	300.5	311.8	327.7	346.1	368.4	391.4	416.4	443.2	473.4
145°	300.8	303.2	310.3	322.1	335.6	353.8	374.3	395.6	417.7	441.3	466.7
147.5°	313.2	314.6	321.5	331.7	344.7	360.2	379.0	398.1	417.7	438.4	460.0
150°	321.3	322.1	328.4	338.7	349.7	364.0	382.1	398.7	417.7	435.9	455.6
152.5°	329.5	329.7	336.0	345.1	354.8	368.4	384.1	400.0	415.8	432.6	450.5
155°	341.8	341.8	346.6	354.5	363.1	374.3	387.7	400.3	413.7	427.2	442.9
157.5°	351.6	352.2	356.1	363.0	370.4	379.0	389.7	401.1	411.0	422.2	434.4
160°	359.2	359.2	362.4	368.7	374.3	382.1	391.6	401.1	409.8	418.5	428.7
162.5°	365.0	365.0	367.5	372.5	377.4	384.1	392.2	400.4	407.3	414.7	423.0
165°	373.4	372.6	374.3	378.2	381.3	386.9	393.1	398.7	403.4	409.0	415.3
167.5°	379.9	379.0	379.8	382.7	385.0	388.5	393.0	397.5	399.7	403.3	407.9
170°	383.7	382.1	382.9	385.3	386.9	388.5	392.4	395.6	397.2	399.5	403.4
172.5°	386.3	385.3	385.5	387.2	388.1	389.1	392.4	395.0	395.3	396.4	399.0
175°	389.2	388.5	387.7	389.2	389.2	390.0	391.6	393.1	392.4	392.4	393.9
177.5°	390.6	390.0	389.4	390.0	390.0	390.0	390.6	391.9	390.6	390.0	390.6
180°	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0



TEST NUMBER: P332317-840

CATALOG NUMBER: S123RDIP-S775D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8	1303.8
2.5°	1298.6	1300.7	1302.7	1303.6	1303.2	1302.8	1302.4	1302.1
5°	1290.0	1292.1	1294.2	1295.1	1294.6	1294.1	1293.6	1293.2
7.5°	1271.9	1273.0	1274.2	1274.4	1273.6	1272.8	1272.0	1271.2
10°	1255.7	1255.9	1256.1	1255.7	1254.5	1253.2	1252.1	1250.9
12.5°	1235.4	1235.3	1235.2	1234.4	1233.0	1231.6	1230.3	1228.9
15°	1199.9	1198.7	1197.6	1196.2	1194.6	1192.9	1191.2	1189.6
17.5°	1157.5	1155.1	1152.6	1150.1	1147.6	1145.2	1142.8	1140.3
20°	1128.5	1125.4	1122.4	1119.4	1116.6	1113.8	1111.0	1108.1
22.5°	1097.4	1093.6	1089.7	1086.5	1083.9	1081.3	1078.6	1076.0
25°	1046.5	1041.6	1036.6	1032.9	1030.3	1027.6	1025.1	1022.5
27.5°	991.0	984.2	977.3	971.9	968.0	964.0	960.1	956.1
30°	951.6	943.5	935.5	929.7	925.9	922.2	918.4	914.6
32.5°	912.8	904.1	895.3	889.0	885.0	881.1	877.2	873.2
35°	855.4	845.3	835.2	828.0	823.7	819.5	815.3	811.0
37.5°	793.6	782.1	770.6	762.3	757.1	751.8	746.7	741.4
40°	750.6	738.4	726.2	717.4	712.0	706.6	701.1	695.8
42.5°	709.4	696.1	682.8	673.7	668.8	664.0	659.1	654.3
45°	648.9	635.5	622.1	612.6	606.9	601.3	595.7	590.1
47.5°	586.2	571.7	557.1	547.3	542.3	537.2	532.3	527.3
50°	544.0	529.4	514.8	504.8	499.5	494.0	488.7	483.2
52.5°	503.1	488.0	472.8	462.8	458.0	453.1	448.3	443.4
55°	442.2	428.6	415.0	405.8	401.1	396.4	391.7	387.0
57.5°	382.4	369.5	356.7	348.2	344.3	340.2	336.2	332.2
60°	344.7	332.0	319.3	311.0	307.0	303.0	299.0	295.0
62.5°	307.3	295.4	283.5	275.4	271.1	267.0	262.9	258.6
65°	254.0	242.5	231.0	223.9	221.4	218.7	216.2	213.6
67.5°	203.2	194.6	185.9	180.3	177.5	174.7	172.0	169.2
70°	171.8	163.5	155.3	150.0	147.3	144.7	142.2	139.6
72.5°	143.5	136.7	130.1	126.1	125.0	124.0	122.9	121.8
75°	107.3	105.0	102.7	101.3	100.8	100.4	99.9	99.4
77.5°	81.0	79.7	78.5	77.6	77.2	76.6	76.1	75.7
80°	65.2	64.5	63.8	63.2	62.7	62.3	61.8	61.3
82.5°	50.0	49.3	48.6	48.2	48.1	48.0	47.9	47.8
85°	28.7	28.2	27.8	27.5	27.5	27.5	27.5	27.5
87.5°	14.5	14.5	14.5	14.6	14.3	14.2	14.2	13.8
90°	19.7	20.5	21.3	22.9	22.1	22.9	23.7	22.9
92.5°	66.4	52.7	46.6	42.5	41.1	38.7	39.5	38.1
95°	284.3	192.7	150.8	122.4	107.3	100.3	94.7	91.6
97.5°	708.5	567.5	465.6	371.2	313.0	277.4	256.1	249.3
100°	930.9	866.9	774.6	662.4	582.7	525.0	494.2	495.0
102.5°	1004.7	1002.7	948.9	877.8	815.8	770.1	744.4	726.2
105°	1026.4	1105.3	1120.3	1099.8	1063.5	1033.5	1008.2	1004.3
107.5°	964.2	1092.4	1161.5	1189.6	1190.3	1180.2	1171.6	1164.4
110°	904.8	1050.1	1149.5	1204.9	1226.9	1233.2	1231.6	1230.1



TEST NUMBER: P332317-840

CATALOG NUMBER: S123RDIP-S775D805U840-4F0-1E-UDD-F4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	846.1	994.5	1106.0	1177.0	1217.5	1237.1	1243.0	1243.3
115°	768.2	905.5	1021.7	1107.7	1166.9	1201.6	1217.5	1221.4
117.5°	711.9	830.4	934.6	1022.0	1083.7	1123.5	1146.2	1151.7
120°	682.2	788.7	883.5	963.2	1025.6	1069.9	1088.7	1093.5
122.5°	658.8	755.3	843.0	917.2	972.5	1012.3	1033.2	1039.2
125°	627.6	713.8	789.5	852.7	903.2	938.0	957.7	963.2
127.5°	600.6	677.2	745.7	803.1	848.1	877.8	895.6	900.7
130°	583.5	654.5	718.5	772.1	814.1	842.4	859.0	865.4
132.5°	567.6	633.1	692.6	743.8	783.0	811.5	826.2	830.6
135°	546.3	602.4	653.7	698.7	737.4	761.1	775.3	780.8
137.5°	526.9	572.9	617.1	656.1	688.6	712.7	724.7	728.3
140°	515.5	555.8	593.7	627.6	657.7	679.7	692.5	691.7
142.5°	504.8	539.4	572.3	601.8	627.3	646.9	658.3	657.5
145°	491.9	518.0	543.2	566.1	585.8	602.4	608.7	610.3
147.5°	481.3	502.0	522.4	538.7	553.6	564.8	570.9	571.5
150°	473.7	491.9	508.5	523.4	535.3	544.0	548.8	548.8
152.5°	466.8	482.4	497.1	509.6	518.9	526.9	529.8	529.8
155°	456.4	469.0	480.8	490.3	497.4	503.7	505.3	506.0
157.5°	445.2	455.9	465.0	472.4	478.6	483.3	484.6	484.4
160°	439.0	447.7	455.6	461.1	466.7	471.3	471.3	470.6
162.5°	431.4	438.8	446.1	451.0	454.6	458.7	458.7	458.0
165°	421.6	426.4	431.9	435.9	439.0	442.1	441.3	441.3
167.5°	413.0	416.7	419.9	422.7	424.1	426.4	425.6	425.6
170°	407.4	409.8	412.9	414.5	415.3	416.9	416.1	416.1
172.5°	402.3	404.0	406.6	407.6	407.7	409.3	407.9	407.3
175°	395.6	396.4	397.9	397.9	397.9	398.7	397.9	397.2
177.5°	391.3	391.9	392.5	392.5	391.9	392.5	391.3	391.3
180°	390.0	390.0	390.0	390.0	390.0	390.0	390.0	390.0

(END OF REPORT)