

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332007-940

Luminaire Tested: **S123DIP-S1000D365U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332007-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1000D365U940-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4785.4 lumens  
Efficiency: N/A  
Efficacy: 110.0 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 43.5  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332007-940

CATALOG NUMBER: S123DIP-S1000D365U940-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

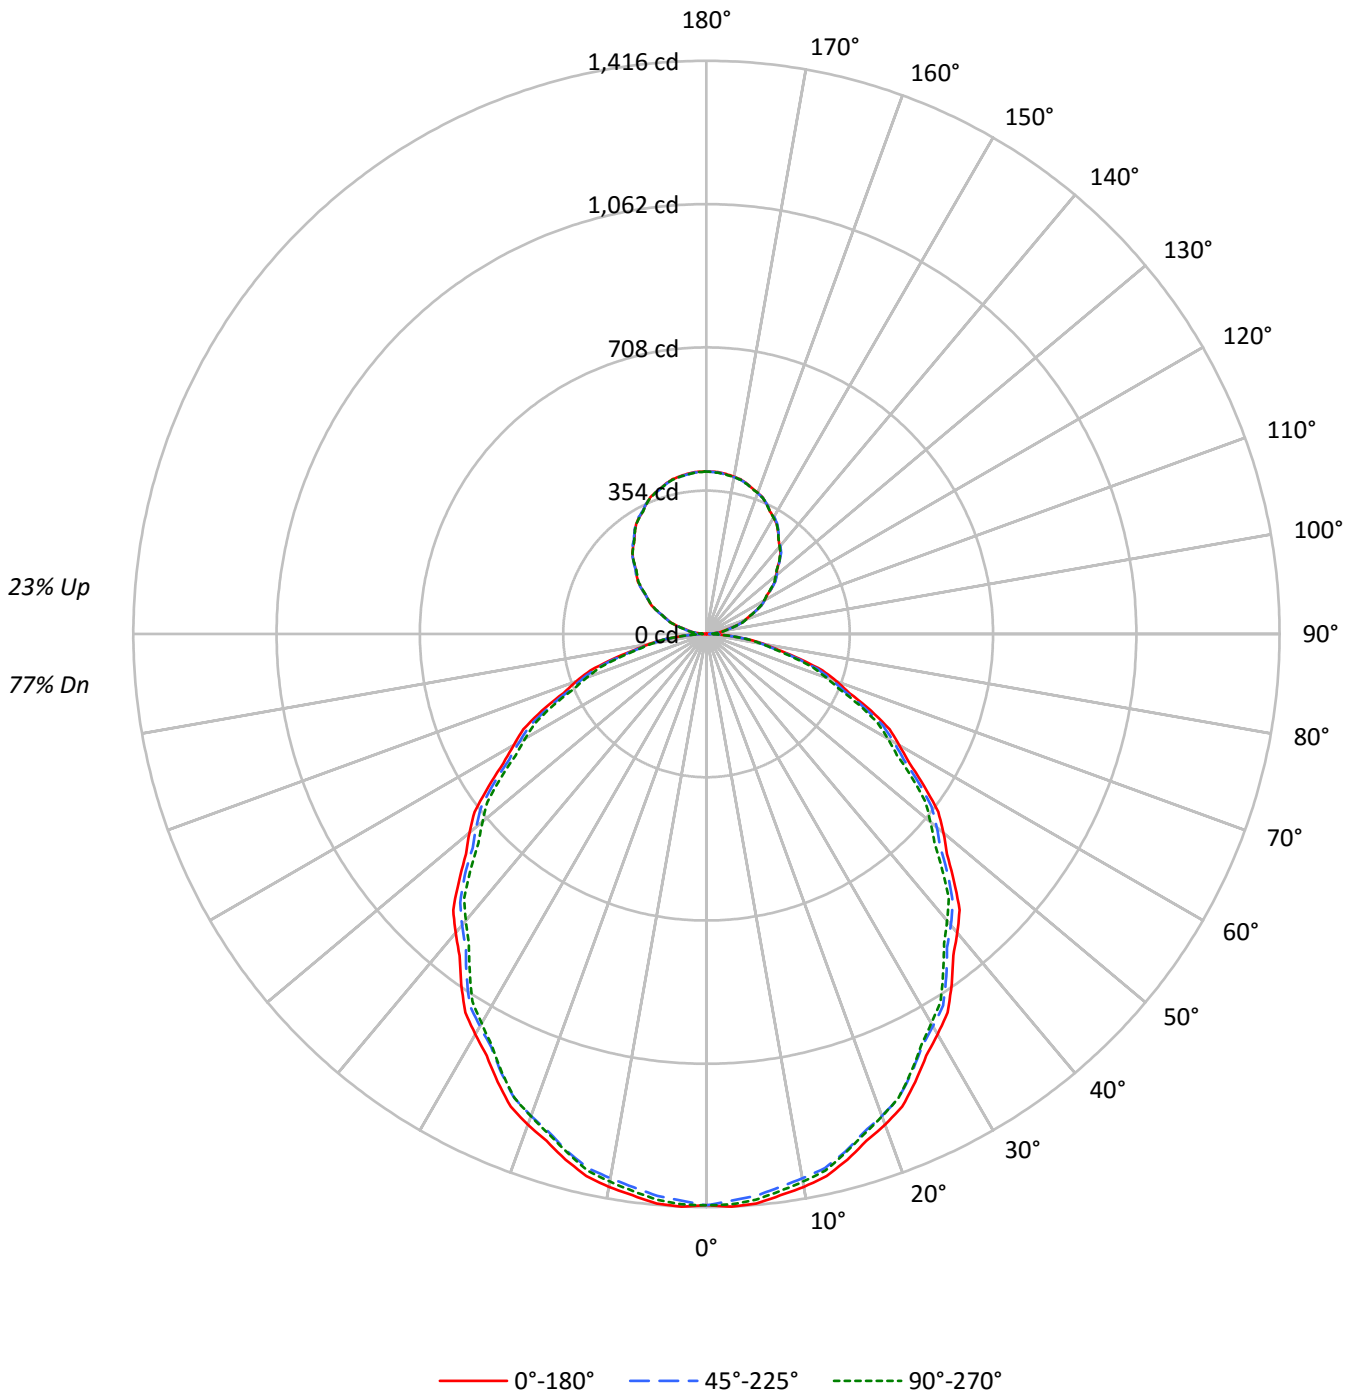



TEST NUMBER: P332007-940

CATALOG NUMBER: S123DIP-S1000D365U940-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	114	114	114	114	108	108	108	108	98	98	98	89	89	89	81	81	81	77
1	104	99	95	91	99	95	91	88	86	83	81	78	76	74	71	70	68	64
2	94	87	80	75	90	83	77	72	75	71	67	69	65	62	63	60	57	54
3	86	76	68	62	82	73	66	60	67	61	56	61	56	52	55	52	49	46
4	79	67	59	53	75	65	57	51	59	53	48	54	49	45	50	45	42	39
5	73	60	52	45	69	58	50	44	53	47	42	49	43	39	45	40	37	34
6	67	54	46	40	64	52	44	39	48	41	36	44	39	34	41	36	32	30
7	62	49	41	35	59	47	39	34	44	37	32	40	35	30	37	32	29	26
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	26	24
9	54	41	33	28	51	40	32	27	37	30	26	34	29	25	32	27	23	21
10	50	38	30	25	48	36	29	25	34	28	23	32	26	22	29	25	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	15193	15193	15193
5°	15263	15055	15159
10°	15162	14924	15017
15°	14985	14755	14782
20°	14778	14513	14528
25°	14500	14226	14197
30°	14194	13908	13801
35°	13875	13571	13397
40°	13541	13198	12995
45°	13172	12858	12543
50°	12804	12439	12092
55°	12322	12003	11639
60°	11834	11496	11130
65°	11405	10942	10603
70°	10770	10313	9854
75°	9844	9491	9087
80°	8877	8498	8424
85°	7793	7497	7188



TEST NUMBER: P332007-940

CATALOG NUMBER: S123DIP-S1000D365U940-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	133.0	2.8
10°-20°	375.4	7.8
20°-30°	554.6	11.6
30°-40°	647.8	13.5
40°-50°	651.3	13.6
50°-60°	572.1	12.0
60°-70°	426.2	8.9
70°-80°	242.8	5.1
80°-90°	70.9	1.5
90°-100°	26.1	0.5
100°-110°	78.2	1.6
110°-120°	133.0	2.8
120°-130°	175.0	3.7
130°-140°	196.7	4.1
140°-150°	193.3	4.0
150°-160°	162.8	3.4
160°-170°	108.3	2.3
170°-180°	37.9	0.8
0°-30°	1062.9	22.2
0°-40°	1710.7	35.7
0°-60°	2934.1	61.3
0°-90°	3674.0	76.8
90°-120°	237.4	5.0
90°-150°	802.4	16.8
90°-180°	1111.0	23.2
0°-180°	4785.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1412	1412	1412	1412	1412	
5°	1413	1406	1393	1405	1403	134
15°	1345	1339	1324	1333	1326	379
25°	1221	1213	1198	1199	1195	562
35°	1056	1048	1033	1026	1020	660
45°	865	860	845	831	824	668
55°	657	655	640	627	620	588
65°	448	441	430	420	416	442
75°	237	232	228	222	218	253
85°	63	61	61	58	58	69
90°	0	4	8	9	10	5
95°	19	21	23	24	25	21
105°	71	72	74	74	75	76
115°	134	135	134	135	134	132
125°	196	197	196	195	194	175
135°	254	256	256	255	254	196
145°	308	309	310	310	308	193
155°	353	353	354	355	353	163
165°	385	384	384	386	384	108
175°	400	399	399	401	399	38
180°	401	401	401	401	401	



TEST NUMBER: P332007-940

CATALOG NUMBER: S123DIP-S1000D365U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5
2.5°	1416.3	1415.5	1414.6	1413.7	1412.9	1411.2	1408.9	1406.5	1404.2	1401.8	1403.9
5°	1412.6	1411.3	1410.0	1408.6	1407.3	1405.2	1402.2	1399.2	1396.2	1393.3	1396.0
7.5°	1398.8	1397.5	1396.2	1394.8	1393.5	1391.2	1388.2	1385.1	1382.1	1378.9	1381.3
10°	1387.2	1385.9	1384.5	1383.1	1381.8	1379.4	1375.9	1372.3	1368.9	1365.4	1367.8
12.5°	1371.6	1370.6	1369.4	1368.2	1367.2	1364.9	1361.6	1358.3	1355.0	1351.7	1353.5
15°	1344.7	1343.6	1342.6	1341.5	1340.4	1338.1	1334.6	1331.1	1327.6	1324.1	1326.2
17.5°	1313.4	1312.0	1310.6	1309.2	1307.8	1305.4	1301.8	1298.3	1294.9	1291.3	1292.8
20°	1290.1	1288.5	1286.9	1285.2	1283.6	1281.0	1277.6	1274.1	1270.6	1267.0	1268.1
22.5°	1263.9	1262.3	1260.7	1259.0	1257.4	1254.9	1251.3	1247.9	1244.4	1240.8	1241.7
25°	1220.9	1219.3	1217.7	1216.1	1214.4	1211.9	1208.4	1204.9	1201.4	1197.8	1198.1
27.5°	1175.1	1173.5	1171.9	1170.4	1168.8	1166.1	1162.3	1158.6	1154.8	1151.0	1151.2
30°	1142.0	1140.7	1139.3	1138.0	1136.7	1134.1	1130.3	1126.5	1122.8	1119.0	1119.0
32.5°	1109.0	1107.2	1105.5	1103.7	1101.9	1099.6	1096.6	1093.8	1090.8	1087.9	1086.4
35°	1055.9	1054.3	1052.7	1051.1	1049.4	1046.9	1043.3	1039.8	1036.3	1032.8	1031.2
37.5°	1001.5	999.4	997.4	995.3	993.3	990.5	986.9	983.4	979.8	976.2	974.3
40°	963.7	962.0	960.4	958.8	957.2	954.5	950.7	946.9	943.2	939.3	937.2
42.5°	925.8	923.9	922.1	920.2	918.5	915.6	911.9	908.1	904.3	900.5	898.4
45°	865.3	864.2	863.2	862.1	861.0	858.7	855.2	851.7	848.2	844.7	841.5
47.5°	805.4	803.8	802.3	800.7	799.2	796.7	793.4	790.1	786.8	783.5	780.3
50°	764.6	763.2	761.9	760.5	759.2	756.8	753.2	749.8	746.3	742.8	739.8
52.5°	721.8	720.9	720.1	719.2	718.2	715.9	712.2	708.5	704.7	701.0	698.5
55°	656.6	656.3	656.0	655.8	655.5	653.6	650.1	646.6	643.1	639.6	636.6
57.5°	594.4	593.5	592.6	591.7	590.8	588.9	586.1	583.3	580.5	577.7	575.1
60°	549.7	549.5	549.2	548.9	548.7	547.0	543.7	540.5	537.3	534.0	531.5
62.5°	510.0	509.3	508.5	507.8	507.2	505.2	501.9	498.7	495.5	492.2	489.8
65°	447.8	446.5	445.1	443.8	442.5	440.4	437.7	435.1	432.3	429.6	427.5
67.5°	382.1	380.8	379.7	378.5	377.3	375.7	373.6	371.6	369.5	367.5	365.6
70°	342.2	340.6	339.0	337.4	335.8	334.1	332.5	330.9	329.3	327.7	325.8
72.5°	300.5	299.3	298.1	296.9	295.8	294.3	292.4	290.6	288.7	286.9	285.3
75°	236.7	235.6	234.5	233.4	232.4	231.4	230.6	229.8	229.0	228.2	226.9
77.5°	180.1	179.5	178.9	178.3	177.7	176.9	176.0	175.0	174.1	173.1	172.2
80°	143.2	142.4	141.6	140.8	140.0	139.3	138.8	138.2	137.7	137.1	136.9
82.5°	107.3	107.1	107.0	106.8	106.6	106.5	106.4	106.3	106.2	106.1	105.6
85°	63.1	62.6	62.1	61.5	61.0	60.7	60.7	60.7	60.7	60.7	60.1
87.5°	25.3	24.8	24.3	23.8	23.3	23.0	23.0	22.9	22.9	22.9	22.7
90°	0.4	1.0	1.7	2.4	3.1	3.9	4.8	5.7	6.7	7.6	7.8
92.5°	7.7	8.1	8.6	9.1	9.5	10.0	10.5	11.1	11.6	12.1	12.3
95°	18.6	19.1	19.5	20.1	20.5	21.0	21.7	22.2	22.7	23.4	23.6
97.5°	33.0	33.3	33.8	34.2	34.5	34.9	35.3	35.7	36.1	36.5	36.8
100°	42.9	43.2	43.7	44.1	44.5	44.9	45.3	45.7	46.0	46.3	46.5
102.5°	54.2	54.5	54.7	54.9	55.2	55.6	56.0	56.5	57.0	57.4	57.6
105°	70.9	71.1	71.2	71.3	71.4	71.9	72.5	73.1	73.7	74.4	74.4
107.5°	90.3	90.4	90.5	90.6	90.7	90.8	91.0	91.3	91.6	91.8	92.0
110°	102.5	102.5	102.7	102.8	103.0	103.1	103.3	103.4	103.5	103.7	104.0



TEST NUMBER: P332007-940

CATALOG NUMBER: S123DIP-S1000D365U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	115.0	115.1	115.2	115.3	115.4	115.4	115.5	115.5	115.5	115.6	115.8
115°	133.9	134.1	134.4	134.6	134.7	134.8	134.6	134.6	134.4	134.2	134.3
117.5°	152.9	153.1	153.3	153.4	153.6	153.5	153.3	153.1	152.9	152.8	152.8
120°	164.8	165.2	165.7	166.0	166.5	166.5	166.2	165.9	165.5	165.1	165.1
122.5°	177.2	177.5	177.8	178.1	178.4	178.4	178.3	178.1	177.9	177.7	177.5
125°	196.0	196.2	196.4	196.6	196.9	196.9	196.7	196.6	196.4	196.4	196.0
127.5°	213.4	213.8	214.3	214.7	215.2	215.3	215.2	215.0	214.9	214.7	214.4
130°	225.0	225.5	226.1	226.7	227.2	227.4	227.2	227.0	226.8	226.6	226.3
132.5°	236.6	237.2	237.7	238.3	238.8	239.1	238.9	238.7	238.5	238.4	238.1
135°	254.3	254.8	255.1	255.6	256.0	256.2	256.1	256.0	255.9	255.9	255.6
137.5°	270.7	271.1	271.3	271.7	272.1	272.3	272.5	272.7	272.9	273.0	272.8
140°	282.0	282.4	282.8	283.1	283.5	283.7	283.7	283.7	283.8	283.9	283.8
142.5°	292.4	292.7	293.1	293.5	293.7	294.0	294.2	294.3	294.4	294.5	294.4
145°	308.5	308.6	308.8	308.9	309.1	309.2	309.4	309.7	309.9	310.0	310.0
147.5°	322.6	322.9	323.2	323.4	323.6	323.9	324.0	324.2	324.4	324.7	324.7
150°	332.4	332.6	332.7	332.9	333.1	333.1	333.3	333.4	333.6	333.7	333.7
152.5°	340.5	340.7	340.9	341.1	341.3	341.4	341.5	341.6	341.7	341.8	341.9
155°	353.3	353.3	353.3	353.3	353.3	353.3	353.4	353.4	353.5	353.6	353.8
157.5°	364.1	364.0	363.9	363.8	363.7	363.7	363.8	363.8	363.9	364.0	364.3
160°	370.9	370.8	370.6	370.5	370.3	370.2	370.2	370.2	370.2	370.2	370.6
162.5°	376.9	376.7	376.6	376.4	376.1	376.1	376.1	376.2	376.3	376.3	376.7
165°	384.8	384.6	384.3	384.1	383.9	383.8	383.8	383.8	383.8	383.8	384.2
167.5°	391.0	390.7	390.5	390.1	389.9	389.8	389.9	389.9	389.9	390.0	390.4
170°	394.5	394.2	394.0	393.7	393.4	393.2	393.2	393.2	393.2	393.2	393.8
172.5°	397.3	397.0	396.7	396.5	396.2	396.0	396.0	396.0	396.0	396.0	396.5
175°	400.2	399.9	399.7	399.4	399.1	399.0	399.0	399.0	399.0	399.0	399.4
177.5°	401.4	401.2	400.9	400.7	400.5	400.4	400.4	400.4	400.4	400.4	400.7
180°	401.2	401.2	401.2	401.2	401.2	401.2	401.2	401.2	401.2	401.2	401.2



TEST NUMBER: P332007-940

CATALOG NUMBER: S123DIP-S1000D365U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5	1411.5
2.5°	1406.0	1408.3	1410.4	1411.4	1411.1	1411.0	1410.7	1410.5
5°	1398.6	1401.3	1404.1	1405.2	1404.6	1404.1	1403.6	1403.0
7.5°	1383.8	1386.3	1388.7	1389.7	1389.4	1389.1	1388.8	1388.4
10°	1370.2	1372.6	1375.1	1376.0	1375.5	1374.9	1374.4	1373.9
12.5°	1355.3	1357.1	1358.9	1359.6	1359.3	1359.0	1358.6	1358.3
15°	1328.4	1330.5	1332.8	1333.0	1331.4	1329.7	1328.1	1326.5
17.5°	1294.3	1295.8	1297.4	1297.8	1297.3	1296.6	1296.0	1295.5
20°	1269.2	1270.3	1271.4	1271.5	1270.7	1269.9	1269.1	1268.3
22.5°	1242.6	1243.4	1244.3	1244.2	1243.2	1242.2	1241.2	1240.1
25°	1198.4	1198.7	1199.0	1198.7	1197.8	1197.0	1196.2	1195.4
27.5°	1151.5	1151.6	1151.9	1151.5	1150.5	1149.4	1148.4	1147.4
30°	1119.0	1119.0	1119.0	1118.0	1116.2	1114.3	1112.4	1110.4
32.5°	1084.9	1083.4	1081.9	1080.6	1079.6	1078.5	1077.5	1076.5
35°	1029.6	1028.0	1026.4	1024.8	1023.5	1022.2	1020.8	1019.5
37.5°	972.4	970.4	968.5	967.1	966.3	965.4	964.5	963.7
40°	935.0	932.9	930.8	929.1	928.0	926.9	925.9	924.8
42.5°	896.2	894.0	891.9	890.3	889.2	888.1	887.1	886.0
45°	838.2	835.0	831.8	829.5	828.1	826.8	825.5	824.0
47.5°	777.1	774.0	770.8	768.7	767.4	766.2	765.1	763.8
50°	736.8	733.9	730.8	728.6	727.0	725.3	723.7	722.1
52.5°	695.9	693.4	690.9	688.8	687.2	685.5	683.9	682.3
55°	633.6	630.7	627.8	625.5	624.2	622.9	621.5	620.2
57.5°	572.4	569.8	567.1	565.0	563.5	561.9	560.4	558.7
60°	529.1	526.7	524.3	522.5	521.0	519.7	518.4	517.0
62.5°	487.4	485.0	482.5	480.9	479.9	479.0	478.1	477.2
65°	425.3	423.1	421.0	419.5	418.7	417.9	417.1	416.3
67.5°	363.7	361.9	360.0	358.5	357.3	356.1	355.0	353.9
70°	323.9	322.0	320.1	318.5	317.2	315.8	314.5	313.1
72.5°	283.6	281.9	280.2	279.0	278.3	277.6	277.0	276.3
75°	225.5	224.1	222.7	221.7	220.9	220.1	219.3	218.5
77.5°	171.2	170.3	169.4	169.0	169.0	169.0	169.0	169.0
80°	136.6	136.3	136.1	135.9	135.9	135.9	135.9	135.9
82.5°	105.1	104.6	104.2	103.8	103.5	103.3	103.2	102.9
85°	59.6	59.0	58.5	58.2	58.2	58.2	58.2	58.2
87.5°	22.6	22.4	22.2	22.2	22.2	22.2	22.3	22.3
90°	8.1	8.4	8.6	8.9	9.0	9.2	9.3	9.5
92.5°	12.6	12.8	13.0	13.1	13.0	12.9	12.8	12.8
95°	23.9	24.2	24.4	24.6	24.6	24.6	24.6	24.6
97.5°	37.1	37.5	37.8	37.9	37.9	37.9	37.8	37.8
100°	46.7	47.0	47.2	47.3	47.4	47.6	47.8	47.9
102.5°	57.9	58.1	58.2	58.3	58.3	58.3	58.2	58.2
105°	74.4	74.4	74.4	74.5	74.5	74.7	74.9	75.0
107.5°	92.3	92.5	92.7	92.8	92.7	92.6	92.6	92.5
110°	104.2	104.5	104.8	104.9	104.7	104.6	104.4	104.3





TEST NUMBER: P332007-940

CATALOG NUMBER: S123DIP-S1000D365U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	116.2	116.5	116.9	117.0	117.0	117.0	116.9	116.9
115°	134.4	134.5	134.6	134.6	134.5	134.4	134.3	134.2
117.5°	152.8	152.8	152.8	152.6	152.4	152.2	152.0	151.9
120°	165.0	164.9	164.9	164.7	164.6	164.4	164.3	164.2
122.5°	177.4	177.2	177.0	176.8	176.6	176.4	176.2	176.0
125°	195.7	195.5	195.2	194.9	194.7	194.4	194.0	193.8
127.5°	213.9	213.6	213.1	212.8	212.5	212.1	211.9	211.5
130°	226.0	225.7	225.4	225.1	224.6	224.1	223.6	223.1
132.5°	237.7	237.4	237.1	236.7	236.3	235.9	235.6	235.2
135°	255.3	255.0	254.8	254.6	254.4	254.2	254.1	254.0
137.5°	272.5	272.2	271.9	271.6	271.3	271.1	270.8	270.5
140°	283.7	283.7	283.7	283.4	282.9	282.4	281.9	281.4
142.5°	294.4	294.3	294.3	294.0	293.6	293.3	292.8	292.5
145°	310.0	309.9	309.8	309.6	309.3	309.1	308.8	308.5
147.5°	324.7	324.7	324.7	324.4	324.0	323.6	323.2	322.7
150°	333.7	333.7	333.7	333.5	333.1	332.7	332.3	331.8
152.5°	342.0	342.1	342.2	342.1	341.7	341.3	341.0	340.6
155°	354.1	354.4	354.7	354.5	354.1	353.6	353.1	352.6
157.5°	364.5	364.9	365.2	365.1	364.7	364.4	363.9	363.6
160°	371.0	371.3	371.7	371.7	371.4	371.1	370.9	370.6
162.5°	377.0	377.4	377.7	377.6	377.2	376.7	376.3	375.9
165°	384.7	385.0	385.5	385.5	385.0	384.5	384.0	383.5
167.5°	390.8	391.3	391.7	391.7	391.3	390.8	390.4	390.0
170°	394.2	394.8	395.2	395.2	394.8	394.2	393.8	393.2
172.5°	396.9	397.3	397.8	397.8	397.3	396.8	396.3	395.8
175°	399.8	400.2	400.6	400.6	400.1	399.6	399.1	398.6
177.5°	401.1	401.4	401.7	401.7	401.4	400.9	400.6	400.1
180°	401.2	401.2	401.2	401.2	401.2	401.2	401.2	401.2

(END OF REPORT)