

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332018-940

Luminaire Tested: **S123DIP-S1000D805U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332018-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1000D805U940-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6644.2 lumens
Efficiency: N/A
Efficacy: 122.1 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 54.4
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

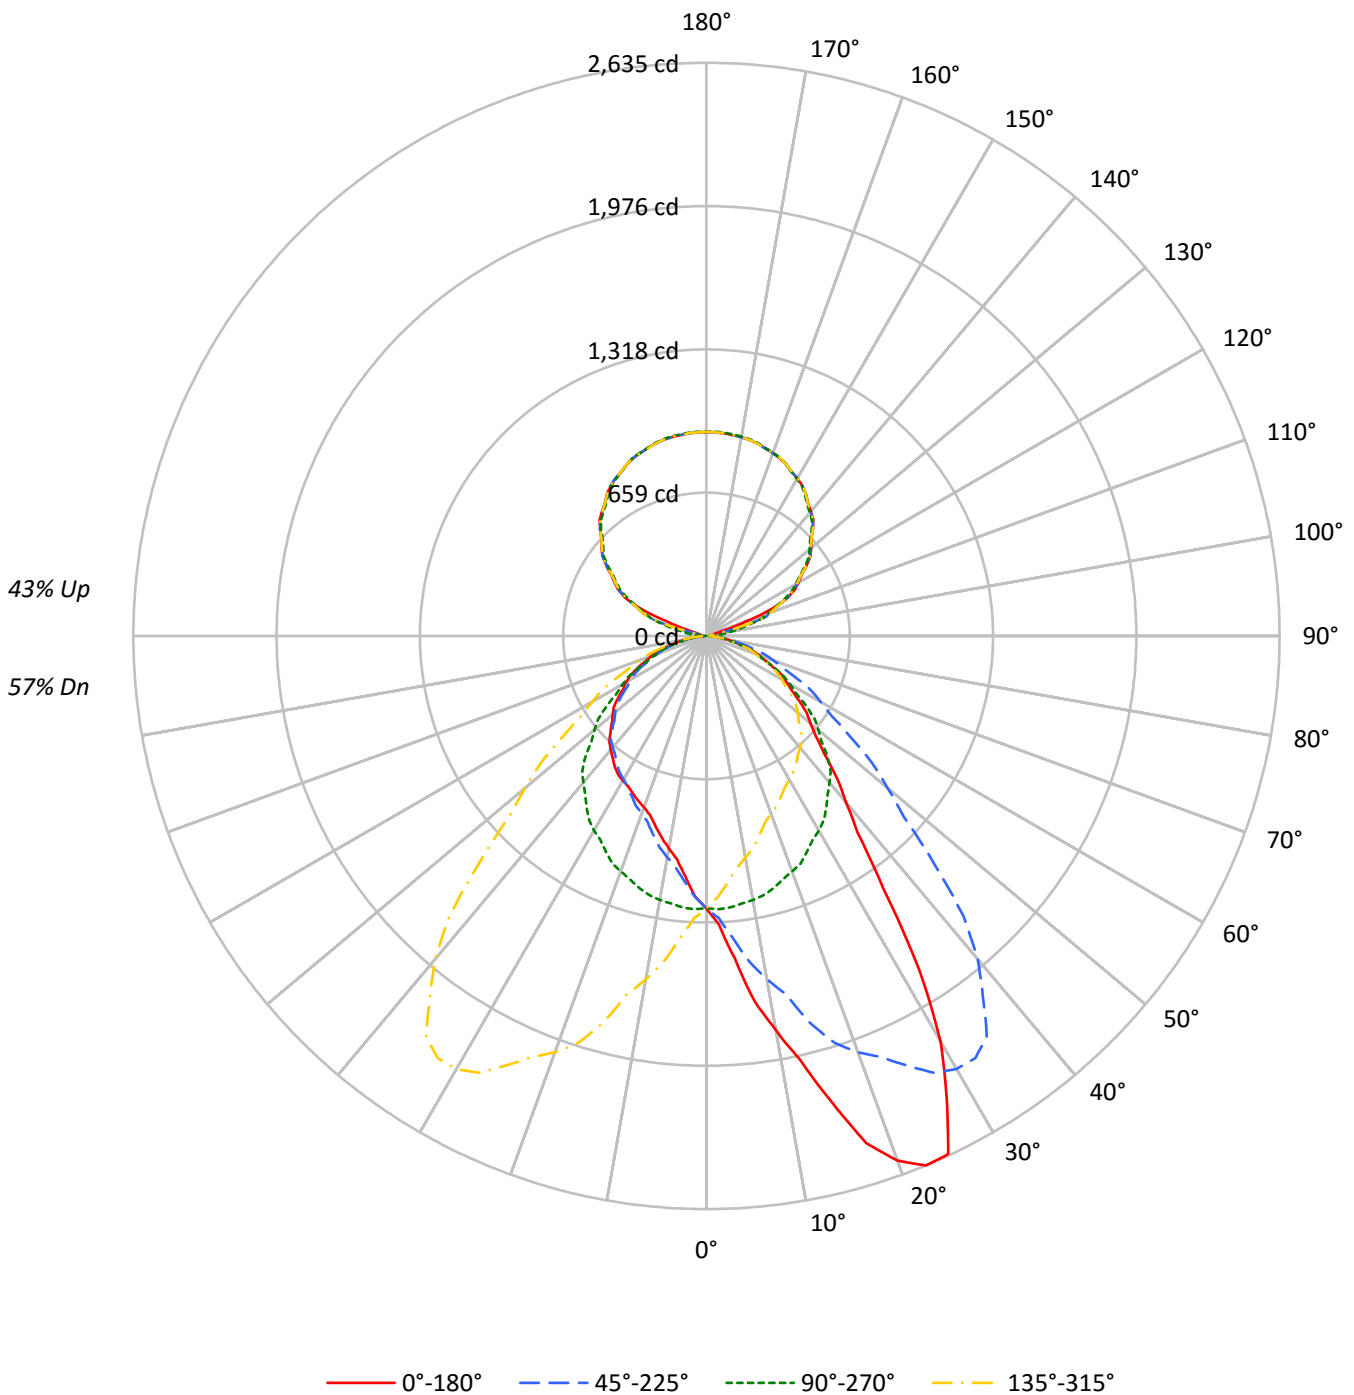



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																		
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																														
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	57																												
1	100	95	92	88	93	89	86	83	77	75	72	66	64	63	56	55	53	49																												
2	91	84	78	72	84	78	73	68	68	64	60	58	55	53	49	47	45	41																												
3	83	74	67	61	77	69	63	57	60	55	51	52	48	45	44	41	39	35																												
4	76	65	58	52	71	61	54	49	54	48	44	46	42	39	39	36	34	30																												
5	70	58	50	44	65	55	48	42	48	42	38	42	37	34	36	32	30	27																												
6	65	53	44	39	60	49	42	37	43	38	33	38	33	30	32	29	26	23																												
7	60	48	40	34	56	45	38	32	39	34	29	34	30	26	30	26	23	21																												
8	56	43	35	30	52	41	34	29	36	30	26	31	27	23	27	24	21	19																												
9	52	39	32	27	48	37	30	26	33	27	23	29	24	21	25	21	19	17																												
10	48	36	29	24	45	34	28	23	30	25	21	27	22	19	23	20	17	15																												

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	13481	13481	13481	13481
5°	16077	13539	11998	13539
10°	20122	13470	10837	13470
15°	24681	13362	10089	13362
20°	29402	13192	9606	13192
25°	31220	12986	9499	12986
30°	26759	12837	9548	12837
35°	18611	12623	9648	12623
40°	14018	12372	9618	12372
45°	11639	12000	9496	12000
50°	10426	11238	9409	11238
55°	9747	10419	9293	10419
60°	9143	9563	9197	9563
65°	8593	8716	8904	8716
70°	8060	7755	8478	7755
75°	7216	6791	7773	6791
80°	6316	5566	6695	5566
85°	4940	4039	4495	4039



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	123.4	1.9
10°-20°	395.6	6.0
20°-30°	664.0	10.0
30°-40°	751.8	11.3
40°-50°	674.2	10.1
50°-60°	544.1	8.2
60°-70°	379.1	5.7
70°-80°	199.3	3.0
80°-90°	51.4	0.8
90°-100°	34.1	0.5
100°-110°	162.6	2.4
110°-120°	390.6	5.9
120°-130°	497.3	7.5
130°-140°	531.4	8.0
140°-150°	496.9	7.5
150°-160°	400.8	6.0
160°-170°	258.7	3.9
170°-180°	89.2	1.3
0°-30°	1182.9	17.8
0°-40°	1934.7	29.1
0°-60°	3153.0	47.5
0°-90°	3782.7	56.9
90°-120°	587.3	8.8
90°-150°	2112.9	31.8
90°-180°	2862.0	43.1
0°-180°	6644.2	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1252	1252	1252	1252	1252	
5°	1488	1253	1110	1253	1488	154
15°	2215	1199	905	1199	2215	639
25°	2629	1093	800	1093	2629	1153
35°	1416	961	734	961	1416	920
45°	765	788	624	788	765	605
55°	519	555	495	555	519	466
65°	337	342	350	342	337	336
75°	174	163	187	163	174	186
85°	40	33	36	33	40	48
90°	21	1	21	1	21	11
95°	26	42	26	42	26	22
105°	31	208	31	208	31	70
115°	410	390	410	390	410	379
125°	560	549	560	549	560	501
135°	691	684	691	684	691	533
145°	797	789	797	789	797	497
155°	868	869	868	869	868	400
165°	915	917	915	917	915	258
175°	935	938	935	938	935	89
180°	938	938	938	938	938	



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1329.1	1328.2	1325.7	1327.7	1323.8	1318.5	1317.9	1313.1	1299.0	1298.1	1294.2
5°	1487.9	1483.0	1482.4	1481.8	1473.3	1461.8	1439.9	1438.2	1409.0	1394.5	1376.8
7.5°	1693.4	1696.0	1687.1	1679.4	1653.4	1636.3	1612.8	1582.9	1547.1	1510.8	1486.7
10°	1841.0	1861.1	1836.2	1819.2	1803.4	1773.7	1739.1	1696.0	1653.0	1602.6	1564.3
12.5°	1999.3	2009.1	2004.1	1988.2	1963.6	1918.3	1857.1	1809.6	1770.0	1686.0	1652.2
15°	2214.8	2251.8	2228.2	2173.5	2174.8	2131.7	2051.6	1963.6	1916.9	1843.4	1743.4
17.5°	2444.4	2449.1	2439.0	2393.4	2363.1	2303.9	2230.0	2145.6	2051.0	1962.1	1856.0
20°	2566.8	2563.1	2541.9	2518.2	2466.0	2419.9	2339.2	2245.1	2123.8	2036.4	1920.6
22.5°	2634.7	2628.7	2618.6	2598.8	2555.4	2505.9	2433.4	2330.6	2215.1	2094.7	1960.8
25°	2628.7	2636.5	2637.8	2632.3	2617.2	2587.4	2530.3	2448.5	2333.2	2178.4	2038.9
27.5°	2390.8	2402.0	2434.4	2463.2	2495.3	2528.1	2523.7	2483.1	2397.7	2264.1	2093.5
30°	2152.9	2128.7	2188.7	2264.6	2316.1	2407.2	2458.2	2461.2	2413.2	2298.6	2132.3
32.5°	1822.8	1849.5	1876.1	1969.4	2082.1	2184.3	2285.8	2367.5	2376.9	2300.5	2155.1
35°	1416.3	1449.7	1498.2	1546.8	1668.1	1772.5	1950.9	2106.2	2230.0	2246.4	2157.1
37.5°	1141.3	1157.8	1188.5	1237.2	1316.5	1440.3	1578.3	1774.7	1954.0	2087.4	2093.2
40°	997.6	1002.5	1037.1	1074.1	1138.4	1240.3	1364.7	1538.2	1753.0	1939.4	2017.0
42.5°	889.8	900.4	915.2	950.7	1001.9	1078.6	1194.3	1337.7	1534.6	1749.0	1900.9
45°	764.6	776.7	785.8	809.5	845.9	897.4	978.2	1109.2	1259.1	1480.6	1685.1
47.5°	681.8	682.8	689.6	707.4	732.2	770.9	828.0	912.1	1049.7	1229.4	1439.3
50°	622.6	632.3	634.7	648.6	668.1	696.6	744.0	815.6	928.4	1086.2	1279.2
52.5°	580.9	583.7	590.6	600.7	617.6	639.8	680.8	736.9	825.5	959.9	1137.4
55°	519.4	519.4	526.1	534.0	543.7	563.7	591.0	632.3	699.6	804.1	950.8
57.5°	462.6	465.7	470.4	472.8	481.1	494.3	517.1	548.4	598.7	679.0	795.8
60°	424.7	430.3	429.6	434.4	441.8	452.1	471.4	497.0	541.9	606.2	704.5
62.5°	391.7	391.4	391.3	397.1	404.4	414.2	426.9	448.9	487.1	544.0	627.8
65°	337.4	336.2	340.5	344.0	346.5	353.7	363.5	382.9	408.4	450.8	515.8
67.5°	289.1	285.5	287.8	289.1	293.2	298.9	308.0	320.0	340.3	374.4	423.3
70°	256.1	253.1	252.4	253.6	257.3	261.5	268.2	279.7	298.5	325.8	361.7
72.5°	222.1	220.0	219.9	222.6	224.3	227.0	231.8	242.4	257.3	277.8	311.2
75°	173.5	173.5	173.5	174.2	175.9	178.4	182.0	187.5	199.0	213.6	236.0
77.5°	130.1	130.0	129.2	129.1	131.8	132.9	133.8	138.8	145.3	155.1	171.5
80°	101.9	98.9	100.1	101.9	103.2	103.8	105.6	106.8	112.3	117.7	129.2
82.5°	75.7	73.2	73.4	76.2	76.4	77.0	78.9	80.6	82.7	87.7	93.8
85°	40.0	40.0	40.7	40.7	41.3	40.7	42.4	43.1	43.1	46.1	49.8
87.5°	18.7	17.7	18.1	18.5	18.0	18.4	18.7	19.2	19.5	19.9	20.0
90°	21.0	20.6	20.3	20.0	19.7	19.2	18.5	18.0	17.4	16.8	14.7
92.5°	23.2	22.9	22.7	22.6	22.4	21.8	20.8	19.8	18.8	17.8	16.3
95°	26.5	26.5	26.5	26.5	26.5	25.9	24.9	23.8	22.7	21.6	19.9
97.5°	28.7	28.5	28.4	28.3	28.1	27.4	26.1	25.0	23.7	22.5	33.6
100°	29.2	29.2	29.0	28.8	28.6	28.0	26.8	25.5	24.3	23.0	47.2
102.5°	29.9	29.5	29.2	29.0	28.7	30.5	34.3	38.2	42.0	45.8	72.2
105°	30.7	30.4	30.1	29.8	29.4	43.0	70.4	97.8	125.3	152.7	166.6
107.5°	96.3	117.0	137.7	158.4	179.0	199.4	219.5	239.6	259.8	279.8	277.6
110°	191.7	213.8	236.0	258.2	280.4	294.0	299.1	304.2	309.3	314.4	312.7



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	329.0	333.6	338.2	343.0	347.6	349.9	349.8	349.7	349.6	349.6	347.9
115°	409.9	409.3	408.7	408.0	407.4	406.4	404.8	403.2	401.7	400.2	398.8
117.5°	455.4	455.2	455.1	455.0	454.9	454.1	453.0	451.7	450.5	449.2	448.5
120°	486.6	486.6	486.6	486.6	486.6	486.0	484.7	483.5	482.2	481.0	480.5
122.5°	517.3	517.2	517.0	516.9	516.7	516.3	515.4	514.5	513.7	512.8	512.2
125°	560.5	560.2	559.9	559.5	559.3	558.9	558.7	558.3	558.0	557.7	557.1
127.5°	602.1	602.4	602.7	603.0	603.2	603.2	602.7	602.2	601.7	601.2	600.5
130°	628.8	629.1	629.5	629.7	630.1	629.9	629.3	628.7	628.0	627.4	626.8
132.5°	653.4	653.8	654.2	654.7	655.1	655.0	654.3	653.7	653.2	652.6	652.0
135°	690.9	691.3	691.8	692.2	692.7	692.7	692.2	691.8	691.3	690.9	690.3
137.5°	726.1	726.5	726.7	727.1	727.4	727.2	726.4	725.7	725.0	724.2	723.8
140°	747.3	747.6	748.0	748.2	748.6	748.4	747.8	747.2	746.5	745.9	745.5
142.5°	766.9	767.3	767.7	768.1	768.6	768.6	768.0	767.6	767.0	766.6	766.1
145°	796.8	796.8	796.8	796.8	796.8	796.7	796.4	796.0	795.8	795.4	795.1
147.5°	819.1	819.8	820.6	821.3	822.0	822.2	821.9	821.5	821.3	820.9	820.6
150°	835.9	836.3	836.8	837.2	837.8	837.8	837.5	837.1	836.9	836.6	836.2
152.5°	849.3	850.0	850.7	851.4	852.1	852.2	851.6	851.0	850.5	850.0	849.8
155°	867.9	868.9	869.8	870.8	871.6	871.7	870.9	870.2	869.4	868.6	868.4
157.5°	883.7	884.9	886.1	887.3	888.5	888.7	887.7	886.8	885.9	884.9	885.1
160°	893.8	894.8	895.9	897.0	898.0	898.1	897.2	896.3	895.4	894.4	894.6
162.5°	903.2	904.2	905.1	906.1	907.0	907.0	906.0	904.9	903.8	902.8	902.9
165°	914.6	915.7	916.8	917.9	919.0	918.9	917.7	916.4	915.2	913.9	914.1
167.5°	922.8	924.1	925.3	926.6	927.8	927.8	926.6	925.3	924.1	922.8	922.8
170°	927.9	929.2	930.3	931.6	932.8	932.8	931.6	930.3	929.2	927.9	927.9
172.5°	930.7	932.0	933.4	934.8	936.1	936.2	935.0	933.7	932.5	931.2	931.1
175°	934.9	936.1	937.4	938.6	939.8	939.9	938.8	937.7	936.7	935.6	935.4
177.5°	936.1	937.4	938.6	939.9	941.1	941.2	940.2	939.2	938.3	937.2	937.1
180°	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1291.3	1287.4	1283.5	1276.8	1270.9	1262.7	1260.2	1257.3	1248.6	1240.8	1234.9
5°	1370.1	1355.6	1334.4	1314.9	1299.1	1277.9	1265.8	1253.0	1234.8	1218.4	1205.1
7.5°	1452.7	1424.1	1391.1	1355.3	1322.1	1290.0	1264.2	1241.2	1215.7	1191.5	1172.7
10°	1518.2	1476.9	1430.8	1381.1	1338.6	1297.4	1262.8	1232.4	1199.6	1171.1	1147.5
12.5°	1593.0	1531.8	1468.2	1407.7	1357.5	1300.3	1258.4	1219.8	1182.7	1148.3	1121.8
15°	1681.4	1603.7	1528.6	1445.4	1369.0	1297.4	1247.6	1199.1	1155.9	1120.8	1086.8
17.5°	1762.0	1674.0	1574.9	1473.8	1381.5	1296.6	1227.0	1172.1	1118.2	1075.1	1041.3
20°	1807.7	1707.5	1595.3	1490.3	1388.4	1293.7	1217.3	1151.7	1093.4	1047.9	1009.7
22.5°	1847.0	1729.8	1613.7	1501.5	1387.9	1285.9	1199.3	1131.8	1068.7	1024.1	983.5
25°	1887.8	1747.6	1631.1	1499.4	1372.6	1267.0	1169.9	1093.4	1030.4	978.2	936.3
27.5°	1922.7	1746.4	1608.1	1466.5	1348.5	1242.7	1139.1	1057.0	990.1	933.4	890.9
30°	1946.0	1748.8	1584.4	1444.2	1325.3	1216.0	1115.3	1032.8	962.4	904.7	864.7
32.5°	1960.6	1747.3	1562.5	1413.1	1288.3	1191.8	1089.6	1004.2	931.8	875.1	836.5
35°	1969.1	1736.7	1524.9	1348.9	1228.8	1134.7	1049.2	960.6	884.8	832.0	788.3
37.5°	1952.0	1714.2	1481.2	1287.0	1155.5	1062.8	990.9	915.4	842.8	784.7	747.1
40°	1925.4	1699.7	1447.2	1243.3	1105.0	1015.7	954.5	880.5	808.9	753.7	718.5
42.5°	1874.4	1670.0	1409.9	1194.8	1052.6	963.3	907.0	845.1	777.3	725.5	690.3
45°	1750.0	1605.6	1353.8	1122.0	975.1	882.9	833.1	788.3	726.9	676.5	646.2
47.5°	1577.4	1508.6	1272.7	1045.2	894.3	805.6	753.9	717.7	673.0	632.3	603.2
50°	1457.5	1429.1	1217.8	992.7	840.4	753.7	703.9	671.1	639.0	598.3	571.6
52.5°	1319.2	1336.8	1153.8	938.3	785.6	700.3	653.4	627.4	598.2	564.8	541.5
55°	1124.4	1188.1	1043.1	847.1	703.9	622.6	578.3	555.2	538.2	513.4	493.3
57.5°	942.0	1023.1	923.5	753.0	623.7	553.5	511.0	485.9	475.0	462.0	446.2
60°	833.7	913.8	838.0	689.9	569.8	503.0	465.4	444.2	433.3	424.2	410.8
62.5°	737.2	818.2	754.5	625.9	516.8	455.0	422.2	401.4	393.0	388.3	376.8
65°	604.4	674.1	631.7	526.1	441.1	386.6	356.8	342.2	334.4	332.5	325.2
67.5°	491.9	545.0	514.1	436.4	369.5	322.4	297.1	284.7	278.7	278.0	272.6
70°	418.1	467.9	444.2	373.8	316.1	279.1	257.3	246.4	242.7	242.1	239.1
72.5°	360.8	395.5	376.7	318.0	273.4	239.8	223.8	212.4	208.2	209.1	207.1
75°	267.0	293.1	282.1	241.5	205.7	183.9	170.5	163.3	159.6	161.4	159.0
77.5°	192.1	208.7	198.8	170.7	148.6	132.8	123.0	118.4	115.2	115.0	114.0
80°	145.0	154.7	149.3	132.2	114.0	100.8	92.8	89.8	88.0	87.4	86.8
82.5°	103.3	111.6	105.1	93.5	81.1	73.0	68.6	64.6	63.2	63.6	63.0
85°	52.2	55.2	52.8	45.5	40.7	37.0	34.6	32.7	31.6	32.2	30.9
87.5°	20.5	20.6	18.7	16.4	15.2	13.4	13.1	11.8	11.1	11.4	11.2
90°	12.7	10.7	8.6	6.9	5.4	3.8	2.2	0.7	2.2	3.8	5.4
92.5°	14.8	13.3	11.8	11.2	11.7	12.1	12.6	12.9	12.6	12.1	11.7
95°	18.2	16.5	14.8	17.1	23.5	29.8	36.2	42.5	36.2	29.8	23.5
97.5°	44.8	55.9	67.1	74.1	77.0	79.8	82.7	85.4	82.7	79.8	77.0
100°	71.3	95.5	119.7	130.2	127.1	124.0	120.9	117.8	120.9	124.0	127.1
102.5°	98.6	125.1	151.5	163.5	161.3	159.1	156.9	154.6	156.9	159.1	161.3
105°	180.6	194.5	208.5	214.5	212.9	211.2	209.5	207.8	209.5	211.2	212.9
107.5°	275.4	273.2	271.0	269.2	267.9	266.5	265.2	263.8	265.2	266.5	267.9
110°	311.0	309.3	307.6	306.1	304.9	303.6	302.4	301.1	302.4	303.6	304.9



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	346.2	344.5	342.7	341.3	340.2	339.1	338.0	336.9	338.0	339.1	340.2
115°	397.3	396.0	394.6	393.4	392.5	391.6	390.7	389.7	390.7	391.6	392.5
117.5°	447.8	447.1	446.4	445.4	444.3	443.2	442.0	440.9	442.0	443.2	444.3
120°	480.1	479.7	479.2	478.2	476.8	475.5	474.0	472.7	474.0	475.5	476.8
122.5°	511.7	511.0	510.4	509.6	508.5	507.3	506.1	505.0	506.1	507.3	508.5
125°	556.4	555.9	555.3	554.3	553.0	551.8	550.5	549.4	550.5	551.8	553.0
127.5°	599.8	599.0	598.2	597.3	596.0	594.8	593.5	592.3	593.5	594.8	596.0
130°	626.2	625.5	624.9	624.0	622.8	621.5	620.3	619.0	620.3	621.5	622.8
132.5°	651.5	651.0	650.5	649.7	648.5	647.2	646.0	644.7	646.0	647.2	648.5
135°	689.6	689.0	688.4	687.6	686.7	685.7	684.8	683.9	684.8	685.7	686.7
137.5°	723.5	723.2	722.8	722.0	720.9	719.7	718.5	717.4	718.5	719.7	720.9
140°	745.0	744.6	744.0	743.4	742.4	741.5	740.6	739.7	740.6	741.5	742.4
142.5°	765.6	765.2	764.7	764.0	763.1	762.1	761.3	760.3	761.3	762.1	763.1
145°	794.8	794.5	794.2	793.5	792.4	791.3	790.2	789.2	790.2	791.3	792.4
147.5°	820.3	820.0	819.7	819.2	818.5	817.8	817.1	816.4	817.1	817.8	818.5
150°	836.0	835.6	835.4	834.9	834.5	834.0	833.6	833.0	833.6	834.0	834.5
152.5°	849.5	849.4	849.2	849.0	848.8	848.6	848.4	848.1	848.4	848.6	848.8
155°	868.3	868.2	868.0	868.1	868.4	868.7	869.1	869.3	869.1	868.7	868.4
157.5°	885.3	885.4	885.6	885.6	885.6	885.7	885.7	885.7	885.7	885.7	885.6
160°	894.7	894.9	895.0	895.2	895.4	895.5	895.6	895.8	895.6	895.5	895.4
162.5°	903.1	903.2	903.4	903.7	904.1	904.5	904.9	905.3	904.9	904.5	904.1
165°	914.3	914.4	914.5	914.9	915.3	915.8	916.2	916.8	916.2	915.8	915.3
167.5°	922.8	922.8	922.8	923.2	923.8	924.4	925.1	925.7	925.1	924.4	923.8
170°	927.9	927.9	927.9	928.2	928.8	929.4	930.1	930.7	930.1	929.4	928.8
172.5°	930.9	930.9	930.8	931.0	931.7	932.6	933.3	934.0	933.3	932.6	931.7
175°	935.2	935.0	935.0	935.2	936.0	936.8	937.5	938.3	937.5	936.8	936.0
177.5°	937.0	936.8	936.7	937.0	937.6	938.3	938.9	939.4	938.9	938.3	937.6
180°	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1231.5	1228.2	1223.3	1216.0	1210.2	1201.0	1201.0	1202.5	1202.5	1201.9	1201.0
5°	1194.2	1185.1	1174.2	1161.5	1148.1	1134.7	1132.3	1127.5	1123.8	1121.3	1118.3
7.5°	1154.8	1138.6	1122.7	1104.8	1088.6	1075.1	1065.8	1058.0	1053.0	1047.7	1043.8
10°	1128.0	1108.0	1089.2	1070.4	1049.7	1033.4	1023.1	1015.7	1010.3	1005.5	1003.1
12.5°	1096.4	1073.5	1052.8	1034.9	1012.4	995.5	985.7	982.3	975.9	965.6	960.3
15°	1050.3	1029.1	1004.2	977.0	966.0	945.4	933.9	928.4	924.8	916.9	914.4
17.5°	1010.9	983.1	955.2	934.9	914.5	897.9	891.4	884.6	879.8	873.3	871.4
20°	979.4	954.5	929.0	907.1	885.9	867.7	862.3	857.4	852.6	849.5	847.1
22.5°	947.4	922.5	901.3	880.9	858.3	846.3	840.4	835.1	831.7	829.6	827.2
25°	902.3	880.5	856.8	838.6	820.4	812.5	808.9	805.8	803.4	800.4	799.8
27.5°	862.0	838.2	819.0	802.1	789.0	782.4	778.9	777.4	777.9	779.0	779.7
30°	832.0	810.1	794.3	779.7	767.6	761.5	760.9	760.9	763.4	763.9	765.2
32.5°	804.2	786.3	770.5	756.4	747.3	743.1	745.4	745.4	747.3	748.9	751.1
35°	763.9	748.1	736.0	723.9	716.0	717.8	719.1	720.2	723.3	726.9	729.4
37.5°	725.5	711.8	699.2	689.6	686.1	689.3	692.2	694.8	698.3	701.1	703.6
40°	697.9	687.5	675.4	666.9	668.1	669.9	672.3	675.4	678.4	680.2	682.7
42.5°	672.1	661.3	652.1	645.1	646.8	649.1	650.5	652.1	655.6	658.9	660.3
45°	632.9	624.4	615.9	611.6	612.9	614.1	615.3	617.2	620.2	622.6	623.2
47.5°	588.8	582.9	577.2	573.1	575.0	574.5	576.1	580.0	580.9	582.4	585.8
50°	560.7	555.2	548.6	547.3	547.3	547.3	548.0	552.8	552.8	555.2	557.7
52.5°	529.6	526.1	521.8	519.7	518.7	518.7	521.2	523.7	524.7	528.1	530.5
55°	483.7	480.0	476.4	474.5	473.3	474.5	479.4	480.5	483.7	485.4	487.2
57.5°	435.7	432.9	430.0	429.0	428.7	430.3	433.0	436.7	437.4	443.0	445.8
60°	404.1	399.8	397.4	397.4	396.3	401.7	400.5	406.5	407.8	411.4	415.6
62.5°	371.6	365.9	364.9	364.9	366.7	368.2	369.9	372.6	375.8	380.3	383.6
65°	319.1	316.1	320.4	319.8	318.6	322.2	322.2	325.2	328.9	333.1	339.8
67.5°	269.6	268.0	268.3	268.3	270.2	272.2	273.9	276.6	281.0	285.4	289.8
70°	236.0	237.9	234.9	237.3	239.1	239.7	240.9	244.5	249.4	252.4	257.3
72.5°	203.5	203.4	203.8	204.7	206.5	207.7	208.8	213.0	218.3	220.9	224.8
75°	156.6	156.0	157.7	157.7	160.8	162.0	163.3	165.1	169.9	173.5	176.6
77.5°	114.3	115.0	114.7	116.7	115.9	116.1	119.9	121.7	122.3	129.4	131.0
80°	86.1	87.4	88.0	88.6	89.2	88.0	92.2	94.1	94.1	98.3	101.3
82.5°	61.9	62.6	64.2	64.8	64.9	66.2	66.5	67.9	69.3	71.2	75.1
85°	30.9	32.7	33.3	32.7	33.3	32.2	34.0	34.6	35.2	35.2	35.2
87.5°	11.1	11.9	11.9	12.8	12.7	13.6	13.6	12.8	12.9	14.5	12.7
90°	6.9	8.6	10.7	12.7	14.7	16.8	17.4	18.0	18.5	19.2	19.7
92.5°	11.2	11.8	13.3	14.8	16.3	17.8	18.8	19.8	20.8	21.8	22.4
95°	17.1	14.8	16.5	18.2	19.9	21.6	22.7	23.8	24.9	25.9	26.5
97.5°	74.1	67.1	55.9	44.8	33.6	22.5	23.7	25.0	26.1	27.4	28.1
100°	130.2	119.7	95.5	71.3	47.2	23.0	24.3	25.5	26.8	28.0	28.6
102.5°	163.5	151.5	125.1	98.6	72.2	45.8	42.0	38.2	34.3	30.5	28.7
105°	214.5	208.5	194.5	180.6	166.6	152.7	125.3	97.8	70.4	43.0	29.4
107.5°	269.2	271.0	273.2	275.4	277.6	279.8	259.8	239.6	219.5	199.4	179.0
110°	306.1	307.6	309.3	311.0	312.7	314.4	309.3	304.2	299.1	294.0	280.4



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	341.3	342.7	344.5	346.2	347.9	349.6	349.6	349.7	349.8	349.9	347.6
115°	393.4	394.6	396.0	397.3	398.8	400.2	401.7	403.2	404.8	406.4	407.4
117.5°	445.4	446.4	447.1	447.8	448.5	449.2	450.5	451.7	453.0	454.1	454.9
120°	478.2	479.2	479.7	480.1	480.5	481.0	482.2	483.5	484.7	486.0	486.6
122.5°	509.6	510.4	511.0	511.7	512.2	512.8	513.7	514.5	515.4	516.3	516.7
125°	554.3	555.3	555.9	556.4	557.1	557.7	558.0	558.3	558.7	558.9	559.3
127.5°	597.3	598.2	599.0	599.8	600.5	601.2	601.7	602.2	602.7	603.2	603.2
130°	624.0	624.9	625.5	626.2	626.8	627.4	628.0	628.7	629.3	629.9	630.1
132.5°	649.7	650.5	651.0	651.5	652.0	652.6	653.2	653.7	654.3	655.0	655.1
135°	687.6	688.4	689.0	689.6	690.3	690.9	691.3	691.8	692.2	692.7	692.7
137.5°	722.0	722.8	723.2	723.5	723.8	724.2	725.0	725.7	726.4	727.2	727.4
140°	743.4	744.0	744.6	745.0	745.5	745.9	746.5	747.2	747.8	748.4	748.6
142.5°	764.0	764.7	765.2	765.6	766.1	766.6	767.0	767.6	768.0	768.6	768.6
145°	793.5	794.2	794.5	794.8	795.1	795.4	795.8	796.0	796.4	796.7	796.8
147.5°	819.2	819.7	820.0	820.3	820.6	820.9	821.3	821.5	821.9	822.2	822.0
150°	834.9	835.4	835.6	836.0	836.2	836.6	836.9	837.1	837.5	837.8	837.8
152.5°	849.0	849.2	849.4	849.5	849.8	850.0	850.5	851.0	851.6	852.2	852.1
155°	868.1	868.0	868.2	868.3	868.4	868.6	869.4	870.2	870.9	871.7	871.6
157.5°	885.6	885.6	885.4	885.3	885.1	884.9	885.9	886.8	887.7	888.7	888.5
160°	895.2	895.0	894.9	894.7	894.6	894.4	895.4	896.3	897.2	898.1	898.0
162.5°	903.7	903.4	903.2	903.1	902.9	902.8	903.8	904.9	906.0	907.0	907.0
165°	914.9	914.5	914.4	914.3	914.1	913.9	915.2	916.4	917.7	918.9	919.0
167.5°	923.2	922.8	922.8	922.8	922.8	922.8	924.1	925.3	926.6	927.8	927.8
170°	928.2	927.9	927.9	927.9	927.9	927.9	929.2	930.3	931.6	932.8	932.8
172.5°	931.0	930.8	930.9	930.9	931.1	931.2	932.5	933.7	935.0	936.2	936.1
175°	935.2	935.0	935.0	935.2	935.4	935.6	936.7	937.7	938.8	939.9	939.8
177.5°	937.0	936.7	936.8	937.0	937.1	937.2	938.3	939.2	940.2	941.2	941.1
180°	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1197.6	1197.1	1200.5	1198.1	1200.5	1197.1	1197.6	1201.0	1201.9	1202.5	1202.5
5°	1114.7	1116.5	1110.4	1110.4	1110.4	1116.5	1114.7	1118.3	1121.3	1123.8	1127.5
7.5°	1040.9	1038.2	1038.5	1035.2	1038.5	1038.2	1040.9	1043.8	1047.7	1053.0	1058.0
10°	995.8	992.1	990.9	991.5	990.9	992.1	995.8	1003.1	1005.5	1010.3	1015.7
12.5°	958.4	957.7	949.7	949.8	949.7	957.7	958.4	960.3	965.6	975.9	982.3
15°	914.4	902.9	901.7	905.4	901.7	902.9	914.4	914.4	916.9	924.8	928.4
17.5°	870.4	864.3	864.7	862.9	864.7	864.3	870.4	871.4	873.3	879.8	884.6
20°	847.1	843.5	842.8	838.6	842.8	843.5	847.1	847.1	849.5	852.6	857.4
22.5°	825.7	824.6	824.9	820.2	824.9	824.6	825.7	827.2	829.6	831.7	835.1
25°	799.2	802.2	799.8	799.8	799.8	802.2	799.2	799.8	800.4	803.4	805.8
27.5°	781.2	781.0	779.9	779.9	779.9	781.0	781.2	779.7	779.0	777.9	777.4
30°	767.6	767.0	768.2	768.2	768.2	767.0	767.6	765.2	763.9	763.4	760.9
32.5°	754.0	754.8	755.1	755.5	755.1	754.8	754.0	751.1	748.9	747.3	745.4
35°	733.0	733.6	735.5	734.2	735.5	733.6	733.0	729.4	726.9	723.3	720.2
37.5°	704.6	707.4	706.8	707.8	706.8	707.4	704.6	703.6	701.1	698.3	694.8
40°	683.2	685.1	684.5	684.5	684.5	685.1	683.2	682.7	680.2	678.4	675.4
42.5°	661.4	662.7	661.2	660.2	661.2	662.7	661.4	660.3	658.9	655.6	652.1
45°	625.6	624.4	626.2	623.8	626.2	624.4	625.6	623.2	622.6	620.2	617.2
47.5°	585.6	586.7	587.3	589.1	587.3	586.7	585.6	585.8	582.4	580.9	580.0
50°	558.8	562.5	562.5	561.9	562.5	562.5	558.8	557.7	555.2	552.8	552.8
52.5°	532.6	534.3	536.8	536.6	536.8	534.3	532.6	530.5	528.1	524.7	523.7
55°	492.1	493.3	494.5	495.2	494.5	493.3	492.1	487.2	485.4	483.7	480.5
57.5°	450.1	449.6	452.5	453.4	452.5	449.6	450.1	445.8	443.0	437.4	436.7
60°	420.5	420.5	425.3	427.2	425.3	420.5	420.5	415.6	411.4	407.8	406.5
62.5°	389.0	390.9	395.7	393.2	395.7	390.9	389.0	383.6	380.3	375.8	372.6
65°	342.9	347.7	347.1	349.6	347.1	347.7	342.9	339.8	333.1	328.9	325.2
67.5°	294.6	297.7	302.0	302.5	302.0	297.7	294.6	289.8	285.4	281.0	276.6
70°	262.2	265.2	267.6	269.4	267.6	265.2	262.2	257.3	252.4	249.4	244.5
72.5°	230.6	232.2	238.0	235.4	238.0	232.2	230.6	224.8	220.9	218.3	213.0
75°	180.8	185.0	188.7	186.9	188.7	185.0	180.8	176.6	173.5	169.9	165.1
77.5°	133.8	137.9	139.6	138.1	139.6	137.9	133.8	131.0	129.4	122.3	121.7
80°	105.6	105.0	108.6	108.0	108.6	105.0	105.6	101.3	98.3	94.1	94.1
82.5°	77.4	76.9	78.6	78.9	78.6	76.9	77.4	75.1	71.2	69.3	67.9
85°	37.6	39.4	37.0	36.4	37.0	39.4	37.6	35.2	35.2	35.2	34.6
87.5°	12.8	12.8	12.4	11.9	12.4	12.8	12.8	12.7	14.5	12.9	12.8
90°	20.0	20.3	20.6	21.0	20.6	20.3	20.0	19.7	19.2	18.5	18.0
92.5°	22.6	22.7	22.9	23.2	22.9	22.7	22.6	22.4	21.8	20.8	19.8
95°	26.5	26.5	26.5	26.5	26.5	26.5	26.5	26.5	25.9	24.9	23.8
97.5°	28.3	28.4	28.5	28.7	28.5	28.4	28.3	28.1	27.4	26.1	25.0
100°	28.8	29.0	29.2	29.2	29.2	29.0	28.8	28.6	28.0	26.8	25.5
102.5°	29.0	29.2	29.5	29.9	29.5	29.2	29.0	28.7	30.5	34.3	38.2
105°	29.8	30.1	30.4	30.7	30.4	30.1	29.8	29.4	43.0	70.4	97.8
107.5°	158.4	137.7	117.0	96.3	117.0	137.7	158.4	179.0	199.4	219.5	239.6
110°	258.2	236.0	213.8	191.7	213.8	236.0	258.2	280.4	294.0	299.1	304.2



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	343.0	338.2	333.6	329.0	333.6	338.2	343.0	347.6	349.9	349.8	349.7
115°	408.0	408.7	409.3	409.9	409.3	408.7	408.0	407.4	406.4	404.8	403.2
117.5°	455.0	455.1	455.2	455.4	455.2	455.1	455.0	454.9	454.1	453.0	451.7
120°	486.6	486.6	486.6	486.6	486.6	486.6	486.6	486.6	486.0	484.7	483.5
122.5°	516.9	517.0	517.2	517.3	517.2	517.0	516.9	516.7	516.3	515.4	514.5
125°	559.5	559.9	560.2	560.5	560.2	559.9	559.5	559.3	558.9	558.7	558.3
127.5°	603.0	602.7	602.4	602.1	602.4	602.7	603.0	603.2	603.2	602.7	602.2
130°	629.7	629.5	629.1	628.8	629.1	629.5	629.7	630.1	629.9	629.3	628.7
132.5°	654.7	654.2	653.8	653.4	653.8	654.2	654.7	655.1	655.0	654.3	653.7
135°	692.2	691.8	691.3	690.9	691.3	691.8	692.2	692.7	692.7	692.2	691.8
137.5°	727.1	726.7	726.5	726.1	726.5	726.7	727.1	727.4	727.2	726.4	725.7
140°	748.2	748.0	747.6	747.3	747.6	748.0	748.2	748.6	748.4	747.8	747.2
142.5°	768.1	767.7	767.3	766.9	767.3	767.7	768.1	768.6	768.6	768.0	767.6
145°	796.8	796.8	796.8	796.8	796.8	796.8	796.8	796.8	796.7	796.4	796.0
147.5°	821.3	820.6	819.8	819.1	819.8	820.6	821.3	822.0	822.2	821.9	821.5
150°	837.2	836.8	836.3	835.9	836.3	836.8	837.2	837.8	837.8	837.5	837.1
152.5°	851.4	850.7	850.0	849.3	850.0	850.7	851.4	852.1	852.2	851.6	851.0
155°	870.8	869.8	868.9	867.9	868.9	869.8	870.8	871.6	871.7	870.9	870.2
157.5°	887.3	886.1	884.9	883.7	884.9	886.1	887.3	888.5	888.7	887.7	886.8
160°	897.0	895.9	894.8	893.8	894.8	895.9	897.0	898.0	898.1	897.2	896.3
162.5°	906.1	905.1	904.2	903.2	904.2	905.1	906.1	907.0	907.0	906.0	904.9
165°	917.9	916.8	915.7	914.6	915.7	916.8	917.9	919.0	918.9	917.7	916.4
167.5°	926.6	925.3	924.1	922.8	924.1	925.3	926.6	927.8	927.8	926.6	925.3
170°	931.6	930.3	929.2	927.9	929.2	930.3	931.6	932.8	932.8	931.6	930.3
172.5°	934.8	933.4	932.0	930.7	932.0	933.4	934.8	936.1	936.2	935.0	933.7
175°	938.6	937.4	936.1	934.9	936.1	937.4	938.6	939.8	939.9	938.8	937.7
177.5°	939.9	938.6	937.4	936.1	937.4	938.6	939.9	941.1	941.2	940.2	939.2
180°	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1201.0	1201.0	1210.2	1216.0	1223.3	1228.2	1231.5	1234.9	1240.8	1248.6	1257.3
5°	1132.3	1134.7	1148.1	1161.5	1174.2	1185.1	1194.2	1205.1	1218.4	1234.8	1253.0
7.5°	1065.8	1075.1	1088.6	1104.8	1122.7	1138.6	1154.8	1172.7	1191.5	1215.7	1241.2
10°	1023.1	1033.4	1049.7	1070.4	1089.2	1108.0	1128.0	1147.5	1171.1	1199.6	1232.4
12.5°	985.7	995.5	1012.4	1034.9	1052.8	1073.5	1096.4	1121.8	1148.3	1182.7	1219.8
15°	933.9	945.4	966.0	977.0	1004.2	1029.1	1050.3	1086.8	1120.8	1155.9	1199.1
17.5°	891.4	897.9	914.5	934.9	955.2	983.1	1010.9	1041.3	1075.1	1118.2	1172.1
20°	862.3	867.7	885.9	907.1	929.0	954.5	979.4	1009.7	1047.9	1093.4	1151.7
22.5°	840.4	846.3	858.3	880.9	901.3	922.5	947.4	983.5	1024.1	1068.7	1131.8
25°	808.9	812.5	820.4	838.6	856.8	880.5	902.3	936.3	978.2	1030.4	1093.4
27.5°	778.9	782.4	789.0	802.1	819.0	838.2	862.0	890.9	933.4	990.1	1057.0
30°	760.9	761.5	767.6	779.7	794.3	810.1	832.0	864.7	904.7	962.4	1032.8
32.5°	745.4	743.1	747.3	756.4	770.5	786.3	804.2	836.5	875.1	931.8	1004.2
35°	719.1	717.8	716.0	723.9	736.0	748.1	763.9	788.3	832.0	884.8	960.6
37.5°	692.2	689.3	686.1	689.6	699.2	711.8	725.5	747.1	784.7	842.8	915.4
40°	672.3	669.9	668.1	666.9	675.4	687.5	697.9	718.5	753.7	808.9	880.5
42.5°	650.5	649.1	646.8	645.1	652.1	661.3	672.1	690.3	725.5	777.3	845.1
45°	615.3	614.1	612.9	611.6	615.9	624.4	632.9	646.2	676.5	726.9	788.3
47.5°	576.1	574.5	575.0	573.1	577.2	582.9	588.8	603.2	632.3	673.0	717.7
50°	548.0	547.3	547.3	547.3	548.6	555.2	560.7	571.6	598.3	639.0	671.1
52.5°	521.2	518.7	518.7	519.7	521.8	526.1	529.6	541.5	564.8	598.2	627.4
55°	479.4	474.5	473.3	474.5	476.4	480.0	483.7	493.3	513.4	538.2	555.2
57.5°	433.0	430.3	428.7	429.0	430.0	432.9	435.7	446.2	462.0	475.0	485.9
60°	400.5	401.7	396.3	397.4	397.4	399.8	404.1	410.8	424.2	433.3	444.2
62.5°	369.9	368.2	366.7	364.9	364.9	365.9	371.6	376.8	388.3	393.0	401.4
65°	322.2	322.2	318.6	319.8	320.4	316.1	319.1	325.2	332.5	334.4	342.2
67.5°	273.9	272.2	270.2	268.3	268.3	268.0	269.6	272.6	278.0	278.7	284.7
70°	240.9	239.7	239.1	237.3	234.9	237.9	236.0	239.1	242.1	242.7	246.4
72.5°	208.8	207.7	206.5	204.7	203.8	203.4	203.5	207.1	209.1	208.2	212.4
75°	163.3	162.0	160.8	157.7	157.7	156.0	156.6	159.0	161.4	159.6	163.3
77.5°	119.9	116.1	115.9	116.7	114.7	115.0	114.3	114.0	115.0	115.2	118.4
80°	92.2	88.0	89.2	88.6	88.0	87.4	86.1	86.8	87.4	88.0	89.8
82.5°	66.5	66.2	64.9	64.8	64.2	62.6	61.9	63.0	63.6	63.2	64.6
85°	34.0	32.2	33.3	32.7	33.3	32.7	30.9	30.9	32.2	31.6	32.7
87.5°	13.6	13.6	12.7	12.8	11.9	11.9	11.1	11.2	11.4	11.1	11.8
90°	17.4	16.8	14.7	12.7	10.7	8.6	6.9	5.4	3.8	2.2	0.7
92.5°	18.8	17.8	16.3	14.8	13.3	11.8	11.2	11.7	12.1	12.6	12.9
95°	22.7	21.6	19.9	18.2	16.5	14.8	17.1	23.5	29.8	36.2	42.5
97.5°	23.7	22.5	33.6	44.8	55.9	67.1	74.1	77.0	79.8	82.7	85.4
100°	24.3	23.0	47.2	71.3	95.5	119.7	130.2	127.1	124.0	120.9	117.8
102.5°	42.0	45.8	72.2	98.6	125.1	151.5	163.5	161.3	159.1	156.9	154.6
105°	125.3	152.7	166.6	180.6	194.5	208.5	214.5	212.9	211.2	209.5	207.8
107.5°	259.8	279.8	277.6	275.4	273.2	271.0	269.2	267.9	266.5	265.2	263.8
110°	309.3	314.4	312.7	311.0	309.3	307.6	306.1	304.9	303.6	302.4	301.1



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	349.6	349.6	347.9	346.2	344.5	342.7	341.3	340.2	339.1	338.0	336.9
115°	401.7	400.2	398.8	397.3	396.0	394.6	393.4	392.5	391.6	390.7	389.7
117.5°	450.5	449.2	448.5	447.8	447.1	446.4	445.4	444.3	443.2	442.0	440.9
120°	482.2	481.0	480.5	480.1	479.7	479.2	478.2	476.8	475.5	474.0	472.7
122.5°	513.7	512.8	512.2	511.7	511.0	510.4	509.6	508.5	507.3	506.1	505.0
125°	558.0	557.7	557.1	556.4	555.9	555.3	554.3	553.0	551.8	550.5	549.4
127.5°	601.7	601.2	600.5	599.8	599.0	598.2	597.3	596.0	594.8	593.5	592.3
130°	628.0	627.4	626.8	626.2	625.5	624.9	624.0	622.8	621.5	620.3	619.0
132.5°	653.2	652.6	652.0	651.5	651.0	650.5	649.7	648.5	647.2	646.0	644.7
135°	691.3	690.9	690.3	689.6	689.0	688.4	687.6	686.7	685.7	684.8	683.9
137.5°	725.0	724.2	723.8	723.5	723.2	722.8	722.0	720.9	719.7	718.5	717.4
140°	746.5	745.9	745.5	745.0	744.6	744.0	743.4	742.4	741.5	740.6	739.7
142.5°	767.0	766.6	766.1	765.6	765.2	764.7	764.0	763.1	762.1	761.3	760.3
145°	795.8	795.4	795.1	794.8	794.5	794.2	793.5	792.4	791.3	790.2	789.2
147.5°	821.3	820.9	820.6	820.3	820.0	819.7	819.2	818.5	817.8	817.1	816.4
150°	836.9	836.6	836.2	836.0	835.6	835.4	834.9	834.5	834.0	833.6	833.0
152.5°	850.5	850.0	849.8	849.5	849.4	849.2	849.0	848.8	848.6	848.4	848.1
155°	869.4	868.6	868.4	868.3	868.2	868.0	868.1	868.4	868.7	869.1	869.3
157.5°	885.9	884.9	885.1	885.3	885.4	885.6	885.6	885.6	885.7	885.7	885.7
160°	895.4	894.4	894.6	894.7	894.9	895.0	895.2	895.4	895.5	895.6	895.8
162.5°	903.8	902.8	902.9	903.1	903.2	903.4	903.7	904.1	904.5	904.9	905.3
165°	915.2	913.9	914.1	914.3	914.4	914.5	914.9	915.3	915.8	916.2	916.8
167.5°	924.1	922.8	922.8	922.8	922.8	922.8	923.2	923.8	924.4	925.1	925.7
170°	929.2	927.9	927.9	927.9	927.9	927.9	928.2	928.8	929.4	930.1	930.7
172.5°	932.5	931.2	931.1	930.9	930.9	930.8	931.0	931.7	932.6	933.3	934.0
175°	936.7	935.6	935.4	935.2	935.0	935.0	935.2	936.0	936.8	937.5	938.3
177.5°	938.3	937.2	937.1	937.0	936.8	936.7	937.0	937.6	938.3	938.9	939.4
180°	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1260.2	1262.7	1270.9	1276.8	1283.5	1287.4	1291.3	1294.2	1298.1	1299.0	1313.1
5°	1265.8	1277.9	1299.1	1314.9	1334.4	1355.6	1370.1	1376.8	1394.5	1409.0	1438.2
7.5°	1264.2	1290.0	1322.1	1355.3	1391.1	1424.1	1452.7	1486.7	1510.8	1547.1	1582.9
10°	1262.8	1297.4	1338.6	1381.1	1430.8	1476.9	1518.2	1564.3	1602.6	1653.0	1696.0
12.5°	1258.4	1300.3	1357.5	1407.7	1468.2	1531.8	1593.0	1652.2	1686.0	1770.0	1809.6
15°	1247.6	1297.4	1369.0	1445.4	1528.6	1603.7	1681.4	1743.4	1843.4	1916.9	1963.6
17.5°	1227.0	1296.6	1381.5	1473.8	1574.9	1674.0	1762.0	1856.0	1962.1	2051.0	2145.6
20°	1217.3	1293.7	1388.4	1490.3	1595.3	1707.5	1807.7	1920.6	2036.4	2123.8	2245.1
22.5°	1199.3	1285.9	1387.9	1501.5	1613.7	1729.8	1847.0	1960.8	2094.7	2215.1	2330.6
25°	1169.9	1267.0	1372.6	1499.4	1631.1	1747.6	1887.8	2038.9	2178.4	2333.2	2448.5
27.5°	1139.1	1242.7	1348.5	1466.5	1608.1	1746.4	1922.7	2093.5	2264.1	2397.7	2483.1
30°	1115.3	1216.0	1325.3	1444.2	1584.4	1748.8	1946.0	2132.3	2298.6	2413.2	2461.2
32.5°	1089.6	1191.8	1288.3	1413.1	1562.5	1747.3	1960.6	2155.1	2300.5	2376.9	2367.5
35°	1049.2	1134.7	1228.8	1348.9	1524.9	1736.7	1969.1	2157.1	2246.4	2230.0	2106.2
37.5°	990.9	1062.8	1155.5	1287.0	1481.2	1714.2	1952.0	2093.2	2087.4	1954.0	1774.7
40°	954.5	1015.7	1105.0	1243.3	1447.2	1699.7	1925.4	2017.0	1939.4	1753.0	1538.2
42.5°	907.0	963.3	1052.6	1194.8	1409.9	1670.0	1874.4	1900.9	1749.0	1534.6	1337.7
45°	833.1	882.9	975.1	1122.0	1353.8	1605.6	1750.0	1685.1	1480.6	1259.1	1109.2
47.5°	753.9	805.6	894.3	1045.2	1272.7	1508.6	1577.4	1439.3	1229.4	1049.7	912.1
50°	703.9	753.7	840.4	992.7	1217.8	1429.1	1457.5	1279.2	1086.2	928.4	815.6
52.5°	653.4	700.3	785.6	938.3	1153.8	1336.8	1319.2	1137.4	959.9	825.5	736.9
55°	578.3	622.6	703.9	847.1	1043.1	1188.1	1124.4	950.8	804.1	699.6	632.3
57.5°	511.0	553.5	623.7	753.0	923.5	1023.1	942.0	795.8	679.0	598.7	548.4
60°	465.4	503.0	569.8	689.9	838.0	913.8	833.7	704.5	606.2	541.9	497.0
62.5°	422.2	455.0	516.8	625.9	754.5	818.2	737.2	627.8	544.0	487.1	448.9
65°	356.8	386.6	441.1	526.1	631.7	674.1	604.4	515.8	450.8	408.4	382.9
67.5°	297.1	322.4	369.5	436.4	514.1	545.0	491.9	423.3	374.4	340.3	320.0
70°	257.3	279.1	316.1	373.8	444.2	467.9	418.1	361.7	325.8	298.5	279.7
72.5°	223.8	239.8	273.4	318.0	376.7	395.5	360.8	311.2	277.8	257.3	242.4
75°	170.5	183.9	205.7	241.5	282.1	293.1	267.0	236.0	213.6	199.0	187.5
77.5°	123.0	132.8	148.6	170.7	198.8	208.7	192.1	171.5	155.1	145.3	138.8
80°	92.8	100.8	114.0	132.2	149.3	154.7	145.0	129.2	117.7	112.3	106.8
82.5°	68.6	73.0	81.1	93.5	105.1	111.6	103.3	93.8	87.7	82.7	80.6
85°	34.6	37.0	40.7	45.5	52.8	55.2	52.2	49.8	46.1	43.1	43.1
87.5°	13.1	13.4	15.2	16.4	18.7	20.6	20.5	20.0	19.9	19.5	19.2
90°	2.2	3.8	5.4	6.9	8.6	10.7	12.7	14.7	16.8	17.4	18.0
92.5°	12.6	12.1	11.7	11.2	11.8	13.3	14.8	16.3	17.8	18.8	19.8
95°	36.2	29.8	23.5	17.1	14.8	16.5	18.2	19.9	21.6	22.7	23.8
97.5°	82.7	79.8	77.0	74.1	67.1	55.9	44.8	33.6	22.5	23.7	25.0
100°	120.9	124.0	127.1	130.2	119.7	95.5	71.3	47.2	23.0	24.3	25.5
102.5°	156.9	159.1	161.3	163.5	151.5	125.1	98.6	72.2	45.8	42.0	38.2
105°	209.5	211.2	212.9	214.5	208.5	194.5	180.6	166.6	152.7	125.3	97.8
107.5°	265.2	266.5	267.9	269.2	271.0	273.2	275.4	277.6	279.8	259.8	239.6
110°	302.4	303.6	304.9	306.1	307.6	309.3	311.0	312.7	314.4	309.3	304.2



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	338.0	339.1	340.2	341.3	342.7	344.5	346.2	347.9	349.6	349.6	349.7
115°	390.7	391.6	392.5	393.4	394.6	396.0	397.3	398.8	400.2	401.7	403.2
117.5°	442.0	443.2	444.3	445.4	446.4	447.1	447.8	448.5	449.2	450.5	451.7
120°	474.0	475.5	476.8	478.2	479.2	479.7	480.1	480.5	481.0	482.2	483.5
122.5°	506.1	507.3	508.5	509.6	510.4	511.0	511.7	512.2	512.8	513.7	514.5
125°	550.5	551.8	553.0	554.3	555.3	555.9	556.4	557.1	557.7	558.0	558.3
127.5°	593.5	594.8	596.0	597.3	598.2	599.0	599.8	600.5	601.2	601.7	602.2
130°	620.3	621.5	622.8	624.0	624.9	625.5	626.2	626.8	627.4	628.0	628.7
132.5°	646.0	647.2	648.5	649.7	650.5	651.0	651.5	652.0	652.6	653.2	653.7
135°	684.8	685.7	686.7	687.6	688.4	689.0	689.6	690.3	690.9	691.3	691.8
137.5°	718.5	719.7	720.9	722.0	722.8	723.2	723.5	723.8	724.2	725.0	725.7
140°	740.6	741.5	742.4	743.4	744.0	744.6	745.0	745.5	745.9	746.5	747.2
142.5°	761.3	762.1	763.1	764.0	764.7	765.2	765.6	766.1	766.6	767.0	767.6
145°	790.2	791.3	792.4	793.5	794.2	794.5	794.8	795.1	795.4	795.8	796.0
147.5°	817.1	817.8	818.5	819.2	819.7	820.0	820.3	820.6	820.9	821.3	821.5
150°	833.6	834.0	834.5	834.9	835.4	835.6	836.0	836.2	836.6	836.9	837.1
152.5°	848.4	848.6	848.8	849.0	849.2	849.4	849.5	849.8	850.0	850.5	851.0
155°	869.1	868.7	868.4	868.1	868.0	868.2	868.3	868.4	868.6	869.4	870.2
157.5°	885.7	885.7	885.6	885.6	885.6	885.4	885.3	885.1	884.9	885.9	886.8
160°	895.6	895.5	895.4	895.2	895.0	894.9	894.7	894.6	894.4	895.4	896.3
162.5°	904.9	904.5	904.1	903.7	903.4	903.2	903.1	902.9	902.8	903.8	904.9
165°	916.2	915.8	915.3	914.9	914.5	914.4	914.3	914.1	913.9	915.2	916.4
167.5°	925.1	924.4	923.8	923.2	922.8	922.8	922.8	922.8	922.8	924.1	925.3
170°	930.1	929.4	928.8	928.2	927.9	927.9	927.9	927.9	927.9	929.2	930.3
172.5°	933.3	932.6	931.7	931.0	930.8	930.9	930.9	931.1	931.2	932.5	933.7
175°	937.5	936.8	936.0	935.2	935.0	935.0	935.2	935.4	935.6	936.7	937.7
177.5°	938.9	938.3	937.6	937.0	936.7	936.8	937.0	937.1	937.2	938.3	939.2
180°	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3	938.3



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4	1252.4
2.5°	1317.9	1318.5	1323.8	1327.7	1325.7	1328.2	1329.1
5°	1439.9	1461.8	1473.3	1481.8	1482.4	1483.0	1487.9
7.5°	1612.8	1636.3	1653.4	1679.4	1687.1	1696.0	1693.4
10°	1739.1	1773.7	1803.4	1819.2	1836.2	1861.1	1841.0
12.5°	1857.1	1918.3	1963.6	1988.2	2004.1	2009.1	1999.3
15°	2051.6	2131.7	2174.8	2173.5	2228.2	2251.8	2214.8
17.5°	2230.0	2303.9	2363.1	2393.4	2439.0	2449.1	2444.4
20°	2339.2	2419.9	2466.0	2518.2	2541.9	2563.1	2566.8
22.5°	2433.4	2505.9	2555.4	2598.8	2618.6	2628.7	2634.7
25°	2530.3	2587.4	2617.2	2632.3	2637.8	2636.5	2628.7
27.5°	2523.7	2528.1	2495.3	2463.2	2434.4	2402.0	2390.8
30°	2458.2	2407.2	2316.1	2264.6	2188.7	2128.7	2152.9
32.5°	2285.8	2184.3	2082.1	1969.4	1876.1	1849.5	1822.8
35°	1950.9	1772.5	1668.1	1546.8	1498.2	1449.7	1416.3
37.5°	1578.3	1440.3	1316.5	1237.2	1188.5	1157.8	1141.3
40°	1364.7	1240.3	1138.4	1074.1	1037.1	1002.5	997.6
42.5°	1194.3	1078.6	1001.9	950.7	915.2	900.4	889.8
45°	978.2	897.4	845.9	809.5	785.8	776.7	764.6
47.5°	828.0	770.9	732.2	707.4	689.6	682.8	681.8
50°	744.0	696.6	668.1	648.6	634.7	632.3	622.6
52.5°	680.8	639.8	617.6	600.7	590.6	583.7	580.9
55°	591.0	563.7	543.7	534.0	526.1	519.4	519.4
57.5°	517.1	494.3	481.1	472.8	470.4	465.7	462.6
60°	471.4	452.1	441.8	434.4	429.6	430.3	424.7
62.5°	426.9	414.2	404.4	397.1	391.3	391.4	391.7
65°	363.5	353.7	346.5	344.0	340.5	336.2	337.4
67.5°	308.0	298.9	293.2	289.1	287.8	285.5	289.1
70°	268.2	261.5	257.3	253.6	252.4	253.1	256.1
72.5°	231.8	227.0	224.3	222.6	219.9	220.0	222.1
75°	182.0	178.4	175.9	174.2	173.5	173.5	173.5
77.5°	133.8	132.9	131.8	129.1	129.2	130.0	130.1
80°	105.6	103.8	103.2	101.9	100.1	98.9	101.9
82.5°	78.9	77.0	76.4	76.2	73.4	73.2	75.7
85°	42.4	40.7	41.3	40.7	40.7	40.0	40.0
87.5°	18.7	18.4	18.0	18.5	18.1	17.7	18.7
90°	18.5	19.2	19.7	20.0	20.3	20.6	21.0
92.5°	20.8	21.8	22.4	22.6	22.7	22.9	23.2
95°	24.9	25.9	26.5	26.5	26.5	26.5	26.5
97.5°	26.1	27.4	28.1	28.3	28.4	28.5	28.7
100°	26.8	28.0	28.6	28.8	29.0	29.2	29.2
102.5°	34.3	30.5	28.7	29.0	29.2	29.5	29.9
105°	70.4	43.0	29.4	29.8	30.1	30.4	30.7
107.5°	219.5	199.4	179.0	158.4	137.7	117.0	96.3
110°	299.1	294.0	280.4	258.2	236.0	213.8	191.7



TEST NUMBER: P332018-940

CATALOG NUMBER: S123DIP-S1000D805U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	349.8	349.9	347.6	343.0	338.2	333.6	329.0
115°	404.8	406.4	407.4	408.0	408.7	409.3	409.9
117.5°	453.0	454.1	454.9	455.0	455.1	455.2	455.4
120°	484.7	486.0	486.6	486.6	486.6	486.6	486.6
122.5°	515.4	516.3	516.7	516.9	517.0	517.2	517.3
125°	558.7	558.9	559.3	559.5	559.9	560.2	560.5
127.5°	602.7	603.2	603.2	603.0	602.7	602.4	602.1
130°	629.3	629.9	630.1	629.7	629.5	629.1	628.8
132.5°	654.3	655.0	655.1	654.7	654.2	653.8	653.4
135°	692.2	692.7	692.7	692.2	691.8	691.3	690.9
137.5°	726.4	727.2	727.4	727.1	726.7	726.5	726.1
140°	747.8	748.4	748.6	748.2	748.0	747.6	747.3
142.5°	768.0	768.6	768.6	768.1	767.7	767.3	766.9
145°	796.4	796.7	796.8	796.8	796.8	796.8	796.8
147.5°	821.9	822.2	822.0	821.3	820.6	819.8	819.1
150°	837.5	837.8	837.8	837.2	836.8	836.3	835.9
152.5°	851.6	852.2	852.1	851.4	850.7	850.0	849.3
155°	870.9	871.7	871.6	870.8	869.8	868.9	867.9
157.5°	887.7	888.7	888.5	887.3	886.1	884.9	883.7
160°	897.2	898.1	898.0	897.0	895.9	894.8	893.8
162.5°	906.0	907.0	907.0	906.1	905.1	904.2	903.2
165°	917.7	918.9	919.0	917.9	916.8	915.7	914.6
167.5°	926.6	927.8	927.8	926.6	925.3	924.1	922.8
170°	931.6	932.8	932.8	931.6	930.3	929.2	927.9
172.5°	935.0	936.2	936.1	934.8	933.4	932.0	930.7
175°	938.8	939.9	939.8	938.6	937.4	936.1	934.9
177.5°	940.2	941.2	941.1	939.9	938.6	937.4	936.1
180°	938.3	938.3	938.3	938.3	938.3	938.3	938.3

(END OF REPORT)