

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332072-940

Luminaire Tested: **S123DIP-S1165D1025U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332072-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D1025U940-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, ASYMMETRIC DIFFUSER
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8022.5 lumens
Efficiency: N/A
Efficacy: 120.1 lumens/watt
Spacing Criteria (0/90/45): 1.37 / 1.23 / 1.49
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 66.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

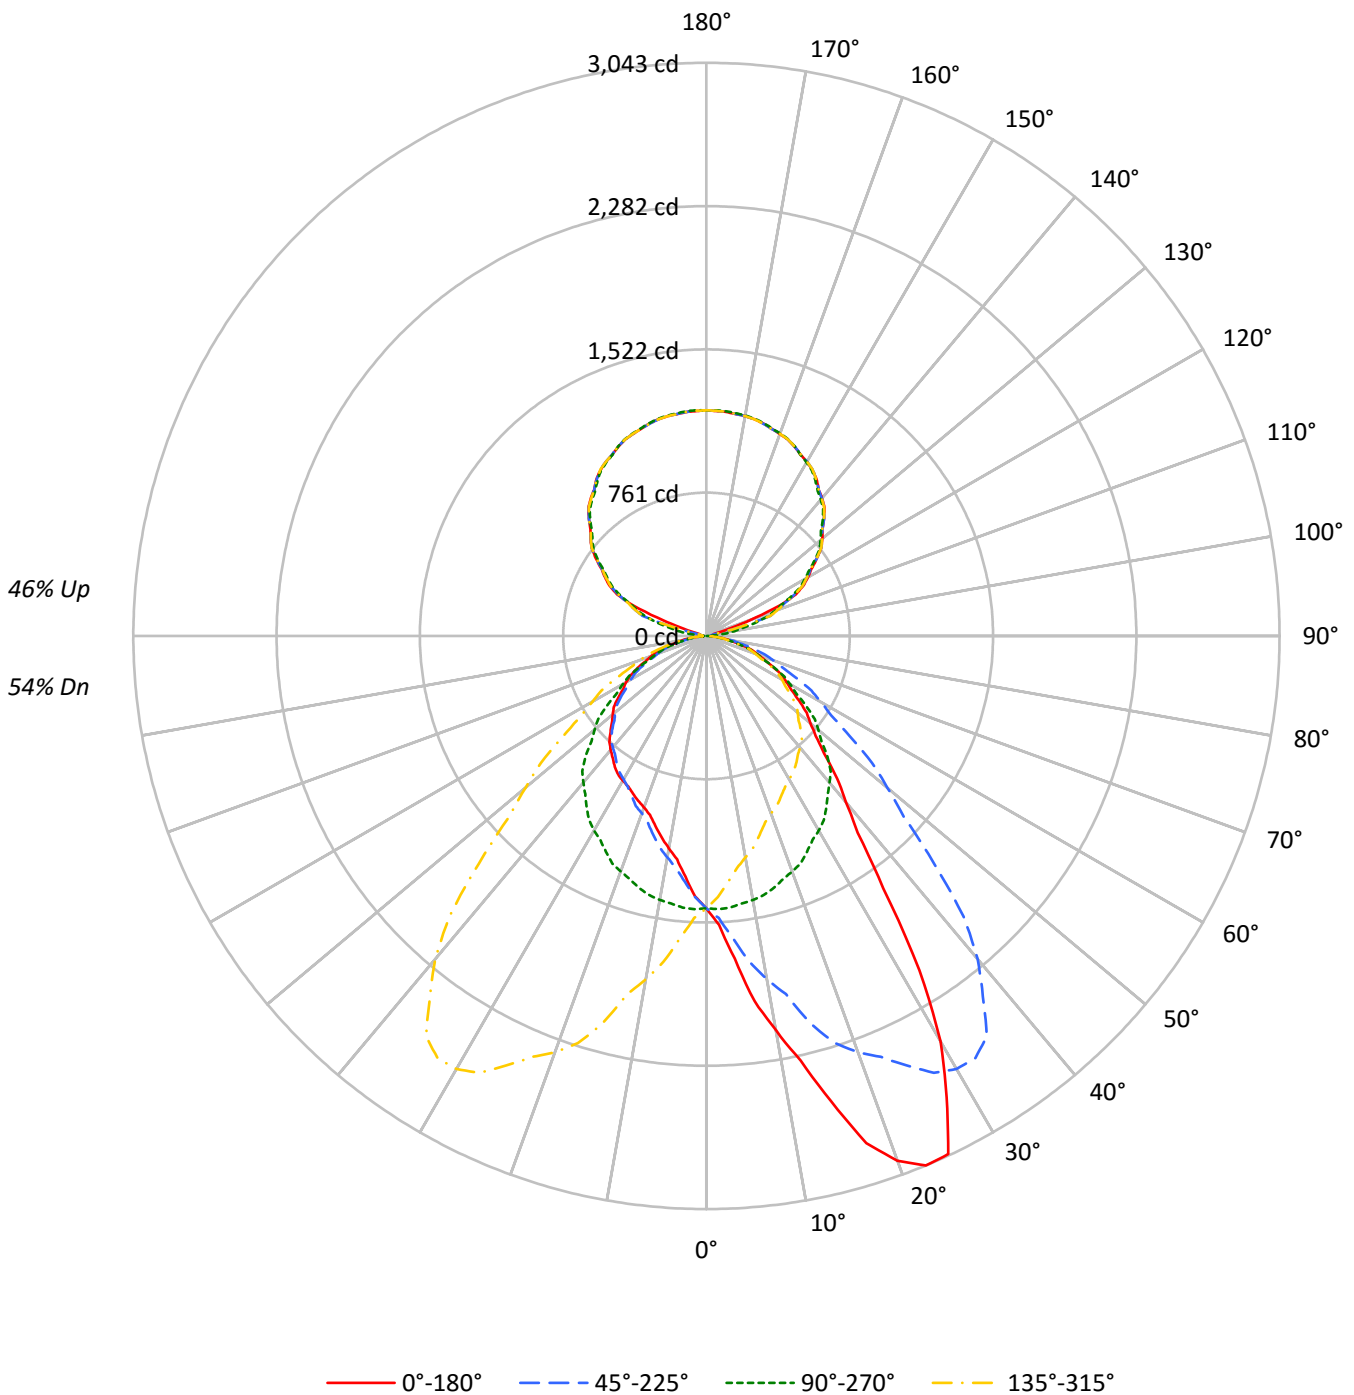



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	108	108	108	108	100	100	100	100	86	86	86	72	72	72	60	60	60	54
1	99	95	91	88	92	88	85	82	76	73	71	64	63	61	54	53	51	46
2	90	83	77	72	84	77	72	68	67	63	59	57	54	51	48	46	44	39
3	83	73	66	60	76	68	62	57	59	54	50	50	47	44	42	40	38	34
4	76	65	57	51	70	61	54	48	53	47	43	45	41	38	38	35	33	29
5	70	58	50	44	64	54	47	42	47	42	37	41	36	33	34	31	28	25
6	64	52	44	38	59	49	42	36	43	37	33	37	32	29	31	28	25	22
7	59	47	39	34	55	44	37	32	39	33	29	33	29	26	29	25	22	20
8	55	43	35	30	51	40	33	28	35	30	26	31	26	23	26	23	20	18
9	51	39	32	27	48	37	30	25	32	27	23	28	24	21	24	21	18	16
10	48	36	29	24	45	34	27	23	30	24	21	26	22	19	22	19	16	15

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15569	15569	15569	15569
5°	18567	15637	13857	15637
10°	23240	15557	12516	15557
15°	28505	15432	11652	15432
20°	33956	15237	11094	15237
25°	36056	14998	10969	14998
30°	30904	14825	11028	14825
35°	21494	14578	11143	14578
40°	16190	14289	11108	14289
45°	13443	13857	10966	13857
50°	12042	12980	10868	12980
55°	11258	12033	10732	12033
60°	10559	11044	10622	11044
65°	9926	10068	10282	10068
70°	9309	8954	9791	8954
75°	8339	7839	8979	7839
80°	7296	6428	7736	6428
85°	5718	4668	5199	4668



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	142.5	1.8
10°-20°	456.9	5.7
20°-30°	766.8	9.6
30°-40°	868.3	10.8
40°-50°	778.6	9.7
50°-60°	628.3	7.8
60°-70°	437.9	5.5
70°-80°	230.1	2.9
80°-90°	59.6	0.7
90°-100°	43.6	0.5
100°-110°	207.6	2.6
110°-120°	498.6	6.2
120°-130°	634.9	7.9
130°-140°	678.4	8.5
140°-150°	634.4	7.9
150°-160°	511.7	6.4
160°-170°	330.3	4.1
170°-180°	113.8	1.4
0°-30°	1366.2	17.0
0°-40°	2234.5	27.9
0°-60°	3641.5	45.4
0°-90°	4369.1	54.5
90°-120°	749.8	9.3
90°-150°	2697.6	33.6
90°-180°	3653.0	45.5
0°-180°	8022.5	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1446	1446	1446	1446	1446	
5°	1718	1447	1282	1447	1718	178
15°	2558	1385	1046	1385	2558	739
25°	3036	1263	924	1263	3036	1331
35°	1636	1109	848	1109	1636	1063
45°	883	910	720	910	883	699
55°	600	641	572	641	600	538
65°	390	395	404	395	390	388
75°	200	188	216	188	200	215
85°	46	38	42	38	46	55
90°	27	1	27	1	27	14
95°	34	54	34	54	34	28
105°	39	265	39	265	39	89
115°	523	498	523	498	523	484
125°	716	701	716	701	716	639
135°	882	873	882	873	882	680
145°	1017	1008	1017	1008	1017	635
155°	1108	1110	1108	1110	1108	511
165°	1168	1170	1168	1170	1168	330
175°	1194	1198	1194	1198	1194	114
180°	1198	1198	1198	1198	1198	



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4
2.5°	1535.1	1533.9	1531.2	1533.4	1528.9	1522.7	1522.2	1516.5	1500.3	1499.1	1494.7
5°	1718.4	1712.8	1712.1	1711.4	1701.6	1688.3	1663.0	1660.9	1627.3	1610.4	1590.2
7.5°	1955.8	1958.7	1948.6	1939.6	1909.6	1889.8	1862.8	1828.2	1786.8	1744.9	1717.0
10°	2126.3	2149.4	2120.7	2101.0	2082.9	2048.4	2008.6	1958.7	1909.0	1850.8	1806.7
12.5°	2309.1	2320.4	2314.6	2296.2	2267.8	2215.5	2144.7	2090.0	2044.2	1947.3	1908.2
15°	2558.0	2600.8	2573.4	2510.3	2511.7	2461.9	2369.5	2267.8	2213.9	2129.0	2013.5
17.5°	2823.2	2828.5	2816.8	2764.3	2729.3	2660.9	2575.5	2478.1	2368.7	2266.2	2143.5
20°	2964.4	2960.2	2935.7	2908.4	2848.1	2794.9	2701.6	2593.0	2452.8	2352.0	2218.0
22.5°	3043.0	3035.9	3024.3	3001.4	2951.3	2894.0	2810.4	2691.7	2558.2	2419.2	2264.6
25°	3035.9	3045.0	3046.4	3040.1	3022.6	2988.3	2922.4	2827.8	2694.7	2516.0	2354.7
27.5°	2761.2	2774.1	2811.6	2844.7	2881.9	2919.7	2914.6	2867.7	2769.2	2614.9	2417.8
30°	2486.4	2458.4	2527.8	2615.5	2675.0	2780.1	2839.0	2842.5	2787.1	2654.7	2462.6
32.5°	2105.2	2136.1	2166.8	2274.6	2404.8	2522.8	2640.0	2734.3	2745.1	2656.9	2489.0
35°	1635.7	1674.3	1730.3	1786.4	1926.5	2047.1	2253.1	2432.5	2575.5	2594.4	2491.4
37.5°	1318.1	1337.1	1372.6	1428.8	1520.5	1663.5	1822.8	2049.6	2256.7	2410.8	2417.5
40°	1152.2	1157.7	1197.7	1240.5	1314.7	1432.4	1576.1	1776.6	2024.6	2239.8	2329.5
42.5°	1027.7	1040.0	1056.9	1098.1	1157.2	1245.8	1379.4	1545.0	1772.4	2020.0	2195.5
45°	883.1	897.1	907.6	934.9	977.0	1036.5	1129.7	1281.1	1454.2	1709.9	1946.2
47.5°	787.5	788.5	796.4	817.0	845.6	890.3	956.2	1053.5	1212.4	1419.9	1662.3
50°	719.1	730.2	733.1	749.1	771.6	804.5	859.2	941.9	1072.3	1254.5	1477.3
52.5°	670.8	674.2	682.1	693.7	713.3	739.0	786.3	851.0	953.4	1108.7	1313.6
55°	599.9	599.9	607.6	616.7	627.9	651.0	682.6	730.2	808.1	928.5	1098.1
57.5°	534.3	537.8	543.2	546.1	555.6	570.9	597.3	633.4	691.4	784.2	919.1
60°	490.5	496.9	496.1	501.8	510.2	522.1	544.6	574.0	625.8	700.1	813.7
62.5°	452.5	452.0	451.9	458.6	467.0	478.4	492.9	518.4	562.5	628.4	725.1
65°	389.7	388.3	393.2	397.3	400.2	408.6	419.8	442.2	471.6	520.7	595.7
67.5°	333.9	329.8	332.4	333.9	338.7	345.2	355.7	369.6	393.0	432.4	488.9
70°	295.8	292.2	291.5	292.9	297.1	302.0	309.8	323.1	344.8	376.3	417.7
72.5°	256.5	254.1	254.0	257.1	259.0	262.3	267.7	279.9	297.1	320.8	359.4
75°	200.5	200.5	200.5	201.2	203.2	206.1	210.3	216.5	229.9	246.6	272.6
77.5°	150.3	150.1	149.3	149.1	152.2	153.5	154.4	160.3	167.7	179.1	198.0
80°	117.7	114.2	115.7	117.7	119.1	119.8	122.0	123.3	129.7	136.0	149.3
82.5°	87.5	84.5	84.8	88.0	88.3	89.0	91.1	93.1	95.4	101.2	108.3
85°	46.3	46.3	47.0	47.0	47.6	47.0	49.0	49.8	49.8	53.2	57.4
87.5°	22.2	21.0	21.4	21.9	21.3	21.8	22.1	22.6	22.9	23.4	23.4
90°	26.7	26.3	25.9	25.5	25.1	24.5	23.7	22.9	22.1	21.4	18.8
92.5°	29.5	29.3	29.1	28.8	28.6	27.8	26.6	25.3	24.1	22.8	20.9
95°	33.8	33.8	33.8	33.8	33.8	33.2	31.7	30.3	29.0	27.6	25.4
97.5°	36.6	36.5	36.3	36.1	35.8	35.0	33.4	31.8	30.2	28.6	42.9
100°	37.4	37.2	37.0	36.8	36.6	35.7	34.2	32.5	30.9	29.3	60.2
102.5°	38.1	37.7	37.4	37.0	36.6	39.0	43.9	48.8	53.7	58.6	92.3
105°	39.1	38.8	38.3	38.0	37.5	54.9	89.9	124.9	159.9	194.9	212.8
107.5°	123.0	149.4	175.8	202.2	228.5	254.6	280.3	305.9	331.6	357.3	354.5
110°	244.8	273.0	301.3	329.6	357.9	375.3	381.8	388.3	394.8	401.4	399.2



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	419.9	425.9	431.9	437.8	443.8	446.7	446.7	446.5	446.4	446.3	444.1
115°	523.3	522.5	521.7	520.9	520.2	518.8	516.8	514.9	512.9	510.9	509.1
117.5°	581.4	581.2	581.0	580.9	580.8	579.9	578.3	576.8	575.2	573.5	572.7
120°	621.3	621.3	621.3	621.3	621.3	620.5	618.8	617.3	615.7	614.1	613.6
122.5°	660.4	660.2	660.1	660.0	659.8	659.2	658.1	656.9	655.9	654.7	654.0
125°	715.6	715.2	714.8	714.4	714.0	713.6	713.2	712.8	712.5	712.0	711.2
127.5°	768.7	769.0	769.5	769.8	770.3	770.1	769.5	768.8	768.2	767.6	766.6
130°	802.8	803.3	803.6	804.1	804.4	804.2	803.4	802.6	801.8	801.0	800.2
132.5°	834.2	834.7	835.3	835.8	836.3	836.2	835.4	834.6	833.9	833.1	832.5
135°	882.1	882.6	883.2	883.9	884.4	884.4	883.9	883.2	882.6	882.1	881.3
137.5°	927.1	927.5	927.9	928.3	928.6	928.4	927.5	926.5	925.5	924.6	924.2
140°	954.1	954.6	954.9	955.3	955.7	955.6	954.8	954.0	953.1	952.3	951.8
142.5°	979.1	979.6	980.2	980.7	981.2	981.2	980.6	980.0	979.4	978.7	978.1
145°	1017.4	1017.4	1017.4	1017.4	1017.4	1017.2	1016.7	1016.4	1015.9	1015.6	1015.1
147.5°	1045.8	1046.7	1047.7	1048.6	1049.5	1049.7	1049.3	1048.9	1048.6	1048.1	1047.8
150°	1067.2	1067.7	1068.4	1069.0	1069.5	1069.7	1069.3	1068.9	1068.4	1068.1	1067.6
152.5°	1084.2	1085.2	1086.1	1087.0	1087.9	1088.0	1087.3	1086.5	1085.8	1085.1	1084.9
155°	1108.1	1109.3	1110.5	1111.7	1112.9	1112.9	1112.0	1111.0	1110.0	1109.0	1108.8
157.5°	1128.3	1129.8	1131.3	1132.8	1134.4	1134.6	1133.4	1132.2	1131.0	1129.8	1130.1
160°	1141.0	1142.5	1143.8	1145.2	1146.6	1146.7	1145.5	1144.3	1143.2	1141.9	1142.1
162.5°	1153.2	1154.4	1155.6	1156.8	1158.1	1158.0	1156.6	1155.3	1154.0	1152.6	1152.8
165°	1167.8	1169.1	1170.5	1171.9	1173.3	1173.2	1171.6	1170.0	1168.4	1166.9	1167.1
167.5°	1178.2	1179.8	1181.4	1183.0	1184.5	1184.5	1183.0	1181.4	1179.8	1178.2	1178.2
170°	1184.6	1186.2	1187.8	1189.5	1191.0	1191.0	1189.5	1187.8	1186.2	1184.6	1184.6
172.5°	1188.2	1190.0	1191.7	1193.5	1195.2	1195.2	1193.6	1192.1	1190.5	1188.9	1188.7
175°	1193.6	1195.2	1196.8	1198.3	1199.9	1200.0	1198.6	1197.2	1195.9	1194.4	1194.3
177.5°	1195.2	1196.8	1198.4	1199.9	1201.5	1201.7	1200.4	1199.1	1197.8	1196.6	1196.4
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4
2.5°	1491.3	1486.8	1482.4	1474.5	1467.8	1458.2	1455.5	1452.1	1442.0	1433.1	1426.3
5°	1582.4	1565.6	1541.1	1518.7	1500.5	1476.0	1461.9	1447.2	1426.1	1407.2	1391.8
7.5°	1677.8	1644.7	1606.5	1565.3	1527.0	1490.0	1460.1	1433.4	1404.0	1376.1	1354.4
10°	1753.5	1705.8	1652.5	1595.1	1546.0	1498.3	1458.4	1423.3	1385.5	1352.5	1325.3
12.5°	1839.8	1769.2	1695.7	1625.9	1567.9	1501.7	1453.3	1408.8	1365.9	1326.2	1295.6
15°	1942.0	1852.3	1765.3	1669.4	1581.0	1498.3	1440.9	1384.8	1335.1	1294.4	1255.2
17.5°	2035.1	1933.4	1818.9	1702.1	1595.6	1497.5	1417.0	1353.7	1291.5	1241.7	1202.6
20°	2087.8	1972.1	1842.5	1721.2	1603.5	1494.2	1405.9	1330.2	1262.8	1210.3	1166.2
22.5°	2133.2	1997.9	1863.8	1734.1	1602.9	1485.1	1385.1	1307.2	1234.3	1182.9	1135.9
25°	2180.2	2018.4	1883.8	1731.7	1585.3	1463.3	1351.2	1262.8	1190.0	1129.7	1081.4
27.5°	2220.6	2017.0	1857.3	1693.7	1557.5	1435.3	1315.5	1220.8	1143.4	1078.0	1028.9
30°	2247.5	2019.7	1829.8	1667.9	1530.6	1404.4	1288.1	1192.8	1111.5	1044.9	998.6
32.5°	2264.3	2018.0	1804.6	1632.1	1488.0	1376.4	1258.4	1159.7	1076.2	1010.8	966.2
35°	2274.1	2005.7	1761.1	1557.9	1419.2	1310.5	1211.7	1109.4	1021.8	960.8	910.3
37.5°	2254.5	1979.8	1710.7	1486.4	1334.5	1227.5	1144.4	1057.2	973.4	906.3	862.8
40°	2223.7	1963.0	1671.4	1436.0	1276.2	1173.1	1102.4	1016.9	934.2	870.4	829.7
42.5°	2164.8	1928.8	1628.3	1379.9	1215.7	1112.6	1047.4	976.0	897.8	837.9	797.3
45°	2021.2	1854.3	1563.5	1295.8	1126.2	1019.7	962.2	910.3	839.5	781.4	746.4
47.5°	1821.9	1742.4	1469.9	1207.1	1032.9	930.4	870.7	828.9	777.2	730.2	696.6
50°	1683.4	1650.4	1406.5	1146.6	970.6	870.4	813.0	775.1	738.0	691.0	660.1
52.5°	1523.6	1543.9	1332.6	1083.7	907.3	808.8	754.7	724.6	690.9	652.3	625.4
55°	1298.6	1372.2	1204.7	978.3	813.0	719.1	667.9	641.2	621.6	592.9	569.8
57.5°	1088.0	1181.6	1066.5	869.7	720.3	639.3	590.2	561.2	548.6	533.6	515.4
60°	963.0	1055.4	967.9	796.8	658.1	580.9	537.5	513.0	500.3	489.9	474.5
62.5°	851.3	944.9	871.4	722.8	596.9	525.5	487.6	463.7	453.9	448.4	435.2
65°	698.0	778.6	729.5	607.6	509.5	446.4	412.1	395.3	386.1	384.1	375.7
67.5°	568.1	629.5	593.7	504.0	426.8	372.3	343.1	328.9	321.8	321.1	314.8
70°	482.9	540.3	513.0	431.7	365.2	322.4	297.1	284.5	280.4	279.6	276.2
72.5°	416.7	456.8	435.1	367.2	315.8	277.0	258.4	245.3	240.5	241.5	239.2
75°	308.4	338.5	325.9	278.9	237.6	212.3	196.9	188.5	184.3	186.5	183.6
77.5°	221.9	240.9	229.6	197.1	171.6	153.4	142.0	136.8	133.0	132.9	131.6
80°	167.5	178.7	172.4	152.8	131.8	116.4	107.2	103.7	101.7	100.9	100.2
82.5°	119.3	128.9	121.4	107.9	93.6	84.4	79.2	74.5	73.0	73.5	72.8
85°	60.3	63.8	61.0	52.5	47.0	42.7	39.9	37.8	36.5	37.2	35.8
87.5°	24.0	24.1	21.8	19.2	17.7	15.5	15.2	13.6	12.9	13.3	13.1
90°	16.2	13.6	11.1	8.8	6.9	4.8	2.9	0.9	2.9	4.8	6.9
92.5°	18.9	16.9	15.1	14.4	14.9	15.4	16.0	16.6	16.0	15.4	14.9
95°	23.3	21.0	18.9	21.8	30.0	38.1	46.2	54.3	46.2	38.1	30.0
97.5°	57.2	71.4	85.6	94.5	98.2	101.8	105.5	109.1	105.5	101.8	98.2
100°	91.0	121.9	152.8	166.2	162.3	158.4	154.4	150.4	154.4	158.4	162.3
102.5°	126.0	159.7	193.4	208.8	206.0	203.1	200.3	197.4	200.3	203.1	206.0
105°	230.5	248.3	266.1	273.9	271.8	269.6	267.4	265.2	267.4	269.6	271.8
107.5°	351.7	348.8	346.1	343.8	342.1	340.3	338.6	336.8	338.6	340.3	342.1
110°	397.1	394.8	392.7	390.8	389.2	387.6	386.1	384.5	386.1	387.6	389.2



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	441.9	439.8	437.6	435.8	434.4	432.9	431.5	430.1	431.5	432.9	434.4
115°	507.3	505.5	503.8	502.3	501.1	499.9	498.7	497.6	498.7	499.9	501.1
117.5°	571.8	570.8	569.9	568.7	567.3	565.8	564.4	562.8	564.4	565.8	567.3
120°	613.0	612.3	611.8	610.6	608.8	607.0	605.2	603.4	605.2	607.0	608.8
122.5°	653.3	652.5	651.8	650.6	649.2	647.6	646.2	644.8	646.2	647.6	649.2
125°	710.4	709.7	708.9	707.7	706.1	704.5	702.9	701.3	702.9	704.5	706.1
127.5°	765.7	764.7	763.8	762.5	760.9	759.4	757.8	756.2	757.8	759.4	760.9
130°	799.5	798.7	797.9	796.7	795.1	793.5	791.9	790.4	791.9	793.5	795.1
132.5°	831.8	831.2	830.5	829.5	827.9	826.3	824.7	823.1	824.7	826.3	827.9
135°	880.5	879.7	878.9	877.9	876.7	875.5	874.3	873.2	874.3	875.5	876.7
137.5°	923.7	923.3	922.8	921.9	920.4	918.9	917.4	915.9	917.4	918.9	920.4
140°	951.2	950.6	950.0	949.1	947.9	946.7	945.6	944.3	945.6	946.7	947.9
142.5°	977.5	977.0	976.3	975.4	974.3	973.0	971.9	970.7	971.9	973.0	974.3
145°	1014.8	1014.4	1014.0	1013.1	1011.7	1010.3	1009.0	1007.5	1009.0	1010.3	1011.7
147.5°	1047.3	1047.0	1046.5	1045.9	1045.0	1044.1	1043.2	1042.2	1043.2	1044.1	1045.0
150°	1067.3	1066.8	1066.5	1066.0	1065.4	1064.8	1064.3	1063.6	1064.3	1064.8	1065.4
152.5°	1084.7	1084.4	1084.2	1084.0	1083.7	1083.4	1083.2	1082.8	1083.2	1083.4	1083.7
155°	1108.6	1108.4	1108.2	1108.3	1108.8	1109.1	1109.5	1109.9	1109.5	1109.1	1108.8
157.5°	1130.2	1130.4	1130.6	1130.8	1130.8	1130.9	1130.9	1130.9	1130.9	1130.9	1130.8
160°	1142.4	1142.5	1142.7	1142.9	1143.2	1143.4	1143.5	1143.7	1143.5	1143.4	1143.2
162.5°	1153.0	1153.2	1153.4	1153.8	1154.3	1154.8	1155.3	1155.8	1155.3	1154.8	1154.3
165°	1167.2	1167.4	1167.7	1168.1	1168.7	1169.2	1169.8	1170.5	1169.8	1169.2	1168.7
167.5°	1178.2	1178.2	1178.2	1178.7	1179.5	1180.3	1181.1	1181.8	1181.1	1180.3	1179.5
170°	1184.6	1184.6	1184.6	1185.1	1185.9	1186.7	1187.4	1188.2	1187.4	1186.7	1185.9
172.5°	1188.7	1188.5	1188.3	1188.7	1189.6	1190.6	1191.6	1192.5	1191.6	1190.6	1189.6
175°	1194.1	1193.8	1193.6	1194.1	1195.1	1196.1	1197.0	1198.0	1197.0	1196.1	1195.1
177.5°	1196.3	1196.1	1196.0	1196.3	1197.0	1197.8	1198.6	1199.4	1198.6	1197.8	1197.0
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4
2.5°	1422.4	1418.4	1412.8	1404.4	1397.7	1387.1	1387.1	1388.8	1388.8	1388.2	1387.1
5°	1379.2	1368.7	1356.1	1341.4	1326.0	1310.5	1307.7	1302.1	1297.9	1295.1	1291.6
7.5°	1333.6	1315.0	1296.6	1276.0	1257.2	1241.7	1230.9	1221.9	1216.2	1210.1	1205.5
10°	1302.8	1279.7	1257.9	1236.3	1212.4	1193.5	1181.6	1173.1	1166.9	1161.3	1158.4
12.5°	1266.4	1239.9	1215.9	1195.3	1169.2	1149.8	1138.4	1134.4	1127.0	1115.3	1109.1
15°	1213.1	1188.6	1159.8	1128.3	1115.7	1091.9	1078.5	1072.3	1068.0	1058.9	1056.1
17.5°	1167.5	1135.4	1103.2	1079.7	1056.2	1036.9	1029.5	1021.6	1016.0	1008.6	1006.4
20°	1131.1	1102.4	1072.9	1047.8	1023.1	1002.2	995.9	990.2	984.6	981.1	978.3
22.5°	1094.1	1065.4	1041.0	1017.4	991.2	977.5	970.6	964.5	960.6	958.1	955.4
25°	1042.1	1016.9	989.5	968.5	947.5	938.3	934.2	930.7	927.9	924.3	923.6
27.5°	995.6	968.1	945.9	926.3	911.2	903.7	899.6	897.9	898.5	899.7	900.5
30°	960.8	935.6	917.4	900.5	886.5	879.5	878.8	878.8	881.6	882.3	883.7
32.5°	928.9	908.1	889.9	873.6	863.0	858.2	860.9	860.9	863.1	865.0	867.5
35°	882.3	864.1	850.1	836.1	827.0	829.0	830.5	831.9	835.4	839.5	842.4
37.5°	837.9	822.1	807.4	796.6	792.4	796.1	799.5	802.5	806.5	809.8	812.5
40°	805.9	794.0	780.0	770.2	771.6	773.7	776.5	780.0	783.5	785.6	788.5
42.5°	776.2	763.8	753.1	744.9	746.9	749.6	751.3	753.1	757.2	761.0	762.6
45°	730.9	721.1	711.3	706.4	707.8	709.3	710.6	712.7	716.2	719.1	719.7
47.5°	680.1	673.2	666.6	661.8	664.1	663.5	665.4	669.9	670.9	672.6	676.5
50°	647.6	641.2	633.6	632.1	632.1	632.1	632.8	638.5	638.5	641.2	644.1
52.5°	611.7	607.6	602.7	600.2	599.1	599.1	602.0	604.8	605.9	609.8	612.7
55°	558.6	554.4	550.1	548.0	546.6	548.0	553.7	555.0	558.6	560.6	562.8
57.5°	503.2	500.0	496.6	495.4	495.2	497.0	500.1	504.3	505.2	511.6	514.8
60°	466.7	461.8	459.1	459.1	457.6	464.0	462.5	469.6	470.9	475.2	480.1
62.5°	429.2	422.6	421.5	421.5	423.5	425.3	427.2	430.3	433.9	439.3	443.1
65°	368.6	365.2	370.1	369.3	367.9	372.1	372.1	375.7	379.9	384.8	392.4
67.5°	311.3	309.5	309.9	309.9	312.0	314.4	316.4	319.4	324.5	329.7	334.7
70°	272.6	274.7	271.3	274.0	276.2	276.8	278.2	282.4	288.0	291.5	297.1
72.5°	235.1	234.9	235.3	236.5	238.5	239.8	241.2	246.0	252.2	255.1	259.6
75°	180.8	180.1	182.2	182.2	185.7	187.1	188.5	190.6	196.3	200.5	203.9
77.5°	132.1	132.9	132.4	134.8	133.8	134.1	138.5	140.6	141.2	149.5	151.2
80°	99.5	100.9	101.7	102.3	103.0	101.7	106.6	108.6	108.6	113.5	117.0
82.5°	71.5	72.3	74.2	74.8	75.0	76.4	76.8	78.4	80.1	82.1	86.8
85°	35.8	37.8	38.5	37.8	38.5	37.2	39.2	39.9	40.7	40.7	40.7
87.5°	12.9	14.0	13.9	15.0	15.0	16.1	16.2	15.2	15.4	17.2	15.2
90°	8.8	11.1	13.6	16.2	18.8	21.4	22.1	22.9	23.7	24.5	25.1
92.5°	14.4	15.1	16.9	18.9	20.9	22.8	24.1	25.3	26.6	27.8	28.6
95°	21.8	18.9	21.0	23.3	25.4	27.6	29.0	30.3	31.7	33.2	33.8
97.5°	94.5	85.6	71.4	57.2	42.9	28.6	30.2	31.8	33.4	35.0	35.8
100°	166.2	152.8	121.9	91.0	60.2	29.3	30.9	32.5	34.2	35.7	36.6
102.5°	208.8	193.4	159.7	126.0	92.3	58.6	53.7	48.8	43.9	39.0	36.6
105°	273.9	266.1	248.3	230.5	212.8	194.9	159.9	124.9	89.9	54.9	37.5
107.5°	343.8	346.1	348.8	351.7	354.5	357.3	331.6	305.9	280.3	254.6	228.5
110°	390.8	392.7	394.8	397.1	399.2	401.4	394.8	388.3	381.8	375.3	357.9



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	435.8	437.6	439.8	441.9	444.1	446.3	446.4	446.5	446.7	446.7	443.8
115°	502.3	503.8	505.5	507.3	509.1	510.9	512.9	514.9	516.8	518.8	520.2
117.5°	568.7	569.9	570.8	571.8	572.7	573.5	575.2	576.8	578.3	579.9	580.8
120°	610.6	611.8	612.3	613.0	613.6	614.1	615.7	617.3	618.8	620.5	621.3
122.5°	650.6	651.8	652.5	653.3	654.0	654.7	655.9	656.9	658.1	659.2	659.8
125°	707.7	708.9	709.7	710.4	711.2	712.0	712.5	712.8	713.2	713.6	714.0
127.5°	762.5	763.8	764.7	765.7	766.6	767.6	768.2	768.8	769.5	770.1	770.3
130°	796.7	797.9	798.7	799.5	800.2	801.0	801.8	802.6	803.4	804.2	804.4
132.5°	829.5	830.5	831.2	831.8	832.5	833.1	833.9	834.6	835.4	836.2	836.3
135°	877.9	878.9	879.7	880.5	881.3	882.1	882.6	883.2	883.9	884.4	884.4
137.5°	921.9	922.8	923.3	923.7	924.2	924.6	925.5	926.5	927.5	928.4	928.6
140°	949.1	950.0	950.6	951.2	951.8	952.3	953.1	954.0	954.8	955.6	955.7
142.5°	975.4	976.3	977.0	977.5	978.1	978.7	979.4	980.0	980.6	981.2	981.2
145°	1013.1	1014.0	1014.4	1014.8	1015.1	1015.6	1015.9	1016.4	1016.7	1017.2	1017.4
147.5°	1045.9	1046.5	1047.0	1047.3	1047.8	1048.1	1048.6	1048.9	1049.3	1049.7	1049.5
150°	1066.0	1066.5	1066.8	1067.3	1067.6	1068.1	1068.4	1068.9	1069.3	1069.7	1069.5
152.5°	1084.0	1084.2	1084.4	1084.7	1084.9	1085.1	1085.8	1086.5	1087.3	1088.0	1087.9
155°	1108.3	1108.2	1108.4	1108.6	1108.8	1109.0	1110.0	1111.0	1112.0	1112.9	1112.9
157.5°	1130.8	1130.6	1130.4	1130.2	1130.1	1129.8	1131.0	1132.2	1133.4	1134.6	1134.4
160°	1142.9	1142.7	1142.5	1142.4	1142.1	1141.9	1143.2	1144.3	1145.5	1146.7	1146.6
162.5°	1153.8	1153.4	1153.2	1153.0	1152.8	1152.6	1154.0	1155.3	1156.6	1158.0	1158.1
165°	1168.1	1167.7	1167.4	1167.2	1167.1	1166.9	1168.4	1170.0	1171.6	1173.2	1173.3
167.5°	1178.7	1178.2	1178.2	1178.2	1178.2	1178.2	1179.8	1181.4	1183.0	1184.5	1184.5
170°	1185.1	1184.6	1184.6	1184.6	1184.6	1184.6	1186.2	1187.8	1189.5	1191.0	1191.0
172.5°	1188.7	1188.3	1188.5	1188.7	1188.7	1188.9	1190.5	1192.1	1193.6	1195.2	1195.2
175°	1194.1	1193.6	1193.8	1194.1	1194.3	1194.4	1195.9	1197.2	1198.6	1200.0	1199.9
177.5°	1196.3	1196.0	1196.1	1196.3	1196.4	1196.6	1197.8	1199.1	1200.4	1201.7	1201.5
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4
2.5°	1383.1	1382.6	1386.5	1383.7	1386.5	1382.6	1383.1	1387.1	1388.2	1388.8	1388.8
5°	1287.4	1289.5	1282.5	1282.5	1282.5	1289.5	1287.4	1291.6	1295.1	1297.9	1302.1
7.5°	1202.2	1199.1	1199.4	1195.6	1199.4	1199.1	1202.2	1205.5	1210.1	1216.2	1221.9
10°	1150.0	1145.8	1144.4	1145.1	1144.4	1145.8	1150.0	1158.4	1161.3	1166.9	1173.1
12.5°	1106.9	1106.0	1096.8	1096.9	1096.8	1106.0	1106.9	1109.1	1115.3	1127.0	1134.4
15°	1056.1	1042.9	1041.4	1045.6	1041.4	1042.9	1056.1	1056.1	1058.9	1068.0	1072.3
17.5°	1005.2	998.3	998.6	996.6	998.6	998.3	1005.2	1006.4	1008.6	1016.0	1021.6
20°	978.3	974.1	973.4	968.5	973.4	974.1	978.3	978.3	981.1	984.6	990.2
22.5°	953.7	952.3	952.7	947.3	952.7	952.3	953.7	955.4	958.1	960.6	964.5
25°	923.0	926.5	923.6	923.6	923.6	926.5	923.0	923.6	924.3	927.9	930.7
27.5°	902.2	902.1	900.7	900.7	900.7	902.1	902.2	900.5	899.7	898.5	897.9
30°	886.5	885.8	887.3	887.3	887.3	885.8	886.5	883.7	882.3	881.6	878.8
32.5°	870.8	871.8	872.1	872.6	872.1	871.8	870.8	867.5	865.0	863.1	860.9
35°	846.6	847.3	849.4	848.0	849.4	847.3	846.6	842.4	839.5	835.4	831.9
37.5°	813.8	817.0	816.3	817.4	816.3	817.0	813.8	812.5	809.8	806.5	802.5
40°	789.1	791.2	790.5	790.5	790.5	791.2	789.1	788.5	785.6	783.5	780.0
42.5°	763.9	765.4	763.6	762.5	763.6	765.4	763.9	762.6	761.0	757.2	753.1
45°	722.6	721.1	723.3	720.4	723.3	721.1	722.6	719.7	719.1	716.2	712.7
47.5°	676.3	677.7	678.2	680.4	678.2	677.7	676.3	676.5	672.6	670.9	669.9
50°	645.4	649.6	649.6	649.0	649.6	649.6	645.4	644.1	641.2	638.5	638.5
52.5°	615.2	617.2	619.9	619.8	619.9	617.2	615.2	612.7	609.8	605.9	604.8
55°	568.4	569.8	571.1	571.9	571.1	569.8	568.4	562.8	560.6	558.6	555.0
57.5°	519.9	519.3	522.6	523.6	522.6	519.3	519.9	514.8	511.6	505.2	504.3
60°	485.6	485.6	491.2	493.4	491.2	485.6	485.6	480.1	475.2	470.9	469.6
62.5°	449.2	451.5	457.1	454.1	457.1	451.5	449.2	443.1	439.3	433.9	430.3
65°	395.9	401.5	400.8	403.7	400.8	401.5	395.9	392.4	384.8	379.9	375.7
67.5°	340.3	343.8	348.8	349.3	348.8	343.8	340.3	334.7	329.7	324.5	319.4
70°	302.7	306.2	309.1	311.1	309.1	306.2	302.7	297.1	291.5	288.0	282.4
72.5°	266.4	268.1	274.8	271.9	274.8	268.1	266.4	259.6	255.1	252.2	246.0
75°	208.8	213.7	217.9	215.9	217.9	213.7	208.8	203.9	200.5	196.3	190.6
77.5°	154.4	159.3	161.3	159.5	161.3	159.3	154.4	151.2	149.5	141.2	140.6
80°	122.0	121.3	125.5	124.8	125.5	121.3	122.0	117.0	113.5	108.6	108.6
82.5°	89.4	88.7	90.7	91.1	90.7	88.7	89.4	86.8	82.1	80.1	78.4
85°	43.4	45.6	42.7	42.1	42.7	45.6	43.4	40.7	40.7	40.7	39.9
87.5°	15.2	15.2	14.8	14.3	14.8	15.2	15.2	15.2	17.2	15.4	15.2
90°	25.5	25.9	26.3	26.7	26.3	25.9	25.5	25.1	24.5	23.7	22.9
92.5°	28.8	29.1	29.3	29.5	29.3	29.1	28.8	28.6	27.8	26.6	25.3
95°	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.8	33.2	31.7	30.3
97.5°	36.1	36.3	36.5	36.6	36.5	36.3	36.1	35.8	35.0	33.4	31.8
100°	36.8	37.0	37.2	37.4	37.2	37.0	36.8	36.6	35.7	34.2	32.5
102.5°	37.0	37.4	37.7	38.1	37.7	37.4	37.0	36.6	39.0	43.9	48.8
105°	38.0	38.3	38.8	39.1	38.8	38.3	38.0	37.5	54.9	89.9	124.9
107.5°	202.2	175.8	149.4	123.0	149.4	175.8	202.2	228.5	254.6	280.3	305.9
110°	329.6	301.3	273.0	244.8	273.0	301.3	329.6	357.9	375.3	381.8	388.3



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	437.8	431.9	425.9	419.9	425.9	431.9	437.8	443.8	446.7	446.7	446.5
115°	520.9	521.7	522.5	523.3	522.5	521.7	520.9	520.2	518.8	516.8	514.9
117.5°	580.9	581.0	581.2	581.4	581.2	581.0	580.9	580.8	579.9	578.3	576.8
120°	621.3	621.3	621.3	621.3	621.3	621.3	621.3	621.3	620.5	618.8	617.3
122.5°	660.0	660.1	660.2	660.4	660.2	660.1	660.0	659.8	659.2	658.1	656.9
125°	714.4	714.8	715.2	715.6	715.2	714.8	714.4	714.0	713.6	713.2	712.8
127.5°	769.8	769.5	769.0	768.7	769.0	769.5	769.8	770.3	770.1	769.5	768.8
130°	804.1	803.6	803.3	802.8	803.3	803.6	804.1	804.4	804.2	803.4	802.6
132.5°	835.8	835.3	834.7	834.2	834.7	835.3	835.8	836.3	836.2	835.4	834.6
135°	883.9	883.2	882.6	882.1	882.6	883.2	883.9	884.4	884.4	883.9	883.2
137.5°	928.3	927.9	927.5	927.1	927.5	927.9	928.3	928.6	928.4	927.5	926.5
140°	955.3	954.9	954.6	954.1	954.6	954.9	955.3	955.7	955.6	954.8	954.0
142.5°	980.7	980.2	979.6	979.1	979.6	980.2	980.7	981.2	981.2	980.6	980.0
145°	1017.4	1017.4	1017.4	1017.4	1017.4	1017.4	1017.4	1017.4	1017.2	1016.7	1016.4
147.5°	1048.6	1047.7	1046.7	1045.8	1046.7	1047.7	1048.6	1049.5	1049.7	1049.3	1048.9
150°	1069.0	1068.4	1067.7	1067.2	1067.7	1068.4	1069.0	1069.5	1069.7	1069.3	1068.9
152.5°	1087.0	1086.1	1085.2	1084.2	1085.2	1086.1	1087.0	1087.9	1088.0	1087.3	1086.5
155°	1111.7	1110.5	1109.3	1108.1	1109.3	1110.5	1111.7	1112.9	1112.9	1112.0	1111.0
157.5°	1132.8	1131.3	1129.8	1128.3	1129.8	1131.3	1132.8	1134.4	1134.6	1133.4	1132.2
160°	1145.2	1143.8	1142.5	1141.0	1142.5	1143.8	1145.2	1146.6	1146.7	1145.5	1144.3
162.5°	1156.8	1155.6	1154.4	1153.2	1154.4	1155.6	1156.8	1158.1	1158.0	1156.6	1155.3
165°	1171.9	1170.5	1169.1	1167.8	1169.1	1170.5	1171.9	1173.3	1173.2	1171.6	1170.0
167.5°	1183.0	1181.4	1179.8	1178.2	1179.8	1181.4	1183.0	1184.5	1184.5	1183.0	1181.4
170°	1189.5	1187.8	1186.2	1184.6	1186.2	1187.8	1189.5	1191.0	1191.0	1189.5	1187.8
172.5°	1193.5	1191.7	1190.0	1188.2	1190.0	1191.7	1193.5	1195.2	1195.2	1193.6	1192.1
175°	1198.3	1196.8	1195.2	1193.6	1195.2	1196.8	1198.3	1199.9	1200.0	1198.6	1197.2
177.5°	1199.9	1198.4	1196.8	1195.2	1196.8	1198.4	1199.9	1201.5	1201.7	1200.4	1199.1
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4
2.5°	1387.1	1387.1	1397.7	1404.4	1412.8	1418.4	1422.4	1426.3	1433.1	1442.0	1452.1
5°	1307.7	1310.5	1326.0	1341.4	1356.1	1368.7	1379.2	1391.8	1407.2	1426.1	1447.2
7.5°	1230.9	1241.7	1257.2	1276.0	1296.6	1315.0	1333.6	1354.4	1376.1	1404.0	1433.4
10°	1181.6	1193.5	1212.4	1236.3	1257.9	1279.7	1302.8	1325.3	1352.5	1385.5	1423.3
12.5°	1138.4	1149.8	1169.2	1195.3	1215.9	1239.9	1266.4	1295.6	1326.2	1365.9	1408.8
15°	1078.5	1091.9	1115.7	1128.3	1159.8	1188.6	1213.1	1255.2	1294.4	1335.1	1384.8
17.5°	1029.5	1036.9	1056.2	1079.7	1103.2	1135.4	1167.5	1202.6	1241.7	1291.5	1353.7
20°	995.9	1002.2	1023.1	1047.8	1072.9	1102.4	1131.1	1166.2	1210.3	1262.8	1330.2
22.5°	970.6	977.5	991.2	1017.4	1041.0	1065.4	1094.1	1135.9	1182.9	1234.3	1307.2
25°	934.2	938.3	947.5	968.5	989.5	1016.9	1042.1	1081.4	1129.7	1190.0	1262.8
27.5°	899.6	903.7	911.2	926.3	945.9	968.1	995.6	1028.9	1078.0	1143.4	1220.8
30°	878.8	879.5	886.5	900.5	917.4	935.6	960.8	998.6	1044.9	1111.5	1192.8
32.5°	860.9	858.2	863.0	873.6	889.9	908.1	928.9	966.2	1010.8	1076.2	1159.7
35°	830.5	829.0	827.0	836.1	850.1	864.1	882.3	910.3	960.8	1021.8	1109.4
37.5°	799.5	796.1	792.4	796.6	807.4	822.1	837.9	862.8	906.3	973.4	1057.2
40°	776.5	773.7	771.6	770.2	780.0	794.0	805.9	829.7	870.4	934.2	1016.9
42.5°	751.3	749.6	746.9	744.9	753.1	763.8	776.2	797.3	837.9	897.8	976.0
45°	710.6	709.3	707.8	706.4	711.3	721.1	730.9	746.4	781.4	839.5	910.3
47.5°	665.4	663.5	664.1	661.8	666.6	673.2	680.1	696.6	730.2	777.2	828.9
50°	632.8	632.1	632.1	632.1	633.6	641.2	647.6	660.1	691.0	738.0	775.1
52.5°	602.0	599.1	599.1	600.2	602.7	607.6	611.7	625.4	652.3	690.9	724.6
55°	553.7	548.0	546.6	548.0	550.1	554.4	558.6	569.8	592.9	621.6	641.2
57.5°	500.1	497.0	495.2	495.4	496.6	500.0	503.2	515.4	533.6	548.6	561.2
60°	462.5	464.0	457.6	459.1	459.1	461.8	466.7	474.5	489.9	500.3	513.0
62.5°	427.2	425.3	423.5	421.5	421.5	422.6	429.2	435.2	448.4	453.9	463.7
65°	372.1	372.1	367.9	369.3	370.1	365.2	368.6	375.7	384.1	386.1	395.3
67.5°	316.4	314.4	312.0	309.9	309.9	309.5	311.3	314.8	321.1	321.8	328.9
70°	278.2	276.8	276.2	274.0	271.3	274.7	272.6	276.2	279.6	280.4	284.5
72.5°	241.2	239.8	238.5	236.5	235.3	234.9	235.1	239.2	241.5	240.5	245.3
75°	188.5	187.1	185.7	182.2	182.2	180.1	180.8	183.6	186.5	184.3	188.5
77.5°	138.5	134.1	133.8	134.8	132.4	132.9	132.1	131.6	132.9	133.0	136.8
80°	106.6	101.7	103.0	102.3	101.7	100.9	99.5	100.2	100.9	101.7	103.7
82.5°	76.8	76.4	75.0	74.8	74.2	72.3	71.5	72.8	73.5	73.0	74.5
85°	39.2	37.2	38.5	37.8	38.5	37.8	35.8	35.8	37.2	36.5	37.8
87.5°	16.2	16.1	15.0	15.0	13.9	14.0	12.9	13.1	13.3	12.9	13.6
90°	22.1	21.4	18.8	16.2	13.6	11.1	8.8	6.9	4.8	2.9	0.9
92.5°	24.1	22.8	20.9	18.9	16.9	15.1	14.4	14.9	15.4	16.0	16.6
95°	29.0	27.6	25.4	23.3	21.0	18.9	21.8	30.0	38.1	46.2	54.3
97.5°	30.2	28.6	42.9	57.2	71.4	85.6	94.5	98.2	101.8	105.5	109.1
100°	30.9	29.3	60.2	91.0	121.9	152.8	166.2	162.3	158.4	154.4	150.4
102.5°	53.7	58.6	92.3	126.0	159.7	193.4	208.8	206.0	203.1	200.3	197.4
105°	159.9	194.9	212.8	230.5	248.3	266.1	273.9	271.8	269.6	267.4	265.2
107.5°	331.6	357.3	354.5	351.7	348.8	346.1	343.8	342.1	340.3	338.6	336.8
110°	394.8	401.4	399.2	397.1	394.8	392.7	390.8	389.2	387.6	386.1	384.5



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	446.4	446.3	444.1	441.9	439.8	437.6	435.8	434.4	432.9	431.5	430.1
115°	512.9	510.9	509.1	507.3	505.5	503.8	502.3	501.1	499.9	498.7	497.6
117.5°	575.2	573.5	572.7	571.8	570.8	569.9	568.7	567.3	565.8	564.4	562.8
120°	615.7	614.1	613.6	613.0	612.3	611.8	610.6	608.8	607.0	605.2	603.4
122.5°	655.9	654.7	654.0	653.3	652.5	651.8	650.6	649.2	647.6	646.2	644.8
125°	712.5	712.0	711.2	710.4	709.7	708.9	707.7	706.1	704.5	702.9	701.3
127.5°	768.2	767.6	766.6	765.7	764.7	763.8	762.5	760.9	759.4	757.8	756.2
130°	801.8	801.0	800.2	799.5	798.7	797.9	796.7	795.1	793.5	791.9	790.4
132.5°	833.9	833.1	832.5	831.8	831.2	830.5	829.5	827.9	826.3	824.7	823.1
135°	882.6	882.1	881.3	880.5	879.7	878.9	877.9	876.7	875.5	874.3	873.2
137.5°	925.5	924.6	924.2	923.7	923.3	922.8	921.9	920.4	918.9	917.4	915.9
140°	953.1	952.3	951.8	951.2	950.6	950.0	949.1	947.9	946.7	945.6	944.3
142.5°	979.4	978.7	978.1	977.5	977.0	976.3	975.4	974.3	973.0	971.9	970.7
145°	1015.9	1015.6	1015.1	1014.8	1014.4	1014.0	1013.1	1011.7	1010.3	1009.0	1007.5
147.5°	1048.6	1048.1	1047.8	1047.3	1047.0	1046.5	1045.9	1045.0	1044.1	1043.2	1042.2
150°	1068.4	1068.1	1067.6	1067.3	1066.8	1066.5	1066.0	1065.4	1064.8	1064.3	1063.6
152.5°	1085.8	1085.1	1084.9	1084.7	1084.4	1084.2	1084.0	1083.7	1083.4	1083.2	1082.8
155°	1110.0	1109.0	1108.8	1108.6	1108.4	1108.2	1108.3	1108.8	1109.1	1109.5	1109.9
157.5°	1131.0	1129.8	1130.1	1130.2	1130.4	1130.6	1130.8	1130.8	1130.9	1130.9	1130.9
160°	1143.2	1141.9	1142.1	1142.4	1142.5	1142.7	1142.9	1143.2	1143.4	1143.5	1143.7
162.5°	1154.0	1152.6	1152.8	1153.0	1153.2	1153.4	1153.8	1154.3	1154.8	1155.3	1155.8
165°	1168.4	1166.9	1167.1	1167.2	1167.4	1167.7	1168.1	1168.7	1169.2	1169.8	1170.5
167.5°	1179.8	1178.2	1178.2	1178.2	1178.2	1178.2	1178.7	1179.5	1180.3	1181.1	1181.8
170°	1186.2	1184.6	1184.6	1184.6	1184.6	1184.6	1185.1	1185.9	1186.7	1187.4	1188.2
172.5°	1190.5	1188.9	1188.7	1188.7	1188.5	1188.3	1188.7	1189.6	1190.6	1191.6	1192.5
175°	1195.9	1194.4	1194.3	1194.1	1193.8	1193.6	1194.1	1195.1	1196.1	1197.0	1198.0
177.5°	1197.8	1196.6	1196.4	1196.3	1196.1	1196.0	1196.3	1197.0	1197.8	1198.6	1199.4
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4
2.5°	1455.5	1458.2	1467.8	1474.5	1482.4	1486.8	1491.3	1494.7	1499.1	1500.3	1516.5
5°	1461.9	1476.0	1500.5	1518.7	1541.1	1565.6	1582.4	1590.2	1610.4	1627.3	1660.9
7.5°	1460.1	1490.0	1527.0	1565.3	1606.5	1644.7	1677.8	1717.0	1744.9	1786.8	1828.2
10°	1458.4	1498.3	1546.0	1595.1	1652.5	1705.8	1753.5	1806.7	1850.8	1909.0	1958.7
12.5°	1453.3	1501.7	1567.9	1625.9	1695.7	1769.2	1839.8	1908.2	1947.3	2044.2	2090.0
15°	1440.9	1498.3	1581.0	1669.4	1765.3	1852.3	1942.0	2013.5	2129.0	2213.9	2267.8
17.5°	1417.0	1497.5	1595.6	1702.1	1818.9	1933.4	2035.1	2143.5	2266.2	2368.7	2478.1
20°	1405.9	1494.2	1603.5	1721.2	1842.5	1972.1	2087.8	2218.0	2352.0	2452.8	2593.0
22.5°	1385.1	1485.1	1602.9	1734.1	1863.8	1997.9	2133.2	2264.6	2419.2	2558.2	2691.7
25°	1351.2	1463.3	1585.3	1731.7	1883.8	2018.4	2180.2	2354.7	2516.0	2694.7	2827.8
27.5°	1315.5	1435.3	1557.5	1693.7	1857.3	2017.0	2220.6	2417.8	2614.9	2769.2	2867.7
30°	1288.1	1404.4	1530.6	1667.9	1829.8	2019.7	2247.5	2462.6	2654.7	2787.1	2842.5
32.5°	1258.4	1376.4	1488.0	1632.1	1804.6	2018.0	2264.3	2489.0	2656.9	2745.1	2734.3
35°	1211.7	1310.5	1419.2	1557.9	1761.1	2005.7	2274.1	2491.4	2594.4	2575.5	2432.5
37.5°	1144.4	1227.5	1334.5	1486.4	1710.7	1979.8	2254.5	2417.5	2410.8	2256.7	2049.6
40°	1102.4	1173.1	1276.2	1436.0	1671.4	1963.0	2223.7	2329.5	2239.8	2024.6	1776.6
42.5°	1047.4	1112.6	1215.7	1379.9	1628.3	1928.8	2164.8	2195.5	2020.0	1772.4	1545.0
45°	962.2	1019.7	1126.2	1295.8	1563.5	1854.3	2021.2	1946.2	1709.9	1454.2	1281.1
47.5°	870.7	930.4	1032.9	1207.1	1469.9	1742.4	1821.9	1662.3	1419.9	1212.4	1053.5
50°	813.0	870.4	970.6	1146.6	1406.5	1650.4	1683.4	1477.3	1254.5	1072.3	941.9
52.5°	754.7	808.8	907.3	1083.7	1332.6	1543.9	1523.6	1313.6	1108.7	953.4	851.0
55°	667.9	719.1	813.0	978.3	1204.7	1372.2	1298.6	1098.1	928.5	808.1	730.2
57.5°	590.2	639.3	720.3	869.7	1066.5	1181.6	1088.0	919.1	784.2	691.4	633.4
60°	537.5	580.9	658.1	796.8	967.9	1055.4	963.0	813.7	700.1	625.8	574.0
62.5°	487.6	525.5	596.9	722.8	871.4	944.9	851.3	725.1	628.4	562.5	518.4
65°	412.1	446.4	509.5	607.6	729.5	778.6	698.0	595.7	520.7	471.6	442.2
67.5°	343.1	372.3	426.8	504.0	593.7	629.5	568.1	488.9	432.4	393.0	369.6
70°	297.1	322.4	365.2	431.7	513.0	540.3	482.9	417.7	376.3	344.8	323.1
72.5°	258.4	277.0	315.8	367.2	435.1	456.8	416.7	359.4	320.8	297.1	279.9
75°	196.9	212.3	237.6	278.9	325.9	338.5	308.4	272.6	246.6	229.9	216.5
77.5°	142.0	153.4	171.6	197.1	229.6	240.9	221.9	198.0	179.1	167.7	160.3
80°	107.2	116.4	131.8	152.8	172.4	178.7	167.5	149.3	136.0	129.7	123.3
82.5°	79.2	84.4	93.6	107.9	121.4	128.9	119.3	108.3	101.2	95.4	93.1
85°	39.9	42.7	47.0	52.5	61.0	63.8	60.3	57.4	53.2	49.8	49.8
87.5°	15.2	15.5	17.7	19.2	21.8	24.1	24.0	23.4	23.4	22.9	22.6
90°	2.9	4.8	6.9	8.8	11.1	13.6	16.2	18.8	21.4	22.1	22.9
92.5°	16.0	15.4	14.9	14.4	15.1	16.9	18.9	20.9	22.8	24.1	25.3
95°	46.2	38.1	30.0	21.8	18.9	21.0	23.3	25.4	27.6	29.0	30.3
97.5°	105.5	101.8	98.2	94.5	85.6	71.4	57.2	42.9	28.6	30.2	31.8
100°	154.4	158.4	162.3	166.2	152.8	121.9	91.0	60.2	29.3	30.9	32.5
102.5°	200.3	203.1	206.0	208.8	193.4	159.7	126.0	92.3	58.6	53.7	48.8
105°	267.4	269.6	271.8	273.9	266.1	248.3	230.5	212.8	194.9	159.9	124.9
107.5°	338.6	340.3	342.1	343.8	346.1	348.8	351.7	354.5	357.3	331.6	305.9
110°	386.1	387.6	389.2	390.8	392.7	394.8	397.1	399.2	401.4	394.8	388.3



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	431.5	432.9	434.4	435.8	437.6	439.8	441.9	444.1	446.3	446.4	446.5
115°	498.7	499.9	501.1	502.3	503.8	505.5	507.3	509.1	510.9	512.9	514.9
117.5°	564.4	565.8	567.3	568.7	569.9	570.8	571.8	572.7	573.5	575.2	576.8
120°	605.2	607.0	608.8	610.6	611.8	612.3	613.0	613.6	614.1	615.7	617.3
122.5°	646.2	647.6	649.2	650.6	651.8	652.5	653.3	654.0	654.7	655.9	656.9
125°	702.9	704.5	706.1	707.7	708.9	709.7	710.4	711.2	712.0	712.5	712.8
127.5°	757.8	759.4	760.9	762.5	763.8	764.7	765.7	766.6	767.6	768.2	768.8
130°	791.9	793.5	795.1	796.7	797.9	798.7	799.5	800.2	801.0	801.8	802.6
132.5°	824.7	826.3	827.9	829.5	830.5	831.2	831.8	832.5	833.1	833.9	834.6
135°	874.3	875.5	876.7	877.9	878.9	879.7	880.5	881.3	882.1	882.6	883.2
137.5°	917.4	918.9	920.4	921.9	922.8	923.3	923.7	924.2	924.6	925.5	926.5
140°	945.6	946.7	947.9	949.1	950.0	950.6	951.2	951.8	952.3	953.1	954.0
142.5°	971.9	973.0	974.3	975.4	976.3	977.0	977.5	978.1	978.7	979.4	980.0
145°	1009.0	1010.3	1011.7	1013.1	1014.0	1014.4	1014.8	1015.1	1015.6	1015.9	1016.4
147.5°	1043.2	1044.1	1045.0	1045.9	1046.5	1047.0	1047.3	1047.8	1048.1	1048.6	1048.9
150°	1064.3	1064.8	1065.4	1066.0	1066.5	1066.8	1067.3	1067.6	1068.1	1068.4	1068.9
152.5°	1083.2	1083.4	1083.7	1084.0	1084.2	1084.4	1084.7	1084.9	1085.1	1085.8	1086.5
155°	1109.5	1109.1	1108.8	1108.3	1108.2	1108.4	1108.6	1108.8	1109.0	1110.0	1111.0
157.5°	1130.9	1130.9	1130.8	1130.8	1130.6	1130.4	1130.2	1130.1	1129.8	1131.0	1132.2
160°	1143.5	1143.4	1143.2	1142.9	1142.7	1142.5	1142.4	1142.1	1141.9	1143.2	1144.3
162.5°	1155.3	1154.8	1154.3	1153.8	1153.4	1153.2	1153.0	1152.8	1152.6	1154.0	1155.3
165°	1169.8	1169.2	1168.7	1168.1	1167.7	1167.4	1167.2	1167.1	1166.9	1168.4	1170.0
167.5°	1181.1	1180.3	1179.5	1178.7	1178.2	1178.2	1178.2	1178.2	1178.2	1179.8	1181.4
170°	1187.4	1186.7	1185.9	1185.1	1184.6	1184.6	1184.6	1184.6	1184.6	1186.2	1187.8
172.5°	1191.6	1190.6	1189.6	1188.7	1188.3	1188.5	1188.7	1188.7	1188.9	1190.5	1192.1
175°	1197.0	1196.1	1195.1	1194.1	1193.6	1193.8	1194.1	1194.3	1194.4	1195.9	1197.2
177.5°	1198.6	1197.8	1197.0	1196.3	1196.0	1196.1	1196.3	1196.4	1196.6	1197.8	1199.1
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4	1446.4
2.5°	1522.2	1522.7	1528.9	1533.4	1531.2	1533.9	1535.1
5°	1663.0	1688.3	1701.6	1711.4	1712.1	1712.8	1718.4
7.5°	1862.8	1889.8	1909.6	1939.6	1948.6	1958.7	1955.8
10°	2008.6	2048.4	2082.9	2101.0	2120.7	2149.4	2126.3
12.5°	2144.7	2215.5	2267.8	2296.2	2314.6	2320.4	2309.1
15°	2369.5	2461.9	2511.7	2510.3	2573.4	2600.8	2558.0
17.5°	2575.5	2660.9	2729.3	2764.3	2816.8	2828.5	2823.2
20°	2701.6	2794.9	2848.1	2908.4	2935.7	2960.2	2964.4
22.5°	2810.4	2894.0	2951.3	3001.4	3024.3	3035.9	3043.0
25°	2922.4	2988.3	3022.6	3040.1	3046.4	3045.0	3035.9
27.5°	2914.6	2919.7	2881.9	2844.7	2811.6	2774.1	2761.2
30°	2839.0	2780.1	2675.0	2615.5	2527.8	2458.4	2486.4
32.5°	2640.0	2522.8	2404.8	2274.6	2166.8	2136.1	2105.2
35°	2253.1	2047.1	1926.5	1786.4	1730.3	1674.3	1635.7
37.5°	1822.8	1663.5	1520.5	1428.8	1372.6	1337.1	1318.1
40°	1576.1	1432.4	1314.7	1240.5	1197.7	1157.7	1152.2
42.5°	1379.4	1245.8	1157.2	1098.1	1056.9	1040.0	1027.7
45°	1129.7	1036.5	977.0	934.9	907.6	897.1	883.1
47.5°	956.2	890.3	845.6	817.0	796.4	788.5	787.5
50°	859.2	804.5	771.6	749.1	733.1	730.2	719.1
52.5°	786.3	739.0	713.3	693.7	682.1	674.2	670.8
55°	682.6	651.0	627.9	616.7	607.6	599.9	599.9
57.5°	597.3	570.9	555.6	546.1	543.2	537.8	534.3
60°	544.6	522.1	510.2	501.8	496.1	496.9	490.5
62.5°	492.9	478.4	467.0	458.6	451.9	452.0	452.5
65°	419.8	408.6	400.2	397.3	393.2	388.3	389.7
67.5°	355.7	345.2	338.7	333.9	332.4	329.8	333.9
70°	309.8	302.0	297.1	292.9	291.5	292.2	295.8
72.5°	267.7	262.3	259.0	257.1	254.0	254.1	256.5
75°	210.3	206.1	203.2	201.2	200.5	200.5	200.5
77.5°	154.4	153.5	152.2	149.1	149.3	150.1	150.3
80°	122.0	119.8	119.1	117.7	115.7	114.2	117.7
82.5°	91.1	89.0	88.3	88.0	84.8	84.5	87.5
85°	49.0	47.0	47.6	47.0	47.0	46.3	46.3
87.5°	22.1	21.8	21.3	21.9	21.4	21.0	22.2
90°	23.7	24.5	25.1	25.5	25.9	26.3	26.7
92.5°	26.6	27.8	28.6	28.8	29.1	29.3	29.5
95°	31.7	33.2	33.8	33.8	33.8	33.8	33.8
97.5°	33.4	35.0	35.8	36.1	36.3	36.5	36.6
100°	34.2	35.7	36.6	36.8	37.0	37.2	37.4
102.5°	43.9	39.0	36.6	37.0	37.4	37.7	38.1
105°	89.9	54.9	37.5	38.0	38.3	38.8	39.1
107.5°	280.3	254.6	228.5	202.2	175.8	149.4	123.0
110°	381.8	375.3	357.9	329.6	301.3	273.0	244.8



TEST NUMBER: P332072-940

CATALOG NUMBER: S123DIP-S1165D1025U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	446.7	446.7	443.8	437.8	431.9	425.9	419.9
115°	516.8	518.8	520.2	520.9	521.7	522.5	523.3
117.5°	578.3	579.9	580.8	580.9	581.0	581.2	581.4
120°	618.8	620.5	621.3	621.3	621.3	621.3	621.3
122.5°	658.1	659.2	659.8	660.0	660.1	660.2	660.4
125°	713.2	713.6	714.0	714.4	714.8	715.2	715.6
127.5°	769.5	770.1	770.3	769.8	769.5	769.0	768.7
130°	803.4	804.2	804.4	804.1	803.6	803.3	802.8
132.5°	835.4	836.2	836.3	835.8	835.3	834.7	834.2
135°	883.9	884.4	884.4	883.9	883.2	882.6	882.1
137.5°	927.5	928.4	928.6	928.3	927.9	927.5	927.1
140°	954.8	955.6	955.7	955.3	954.9	954.6	954.1
142.5°	980.6	981.2	981.2	980.7	980.2	979.6	979.1
145°	1016.7	1017.2	1017.4	1017.4	1017.4	1017.4	1017.4
147.5°	1049.3	1049.7	1049.5	1048.6	1047.7	1046.7	1045.8
150°	1069.3	1069.7	1069.5	1069.0	1068.4	1067.7	1067.2
152.5°	1087.3	1088.0	1087.9	1087.0	1086.1	1085.2	1084.2
155°	1112.0	1112.9	1112.9	1111.7	1110.5	1109.3	1108.1
157.5°	1133.4	1134.6	1134.4	1132.8	1131.3	1129.8	1128.3
160°	1145.5	1146.7	1146.6	1145.2	1143.8	1142.5	1141.0
162.5°	1156.6	1158.0	1158.1	1156.8	1155.6	1154.4	1153.2
165°	1171.6	1173.2	1173.3	1171.9	1170.5	1169.1	1167.8
167.5°	1183.0	1184.5	1184.5	1183.0	1181.4	1179.8	1178.2
170°	1189.5	1191.0	1191.0	1189.5	1187.8	1186.2	1184.6
172.5°	1193.6	1195.2	1195.2	1193.5	1191.7	1190.0	1188.2
175°	1198.6	1200.0	1199.9	1198.3	1196.8	1195.2	1193.6
177.5°	1200.4	1201.7	1201.5	1199.9	1198.4	1196.8	1195.2
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0

(END OF REPORT)