

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332051-940

Luminaire Tested: **S123DIP-S1165D365U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332051-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1165D365U940-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 365 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5536.4 lumens  
Efficiency: N/A  
Efficacy: 111.2 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 49.8  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332051-940

CATALOG NUMBER: S123DIP-S1165D365U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

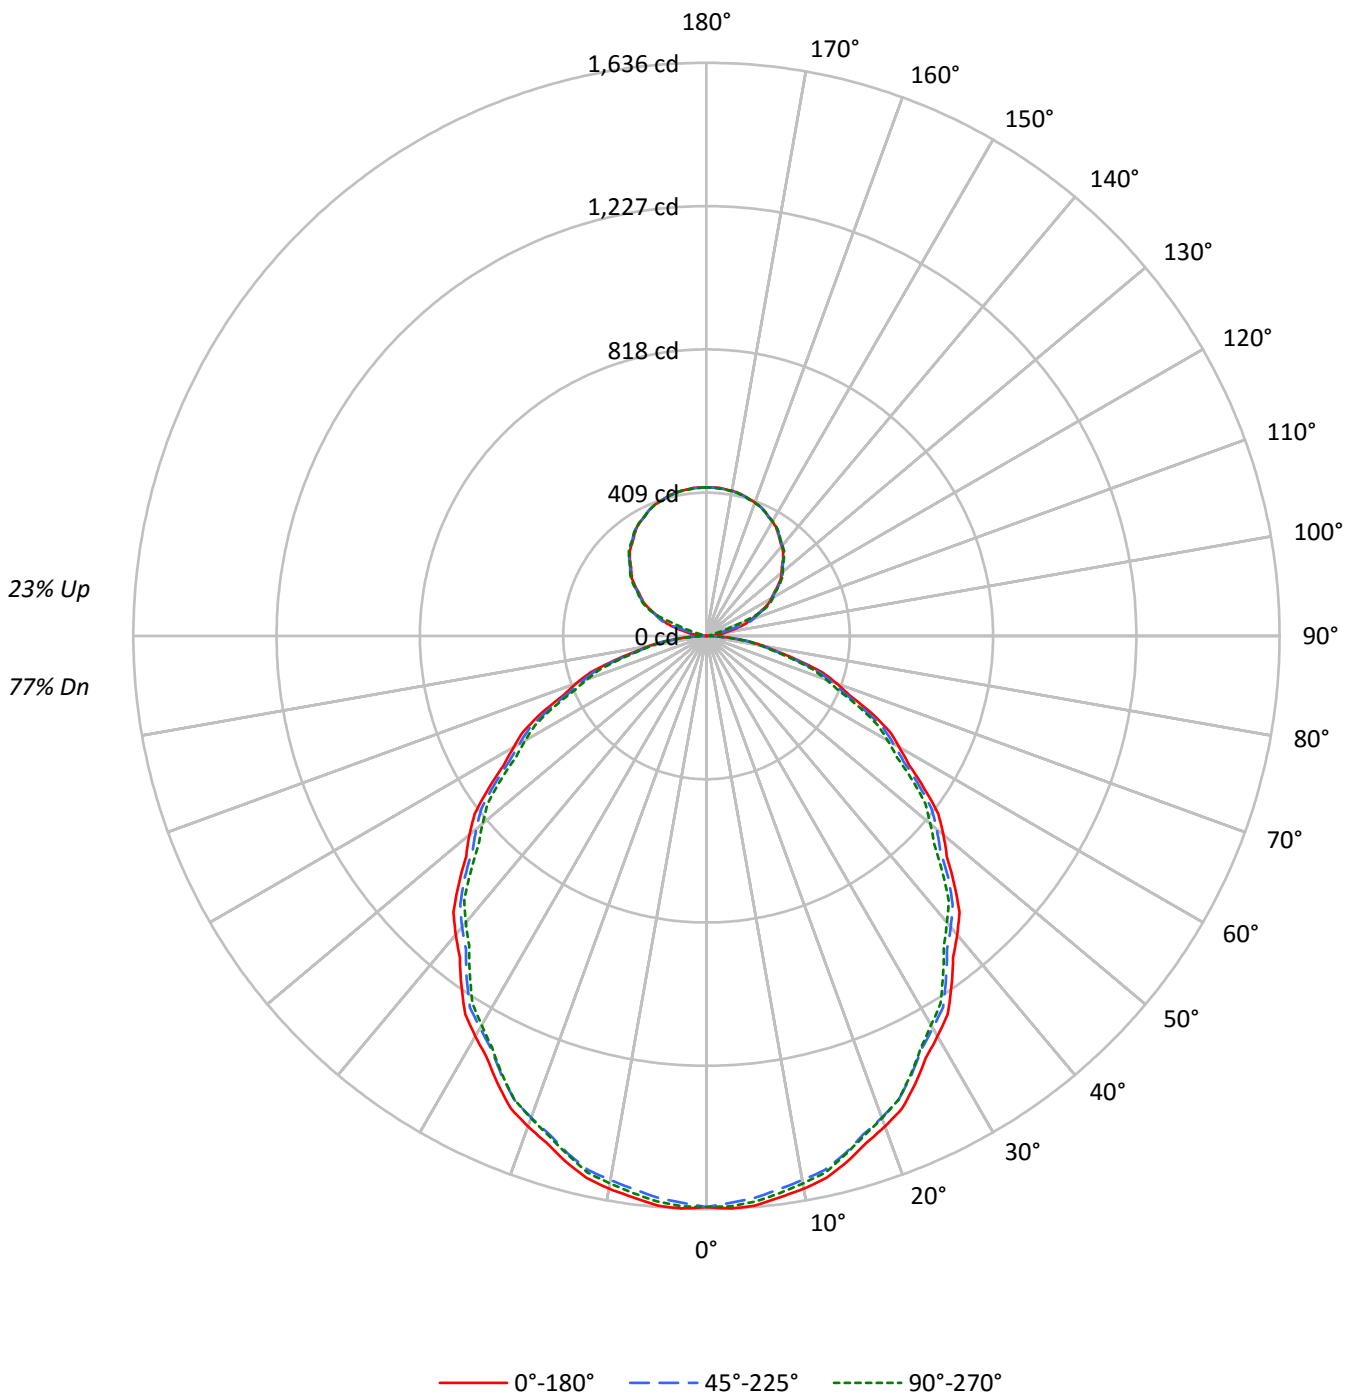



TEST NUMBER: P332051-940

CATALOG NUMBER: S123DIP-S1165D365U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	113	113	113	113	108	108	108	108	98	98	98	89	89	89	81	81	81	77
1	104	99	95	91	99	95	91	88	86	83	81	78	76	74	71	69	68	64
2	94	87	80	75	90	83	77	72	75	71	67	69	65	62	63	60	57	54
3	86	76	68	62	82	73	66	60	67	61	56	61	56	52	55	52	49	46
4	79	67	59	53	75	65	57	51	59	53	48	54	49	45	50	45	42	39
5	73	60	52	45	69	58	50	44	53	47	42	49	43	39	45	40	37	34
6	67	54	46	40	64	52	44	38	48	41	36	44	39	34	41	36	32	30
7	62	49	41	35	59	47	39	34	44	37	32	40	35	30	37	32	29	26
8	58	45	37	31	55	43	36	30	40	33	29	37	31	27	34	29	26	24
9	54	41	33	28	51	40	32	27	37	30	26	34	28	25	31	27	23	21
10	50	38	30	25	48	36	29	25	34	28	23	31	26	22	29	25	21	19

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	17546	17546	17546
5°	17629	17386	17507
10°	17511	17235	17343
15°	17307	17041	17072
20°	17068	16763	16778
25°	16747	16431	16397
30°	16394	16063	15940
35°	16025	15674	15471
40°	15638	15244	15008
45°	15213	14850	14487
50°	14788	14364	13966
55°	14230	13863	13440
60°	13670	13276	12854
65°	13173	12638	12246
70°	12441	11909	11383
75°	11366	10959	10493
80°	10253	9819	9732
85°	9003	8657	8312



TEST NUMBER: P332051-940

CATALOG NUMBER: S123DIP-S1165D365U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	153.6	2.8
10°-20°	433.6	7.8
20°-30°	640.5	11.6
30°-40°	748.2	13.5
40°-50°	752.2	13.6
50°-60°	660.7	11.9
60°-70°	492.2	8.9
70°-80°	280.4	5.1
80°-90°	81.7	1.5
90°-100°	15.4	0.3
100°-110°	73.5	1.3
110°-120°	176.5	3.2
120°-130°	224.8	4.1
130°-140°	240.2	4.3
140°-150°	224.6	4.1
150°-160°	181.2	3.3
160°-170°	116.9	2.1
170°-180°	40.3	0.7
0°-30°	1227.6	22.2
0°-40°	1975.8	35.7
0°-60°	3388.7	61.2
0°-90°	4243.0	76.6
90°-120°	265.4	4.8
90°-150°	955.0	17.2
90°-180°	1293.0	23.4
0°-180°	5536.4	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1630	1630	1630	1630	1630	
5°	1632	1624	1609	1622	1620	155
15°	1553	1547	1529	1539	1532	438
25°	1410	1401	1384	1385	1381	649
35°	1220	1211	1193	1185	1177	763
45°	999	993	976	959	952	771
55°	758	756	739	724	716	679
65°	517	510	496	485	481	510
75°	273	268	264	257	252	292
85°	73	70	70	67	67	80
90°	0	4	8	9	10	5
95°	19	7	10	12	12	24
105°	94	96	69	16	14	100
115°	176	178	181	184	185	174
125°	248	251	252	253	253	222
135°	309	311	312	313	312	238
145°	357	359	360	360	360	223
155°	393	392	393	394	392	181
165°	414	413	413	415	413	117
175°	424	423	423	425	423	40
180°	424	424	424	424	424	



TEST NUMBER: P332051-940

CATALOG NUMBER: S123DIP-S1165D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1
2.5°	1635.8	1634.8	1633.8	1632.8	1631.7	1629.9	1627.2	1624.4	1621.7	1618.9	1621.4
5°	1631.6	1630.0	1628.4	1626.9	1625.3	1622.8	1619.4	1616.0	1612.6	1609.1	1612.2
7.5°	1615.6	1614.0	1612.5	1610.9	1609.4	1606.8	1603.2	1599.7	1596.2	1592.6	1595.4
10°	1602.1	1600.5	1599.0	1597.4	1595.9	1593.1	1589.0	1585.0	1580.9	1576.9	1579.7
12.5°	1584.2	1582.9	1581.5	1580.3	1579.0	1576.4	1572.6	1568.8	1565.0	1561.2	1563.3
15°	1553.1	1551.8	1550.6	1549.3	1548.1	1545.4	1541.4	1537.3	1533.3	1529.2	1531.7
17.5°	1516.9	1515.3	1513.7	1512.1	1510.4	1507.6	1503.5	1499.5	1495.4	1491.4	1493.2
20°	1490.0	1488.1	1486.2	1484.3	1482.6	1479.5	1475.5	1471.5	1467.4	1463.4	1464.6
22.5°	1459.7	1457.9	1456.0	1454.1	1452.2	1449.3	1445.2	1441.2	1437.2	1433.1	1434.0
25°	1410.1	1408.2	1406.3	1404.4	1402.7	1399.6	1395.6	1391.6	1387.5	1383.5	1383.8
27.5°	1357.1	1355.3	1353.5	1351.7	1349.9	1346.8	1342.5	1338.1	1333.7	1329.4	1329.6
30°	1319.0	1317.4	1315.9	1314.3	1312.8	1309.8	1305.5	1301.1	1296.7	1292.4	1292.4
32.5°	1280.9	1278.8	1276.8	1274.7	1272.6	1269.9	1266.6	1263.2	1259.8	1256.5	1254.7
35°	1219.5	1217.6	1215.8	1213.9	1212.0	1209.1	1205.0	1201.0	1196.9	1192.8	1191.0
37.5°	1156.6	1154.3	1151.9	1149.6	1147.2	1144.0	1139.9	1135.8	1131.7	1127.5	1125.2
40°	1112.9	1111.1	1109.2	1107.3	1105.5	1102.3	1098.0	1093.6	1089.2	1084.9	1082.4
42.5°	1069.2	1067.1	1065.0	1062.8	1060.7	1057.5	1053.1	1048.7	1044.4	1040.1	1037.6
45°	999.4	998.2	996.9	995.7	994.4	991.8	987.7	983.6	979.6	975.5	971.9
47.5°	930.1	928.4	926.6	924.7	922.9	920.2	916.3	912.5	908.7	904.9	901.3
50°	883.1	881.5	879.9	878.4	876.8	874.1	870.0	865.9	861.8	857.8	854.4
52.5°	833.7	832.7	831.6	830.5	829.5	826.8	822.5	818.2	814.0	809.6	806.6
55°	758.3	758.0	757.7	757.4	757.1	754.9	750.8	746.8	742.7	738.7	735.3
57.5°	686.5	685.5	684.4	683.4	682.3	680.2	676.9	673.7	670.5	667.2	664.1
60°	635.0	634.6	634.4	634.0	633.7	631.7	627.9	624.2	620.5	616.7	613.9
62.5°	589.0	588.2	587.4	586.6	585.8	583.4	579.7	576.0	572.3	568.6	565.7
65°	517.2	515.7	514.1	512.6	511.0	508.6	505.5	502.4	499.3	496.2	493.7
67.5°	441.2	439.9	438.5	437.1	435.8	433.9	431.5	429.2	426.8	424.5	422.2
70°	395.3	393.4	391.6	389.7	387.8	385.9	384.1	382.2	380.3	378.4	376.3
72.5°	347.1	345.7	344.3	343.0	341.6	339.8	337.7	335.6	333.5	331.4	329.4
75°	273.3	272.1	270.8	269.6	268.3	267.2	266.4	265.4	264.5	263.5	262.0
77.5°	208.0	207.3	206.6	206.0	205.3	204.4	203.2	202.2	201.0	199.9	198.9
80°	165.4	164.4	163.5	162.6	161.7	160.9	160.2	159.6	159.0	158.4	158.1
82.5°	123.9	123.7	123.5	123.3	123.1	123.0	122.9	122.8	122.6	122.5	122.0
85°	72.9	72.2	71.6	71.0	70.4	70.1	70.1	70.1	70.1	70.1	69.5
87.5°	29.2	28.6	28.0	27.4	26.8	26.5	26.4	26.3	26.2	26.2	25.9
90°	0.4	1.0	1.7	2.4	3.1	3.9	4.8	5.7	6.7	7.6	7.8
92.5°	5.9	5.7	5.4	5.3	5.1	5.4	6.0	6.7	7.4	8.0	8.5
95°	19.3	16.3	13.5	10.6	7.8	6.7	7.5	8.2	9.0	9.8	10.3
97.5°	38.6	37.4	36.0	34.8	33.4	30.3	25.2	20.2	15.2	10.2	10.7
100°	53.2	54.7	56.1	57.4	58.9	54.1	43.2	32.3	21.3	10.4	11.0
102.5°	69.9	70.9	71.9	72.9	73.9	68.5	56.5	44.6	32.6	20.8	19.0
105°	93.9	94.7	95.4	96.2	97.0	94.3	87.9	81.6	75.3	69.0	56.6
107.5°	119.2	119.8	120.5	121.1	121.7	122.5	123.5	124.5	125.5	126.4	117.3
110°	136.2	136.7	137.2	137.8	138.4	139.0	139.8	140.5	141.3	142.1	139.8



TEST NUMBER: P332051-940

CATALOG NUMBER: S123DIP-S1165D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	152.2	152.8	153.3	153.7	154.3	154.9	155.7	156.5	157.2	158.0	158.0
115°	176.1	176.6	177.0	177.4	177.8	178.3	179.0	179.6	180.2	180.8	181.6
117.5°	199.3	199.8	200.3	200.8	201.3	201.8	202.1	202.4	202.8	203.0	203.6
120°	213.7	214.3	214.9	215.5	216.2	216.6	216.8	217.0	217.2	217.4	218.0
122.5°	228.3	228.8	229.3	229.8	230.3	230.7	231.0	231.2	231.5	231.8	232.2
125°	248.3	248.9	249.4	249.9	250.6	250.9	251.3	251.6	251.8	252.1	252.3
127.5°	267.7	268.3	268.9	269.4	269.9	270.4	270.7	271.1	271.4	271.7	272.0
130°	279.8	280.4	280.9	281.5	282.0	282.5	282.8	283.0	283.3	283.6	283.8
132.5°	291.4	291.9	292.6	293.1	293.6	294.0	294.3	294.5	294.7	295.0	295.2
135°	309.2	309.5	310.0	310.4	310.8	311.1	311.4	311.7	312.0	312.3	312.5
137.5°	324.2	324.8	325.3	325.8	326.4	326.7	326.9	327.0	327.2	327.3	327.7
140°	334.3	334.7	335.2	335.6	336.0	336.4	336.5	336.7	337.0	337.2	337.4
142.5°	343.7	344.1	344.5	344.9	345.4	345.6	345.9	346.1	346.3	346.5	346.7
145°	356.7	357.2	357.7	358.2	358.6	359.0	359.1	359.3	359.4	359.5	359.7
147.5°	369.0	369.3	369.6	370.0	370.2	370.5	370.7	370.8	371.0	371.0	371.2
150°	376.6	376.7	376.9	377.2	377.4	377.6	377.7	377.8	378.0	378.1	378.3
152.5°	383.3	383.4	383.5	383.6	383.7	383.9	383.9	384.0	384.1	384.1	384.4
155°	393.0	392.8	392.6	392.5	392.4	392.4	392.4	392.4	392.5	392.6	393.0
157.5°	400.4	400.4	400.4	400.3	400.3	400.3	400.2	400.1	400.0	400.0	400.4
160°	404.9	404.8	404.7	404.7	404.7	404.6	404.5	404.4	404.4	404.3	404.7
162.5°	409.2	409.0	408.8	408.7	408.5	408.3	408.2	408.2	408.1	408.0	408.5
165°	414.4	414.1	413.9	413.8	413.5	413.4	413.3	413.2	413.1	413.1	413.7
167.5°	418.4	418.1	417.9	417.6	417.2	417.1	417.1	417.1	417.1	417.1	417.7
170°	420.6	420.4	420.1	419.8	419.5	419.4	419.4	419.4	419.4	419.4	420.0
172.5°	422.1	421.9	421.5	421.2	420.8	420.7	420.7	420.8	420.9	420.9	421.5
175°	424.1	423.7	423.4	423.1	422.8	422.6	422.7	422.8	422.8	422.8	423.4
177.5°	424.6	424.4	424.1	423.8	423.5	423.4	423.5	423.5	423.6	423.7	424.1
180°	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1



TEST NUMBER: P332051-940

CATALOG NUMBER: S123DIP-S1165D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1
2.5°	1623.9	1626.4	1628.9	1630.0	1629.8	1629.5	1629.2	1629.1
5°	1615.3	1618.5	1621.6	1622.8	1622.2	1621.6	1621.0	1620.3
7.5°	1598.2	1601.0	1603.8	1605.0	1604.6	1604.3	1603.9	1603.6
10°	1582.5	1585.3	1588.1	1589.2	1588.6	1588.0	1587.3	1586.7
12.5°	1565.3	1567.4	1569.4	1570.3	1569.9	1569.5	1569.1	1568.8
15°	1534.2	1536.7	1539.2	1539.5	1537.7	1535.8	1533.9	1532.0
17.5°	1494.9	1496.6	1498.3	1498.9	1498.3	1497.5	1496.8	1496.2
20°	1465.9	1467.1	1468.4	1468.5	1467.6	1466.6	1465.7	1464.7
22.5°	1435.1	1436.1	1437.1	1437.0	1435.8	1434.6	1433.4	1432.3
25°	1384.1	1384.4	1384.7	1384.4	1383.5	1382.5	1381.6	1380.6
27.5°	1329.9	1330.1	1330.3	1329.9	1328.7	1327.5	1326.3	1325.2
30°	1292.4	1292.4	1292.4	1291.3	1289.1	1286.9	1284.7	1282.5
32.5°	1252.9	1251.2	1249.5	1248.0	1246.9	1245.6	1244.5	1243.3
35°	1189.1	1187.2	1185.4	1183.7	1182.1	1180.5	1178.9	1177.4
37.5°	1123.0	1120.8	1118.6	1117.0	1115.9	1114.9	1113.9	1112.9
40°	1080.0	1077.5	1075.0	1073.1	1071.8	1070.6	1069.3	1068.1
42.5°	1035.1	1032.6	1030.1	1028.2	1027.0	1025.7	1024.5	1023.2
45°	968.1	964.4	960.6	958.0	956.4	954.8	953.3	951.7
47.5°	897.6	893.9	890.2	887.7	886.4	884.9	883.6	882.3
50°	851.0	847.6	844.1	841.5	839.6	837.8	835.9	834.0
52.5°	803.8	800.8	797.9	795.5	793.6	791.8	789.9	788.0
55°	731.8	728.4	725.0	722.5	720.9	719.3	717.8	716.2
57.5°	661.1	658.1	655.0	652.6	650.8	649.0	647.1	645.3
60°	611.2	608.3	605.6	603.3	601.8	600.2	598.7	597.1
62.5°	562.9	560.1	557.3	555.4	554.3	553.2	552.2	551.2
65°	491.2	488.7	486.2	484.6	483.6	482.7	481.7	480.8
67.5°	420.1	417.9	415.7	413.9	412.7	411.3	410.0	408.8
70°	374.1	371.9	369.7	367.8	366.3	364.7	363.2	361.7
72.5°	327.5	325.6	323.6	322.3	321.5	320.7	319.9	319.1
75°	260.4	258.9	257.3	256.0	255.1	254.1	253.2	252.3
77.5°	197.8	196.7	195.6	195.1	195.1	195.1	195.1	195.1
80°	157.7	157.5	157.1	157.0	157.0	157.0	157.0	157.0
82.5°	121.4	120.8	120.3	119.8	119.6	119.4	119.1	118.9
85°	68.8	68.2	67.6	67.3	67.3	67.3	67.3	67.3
87.5°	25.8	25.6	25.4	25.3	25.3	25.4	25.4	25.4
90°	8.1	8.4	8.6	8.9	9.0	9.2	9.3	9.5
92.5°	9.0	9.5	9.9	10.2	10.2	10.3	10.3	10.4
95°	10.8	11.2	11.8	11.9	11.9	11.9	11.9	11.9
97.5°	11.2	11.9	12.4	12.7	12.8	12.8	12.9	13.0
100°	11.5	12.0	12.7	12.9	13.0	13.1	13.2	13.2
102.5°	17.3	15.5	13.8	13.0	13.1	13.2	13.4	13.5
105°	44.2	31.8	19.4	13.3	13.5	13.6	13.7	13.8
107.5°	108.3	99.2	90.2	80.9	71.6	62.2	52.9	43.5
110°	137.5	135.2	132.9	126.7	116.7	106.6	96.7	86.7





TEST NUMBER: P332051-940

CATALOG NUMBER: S123DIP-S1165D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	158.1	158.1	158.2	157.1	155.0	152.9	150.8	148.6
115°	182.3	183.0	183.7	184.1	184.4	184.8	185.0	185.3
117.5°	204.2	204.7	205.3	205.6	205.6	205.7	205.8	205.8
120°	218.6	219.1	219.6	220.0	220.0	220.0	220.0	220.0
122.5°	232.6	233.0	233.4	233.5	233.6	233.7	233.7	233.8
125°	252.4	252.5	252.6	252.8	252.9	253.1	253.2	253.3
127.5°	272.2	272.4	272.7	272.7	272.5	272.4	272.2	272.2
130°	284.2	284.5	284.7	284.8	284.6	284.5	284.4	284.2
132.5°	295.5	295.8	296.0	296.1	295.9	295.7	295.5	295.3
135°	312.7	312.9	313.1	313.1	312.9	312.7	312.5	312.3
137.5°	328.0	328.3	328.7	328.8	328.6	328.5	328.3	328.2
140°	337.7	338.0	338.3	338.3	338.2	338.0	338.0	337.8
142.5°	347.0	347.1	347.4	347.4	347.2	347.0	346.8	346.6
145°	359.8	360.0	360.1	360.2	360.2	360.2	360.2	360.2
147.5°	371.3	371.5	371.7	371.6	371.2	370.9	370.6	370.2
150°	378.4	378.5	378.7	378.6	378.4	378.3	378.0	377.8
152.5°	384.7	385.0	385.2	385.1	384.9	384.5	384.1	383.9
155°	393.3	393.7	394.0	394.0	393.6	393.2	392.7	392.3
157.5°	400.8	401.3	401.7	401.6	401.1	400.6	399.9	399.4
160°	405.1	405.6	406.0	405.9	405.5	404.9	404.5	403.9
162.5°	409.0	409.5	409.9	410.0	409.6	409.1	408.7	408.2
165°	414.2	414.8	415.4	415.4	414.9	414.4	413.9	413.4
167.5°	418.2	418.8	419.4	419.4	418.8	418.2	417.7	417.1
170°	420.5	421.1	421.6	421.6	421.1	420.5	420.0	419.4
172.5°	422.0	422.6	423.1	423.1	422.5	421.9	421.2	420.6
175°	423.8	424.4	424.8	424.8	424.3	423.7	423.1	422.6
177.5°	424.5	425.0	425.4	425.3	424.8	424.3	423.7	423.1
180°	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1

(END OF REPORT)