

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332070-940

Luminaire Tested: **S123DIP-S1165D805U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332070-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S1165D805U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 805 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6703.4 lumens
Efficiency: N/A
Efficacy: 110.4 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 60.7
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332070-940

CATALOG NUMBER: S123DIP-S1165D805U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

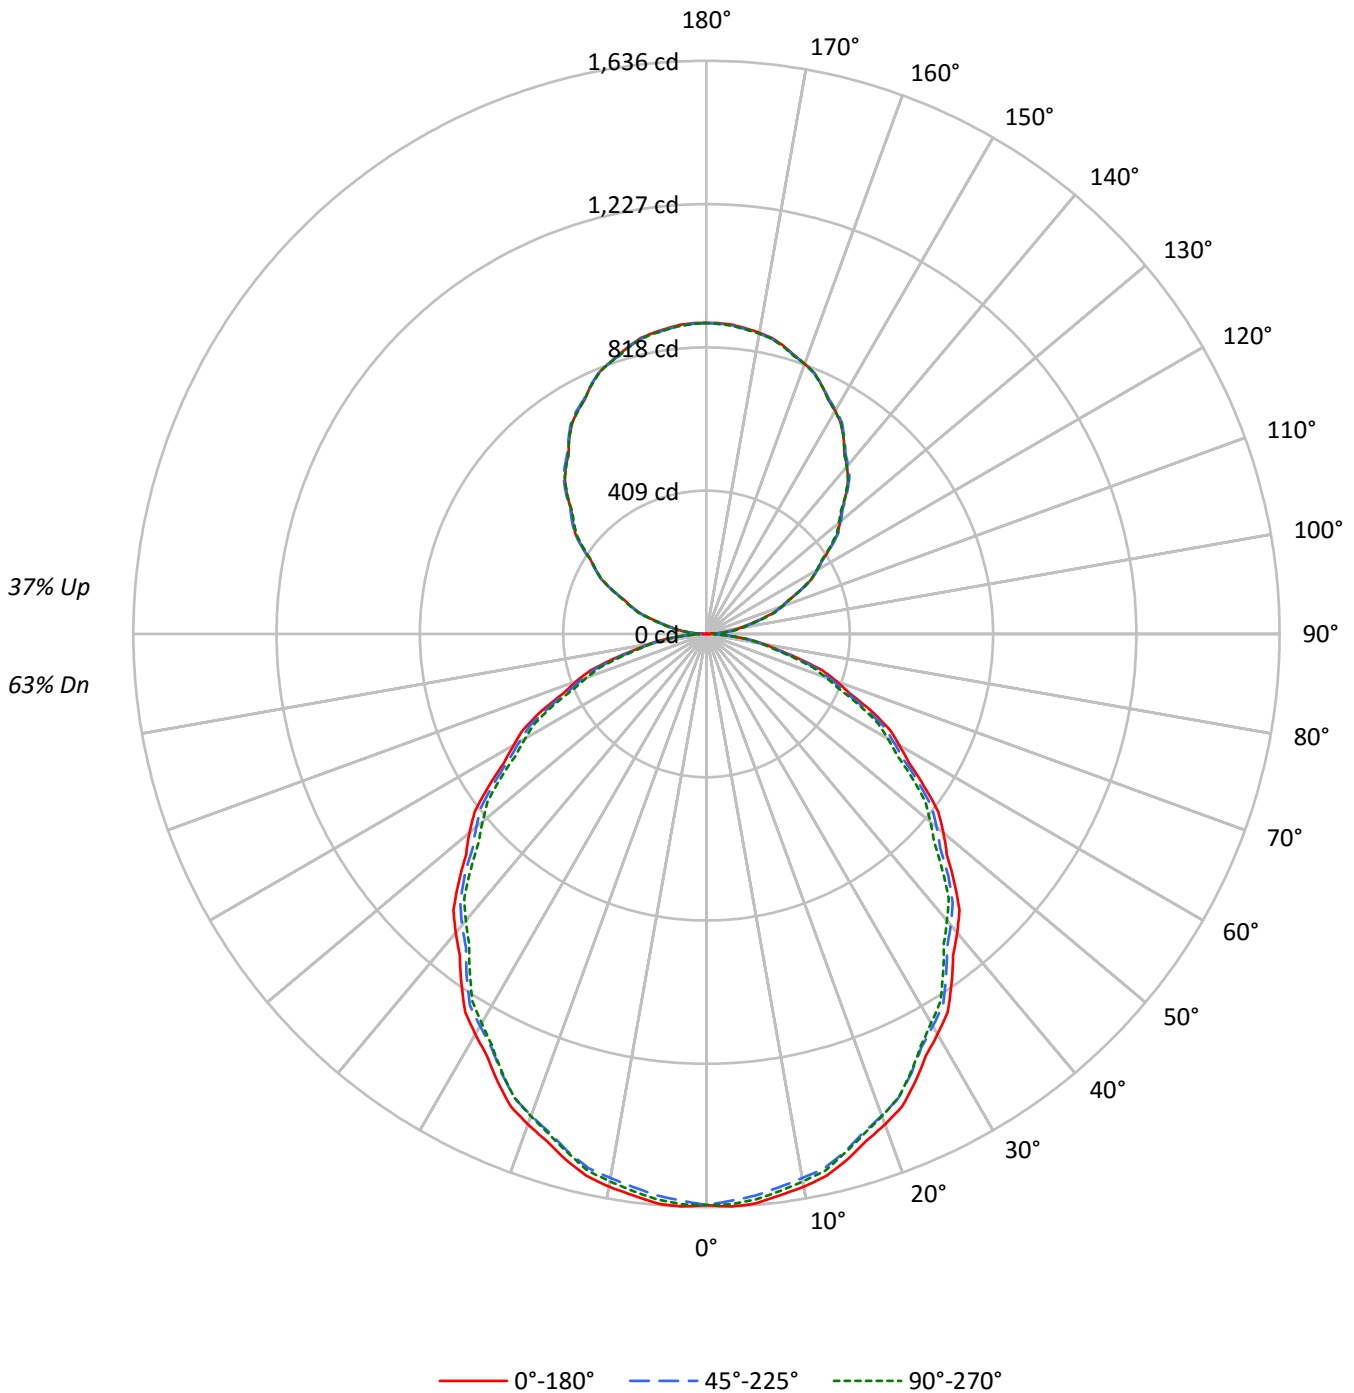



TEST NUMBER: P332070-940

CATALOG NUMBER: S123DIP-S1165D805U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10	0		
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50	30	10	0
RCR																				
0	110	110	110	110	103	103	103	103	91	91	91		79	79	79		68	68	68	63
1	101	96	92	89	94	90	87	84	80	77	74		70	68	66		60	59	58	53
2	92	84	78	72	86	79	73	69	70	65	62		61	58	55		53	51	48	44
3	84	74	66	60	78	70	63	57	61	56	52		54	50	46		47	44	41	38
4	77	65	57	51	71	62	54	49	55	49	44		48	43	40		42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38		43	38	35		38	34	31	28
6	65	52	44	38	61	50	42	37	44	38	33		39	34	30		34	30	27	25
7	60	47	39	33	56	45	37	32	40	34	29		36	31	27		31	27	24	22
8	56	43	35	30	52	41	34	29	37	31	26		33	28	24		29	25	22	19
9	52	39	32	27	49	37	30	26	34	28	24		30	25	22		27	23	20	18
10	49	36	29	24	46	34	28	23	31	25	21		28	23	20		25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	17546	17546	17546
5°	17629	17386	17507
10°	17511	17235	17343
15°	17307	17041	17072
20°	17068	16763	16778
25°	16747	16431	16397
30°	16394	16063	15940
35°	16025	15674	15471
40°	15638	15244	15008
45°	15213	14850	14487
50°	14788	14364	13966
55°	14230	13863	13440
60°	13670	13276	12854
65°	13173	12638	12246
70°	12441	11909	11383
75°	11366	10959	10493
80°	10253	9819	9732
85°	9003	8657	8312



TEST NUMBER: P332070-940

CATALOG NUMBER: S123DIP-S1165D805U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.6	2.3
10°-20°	433.6	6.5
20°-30°	640.5	9.6
30°-40°	748.2	11.2
40°-50°	752.2	11.2
50°-60°	660.7	9.9
60°-70°	492.2	7.3
70°-80°	280.4	4.2
80°-90°	83.1	1.2
90°-100°	57.8	0.9
100°-110°	173.1	2.6
110°-120°	294.3	4.4
120°-130°	387.1	5.8
130°-140°	435.1	6.5
140°-150°	427.7	6.4
150°-160°	360.1	5.4
160°-170°	239.7	3.6
170°-180°	83.9	1.3
0°-30°	1227.6	18.3
0°-40°	1975.8	29.5
0°-60°	3388.7	50.6
0°-90°	4244.5	63.3
90°-120°	525.2	7.8
90°-150°	1775.2	26.5
90°-180°	2459.0	36.7
0°-180°	6703.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1630	1630	1630	1630	1630	
5°	1632	1624	1609	1622	1620	155
15°	1553	1547	1529	1539	1532	438
25°	1410	1401	1384	1385	1381	649
35°	1220	1211	1193	1185	1177	763
45°	999	993	976	959	952	771
55°	758	756	739	724	716	679
65°	517	510	496	485	481	510
75°	273	268	264	257	252	292
85°	73	70	70	67	67	80
90°	1	8	17	19	21	7
95°	41	46	52	54	54	46
105°	157	159	164	165	166	168
115°	296	298	297	298	297	293
125°	434	436	434	432	429	387
135°	563	567	566	563	562	433
145°	682	684	686	685	682	426
155°	782	782	782	785	780	360
165°	851	849	849	853	848	240
175°	885	883	883	886	882	84
180°	888	888	888	888	888	



TEST NUMBER: P332070-940

CATALOG NUMBER: S123DIP-S1165D805U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1
2.5°	1635.8	1634.8	1633.8	1632.8	1631.7	1629.9	1627.2	1624.4	1621.7	1618.9	1621.4
5°	1631.6	1630.0	1628.4	1626.9	1625.3	1622.8	1619.4	1616.0	1612.6	1609.1	1612.2
7.5°	1615.6	1614.0	1612.5	1610.9	1609.4	1606.8	1603.2	1599.7	1596.2	1592.6	1595.4
10°	1602.1	1600.5	1599.0	1597.4	1595.9	1593.1	1589.0	1585.0	1580.9	1576.9	1579.7
12.5°	1584.2	1582.9	1581.5	1580.3	1579.0	1576.4	1572.6	1568.8	1565.0	1561.2	1563.3
15°	1553.1	1551.8	1550.6	1549.3	1548.1	1545.4	1541.4	1537.3	1533.3	1529.2	1531.7
17.5°	1516.9	1515.3	1513.7	1512.1	1510.4	1507.6	1503.5	1499.5	1495.4	1491.4	1493.2
20°	1490.0	1488.1	1486.2	1484.3	1482.6	1479.5	1475.5	1471.5	1467.4	1463.4	1464.6
22.5°	1459.7	1457.9	1456.0	1454.1	1452.2	1449.3	1445.2	1441.2	1437.2	1433.1	1434.0
25°	1410.1	1408.2	1406.3	1404.4	1402.7	1399.6	1395.6	1391.6	1387.5	1383.5	1383.8
27.5°	1357.1	1355.3	1353.5	1351.7	1349.9	1346.8	1342.5	1338.1	1333.7	1329.4	1329.6
30°	1319.0	1317.4	1315.9	1314.3	1312.8	1309.8	1305.5	1301.1	1296.7	1292.4	1292.4
32.5°	1280.9	1278.8	1276.8	1274.7	1272.6	1269.9	1266.6	1263.2	1259.8	1256.5	1254.7
35°	1219.5	1217.6	1215.8	1213.9	1212.0	1209.1	1205.0	1201.0	1196.9	1192.8	1191.0
37.5°	1156.6	1154.3	1151.9	1149.6	1147.2	1144.0	1139.9	1135.8	1131.7	1127.5	1125.2
40°	1112.9	1111.1	1109.2	1107.3	1105.5	1102.3	1098.0	1093.6	1089.2	1084.9	1082.4
42.5°	1069.2	1067.1	1065.0	1062.8	1060.7	1057.5	1053.1	1048.7	1044.4	1040.1	1037.6
45°	999.4	998.2	996.9	995.7	994.4	991.8	987.7	983.6	979.6	975.5	971.9
47.5°	930.1	928.4	926.6	924.7	922.9	920.2	916.3	912.5	908.7	904.9	901.3
50°	883.1	881.5	879.9	878.4	876.8	874.1	870.0	865.9	861.8	857.8	854.4
52.5°	833.7	832.7	831.6	830.5	829.5	826.8	822.5	818.2	814.0	809.6	806.6
55°	758.3	758.0	757.7	757.4	757.1	754.9	750.8	746.8	742.7	738.7	735.3
57.5°	686.5	685.5	684.4	683.4	682.3	680.2	676.9	673.7	670.5	667.2	664.1
60°	635.0	634.6	634.4	634.0	633.7	631.7	627.9	624.2	620.5	616.7	613.9
62.5°	589.0	588.2	587.4	586.6	585.8	583.4	579.7	576.0	572.3	568.6	565.7
65°	517.2	515.7	514.1	512.6	511.0	508.6	505.5	502.4	499.3	496.2	493.7
67.5°	441.2	439.9	438.5	437.1	435.8	433.9	431.5	429.2	426.8	424.5	422.2
70°	395.3	393.4	391.6	389.7	387.8	385.9	384.1	382.2	380.3	378.4	376.3
72.5°	347.1	345.7	344.3	343.0	341.6	339.8	337.7	335.6	333.5	331.4	329.4
75°	273.3	272.1	270.8	269.6	268.3	267.2	266.4	265.4	264.5	263.5	262.0
77.5°	208.0	207.3	206.6	206.0	205.3	204.4	203.2	202.2	201.0	199.9	198.9
80°	165.4	164.4	163.5	162.6	161.7	160.9	160.2	159.6	159.0	158.4	158.1
82.5°	123.9	123.7	123.5	123.3	123.1	123.0	122.9	122.8	122.6	122.5	122.0
85°	72.9	72.2	71.6	71.0	70.4	70.1	70.1	70.1	70.1	70.1	69.5
87.5°	29.3	28.9	28.4	28.0	27.6	27.4	27.6	27.7	27.8	28.0	27.9
90°	0.7	2.2	3.8	5.4	6.9	8.6	10.7	12.7	14.7	16.8	17.4
92.5°	16.9	17.9	19.0	20.1	21.0	22.2	23.4	24.5	25.6	26.8	27.3
95°	41.1	42.2	43.3	44.4	45.5	46.6	47.9	49.1	50.4	51.6	52.3
97.5°	73.0	73.8	74.6	75.4	76.3	77.1	78.0	78.9	79.8	80.7	81.4
100°	94.8	95.8	96.7	97.6	98.5	99.4	100.1	100.9	101.7	102.5	103.0
102.5°	119.9	120.5	121.0	121.6	122.2	123.0	123.9	125.0	126.0	127.1	127.5
105°	156.9	157.2	157.5	157.8	158.1	159.0	160.3	161.8	163.2	164.5	164.5
107.5°	199.8	200.0	200.2	200.4	200.5	200.9	201.5	202.1	202.6	203.1	203.7
110°	226.6	226.9	227.2	227.5	227.8	228.1	228.5	228.7	229.1	229.3	230.0



TEST NUMBER: P332070-940

CATALOG NUMBER: S123DIP-S1165D805U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	254.5	254.7	254.9	255.0	255.2	255.3	255.4	255.5	255.6	255.6	256.4
115°	296.3	296.8	297.2	297.7	298.2	298.3	297.9	297.7	297.3	297.0	297.1
117.5°	338.4	338.8	339.0	339.3	339.7	339.6	339.2	338.8	338.4	338.0	338.0
120°	364.6	365.5	366.5	367.4	368.4	368.5	367.7	366.8	366.1	365.3	365.2
122.5°	392.0	392.6	393.3	394.0	394.7	394.8	394.4	394.0	393.6	393.2	392.8
125°	433.6	434.1	434.5	435.1	435.5	435.6	435.2	435.0	434.6	434.4	433.7
127.5°	472.2	473.1	474.1	475.1	476.1	476.4	476.1	475.7	475.4	475.0	474.2
130°	497.8	499.0	500.2	501.5	502.7	503.1	502.7	502.2	501.8	501.2	500.6
132.5°	523.4	524.7	525.9	527.2	528.4	528.9	528.5	528.2	527.8	527.4	526.7
135°	562.6	563.6	564.5	565.4	566.3	566.8	566.6	566.4	566.2	566.1	565.5
137.5°	598.9	599.7	600.4	601.2	602.0	602.5	603.0	603.3	603.8	604.1	603.5
140°	623.9	624.7	625.5	626.3	627.1	627.5	627.7	627.9	628.0	628.1	628.0
142.5°	646.8	647.6	648.4	649.2	650.0	650.5	650.8	651.0	651.3	651.6	651.4
145°	682.5	682.9	683.1	683.5	683.8	684.1	684.7	685.1	685.5	686.0	685.9
147.5°	713.8	714.3	714.9	715.4	716.0	716.5	716.9	717.4	717.8	718.3	718.3
150°	735.5	735.8	736.1	736.5	736.7	737.1	737.4	737.7	738.0	738.3	738.3
152.5°	753.4	753.8	754.2	754.7	755.1	755.5	755.6	755.8	756.0	756.2	756.4
155°	781.5	781.5	781.5	781.5	781.5	781.6	781.8	781.9	782.1	782.2	782.8
157.5°	805.5	805.3	805.1	804.9	804.8	804.8	804.9	805.0	805.1	805.2	805.9
160°	820.6	820.3	819.9	819.7	819.3	819.2	819.2	819.2	819.2	819.2	819.9
162.5°	833.9	833.6	833.1	832.7	832.2	832.1	832.2	832.3	832.4	832.6	833.3
165°	851.2	850.8	850.3	849.9	849.4	849.2	849.2	849.2	849.2	849.2	850.1
167.5°	865.0	864.4	863.8	863.2	862.6	862.4	862.5	862.6	862.7	862.8	863.8
170°	872.9	872.3	871.6	871.0	870.4	870.0	870.0	870.0	870.0	870.0	871.2
172.5°	879.0	878.4	877.8	877.2	876.6	876.2	876.2	876.2	876.2	876.2	877.2
175°	885.4	884.8	884.2	883.6	883.0	882.6	882.6	882.6	882.6	882.6	883.6
177.5°	888.1	887.6	887.1	886.5	886.1	885.8	885.8	885.8	885.8	885.8	886.5
180°	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5



TEST NUMBER: P332070-940

CATALOG NUMBER: S123DIP-S1165D805U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1	1630.1
2.5°	1623.9	1626.4	1628.9	1630.0	1629.8	1629.5	1629.2	1629.1
5°	1615.3	1618.5	1621.6	1622.8	1622.2	1621.6	1621.0	1620.3
7.5°	1598.2	1601.0	1603.8	1605.0	1604.6	1604.3	1603.9	1603.6
10°	1582.5	1585.3	1588.1	1589.2	1588.6	1588.0	1587.3	1586.7
12.5°	1565.3	1567.4	1569.4	1570.3	1569.9	1569.5	1569.1	1568.8
15°	1534.2	1536.7	1539.2	1539.5	1537.7	1535.8	1533.9	1532.0
17.5°	1494.9	1496.6	1498.3	1498.9	1498.3	1497.5	1496.8	1496.2
20°	1465.9	1467.1	1468.4	1468.5	1467.6	1466.6	1465.7	1464.7
22.5°	1435.1	1436.1	1437.1	1437.0	1435.8	1434.6	1433.4	1432.3
25°	1384.1	1384.4	1384.7	1384.4	1383.5	1382.5	1381.6	1380.6
27.5°	1329.9	1330.1	1330.3	1329.9	1328.7	1327.5	1326.3	1325.2
30°	1292.4	1292.4	1292.4	1291.3	1289.1	1286.9	1284.7	1282.5
32.5°	1252.9	1251.2	1249.5	1248.0	1246.9	1245.6	1244.5	1243.3
35°	1189.1	1187.2	1185.4	1183.7	1182.1	1180.5	1178.9	1177.4
37.5°	1123.0	1120.8	1118.6	1117.0	1115.9	1114.9	1113.9	1112.9
40°	1080.0	1077.5	1075.0	1073.1	1071.8	1070.6	1069.3	1068.1
42.5°	1035.1	1032.6	1030.1	1028.2	1027.0	1025.7	1024.5	1023.2
45°	968.1	964.4	960.6	958.0	956.4	954.8	953.3	951.7
47.5°	897.6	893.9	890.2	887.7	886.4	884.9	883.6	882.3
50°	851.0	847.6	844.1	841.5	839.6	837.8	835.9	834.0
52.5°	803.8	800.8	797.9	795.5	793.6	791.8	789.9	788.0
55°	731.8	728.4	725.0	722.5	720.9	719.3	717.8	716.2
57.5°	661.1	658.1	655.0	652.6	650.8	649.0	647.1	645.3
60°	611.2	608.3	605.6	603.3	601.8	600.2	598.7	597.1
62.5°	562.9	560.1	557.3	555.4	554.3	553.2	552.2	551.2
65°	491.2	488.7	486.2	484.6	483.6	482.7	481.7	480.8
67.5°	420.1	417.9	415.7	413.9	412.7	411.3	410.0	408.8
70°	374.1	371.9	369.7	367.8	366.3	364.7	363.2	361.7
72.5°	327.5	325.6	323.6	322.3	321.5	320.7	319.9	319.1
75°	260.4	258.9	257.3	256.0	255.1	254.1	253.2	252.3
77.5°	197.8	196.7	195.6	195.1	195.1	195.1	195.1	195.1
80°	157.7	157.5	157.1	157.0	157.0	157.0	157.0	157.0
82.5°	121.4	120.8	120.3	119.8	119.6	119.4	119.1	118.9
85°	68.8	68.2	67.6	67.3	67.3	67.3	67.3	67.3
87.5°	27.7	27.6	27.6	27.5	27.6	27.6	27.6	27.7
90°	18.0	18.5	19.2	19.7	20.0	20.3	20.6	21.0
92.5°	27.7	28.3	28.7	28.9	28.7	28.5	28.4	28.2
95°	52.8	53.4	54.0	54.4	54.4	54.4	54.4	54.4
97.5°	82.1	82.8	83.6	83.9	83.8	83.8	83.7	83.6
100°	103.4	103.9	104.3	104.8	105.0	105.3	105.7	105.9
102.5°	128.0	128.4	128.9	129.1	129.0	128.9	128.9	128.9
105°	164.5	164.5	164.5	164.7	165.0	165.3	165.6	165.9
107.5°	204.1	204.6	205.2	205.3	205.1	204.9	204.7	204.6
110°	230.6	231.2	231.8	232.0	231.7	231.4	231.0	230.8



TEST NUMBER: P332070-940

CATALOG NUMBER: S123DIP-S1165D805U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	257.1	257.8	258.6	258.9	258.9	258.8	258.7	258.7
115°	297.3	297.5	297.7	297.7	297.5	297.3	297.1	297.0
117.5°	338.0	337.9	337.9	337.6	337.2	336.8	336.4	335.9
120°	365.0	364.9	364.7	364.4	364.2	363.8	363.6	363.2
122.5°	392.4	392.0	391.6	391.2	390.7	390.3	389.9	389.4
125°	433.1	432.5	431.9	431.2	430.6	430.0	429.4	428.7
127.5°	473.3	472.4	471.6	470.8	470.1	469.4	468.7	468.0
130°	500.1	499.4	498.8	497.9	496.9	495.8	494.7	493.6
132.5°	526.0	525.2	524.5	523.7	522.9	522.0	521.2	520.4
135°	564.9	564.3	563.7	563.2	562.8	562.6	562.2	562.0
137.5°	602.9	602.3	601.5	600.9	600.4	599.8	599.2	598.6
140°	627.9	627.7	627.5	627.0	625.8	624.7	623.7	622.6
142.5°	651.3	651.1	650.9	650.5	649.6	648.8	647.9	647.1
145°	685.7	685.5	685.4	685.0	684.4	683.8	683.1	682.5
147.5°	718.3	718.3	718.3	717.7	716.8	715.9	715.0	714.1
150°	738.3	738.3	738.3	737.9	736.9	736.0	735.0	734.1
152.5°	756.6	756.9	757.2	756.9	756.1	755.3	754.5	753.7
155°	783.5	784.1	784.7	784.4	783.4	782.3	781.2	780.2
157.5°	806.6	807.2	807.8	807.7	806.9	806.0	805.1	804.2
160°	820.7	821.5	822.2	822.3	821.7	821.1	820.5	819.8
162.5°	834.1	834.9	835.7	835.5	834.6	833.6	832.6	831.6
165°	851.0	851.9	852.9	852.8	851.8	850.6	849.5	848.5
167.5°	864.8	865.7	866.7	866.7	865.7	864.8	863.8	862.8
170°	872.3	873.3	874.4	874.4	873.3	872.3	871.2	870.0
172.5°	878.2	879.1	880.0	880.0	878.9	877.8	876.7	875.7
175°	884.5	885.4	886.4	886.3	885.2	884.1	883.0	881.9
177.5°	887.3	888.1	888.8	888.8	887.9	887.0	886.2	885.3
180°	887.5	887.5	887.5	887.5	887.5	887.5	887.5	887.5

(END OF REPORT)