

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831364

Luminaire Tested: S123DIP-S340D1195U940-4F0-1E-UDD-G1

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831364  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S340D1195U940-4F0-1E-UDD-G1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 5064.6 lumens  
Efficiency: N/A  
Efficacy: 116.7 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Indirect

Input Watts (W): 43.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

### Luminous Intensity Polar Plot

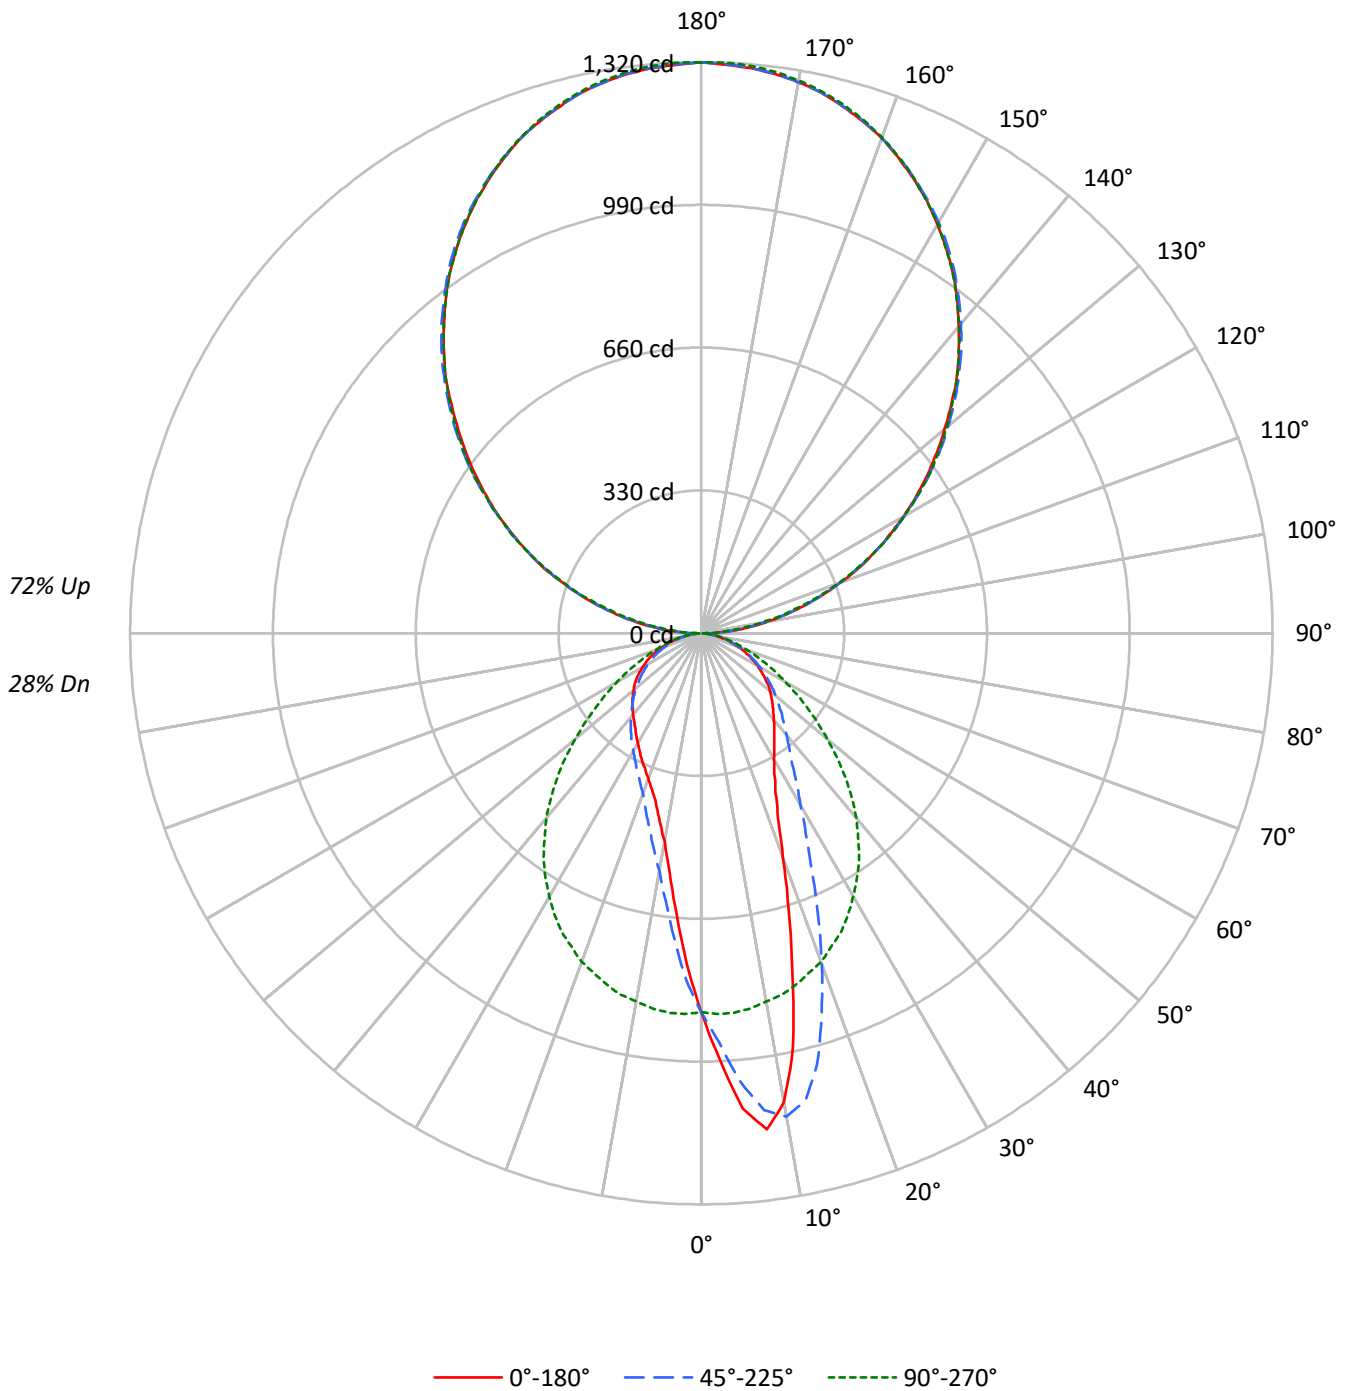



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	102	102	102	102	91	91	91	91	71	71	71	53	53	53	36	36	36	28				
1	93	89	85	82	83	80	77	74	62	60	59	47	45	44	32	31	31	24				
2	85	78	72	67	76	70	65	61	55	52	49	41	39	37	29	27	26	21				
3	78	69	62	57	69	62	56	51	49	45	42	37	34	32	26	24	23	18				
4	71	61	54	48	63	55	49	44	44	39	36	33	30	28	23	21	20	16				
5	65	54	47	41	58	49	43	38	39	34	31	30	27	24	21	19	18	14				
6	60	49	41	36	54	44	38	33	35	31	27	27	24	21	19	17	16	12				
7	56	44	37	31	50	40	33	29	32	27	24	25	21	19	18	16	14	11				
8	52	40	33	28	46	36	30	26	29	25	21	23	19	17	16	14	13	10				
9	48	37	30	25	43	33	27	23	27	22	19	21	18	15	15	13	12	9				
10	45	34	27	22	40	31	25	21	25	20	17	19	16	14	14	12	11	9				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	9424	9424	9424	9424	9424
5°	11918	11249	9508	7662	7042
10°	12034	12398	9445	6108	5337
15°	9063	11510	9381	5173	4513
20°	6315	9314	9261	4523	4100
25°	4816	7163	9057	4162	3846
30°	4166	5691	8730	3905	3640
35°	3865	4804	8355	3721	3497
40°	3659	4310	7827	3545	3448
45°	3538	3988	7155	3408	3427
50°	3476	3734	6362	3282	3408
55°	3348	3549	5581	3164	3423
60°	3227	3350	4809	3053	3367
65°	3031	3161	4149	2934	3301
70°	2801	2921	3528	2735	3106
75°	2533	2620	3023	2541	2840
80°	2089	2294	2393	2219	2393
85°	1655	1853	1754	1877	1902

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 8170 cd/sqm



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	82.8	1.6
10°-20°	205.9	4.1
20°-30°	243.8	4.8
30°-40°	245.1	4.8
40°-50°	224.9	4.4
50°-60°	185.6	3.7
60°-70°	131.3	2.6
70°-80°	70.1	1.4
80°-90°	20.6	0.4
90°-100°	84.9	1.7
100°-110°	257.0	5.1
110°-120°	437.5	8.6
120°-130°	575.5	11.4
130°-140°	646.9	12.8
140°-150°	636.0	12.6
150°-160°	535.4	10.6
160°-170°	356.4	7.0
170°-180°	124.8	2.5
0°-30°	532.5	10.5
0°-40°	777.6	15.4
0°-60°	1188.2	23.5
0°-90°	1410.2	27.8
90°-120°	779.3	15.4
90°-150°	2637.7	52.1
90°-180°	3654.0	72.1
0°-180°	5064.6	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	876	876	876	876	876	
5°	1103	1041	880	709	652	105
15°	813	1033	842	464	405	225
25°	406	603	763	350	324	191
35°	294	366	636	283	266	185
45°	232	262	470	224	225	180
55°	178	189	297	169	182	160
65°	119	124	163	115	130	118
75°	61	63	73	61	68	64
85°	13	15	14	15	15	15
90°	31	25	1	25	31	16
95°	81	77	61	77	81	81
105°	247	244	233	244	247	261
115°	441	441	440	441	441	437
125°	637	646	644	646	637	570
135°	835	841	836	841	835	642
145°	1014	1020	1014	1020	1014	634
155°	1159	1162	1161	1162	1159	534
165°	1261	1262	1265	1262	1261	356
175°	1311	1312	1316	1312	1311	125
180°	1319	1319	1319	1319	1319	



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5
2.5°	986.8	985.8	984.8	979.7	974.6	972.2	969.8	962.4	955.1	947.0	938.9
5°	1103.0	1105.9	1108.7	1105.5	1102.2	1092.2	1082.3	1069.1	1055.9	1041.1	1026.2
7.5°	1156.6	1158.3	1159.9	1157.9	1155.8	1153.2	1150.5	1138.8	1127.0	1111.7	1096.5
10°	1101.0	1104.6	1108.3	1116.2	1124.1	1133.1	1142.0	1140.4	1138.8	1134.3	1129.8
12.5°	978.7	983.2	987.6	1003.5	1019.3	1039.6	1059.9	1077.4	1094.9	1107.1	1119.3
15°	813.3	825.7	838.1	852.5	867.0	896.8	926.7	963.5	1000.2	1032.9	1065.6
17.5°	669.9	674.6	679.3	694.7	710.2	747.7	785.3	827.8	870.2	924.5	978.7
20°	551.3	555.6	559.8	580.1	600.5	629.9	659.4	707.1	754.8	813.1	871.4
22.5°	463.1	469.8	476.6	487.9	499.3	527.5	555.8	598.2	640.7	705.1	769.5
25°	405.5	410.3	415.2	422.1	429.0	451.6	474.1	509.1	544.0	603.1	662.2
27.5°	366.0	368.1	370.1	377.0	383.9	398.5	413.2	443.2	473.3	523.5	573.6
30°	335.2	336.6	338.0	344.1	350.2	360.2	370.1	391.8	413.6	457.9	502.1
32.5°	313.6	314.7	315.7	320.3	325.0	332.1	339.2	355.1	370.9	407.5	444.0
35°	294.1	294.7	295.4	298.8	302.3	307.5	312.8	324.8	336.8	365.6	394.5
37.5°	277.1	277.9	278.7	280.7	282.8	287.4	292.1	301.7	311.2	333.3	355.5
40°	260.4	261.8	263.3	264.7	266.1	270.0	273.8	281.1	288.4	306.7	325.0
42.5°	246.2	247.6	249.0	249.7	250.3	252.5	254.7	261.4	268.1	281.7	295.4
45°	232.4	233.0	233.6	234.2	234.8	236.7	238.5	244.4	250.3	262.0	273.8
47.5°	219.8	219.8	219.8	220.2	220.6	222.2	223.9	228.1	232.4	241.5	250.7
50°	207.6	207.6	207.6	207.0	206.4	207.4	208.4	211.7	214.9	223.0	231.2
52.5°	193.0	193.0	193.0	193.2	193.4	193.4	193.4	196.2	199.1	206.4	213.7
55°	178.4	179.2	180.0	179.4	178.8	179.2	179.6	181.4	183.2	189.1	195.0
57.5°	163.7	164.1	164.5	164.3	164.1	164.3	164.5	166.2	167.8	172.3	176.7
60°	149.9	149.9	149.9	149.5	149.1	149.5	149.9	150.7	151.5	155.6	159.7
62.5°	134.5	134.7	134.9	135.1	135.3	134.9	134.5	135.5	136.5	139.6	142.6
65°	119.0	119.2	119.4	120.1	120.7	120.3	119.8	120.9	121.9	124.1	126.3
67.5°	105.2	104.8	104.4	104.6	104.8	105.4	106.0	106.2	106.4	108.9	111.3
70°	89.0	89.4	89.8	89.6	89.4	89.6	89.8	90.4	91.0	92.8	94.7
72.5°	74.3	74.5	74.8	74.8	74.8	75.2	75.6	76.2	76.8	77.8	78.8
75°	60.9	60.9	60.9	61.3	61.8	62.0	62.2	62.2	62.2	63.0	63.8
77.5°	46.3	47.3	48.3	48.1	47.9	48.3	48.8	49.4	50.0	50.4	50.8
80°	33.7	33.7	33.7	33.9	34.1	34.7	35.3	35.8	36.2	37.0	37.8
82.5°	21.5	21.7	21.9	22.5	23.2	23.6	24.0	24.6	25.2	25.2	25.2
85°	13.4	13.0	12.6	13.0	13.4	13.8	14.2	14.4	14.6	15.0	15.4
87.5°	6.5	6.5	6.5	6.5	6.5	6.7	6.9	6.9	6.9	6.9	6.9
90°	31.1	30.6	30.2	29.7	29.2	28.5	27.6	26.7	25.8	24.9	21.9
92.5°	44.6	45.0	45.5	45.9	46.4	46.3	45.6	44.9	44.2	43.5	42.1
95°	80.8	80.8	80.8	80.8	80.8	80.4	79.4	78.5	77.6	76.7	74.8
97.5°	116.0	116.3	116.5	116.7	117.0	116.5	115.3	114.2	113.0	111.9	110.5
100°	157.5	157.0	156.6	156.1	155.6	155.1	154.4	153.7	153.0	152.3	151.1
102.5°	200.0	200.2	200.4	200.7	200.9	200.7	200.0	199.3	198.6	197.9	196.3
105°	246.6	246.1	245.7	245.2	244.7	244.5	244.5	244.5	244.5	244.5	242.4
107.5°	294.2	294.5	294.7	294.9	295.2	294.9	294.2	293.6	292.9	292.2	291.2
110°	342.9	343.4	343.9	344.3	344.8	344.5	343.6	342.7	341.8	340.9	340.4



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	394.7	394.7	394.7	394.7	394.7	394.2	393.0	391.9	390.7	389.6	389.6
115°	441.4	441.6	441.8	442.1	442.3	442.3	442.1	441.8	441.6	441.4	441.8
117.5°	489.0	489.7	490.4	491.1	491.8	492.1	492.1	492.1	492.1	492.1	492.6
120°	539.8	540.2	540.7	541.2	541.6	542.0	542.2	542.4	542.7	542.9	544.0
122.5°	588.5	589.2	589.9	590.6	591.2	591.9	592.6	593.3	594.0	594.7	595.2
125°	637.2	638.1	639.0	639.9	640.9	641.8	642.7	643.6	644.5	645.5	645.9
127.5°	685.9	686.8	687.7	688.6	689.6	690.7	692.1	693.5	694.9	696.2	696.7
130°	733.5	735.1	736.8	738.4	740.0	741.2	742.2	743.1	744.0	744.9	745.6
132.5°	783.3	784.4	785.6	786.7	787.9	789.0	790.2	791.3	792.5	793.6	794.1
135°	835.1	835.5	836.0	836.4	836.9	837.6	838.5	839.4	840.4	841.3	841.5
137.5°	880.7	881.3	882.0	882.7	883.4	884.3	885.5	886.6	887.8	888.9	888.3
140°	925.2	926.8	928.4	930.0	931.6	932.6	932.8	933.0	933.3	933.5	933.3
142.5°	970.8	971.9	973.1	974.2	975.4	976.1	976.3	976.5	976.8	977.0	976.5
145°	1014.3	1015.2	1016.1	1017.1	1018.0	1018.6	1018.8	1019.0	1019.3	1019.5	1018.8
147.5°	1053.7	1055.1	1056.4	1057.8	1059.2	1059.9	1059.9	1059.9	1059.9	1059.9	1059.2
150°	1091.0	1092.4	1093.7	1095.1	1096.5	1097.2	1097.2	1097.2	1097.2	1097.2	1096.7
152.5°	1127.2	1128.4	1129.5	1130.7	1131.8	1132.2	1131.7	1131.3	1130.8	1130.3	1130.1
155°	1159.4	1161.0	1162.6	1164.2	1165.8	1166.1	1165.2	1164.3	1163.4	1162.5	1162.2
157.5°	1189.4	1190.8	1192.2	1193.5	1194.9	1195.2	1194.2	1193.3	1192.4	1191.5	1191.2
160°	1218.4	1219.3	1220.3	1221.2	1222.1	1222.0	1220.8	1219.7	1218.5	1217.4	1217.4
162.5°	1240.2	1241.8	1243.4	1245.0	1246.6	1246.8	1245.7	1244.5	1243.4	1242.2	1242.0
165°	1260.9	1262.5	1264.1	1265.7	1267.3	1267.4	1266.1	1264.7	1263.3	1261.9	1261.9
167.5°	1279.5	1280.9	1282.3	1283.7	1285.1	1285.1	1283.7	1282.3	1280.9	1279.5	1279.3
170°	1293.0	1294.6	1296.2	1297.8	1299.5	1299.5	1297.8	1296.2	1294.6	1293.0	1293.0
172.5°	1303.4	1305.0	1306.6	1308.2	1309.8	1309.9	1308.5	1307.2	1305.8	1304.4	1304.4
175°	1310.6	1312.2	1313.8	1315.5	1317.1	1317.2	1315.8	1314.4	1313.0	1311.7	1311.7
177.5°	1314.8	1316.4	1318.0	1319.6	1321.2	1321.3	1319.9	1318.6	1317.2	1315.8	1315.8
180°	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5
2.5°	936.4	934.0	925.1	916.1	906.0	895.8	888.3	880.8	869.6	858.4	849.3
5°	1014.9	1003.5	984.6	965.7	940.1	914.5	897.2	880.0	856.8	833.7	815.2
7.5°	1077.0	1057.5	1031.1	1004.7	971.2	937.7	906.0	874.3	838.9	803.6	774.7
10°	1116.6	1103.4	1072.9	1042.5	997.6	952.7	908.4	864.1	818.6	773.1	734.9
12.5°	1120.5	1121.7	1093.7	1065.6	1014.9	964.1	910.2	856.4	799.1	741.8	697.4
15°	1086.6	1107.5	1092.0	1076.6	1025.4	974.2	908.0	841.8	775.8	709.7	658.4
17.5°	1023.6	1068.5	1070.7	1072.9	1021.8	970.6	897.2	823.9	749.2	674.4	620.4
20°	937.7	1003.9	1026.6	1049.4	1007.7	966.1	887.3	808.5	724.8	641.1	584.4
22.5°	849.9	930.3	972.0	1013.6	982.8	951.9	868.0	784.1	695.7	607.4	549.9
25°	750.0	837.7	901.7	965.7	946.8	927.9	845.2	762.6	668.5	574.5	515.8
27.5°	662.8	752.0	829.2	906.4	902.3	898.3	816.2	734.1	637.8	541.6	484.9
30°	585.2	668.3	754.6	841.0	850.9	860.9	781.7	702.4	605.9	509.5	454.8
32.5°	516.6	589.1	681.7	774.3	793.8	813.3	741.8	670.3	574.9	479.4	426.8
35°	460.3	526.1	618.7	711.4	735.7	760.1	698.0	635.8	542.8	449.7	399.6
37.5°	410.5	465.6	556.0	646.4	676.2	706.1	650.4	594.8	507.6	420.5	374.4
40°	369.3	413.6	496.7	579.7	614.3	648.8	602.9	557.0	474.3	391.6	349.2
42.5°	334.8	374.2	449.5	524.9	558.0	591.1	552.3	513.5	440.0	366.5	327.7
45°	305.3	336.8	405.3	473.7	505.2	536.7	503.4	470.0	405.3	340.5	304.3
47.5°	277.7	304.7	363.2	421.7	449.7	477.8	451.8	425.8	370.9	316.1	283.4
50°	252.9	274.6	325.8	377.0	401.4	425.8	402.8	379.9	334.8	289.7	261.2
52.5°	231.4	249.0	291.9	334.8	355.7	376.6	356.9	337.2	301.4	265.7	240.9
55°	210.0	225.1	262.2	299.4	313.6	327.9	312.6	297.4	268.5	239.7	218.8
57.5°	190.1	203.5	234.0	264.5	275.4	286.4	272.6	258.8	237.1	215.3	197.9
60°	170.6	181.6	207.0	232.4	239.1	245.8	234.6	223.4	208.2	193.0	177.3
62.5°	152.6	162.5	181.4	200.3	204.8	209.2	200.7	192.2	180.6	169.0	156.8
65°	133.9	141.4	156.8	172.3	175.1	177.9	170.4	162.9	154.2	145.4	136.5
67.5°	116.6	121.9	134.5	147.1	147.3	147.5	141.4	135.3	130.4	125.5	118.4
70°	99.7	104.8	113.1	121.5	121.7	121.9	117.0	112.1	108.5	104.8	99.5
72.5°	82.5	86.1	92.4	98.7	98.3	97.9	94.9	91.8	89.0	86.1	82.3
75°	66.8	69.9	74.1	78.4	77.2	76.0	74.3	72.7	70.3	67.8	65.4
77.5°	52.6	54.4	56.9	59.3	58.5	57.7	56.3	54.8	53.0	51.2	50.2
80°	38.6	39.4	41.0	42.7	42.3	41.8	40.2	38.6	38.2	37.8	36.4
82.5°	26.2	27.2	27.6	28.0	27.8	27.6	26.4	25.2	24.8	24.4	24.2
85°	15.6	15.8	16.0	16.3	15.6	15.0	14.6	14.2	14.2	14.2	14.0
87.5°	7.1	7.3	7.3	7.3	7.1	6.9	6.5	6.1	6.3	6.5	6.5
90°	18.9	15.9	12.9	10.2	7.9	5.6	3.3	1.0	3.3	5.6	7.9
92.5°	40.8	39.4	38.0	36.6	35.2	33.8	32.5	31.1	32.5	33.8	35.2
95°	73.0	71.1	69.3	67.6	66.0	64.4	62.7	61.1	62.7	64.4	66.0
97.5°	109.1	107.8	106.4	105.1	104.0	102.8	101.6	100.5	101.6	102.8	104.0
100°	150.0	148.8	147.7	146.4	145.0	143.7	142.3	140.9	142.3	143.7	145.0
102.5°	194.7	193.1	191.4	190.3	189.6	188.9	188.2	187.5	188.2	188.9	189.6
105°	240.4	238.3	236.2	235.0	234.5	234.0	233.6	233.1	233.6	234.0	234.5
107.5°	290.3	289.4	288.5	287.9	287.7	287.4	287.2	287.0	287.2	287.4	287.7
110°	339.9	339.5	339.0	338.6	338.1	337.6	337.2	336.7	337.2	337.6	338.1





TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	389.6	389.6	389.6	389.4	389.2	389.0	388.8	388.5	388.8	389.0	389.2
115°	442.3	442.7	443.2	443.1	442.4	441.7	441.0	440.3	441.0	441.7	442.4
117.5°	493.1	493.5	494.0	494.1	493.9	493.6	493.4	493.2	493.4	493.6	493.9
120°	545.2	546.3	547.5	547.4	546.0	544.6	543.2	541.9	543.2	544.6	546.0
122.5°	595.6	596.1	596.5	596.3	595.4	594.5	593.5	592.6	593.5	594.5	595.4
125°	646.4	646.8	647.3	647.2	646.5	645.8	645.1	644.4	645.1	645.8	646.5
127.5°	697.2	697.6	698.1	697.6	696.2	694.9	693.5	692.1	693.5	694.9	696.2
130°	746.3	747.0	747.7	747.1	745.3	743.4	741.6	739.7	741.6	743.4	745.3
132.5°	794.5	795.0	795.5	794.8	792.9	791.1	789.2	787.4	789.2	791.1	792.9
135°	841.7	842.0	842.2	841.6	840.2	838.9	837.5	836.1	837.5	838.9	840.2
137.5°	887.6	886.9	886.2	885.3	884.1	883.0	881.8	880.7	881.8	883.0	884.1
140°	933.0	932.8	932.6	931.9	930.7	929.6	928.4	927.3	928.4	929.6	930.7
142.5°	976.1	975.6	975.2	974.4	973.2	972.1	970.9	969.8	970.9	972.1	973.2
145°	1018.1	1017.4	1016.7	1016.1	1015.7	1015.2	1014.8	1014.3	1014.8	1015.2	1015.7
147.5°	1058.5	1057.8	1057.1	1056.3	1055.4	1054.5	1053.6	1052.6	1053.6	1054.5	1055.4
150°	1096.3	1095.8	1095.3	1094.9	1094.4	1094.0	1093.5	1093.0	1093.5	1094.0	1094.4
152.5°	1129.9	1129.7	1129.4	1129.0	1128.3	1127.6	1126.9	1126.2	1126.9	1127.6	1128.3
155°	1162.0	1161.8	1161.5	1161.4	1161.4	1161.4	1161.4	1161.4	1161.4	1161.4	1161.4
157.5°	1191.0	1190.8	1190.6	1190.6	1190.8	1191.0	1191.2	1191.5	1191.2	1191.0	1190.8
160°	1217.4	1217.4	1217.4	1217.6	1218.1	1218.5	1219.0	1219.4	1219.0	1218.5	1218.1
162.5°	1241.8	1241.5	1241.3	1241.5	1242.2	1242.9	1243.6	1244.3	1243.6	1242.9	1242.2
165°	1261.9	1261.9	1261.9	1262.3	1263.0	1263.7	1264.3	1265.0	1264.3	1263.7	1263.0
167.5°	1279.1	1278.8	1278.6	1279.0	1279.9	1280.8	1281.7	1282.6	1281.7	1280.8	1279.9
170°	1293.0	1293.0	1293.0	1293.5	1294.4	1295.3	1296.2	1297.1	1296.2	1295.3	1294.4
172.5°	1304.4	1304.4	1304.4	1304.9	1305.8	1306.7	1307.6	1308.5	1307.6	1306.7	1305.8
175°	1311.7	1311.7	1311.7	1312.1	1313.0	1314.0	1314.9	1315.8	1314.9	1314.0	1313.0
177.5°	1315.8	1315.8	1315.8	1316.3	1317.2	1318.1	1319.0	1319.9	1319.0	1318.1	1317.2
180°	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5	875.5
2.5°	840.2	832.2	824.3	818.2	812.1	801.8	791.4	789.0	786.5	783.1	779.6
5°	796.7	777.2	757.7	740.2	722.7	709.1	695.5	686.6	677.7	671.2	664.7
7.5°	745.9	716.7	687.4	666.7	646.0	626.3	606.6	600.3	594.0	585.4	576.9
10°	696.7	664.4	632.2	605.1	578.1	558.8	539.5	531.8	524.1	513.3	502.6
12.5°	652.9	617.5	582.2	555.0	527.7	509.1	490.4	479.2	468.0	461.9	455.8
15°	607.0	569.2	531.4	506.2	481.0	464.2	447.3	437.5	427.8	421.9	416.0
17.5°	566.3	529.0	491.6	467.4	443.2	427.8	412.4	403.8	395.3	390.8	386.4
20°	527.7	491.2	454.6	431.0	407.5	394.9	382.3	376.8	371.3	367.7	364.0
22.5°	492.4	456.4	420.5	400.4	380.3	370.1	360.0	356.1	352.2	349.2	346.1
25°	457.0	425.0	392.9	375.8	358.7	350.4	342.1	338.2	334.4	331.3	328.3
27.5°	428.2	397.5	366.9	352.2	337.6	331.1	324.6	321.6	318.5	315.7	312.8
30°	400.2	372.7	345.3	332.7	320.1	314.2	308.4	305.3	302.3	299.6	297.0
32.5°	374.2	350.6	327.0	315.5	303.9	299.0	294.1	290.5	286.8	284.8	282.8
35°	349.4	328.3	307.1	297.6	288.0	283.2	278.3	275.2	272.2	270.6	268.9
37.5°	328.3	309.4	290.5	281.3	272.2	267.5	262.9	260.2	257.6	257.0	256.4
40°	306.7	290.5	274.2	265.3	256.4	252.3	248.2	246.6	245.0	244.6	244.2
42.5°	288.9	273.0	257.2	249.0	240.9	237.5	234.0	233.2	232.4	233.0	233.6
45°	268.1	254.9	241.7	234.2	226.7	223.9	221.0	220.4	219.8	221.0	222.2
47.5°	250.7	238.5	226.3	219.2	212.1	210.0	208.0	207.8	207.6	209.2	210.9
50°	232.8	221.0	209.2	203.5	197.9	196.0	194.2	194.8	195.4	198.1	200.7
52.5°	216.1	205.2	194.2	188.9	183.6	182.4	181.2	182.6	184.0	186.9	189.7
55°	197.9	187.9	177.9	173.9	169.8	168.6	167.4	170.2	173.1	175.7	178.4
57.5°	180.4	171.6	162.9	159.3	155.6	155.4	155.2	157.8	160.5	163.3	166.2
60°	161.7	154.4	147.1	144.2	141.4	141.8	142.2	145.2	148.3	150.5	152.8
62.5°	144.6	138.5	132.4	129.8	127.2	128.2	129.2	132.2	135.3	137.9	140.6
65°	127.6	122.5	117.4	115.6	113.8	115.2	116.6	119.2	121.9	123.7	125.5
67.5°	111.3	107.1	102.8	101.4	99.9	101.4	102.8	105.4	108.1	109.9	111.7
70°	94.3	90.8	87.3	86.3	85.3	86.9	88.6	90.8	93.0	94.9	96.7
72.5°	78.4	75.8	73.1	72.9	72.7	74.1	75.6	77.8	80.0	81.3	82.5
75°	63.0	61.5	60.1	59.9	59.7	61.1	62.6	63.8	65.0	66.0	67.0
77.5°	49.2	47.9	46.7	46.9	47.1	48.1	49.2	50.4	51.6	52.2	52.8
80°	34.9	34.5	34.1	34.5	34.9	35.8	36.6	37.4	38.2	38.6	39.0
82.5°	24.0	23.6	23.2	23.8	24.4	25.0	25.6	26.2	26.8	27.0	27.2
85°	13.8	14.4	15.0	15.0	15.0	15.2	15.4	15.6	15.8	15.6	15.4
87.5°	6.5	6.7	6.9	6.9	6.9	7.1	7.3	7.3	7.3	7.1	6.9
90°	10.2	12.9	15.9	18.9	21.9	24.9	25.8	26.7	27.6	28.5	29.2
92.5°	36.6	38.0	39.4	40.8	42.1	43.5	44.2	44.9	45.6	46.3	46.4
95°	67.6	69.3	71.1	73.0	74.8	76.7	77.6	78.5	79.4	80.4	80.8
97.5°	105.1	106.4	107.8	109.1	110.5	111.9	113.0	114.2	115.3	116.5	117.0
100°	146.4	147.7	148.8	150.0	151.1	152.3	153.0	153.7	154.4	155.1	155.6
102.5°	190.3	191.4	193.1	194.7	196.3	197.9	198.6	199.3	200.0	200.7	200.9
105°	235.0	236.2	238.3	240.4	242.4	244.5	244.5	244.5	244.5	244.5	244.7
107.5°	287.9	288.5	289.4	290.3	291.2	292.2	292.9	293.6	294.2	294.9	295.2
110°	338.6	339.0	339.5	339.9	340.4	340.9	341.8	342.7	343.6	344.5	344.8



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	389.4	389.6	389.6	389.6	389.6	389.6	390.7	391.9	393.0	394.2	394.7
115°	443.1	443.2	442.7	442.3	441.8	441.4	441.6	441.8	442.1	442.3	442.3
117.5°	494.1	494.0	493.5	493.1	492.6	492.1	492.1	492.1	492.1	492.1	491.8
120°	547.4	547.5	546.3	545.2	544.0	542.9	542.7	542.4	542.2	542.0	541.6
122.5°	596.3	596.5	596.1	595.6	595.2	594.7	594.0	593.3	592.6	591.9	591.2
125°	647.2	647.3	646.8	646.4	645.9	645.5	644.5	643.6	642.7	641.8	640.9
127.5°	697.6	698.1	697.6	697.2	696.7	696.2	694.9	693.5	692.1	690.7	689.6
130°	747.1	747.7	747.0	746.3	745.6	744.9	744.0	743.1	742.2	741.2	740.0
132.5°	794.8	795.5	795.0	794.5	794.1	793.6	792.5	791.3	790.2	789.0	787.9
135°	841.6	842.2	842.0	841.7	841.5	841.3	840.4	839.4	838.5	837.6	836.9
137.5°	885.3	886.2	886.9	887.6	888.3	888.9	887.8	886.6	885.5	884.3	883.4
140°	931.9	932.6	932.8	933.0	933.3	933.5	933.3	933.0	932.8	932.6	931.6
142.5°	974.4	975.2	975.6	976.1	976.5	977.0	976.8	976.5	976.3	976.1	975.4
145°	1016.1	1016.7	1017.4	1018.1	1018.8	1019.5	1019.3	1019.0	1018.8	1018.6	1018.0
147.5°	1056.3	1057.1	1057.8	1058.5	1059.2	1059.9	1059.9	1059.9	1059.9	1059.9	1059.2
150°	1094.9	1095.3	1095.8	1096.3	1096.7	1097.2	1097.2	1097.2	1097.2	1097.2	1096.5
152.5°	1129.0	1129.4	1129.7	1129.9	1130.1	1130.3	1130.8	1131.3	1131.7	1132.2	1131.8
155°	1161.4	1161.5	1161.8	1162.0	1162.2	1162.5	1163.4	1164.3	1165.2	1166.1	1165.8
157.5°	1190.6	1190.6	1190.8	1191.0	1191.2	1191.5	1192.4	1193.3	1194.2	1195.2	1194.9
160°	1217.6	1217.4	1217.4	1217.4	1217.4	1217.4	1218.5	1219.7	1220.8	1222.0	1222.1
162.5°	1241.5	1241.3	1241.5	1241.8	1242.0	1242.2	1243.4	1244.5	1245.7	1246.8	1246.6
165°	1262.3	1261.9	1261.9	1261.9	1261.9	1261.9	1263.3	1264.7	1266.1	1267.4	1267.3
167.5°	1279.0	1278.6	1278.8	1279.1	1279.3	1279.5	1280.9	1282.3	1283.7	1285.1	1285.1
170°	1293.5	1293.0	1293.0	1293.0	1293.0	1293.0	1294.6	1296.2	1297.8	1299.5	1299.5
172.5°	1304.9	1304.4	1304.4	1304.4	1304.4	1304.4	1305.8	1307.2	1308.5	1309.9	1309.8
175°	1312.1	1311.7	1311.7	1311.7	1311.7	1311.7	1313.0	1314.4	1315.8	1317.2	1317.1
177.5°	1316.3	1315.8	1315.8	1315.8	1315.8	1315.8	1317.2	1318.6	1319.9	1321.3	1321.2
180°	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	875.5	875.5	875.5	875.5
2.5°	778.2	776.8	771.1	765.4
5°	659.8	654.9	653.3	651.7
7.5°	576.5	576.1	567.6	559.0
10°	503.2	503.8	496.1	488.3
12.5°	450.8	445.7	445.1	444.5
15°	411.3	406.7	405.9	405.0
17.5°	383.5	380.7	379.9	379.0
20°	362.4	360.8	359.3	357.9
22.5°	344.1	342.1	340.9	339.6
25°	326.4	324.6	324.2	323.8
27.5°	310.6	308.4	308.4	308.4
30°	295.6	294.1	293.5	292.9
32.5°	281.5	280.3	280.3	280.3
35°	268.3	267.7	266.9	266.1
37.5°	256.4	256.4	255.9	255.5
40°	244.8	245.4	245.4	245.4
42.5°	234.2	234.8	234.8	234.8
45°	223.2	224.3	224.7	225.1
47.5°	212.5	214.1	214.5	214.9
50°	201.9	203.1	203.3	203.5
52.5°	191.1	192.6	193.6	194.6
55°	179.8	181.2	181.8	182.4
57.5°	167.6	169.0	169.2	169.4
60°	154.2	155.6	156.0	156.4
62.5°	141.4	142.2	142.6	143.0
65°	126.8	128.0	128.8	129.6
67.5°	112.7	113.8	113.8	113.8
70°	97.1	97.5	98.1	98.7
72.5°	82.7	82.9	82.9	82.9
75°	67.4	67.8	68.0	68.3
77.5°	53.0	53.2	53.2	53.2
80°	38.8	38.6	38.6	38.6
82.5°	26.6	26.0	26.0	26.0
85°	15.2	15.0	15.2	15.4
87.5°	6.9	6.9	6.9	6.9
90°	29.7	30.2	30.6	31.1
92.5°	45.9	45.5	45.0	44.6
95°	80.8	80.8	80.8	80.8
97.5°	116.7	116.5	116.3	116.0
100°	156.1	156.6	157.0	157.5
102.5°	200.7	200.4	200.2	200.0
105°	245.2	245.7	246.1	246.6
107.5°	294.9	294.7	294.5	294.2
110°	344.3	343.9	343.4	342.9



TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	394.7	394.7	394.7	394.7
115°	442.1	441.8	441.6	441.4
117.5°	491.1	490.4	489.7	489.0
120°	541.2	540.7	540.2	539.8
122.5°	590.6	589.9	589.2	588.5
125°	639.9	639.0	638.1	637.2
127.5°	688.6	687.7	686.8	685.9
130°	738.4	736.8	735.1	733.5
132.5°	786.7	785.6	784.4	783.3
135°	836.4	836.0	835.5	835.1
137.5°	882.7	882.0	881.3	880.7
140°	930.0	928.4	926.8	925.2
142.5°	974.2	973.1	971.9	970.8
145°	1017.1	1016.1	1015.2	1014.3
147.5°	1057.8	1056.4	1055.1	1053.7
150°	1095.1	1093.7	1092.4	1091.0
152.5°	1130.7	1129.5	1128.4	1127.2
155°	1164.2	1162.6	1161.0	1159.4
157.5°	1193.5	1192.2	1190.8	1189.4
160°	1221.2	1220.3	1219.3	1218.4
162.5°	1245.0	1243.4	1241.8	1240.2
165°	1265.7	1264.1	1262.5	1260.9
167.5°	1283.7	1282.3	1280.9	1279.5
170°	1297.8	1296.2	1294.6	1293.0
172.5°	1308.2	1306.6	1305.0	1303.4
175°	1315.5	1313.8	1312.2	1310.6
177.5°	1319.6	1318.0	1316.4	1314.8
180°	1318.9	1318.9	1318.9	1318.9

TEST NUMBER: P831364

CATALOG NUMBER: S123DIP-S340D1195U940-4F0-1E-UDD-G1

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.82	9.50	9.95	10.61	12.17	11.06	11.73	12.19	12.85	14.41
	3H	10.45	11.06	11.59	12.19	13.76	12.47	13.07	13.61	14.20	15.77
	4H	11.02	11.60	12.17	12.72	14.30	12.91	13.48	14.06	14.61	16.19
	6H	11.38	11.91	12.54	13.04	14.63	13.18	13.70	14.33	14.83	16.42
	8H	11.47	11.98	12.63	13.12	14.70	13.23	13.73	14.39	14.88	16.46
	12H	11.51	11.99	12.68	13.13	14.73	13.25	13.72	14.41	14.86	16.47
4H	2H	9.37	9.95	10.53	11.07	12.65	11.20	11.77	12.35	12.90	14.48
	3H	11.19	11.66	12.35	12.82	14.41	12.80	13.28	13.96	14.43	16.02
	4H	11.88	12.32	13.04	13.46	15.07	13.38	13.82	14.54	14.96	16.57
	6H	12.34	12.72	13.51	13.88	15.48	13.77	14.15	14.94	15.31	16.91
	8H	12.47	12.82	13.64	13.98	15.60	13.88	14.23	15.05	15.39	17.00
	12H	12.53	12.85	13.72	14.02	15.64	13.92	14.23	15.10	15.40	17.02
8H	4H	12.13	12.48	13.30	13.64	15.25	13.47	13.82	14.64	14.98	16.59
	6H	12.71	13.00	13.90	14.20	15.81	13.96	14.25	15.15	15.45	17.07
	8H	12.92	13.17	14.11	14.35	15.98	14.14	14.39	15.34	15.57	17.21
	12H	13.03	13.25	14.23	14.43	16.10	14.24	14.46	15.43	15.63	17.30
12H	4H	12.12	12.44	13.30	13.61	15.23	13.44	13.75	14.62	14.92	16.54
	6H	12.76	13.01	13.95	14.19	15.82	13.98	14.23	15.17	15.41	17.04
	8H	12.99	13.21	14.18	14.38	16.05	14.17	14.39	15.37	15.57	17.23