

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331936-940

Luminaire Tested: **S123DIP-S560D805U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331936-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S560D805U940-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 560 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 805 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4660.9 lumens  
Efficiency: N/A  
Efficacy: 121.4 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 38.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331936-940

CATALOG NUMBER: S123DIP-S560D805U940-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

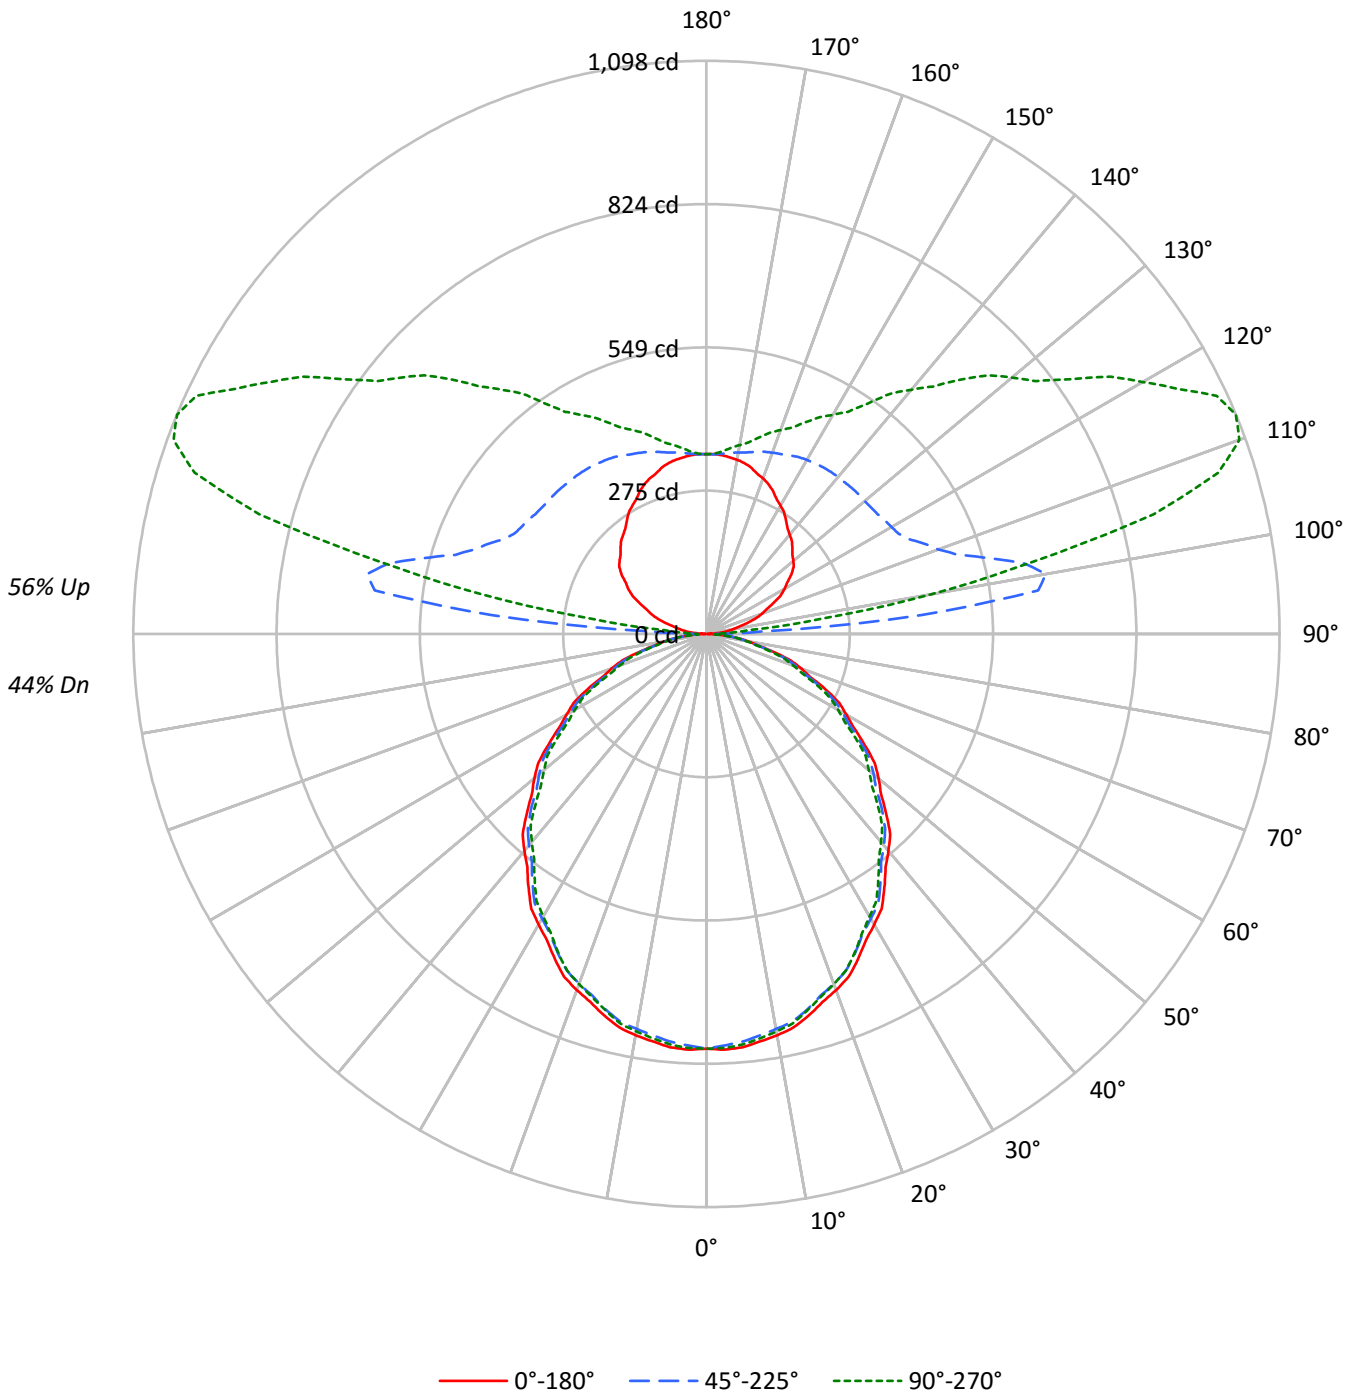



TEST NUMBER: P331936-940

CATALOG NUMBER: S123DIP-S560D805U940-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	106	106	106	106	97	97	97	97	80	80	80	65	65	65	51	51	51	44
1	96	92	88	85	88	85	81	78	70	68	66	57	55	54	45	44	43	37
2	88	80	74	69	80	74	69	64	61	58	54	50	47	45	40	38	36	31
3	80	71	63	58	73	65	59	54	54	49	46	44	41	38	35	33	31	26
4	73	62	55	49	67	57	51	45	48	43	39	39	36	33	31	29	26	23
5	67	56	48	42	61	51	44	39	43	38	33	35	31	28	28	25	23	20
6	62	50	42	36	56	46	39	34	39	33	29	32	28	25	26	23	20	17
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	23	20	18	15
8	53	41	33	28	48	38	31	26	32	27	23	26	22	19	21	18	16	14
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	20	17	15	12
10	46	34	27	22	42	32	25	21	27	22	18	22	19	16	18	15	13	11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	8551	8551	8551
5°	8590	8473	8532
10°	8534	8400	8451
15°	8433	8304	8320
20°	8317	8168	8176
25°	8162	8007	7991
30°	7988	7828	7768
35°	7808	7638	7540
40°	7620	7429	7314
45°	7415	7237	7060
50°	7206	7000	6805
55°	6934	6756	6549
60°	6661	6469	6265
65°	6421	6159	5968
70°	6061	5803	5545
75°	5540	5340	5115
80°	4996	4785	4742
85°	4384	4224	4051



TEST NUMBER: P331936-940

CATALOG NUMBER: S123DIP-S560D805U940-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	74.8	1.6
10°-20°	211.3	4.5
20°-30°	312.1	6.7
30°-40°	364.6	7.8
40°-50°	366.5	7.9
50°-60°	322.0	6.9
60°-70°	239.9	5.1
70°-80°	136.7	2.9
80°-90°	41.9	0.9
90°-100°	191.7	4.1
100°-110°	542.7	11.6
110°-120°	533.9	11.5
120°-130°	425.8	9.1
130°-140°	335.7	7.2
140°-150°	250.6	5.4
150°-160°	174.7	3.7
160°-170°	102.6	2.2
170°-180°	33.4	0.7
0°-30°	598.2	12.8
0°-40°	962.8	20.7
0°-60°	1651.3	35.4
0°-90°	2069.8	44.4
90°-120°	1268.2	27.2
90°-150°	2280.4	48.9
90°-180°	2591.0	55.6
0°-180°	4660.9	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	794	794	794	794	794	
5°	795	791	784	791	790	75
15°	757	754	745	750	747	213
25°	687	683	674	675	673	316
35°	594	590	581	577	574	372
45°	487	484	475	467	464	376
55°	370	368	360	353	349	331
65°	252	248	242	236	234	249
75°	133	131	128	125	123	142
85°	36	34	34	33	33	39
90°	1	8	17	20	20	4
95°	24	77	413	121	81	26
105°	81	120	560	980	887	86
115°	143	178	429	940	1078	141
125°	199	235	400	725	850	176
135°	233	278	395	597	690	180
145°	266	304	390	490	539	166
155°	302	326	377	429	447	139
165°	330	339	361	383	390	93
175°	344	344	346	351	351	33
180°	344	344	344	344	344	



TEST NUMBER: P331936-940

CATALOG NUMBER: S123DIP-S560D805U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	797.1	796.7	796.2	795.7	795.2	794.2	792.9	791.6	790.3	789.0	790.1
5°	795.0	794.3	793.5	792.8	792.0	790.9	789.2	787.5	785.9	784.2	785.7
7.5°	787.3	786.6	785.8	785.1	784.3	783.0	781.3	779.5	777.8	776.1	777.5
10°	780.8	780.0	779.3	778.5	777.8	776.3	774.4	772.4	770.4	768.5	769.8
12.5°	772.0	771.3	770.7	770.1	769.5	768.2	766.3	764.5	762.7	760.8	761.8
15°	756.8	756.3	755.6	755.0	754.4	753.1	751.2	749.2	747.2	745.2	746.5
17.5°	739.2	738.4	737.6	736.8	736.0	734.7	732.7	730.8	728.8	726.7	727.6
20°	726.1	725.2	724.2	723.4	722.5	721.0	719.1	717.1	715.1	713.1	713.7
22.5°	711.3	710.4	709.5	708.6	707.7	706.2	704.3	702.3	700.3	698.4	698.8
25°	687.2	686.3	685.4	684.5	683.5	682.1	680.1	678.1	676.2	674.2	674.3
27.5°	661.4	660.5	659.6	658.7	657.8	656.3	654.2	652.1	650.0	647.8	647.9
30°	642.7	642.0	641.2	640.5	639.7	638.3	636.1	634.0	632.0	629.8	629.8
32.5°	624.2	623.2	622.1	621.2	620.2	618.8	617.2	615.5	613.9	612.3	611.4
35°	594.2	593.3	592.5	591.6	590.7	589.2	587.2	585.2	583.3	581.3	580.4
37.5°	563.7	562.5	561.3	560.2	559.0	557.5	555.4	553.5	551.4	549.5	548.4
40°	542.3	541.4	540.6	539.7	538.7	537.2	535.0	533.0	530.8	528.7	527.4
42.5°	521.0	520.0	519.0	517.9	516.9	515.3	513.2	511.1	509.0	506.8	505.6
45°	487.1	486.4	485.8	485.2	484.6	483.3	481.3	479.4	477.4	475.4	473.6
47.5°	453.3	452.4	451.6	450.7	449.8	448.4	446.6	444.7	442.8	441.0	439.2
50°	430.3	429.5	428.8	428.0	427.3	426.0	423.9	422.0	420.0	418.0	416.3
52.5°	406.3	405.7	405.3	404.7	404.2	402.9	400.8	398.8	396.6	394.6	393.2
55°	369.5	369.3	369.3	369.1	368.9	367.8	365.9	363.9	361.9	360.0	358.3
57.5°	334.6	334.0	333.5	333.1	332.5	331.4	329.8	328.3	326.7	325.1	323.7
60°	309.4	309.2	309.2	309.0	308.8	307.8	306.0	304.2	302.4	300.5	299.2
62.5°	287.0	286.6	286.2	285.9	285.4	284.4	282.5	280.7	278.8	277.1	275.7
65°	252.1	251.3	250.6	249.8	249.1	247.9	246.4	244.9	243.3	241.8	240.6
67.5°	215.0	214.4	213.7	213.0	212.3	211.4	210.3	209.1	207.9	206.9	205.8
70°	192.6	191.7	190.8	189.9	189.0	188.1	187.2	186.3	185.3	184.4	183.3
72.5°	169.2	168.4	167.8	167.1	166.5	165.6	164.6	163.5	162.5	161.5	160.5
75°	133.2	132.6	132.0	131.3	130.8	130.3	129.7	129.3	128.9	128.4	127.7
77.5°	101.4	101.0	100.7	100.4	100.0	99.6	99.1	98.5	97.9	97.4	96.9
80°	80.6	80.2	79.7	79.3	78.7	78.4	78.1	77.8	77.5	77.2	77.0
82.5°	60.4	60.3	60.2	60.1	60.0	59.9	59.9	59.8	59.7	59.7	59.4
85°	35.5	35.2	35.0	34.6	34.3	34.2	34.2	34.2	34.2	34.2	33.9
87.5°	14.4	14.4	14.4	14.4	14.3	14.4	14.6	14.9	15.2	15.5	15.2
90°	1.4	2.8	4.2	6.2	7.7	9.1	11.1	13.3	15.3	17.4	16.8
92.5°	8.6	12.8	18.7	24.2	30.0	40.3	58.6	88.5	118.0	107.2	80.9
95°	23.7	25.8	33.4	45.3	63.4	90.6	149.9	253.8	368.1	413.4	335.4
97.5°	40.4	41.1	47.2	57.4	75.3	104.7	161.3	278.5	469.0	640.7	685.5
100°	51.6	52.3	57.2	67.0	83.6	110.8	159.6	262.8	446.2	660.2	797.5
102.5°	63.3	64.6	68.8	78.1	93.2	118.1	161.8	249.4	412.7	623.9	803.2
105°	80.9	82.9	87.1	95.5	108.8	130.4	168.0	239.8	371.6	560.5	760.6
107.5°	99.5	101.7	105.7	113.9	126.4	146.4	179.4	239.2	345.4	504.4	686.2
110°	113.0	115.0	118.5	126.2	138.0	157.6	189.0	241.9	335.4	472.7	639.3



TEST NUMBER: P331936-940

CATALOG NUMBER: S123DIP-S560D805U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	125.2	127.3	130.8	138.5	150.3	169.2	198.4	247.4	329.8	451.5	598.6
115°	142.9	145.7	149.9	156.9	168.7	187.5	214.0	256.5	327.7	428.7	549.4
117.5°	160.6	163.8	167.3	173.7	187.0	204.4	230.6	268.6	329.0	415.4	519.7
120°	172.9	175.0	178.4	185.5	198.7	216.2	241.2	277.5	331.2	409.2	504.1
122.5°	183.5	185.6	189.0	196.6	209.3	227.8	252.4	285.8	335.0	405.4	491.2
125°	198.7	200.1	204.3	212.0	225.2	244.0	268.4	299.1	340.9	400.2	474.7
127.5°	210.3	212.3	217.5	225.3	240.0	258.8	282.3	310.0	347.6	397.7	460.3
130°	217.5	219.6	225.9	234.3	248.9	267.7	290.7	317.2	352.0	396.0	452.5
132.5°	223.1	225.8	232.6	242.6	257.3	275.5	297.9	323.9	355.4	395.4	445.2
135°	232.8	235.7	243.3	253.8	268.4	287.2	308.8	332.5	360.4	394.6	435.7
137.5°	242.0	245.0	252.5	263.7	278.1	295.6	316.4	338.9	363.8	393.1	427.5
140°	248.2	251.6	258.7	269.8	283.7	301.1	321.4	342.3	366.0	392.5	422.5
142.5°	254.9	257.8	265.4	275.4	289.4	305.6	325.3	345.6	367.7	391.4	418.0
145°	265.6	267.7	274.0	284.5	296.3	312.4	330.5	349.3	368.8	389.7	412.1
147.5°	276.5	277.8	283.9	292.9	304.3	318.1	334.7	351.5	368.8	387.1	406.2
150°	283.7	284.5	290.0	299.1	308.8	321.4	337.4	352.0	368.8	384.9	402.3
152.5°	291.0	291.1	296.7	304.7	313.3	325.3	339.1	353.2	367.1	382.0	397.8
155°	301.8	301.8	306.0	313.0	320.7	330.5	342.3	353.5	365.3	377.2	391.1
157.5°	310.5	311.0	314.4	320.6	327.1	334.7	344.1	354.2	362.9	372.8	383.6
160°	317.2	317.2	320.0	325.6	330.5	337.4	345.8	354.2	361.9	369.5	378.5
162.5°	322.3	322.3	324.5	329.0	333.2	339.1	346.3	353.6	359.6	366.1	373.5
165°	329.8	329.0	330.5	333.9	336.7	341.6	347.1	352.0	356.2	361.1	366.7
167.5°	335.5	334.7	335.4	338.0	339.9	343.0	347.1	351.0	352.9	356.1	360.2
170°	338.9	337.4	338.1	340.2	341.6	343.0	346.5	349.3	350.7	352.8	356.2
172.5°	341.1	340.2	340.4	341.9	342.7	343.6	346.5	348.7	349.0	350.0	352.3
175°	343.7	343.0	342.3	343.7	343.7	344.4	345.8	347.1	346.5	346.5	347.9
177.5°	344.9	344.4	343.8	344.4	344.4	344.4	344.9	346.1	344.9	344.4	344.9
180°	344.4	344.4	344.4	344.4	344.4	344.4	344.4	344.4	344.4	344.4	344.4



TEST NUMBER: P331936-940

CATALOG NUMBER: S123DIP-S560D805U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	794.4	794.4	794.4	794.4	794.4	794.4	794.4	794.4
2.5°	791.4	792.6	793.8	794.3	794.2	794.1	794.0	793.9
5°	787.2	788.7	790.2	790.9	790.5	790.2	790.0	789.6
7.5°	778.8	780.2	781.6	782.1	781.9	781.8	781.6	781.4
10°	771.2	772.6	773.9	774.5	774.2	773.8	773.6	773.2
12.5°	762.8	763.8	764.8	765.2	765.0	764.8	764.6	764.5
15°	747.7	748.9	750.1	750.2	749.3	748.4	747.5	746.6
17.5°	728.5	729.3	730.2	730.4	730.1	729.8	729.4	729.1
20°	714.3	715.0	715.5	715.6	715.2	714.7	714.3	713.8
22.5°	699.4	699.8	700.3	700.3	699.7	699.1	698.6	697.9
25°	674.5	674.7	674.8	674.7	674.2	673.8	673.2	672.8
27.5°	648.1	648.2	648.3	648.1	647.5	646.9	646.3	645.8
30°	629.8	629.8	629.8	629.3	628.2	627.1	626.1	625.0
32.5°	610.6	609.8	608.9	608.1	607.6	607.1	606.5	605.9
35°	579.4	578.5	577.7	576.8	576.0	575.3	574.5	573.8
37.5°	547.2	546.2	545.1	544.3	543.9	543.3	542.9	542.3
40°	526.3	525.0	523.9	522.9	522.3	521.7	521.1	520.5
42.5°	504.4	503.2	501.9	501.1	500.4	499.9	499.3	498.6
45°	471.8	469.9	468.1	466.8	466.1	465.3	464.6	463.8
47.5°	437.4	435.6	433.8	432.6	431.9	431.2	430.6	429.9
50°	414.7	413.0	411.3	410.1	409.1	408.2	407.3	406.4
52.5°	391.7	390.3	388.9	387.6	386.7	385.8	385.0	384.1
55°	356.6	355.0	353.3	352.0	351.3	350.5	349.8	349.0
57.5°	322.2	320.7	319.2	318.0	317.1	316.3	315.4	314.5
60°	297.8	296.5	295.1	294.0	293.3	292.5	291.8	291.0
62.5°	274.3	273.0	271.6	270.6	270.1	269.7	269.1	268.6
65°	239.3	238.2	236.9	236.1	235.7	235.2	234.8	234.3
67.5°	204.7	203.7	202.6	201.7	201.1	200.5	199.8	199.2
70°	182.3	181.3	180.2	179.2	178.5	177.7	177.0	176.2
72.5°	159.6	158.6	157.7	157.0	156.7	156.2	155.9	155.4
75°	126.9	126.2	125.4	124.8	124.3	123.9	123.4	123.0
77.5°	96.4	95.9	95.3	95.1	95.1	95.1	95.1	95.1
80°	76.9	76.7	76.6	76.5	76.5	76.5	76.5	76.5
82.5°	59.1	58.9	58.6	58.4	58.3	58.1	58.1	58.0
85°	33.5	33.3	32.9	32.8	32.8	32.8	32.8	32.8
87.5°	15.2	15.2	15.3	15.5	15.3	15.5	15.7	15.5
90°	17.4	18.1	18.8	20.2	19.5	20.2	21.0	20.2
92.5°	58.7	46.5	41.1	37.5	36.3	34.2	34.9	33.6
95°	251.0	170.1	133.1	108.1	94.8	88.5	83.6	80.9
97.5°	625.6	501.1	411.2	327.8	276.3	245.0	226.1	220.2
100°	822.0	765.4	683.9	584.9	514.5	463.6	436.4	437.1
102.5°	887.2	885.4	837.9	775.1	720.3	680.0	657.3	641.2
105°	906.3	976.0	989.3	971.2	939.1	912.6	890.3	886.8
107.5°	851.4	964.6	1025.6	1050.4	1051.1	1042.1	1034.6	1028.1
110°	799.0	927.2	1015.0	1063.9	1083.3	1089.0	1087.5	1086.2





TEST NUMBER: P331936-940

CATALOG NUMBER: S123DIP-S560D805U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	747.1	878.2	976.6	1039.3	1075.0	1092.3	1097.6	1097.9
115°	678.3	799.6	902.1	978.1	1030.4	1061.0	1075.0	1078.5
117.5°	628.6	733.3	825.3	902.4	956.9	992.0	1012.1	1016.9
120°	602.4	696.4	780.2	850.5	905.6	944.7	961.4	965.5
122.5°	581.8	666.9	744.4	809.9	858.7	893.9	912.3	917.6
125°	554.2	630.3	697.1	753.0	797.5	828.2	845.6	850.5
127.5°	530.3	598.0	658.4	709.2	748.9	775.1	790.9	795.3
130°	515.2	577.9	634.5	681.8	718.8	743.9	758.5	764.1
132.5°	501.2	559.0	611.5	656.7	691.4	716.6	729.5	733.4
135°	482.4	531.9	577.2	617.0	651.1	672.1	684.6	689.5
137.5°	465.3	505.9	544.9	579.3	608.1	629.3	639.9	643.1
140°	455.2	490.8	524.2	554.2	580.8	600.2	611.4	610.7
142.5°	445.8	476.3	505.3	531.4	553.9	571.2	581.3	580.6
145°	434.4	457.4	479.7	499.9	517.3	531.9	537.5	538.9
147.5°	425.0	443.3	461.3	475.6	488.8	498.7	504.1	504.6
150°	418.3	434.4	449.0	462.2	472.7	480.4	484.6	484.6
152.5°	412.1	426.0	438.9	450.0	458.2	465.3	467.8	467.8
155°	403.0	414.1	424.5	432.9	439.2	444.8	446.2	446.8
157.5°	393.2	402.5	410.6	417.1	422.6	426.8	427.9	427.8
160°	387.6	395.3	402.3	407.2	412.1	416.2	416.2	415.5
162.5°	380.9	387.4	393.9	398.2	401.4	405.0	405.0	404.4
165°	372.3	376.5	381.4	384.9	387.6	390.4	389.7	389.7
167.5°	364.7	367.9	370.8	373.3	374.5	376.5	375.8	375.8
170°	359.7	361.9	364.6	366.0	366.7	368.1	367.4	367.4
172.5°	355.3	356.8	359.0	359.9	360.0	361.4	360.2	359.6
175°	349.3	350.0	351.3	351.3	351.3	352.0	351.3	350.7
177.5°	345.5	346.1	346.6	346.6	346.1	346.6	345.5	345.5
180°	344.4	344.4	344.4	344.4	344.4	344.4	344.4	344.4

(END OF REPORT)