

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331998-940

Luminaire Tested: **S123DIP-S775D1195U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331998-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D1195U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6483.7 lumens
Efficiency: N/A
Efficacy: 113.9 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 56.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331998-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

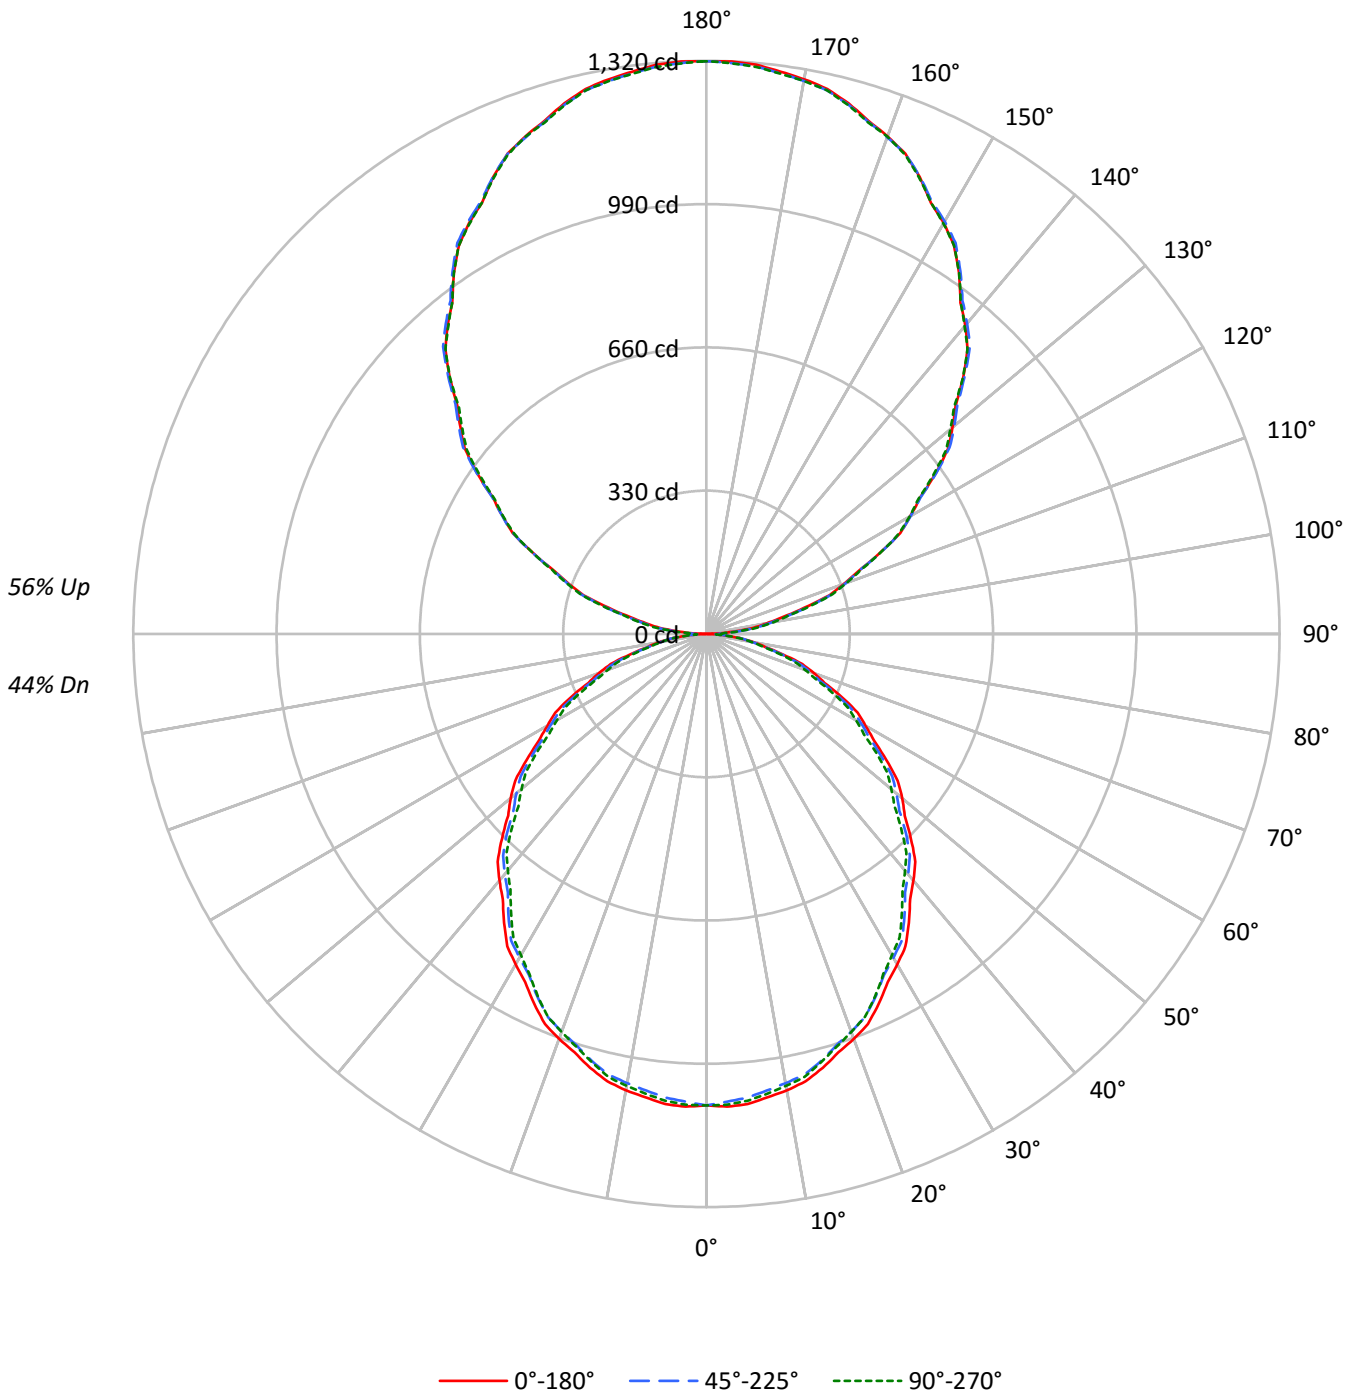



TEST NUMBER: P331998-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	97	97	97	97	80	80	80	64	64	64	50	50	50	44				44
1	96	92	88	85	88	84	81	78	70	67	65	57	55	53	44	43	42				37	
2	88	80	74	69	80	74	68	64	61	57	54	50	47	45	39	37	36				31	
3	80	71	63	57	73	65	58	53	54	49	45	44	40	38	35	32	30				26	
4	73	62	55	49	67	57	50	45	48	43	39	39	35	32	31	28	26				22	
5	67	55	47	41	61	51	44	39	43	37	33	35	31	28	28	25	23				19	
6	62	50	42	36	56	46	39	34	38	33	29	32	28	24	25	22	20				17	
7	57	45	37	31	52	41	34	29	35	29	25	29	25	22	23	20	18				15	
8	53	41	33	28	48	38	31	26	32	26	23	26	22	19	21	18	16				13	
9	49	37	30	25	45	34	28	23	29	24	20	24	20	17	19	16	14				12	
10	46	34	27	22	42	31	25	21	27	22	18	22	18	16	18	15	13				11	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11689	11689	11689
5°	11743	11581	11662
10°	11664	11481	11552
15°	11529	11352	11373
20°	11369	11165	11176
25°	11156	10946	10923
30°	10920	10700	10618
35°	10674	10441	10306
40°	10418	10153	9997
45°	10135	9893	9651
50°	9851	9568	9302
55°	9481	9233	8955
60°	9104	8844	8564
65°	8777	8420	8155
70°	8286	7934	7582
75°	7573	7303	6991
80°	6831	6540	6484
85°	5990	5768	5545



TEST NUMBER: P331998-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.3	1.6
10°-20°	288.8	4.5
20°-30°	426.6	6.6
30°-40°	498.4	7.7
40°-50°	501.0	7.7
50°-60°	440.1	6.8
60°-70°	327.9	5.1
70°-80°	186.8	2.9
80°-90°	57.5	0.9
90°-100°	85.9	1.3
100°-110°	257.2	4.0
110°-120°	437.4	6.7
120°-130°	575.3	8.9
130°-140°	646.7	10.0
140°-150°	635.6	9.8
150°-160°	535.1	8.3
160°-170°	356.2	5.5
170°-180°	124.7	1.9
0°-30°	817.7	12.6
0°-40°	1316.1	20.3
0°-60°	2257.3	34.8
0°-90°	2829.5	43.6
90°-120°	780.5	12.0
90°-150°	2638.1	40.7
90°-180°	3654.0	56.4
0°-180°	6483.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1086	1086	1086	1086	1086	
5°	1087	1082	1072	1081	1079	103
15°	1035	1030	1019	1025	1021	292
25°	939	933	922	922	920	432
35°	812	806	795	789	784	508
45°	666	662	650	639	634	514
55°	505	504	492	482	477	452
65°	345	340	331	323	320	340
75°	182	178	176	171	168	195
85°	48	47	47	45	45	53
90°	1	12	25	29	31	6
95°	61	68	77	81	81	69
105°	233	236	244	245	247	250
115°	440	443	441	442	441	436
125°	644	647	646	641	637	574
135°	836	842	841	837	835	644
145°	1014	1016	1020	1018	1014	633
155°	1162	1162	1162	1166	1159	534
165°	1265	1262	1262	1267	1261	357
175°	1316	1312	1312	1317	1311	125
180°	1319	1319	1319	1319	1319	



TEST NUMBER: P331998-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1089.6	1089.0	1088.3	1087.6	1087.0	1085.7	1083.9	1082.1	1080.2	1078.4	1080.0
5°	1086.8	1085.7	1084.8	1083.7	1082.6	1081.0	1078.7	1076.5	1074.2	1071.8	1074.0
7.5°	1076.2	1075.1	1074.1	1073.1	1072.0	1070.3	1067.9	1065.6	1063.2	1060.9	1062.7
10°	1067.2	1066.1	1065.1	1064.1	1063.1	1061.2	1058.5	1055.8	1053.1	1050.4	1052.3
12.5°	1055.3	1054.4	1053.6	1052.7	1051.8	1050.1	1047.6	1045.0	1042.5	1039.9	1041.3
15°	1034.6	1033.7	1032.9	1032.1	1031.2	1029.5	1026.7	1024.0	1021.4	1018.7	1020.3
17.5°	1010.4	1009.3	1008.3	1007.2	1006.1	1004.2	1001.6	998.8	996.1	993.5	994.6
20°	992.5	991.2	990.1	988.8	987.6	985.5	982.8	980.2	977.5	974.7	975.6
22.5°	972.3	971.1	969.8	968.6	967.3	965.4	962.7	960.0	957.3	954.6	955.3
25°	939.3	938.1	936.8	935.6	934.3	932.4	929.6	926.9	924.3	921.6	921.8
27.5°	904.0	902.8	901.6	900.4	899.2	897.2	894.2	891.4	888.4	885.5	885.6
30°	878.6	877.5	876.6	875.5	874.4	872.4	869.6	866.7	863.8	860.9	860.9
32.5°	853.2	851.9	850.4	849.1	847.7	846.0	843.6	841.4	839.2	837.0	835.8
35°	812.3	811.1	809.9	808.6	807.4	805.4	802.6	800.0	797.3	794.6	793.4
37.5°	770.4	768.9	767.3	765.7	764.2	762.1	759.3	756.5	753.8	751.1	749.6
40°	741.4	740.1	738.9	737.6	736.4	734.3	731.4	728.5	725.6	722.6	721.0
42.5°	712.2	710.8	709.4	708.0	706.6	704.5	701.5	698.6	695.7	692.8	691.2
45°	665.8	664.9	664.1	663.3	662.4	660.7	657.9	655.2	652.6	649.9	647.4
47.5°	619.6	618.4	617.2	616.0	614.7	612.9	610.4	607.9	605.3	602.8	600.3
50°	588.3	587.2	586.1	585.1	584.1	582.2	579.5	576.8	574.1	571.4	569.2
52.5°	555.4	554.6	553.9	553.2	552.5	550.7	547.9	545.0	542.2	539.3	537.3
55°	505.2	504.9	504.7	504.5	504.3	502.8	500.2	497.5	494.7	492.0	489.8
57.5°	457.4	456.6	455.9	455.2	454.5	453.1	450.9	448.7	446.6	444.4	442.4
60°	422.9	422.8	422.6	422.3	422.1	420.8	418.3	415.8	413.3	410.8	408.9
62.5°	392.4	391.8	391.3	390.7	390.2	388.7	386.2	383.7	381.2	378.7	376.8
65°	344.6	343.5	342.4	341.4	340.4	338.9	336.7	334.7	332.6	330.6	328.9
67.5°	293.9	293.0	292.1	291.1	290.3	289.0	287.5	285.9	284.3	282.8	281.2
70°	263.3	262.1	260.8	259.6	258.3	257.1	255.8	254.6	253.3	252.1	250.7
72.5°	231.2	230.2	229.3	228.5	227.6	226.4	225.0	223.6	222.1	220.7	219.5
75°	182.1	181.2	180.4	179.6	178.8	178.0	177.4	176.7	176.1	175.6	174.5
77.5°	138.6	138.1	137.7	137.2	136.7	136.2	135.4	134.6	133.9	133.1	132.4
80°	110.2	109.6	109.0	108.3	107.7	107.2	106.7	106.4	105.9	105.5	105.3
82.5°	82.6	82.4	82.3	82.1	82.0	81.9	81.9	81.8	81.7	81.6	81.2
85°	48.5	48.2	47.7	47.3	46.9	46.7	46.7	46.7	46.7	46.7	46.3
87.5°	19.6	19.6	19.5	19.5	19.4	19.7	20.2	20.5	21.0	21.4	21.4
90°	1.1	3.3	5.6	7.9	10.3	12.9	15.9	18.9	21.8	24.9	25.8
92.5°	25.1	26.7	28.2	29.8	31.3	33.0	34.7	36.4	38.1	39.8	40.5
95°	61.2	62.8	64.4	66.0	67.6	69.3	71.2	72.9	74.8	76.7	77.6
97.5°	108.6	109.8	111.0	112.2	113.3	114.7	116.0	117.3	118.6	119.9	121.0
100°	140.9	142.3	143.7	145.1	146.4	147.7	148.8	150.0	151.1	152.3	153.0
102.5°	178.2	179.1	179.9	180.7	181.6	182.7	184.2	185.7	187.3	188.8	189.5
105°	233.1	233.5	234.1	234.5	235.0	236.2	238.3	240.4	242.5	244.5	244.5
107.5°	296.9	297.2	297.5	297.7	298.0	298.6	299.4	300.2	301.0	301.9	302.6
110°	336.7	337.2	337.6	338.1	338.6	339.0	339.5	339.9	340.4	340.9	341.8



TEST NUMBER: P331998-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	378.2	378.4	378.7	379.0	379.2	379.4	379.5	379.6	379.7	379.8	380.9
115°	440.3	441.0	441.7	442.4	443.1	443.2	442.7	442.3	441.8	441.4	441.6
117.5°	502.9	503.4	503.8	504.3	504.7	504.7	504.1	503.5	502.9	502.3	502.2
120°	541.9	543.2	544.7	546.0	547.4	547.5	546.4	545.2	544.0	542.9	542.7
122.5°	582.5	583.4	584.5	585.5	586.6	586.7	586.1	585.5	585.0	584.3	583.7
125°	644.4	645.2	645.8	646.5	647.2	647.3	646.8	646.4	646.0	645.5	644.5
127.5°	701.6	703.1	704.5	706.1	707.5	708.0	707.5	706.9	706.5	706.0	704.7
130°	739.8	741.5	743.4	745.3	747.1	747.7	747.0	746.3	745.6	744.9	744.0
132.5°	777.8	779.7	781.6	783.4	785.2	786.0	785.4	784.9	784.3	783.9	782.7
135°	836.1	837.5	838.8	840.3	841.6	842.2	842.0	841.8	841.5	841.2	840.3
137.5°	890.0	891.1	892.2	893.4	894.6	895.5	896.1	896.6	897.2	897.9	896.9
140°	927.3	928.4	929.6	930.8	931.8	932.6	932.8	933.0	933.3	933.5	933.3
142.5°	961.3	962.4	963.6	964.7	965.9	966.6	967.1	967.5	967.9	968.3	968.0
145°	1014.3	1014.8	1015.2	1015.7	1016.1	1016.7	1017.4	1018.1	1018.8	1019.5	1019.2
147.5°	1060.7	1061.6	1062.4	1063.2	1064.1	1064.8	1065.4	1066.0	1066.7	1067.4	1067.4
150°	1093.1	1093.5	1094.0	1094.4	1094.9	1095.4	1095.8	1096.3	1096.7	1097.2	1097.2
152.5°	1119.5	1120.3	1120.9	1121.5	1122.1	1122.6	1122.8	1123.2	1123.5	1123.7	1124.1
155°	1161.5	1161.5	1161.5	1161.5	1161.5	1161.5	1161.8	1162.0	1162.3	1162.4	1163.4
157.5°	1197.0	1196.8	1196.5	1196.2	1196.0	1195.9	1196.1	1196.3	1196.5	1196.7	1197.7
160°	1219.4	1219.0	1218.5	1218.1	1217.6	1217.4	1217.4	1217.4	1217.4	1217.4	1218.5
162.5°	1239.3	1238.7	1238.1	1237.4	1236.8	1236.5	1236.7	1236.9	1237.1	1237.2	1238.4
165°	1265.1	1264.4	1263.6	1262.9	1262.3	1261.9	1261.9	1261.9	1261.9	1261.9	1263.3
167.5°	1285.6	1284.6	1283.7	1282.8	1281.8	1281.5	1281.7	1281.8	1282.0	1282.2	1283.6
170°	1297.2	1296.2	1295.3	1294.4	1293.4	1293.0	1293.0	1293.0	1293.0	1293.0	1294.6
172.5°	1306.3	1305.4	1304.4	1303.5	1302.6	1302.2	1302.2	1302.2	1302.2	1302.2	1303.6
175°	1315.8	1314.9	1313.9	1313.0	1312.2	1311.6	1311.6	1311.6	1311.6	1311.6	1313.0
177.5°	1319.7	1319.0	1318.3	1317.5	1316.8	1316.4	1316.4	1316.4	1316.4	1316.4	1317.5
180°	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9



TEST NUMBER: P331998-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1081.7	1083.4	1085.0	1085.8	1085.7	1085.5	1085.3	1085.1
5°	1076.0	1078.1	1080.2	1081.0	1080.6	1080.2	1079.8	1079.3
7.5°	1064.6	1066.5	1068.4	1069.2	1068.9	1068.6	1068.4	1068.2
10°	1054.2	1056.0	1057.8	1058.6	1058.2	1057.7	1057.4	1056.9
12.5°	1042.7	1044.0	1045.4	1046.0	1045.7	1045.4	1045.3	1045.0
15°	1022.0	1023.6	1025.3	1025.5	1024.2	1023.0	1021.8	1020.6
17.5°	995.8	996.9	998.1	998.4	998.0	997.6	997.1	996.7
20°	976.4	977.2	978.1	978.2	977.6	977.0	976.3	975.7
22.5°	955.9	956.6	957.3	957.2	956.4	955.6	954.8	954.0
25°	921.9	922.2	922.4	922.2	921.6	921.0	920.3	919.7
27.5°	885.8	886.0	886.2	885.8	885.1	884.3	883.5	882.7
30°	860.9	860.9	860.9	860.1	858.7	857.2	855.8	854.3
32.5°	834.6	833.5	832.3	831.3	830.5	829.7	828.9	828.2
35°	792.1	790.9	789.6	788.5	787.4	786.4	785.3	784.3
37.5°	748.1	746.5	745.1	744.0	743.3	742.7	742.0	741.4
40°	719.3	717.7	716.0	714.8	714.0	713.1	712.3	711.5
42.5°	689.5	687.8	686.2	684.9	684.1	683.2	682.4	681.6
45°	644.9	642.4	639.9	638.1	637.1	636.1	635.0	634.0
47.5°	597.9	595.5	593.0	591.3	590.4	589.5	588.6	587.6
50°	566.9	564.5	562.3	560.5	559.3	558.0	556.8	555.5
52.5°	535.4	533.4	531.5	529.9	528.7	527.4	526.2	525.0
55°	487.5	485.2	483.0	481.3	480.2	479.2	478.1	477.2
57.5°	440.3	438.4	436.3	434.7	433.5	432.3	431.1	429.9
60°	407.1	405.2	403.3	401.9	400.8	399.8	398.8	397.8
62.5°	375.0	373.1	371.2	370.0	369.3	368.5	367.8	367.1
65°	327.2	325.6	323.9	322.7	322.1	321.5	320.8	320.2
67.5°	279.8	278.4	276.9	275.7	274.9	274.0	273.1	272.2
70°	249.2	247.7	246.3	245.0	244.0	243.0	241.9	240.9
72.5°	218.1	216.9	215.6	214.6	214.1	213.6	213.0	212.5
75°	173.4	172.5	171.4	170.6	170.0	169.3	168.7	168.1
77.5°	131.7	131.0	130.3	130.0	130.0	130.0	130.0	130.0
80°	105.1	104.9	104.7	104.6	104.6	104.6	104.6	104.6
82.5°	80.9	80.5	80.1	79.8	79.7	79.5	79.4	79.2
85°	45.8	45.5	45.0	44.9	44.9	44.9	44.9	44.9
87.5°	21.4	21.5	21.5	21.5	21.7	21.8	21.8	21.9
90°	26.8	27.6	28.5	29.2	29.7	30.1	30.6	31.1
92.5°	41.3	42.0	42.7	43.0	42.7	42.4	42.1	41.8
95°	78.5	79.5	80.3	80.8	80.8	80.8	80.8	80.8
97.5°	122.1	123.1	124.2	124.7	124.6	124.5	124.4	124.3
100°	153.6	154.4	155.1	155.6	156.1	156.6	157.0	157.5
102.5°	190.1	190.8	191.5	191.8	191.7	191.6	191.5	191.5
105°	244.5	244.5	244.5	244.8	245.2	245.7	246.1	246.6
107.5°	303.4	304.2	304.9	305.1	304.8	304.5	304.3	304.0
110°	342.7	343.7	344.6	344.7	344.3	343.8	343.4	343.0



TEST NUMBER: P331998-940

CATALOG NUMBER: S123DIP-S775D1195U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	382.0	383.2	384.2	384.8	384.7	384.6	384.5	384.4
115°	441.8	442.0	442.3	442.3	442.0	441.8	441.6	441.4
117.5°	502.2	502.1	502.1	501.8	501.1	500.4	499.8	499.2
120°	542.4	542.2	542.0	541.6	541.2	540.7	540.3	539.8
122.5°	583.2	582.6	581.9	581.3	580.7	580.1	579.3	578.7
125°	643.6	642.7	641.8	640.9	640.0	639.0	638.1	637.2
127.5°	703.4	702.1	700.8	699.6	698.6	697.5	696.4	695.4
130°	743.1	742.2	741.3	739.9	738.3	736.7	735.1	733.5
132.5°	781.7	780.6	779.4	778.3	777.0	775.8	774.5	773.3
135°	839.5	838.5	837.6	836.9	836.4	836.0	835.5	835.1
137.5°	895.9	894.9	893.9	893.0	892.2	891.4	890.5	889.6
140°	933.0	932.8	932.6	931.7	930.1	928.4	926.8	925.2
142.5°	967.9	967.6	967.4	966.6	965.4	964.1	963.0	961.7
145°	1019.0	1018.8	1018.6	1018.0	1017.1	1016.1	1015.2	1014.3
147.5°	1067.4	1067.4	1067.4	1066.7	1065.2	1063.9	1062.5	1061.1
150°	1097.2	1097.2	1097.2	1096.5	1095.1	1093.8	1092.3	1091.0
152.5°	1124.4	1124.8	1125.2	1124.8	1123.6	1122.4	1121.1	1120.0
155°	1164.3	1165.2	1166.2	1165.8	1164.2	1162.6	1161.0	1159.3
157.5°	1198.5	1199.5	1200.5	1200.3	1199.1	1197.7	1196.5	1195.2
160°	1219.7	1220.8	1222.0	1222.1	1221.2	1220.2	1219.3	1218.4
162.5°	1239.6	1240.7	1241.9	1241.7	1240.2	1238.8	1237.2	1235.8
165°	1264.7	1266.1	1267.5	1267.3	1265.7	1264.1	1262.5	1260.9
167.5°	1285.0	1286.5	1287.9	1287.9	1286.5	1285.0	1283.6	1282.2
170°	1296.2	1297.9	1299.5	1299.5	1297.9	1296.2	1294.6	1293.0
172.5°	1305.0	1306.4	1307.9	1307.8	1306.1	1304.5	1302.9	1301.3
175°	1314.4	1315.8	1317.1	1317.1	1315.5	1313.8	1312.2	1310.6
177.5°	1318.7	1319.7	1320.8	1320.7	1319.5	1318.1	1316.9	1315.6
180°	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9

(END OF REPORT)