

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331961-940

Luminaire Tested: **S123DIP-S775D365U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P331961-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123DIP-S775D365U940-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
UPLIGHT 365 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4120.2 lumens
Efficiency: N/A
Efficacy: 117.7 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 35
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P331961-940

CATALOG NUMBER: S123DIP-S775D365U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

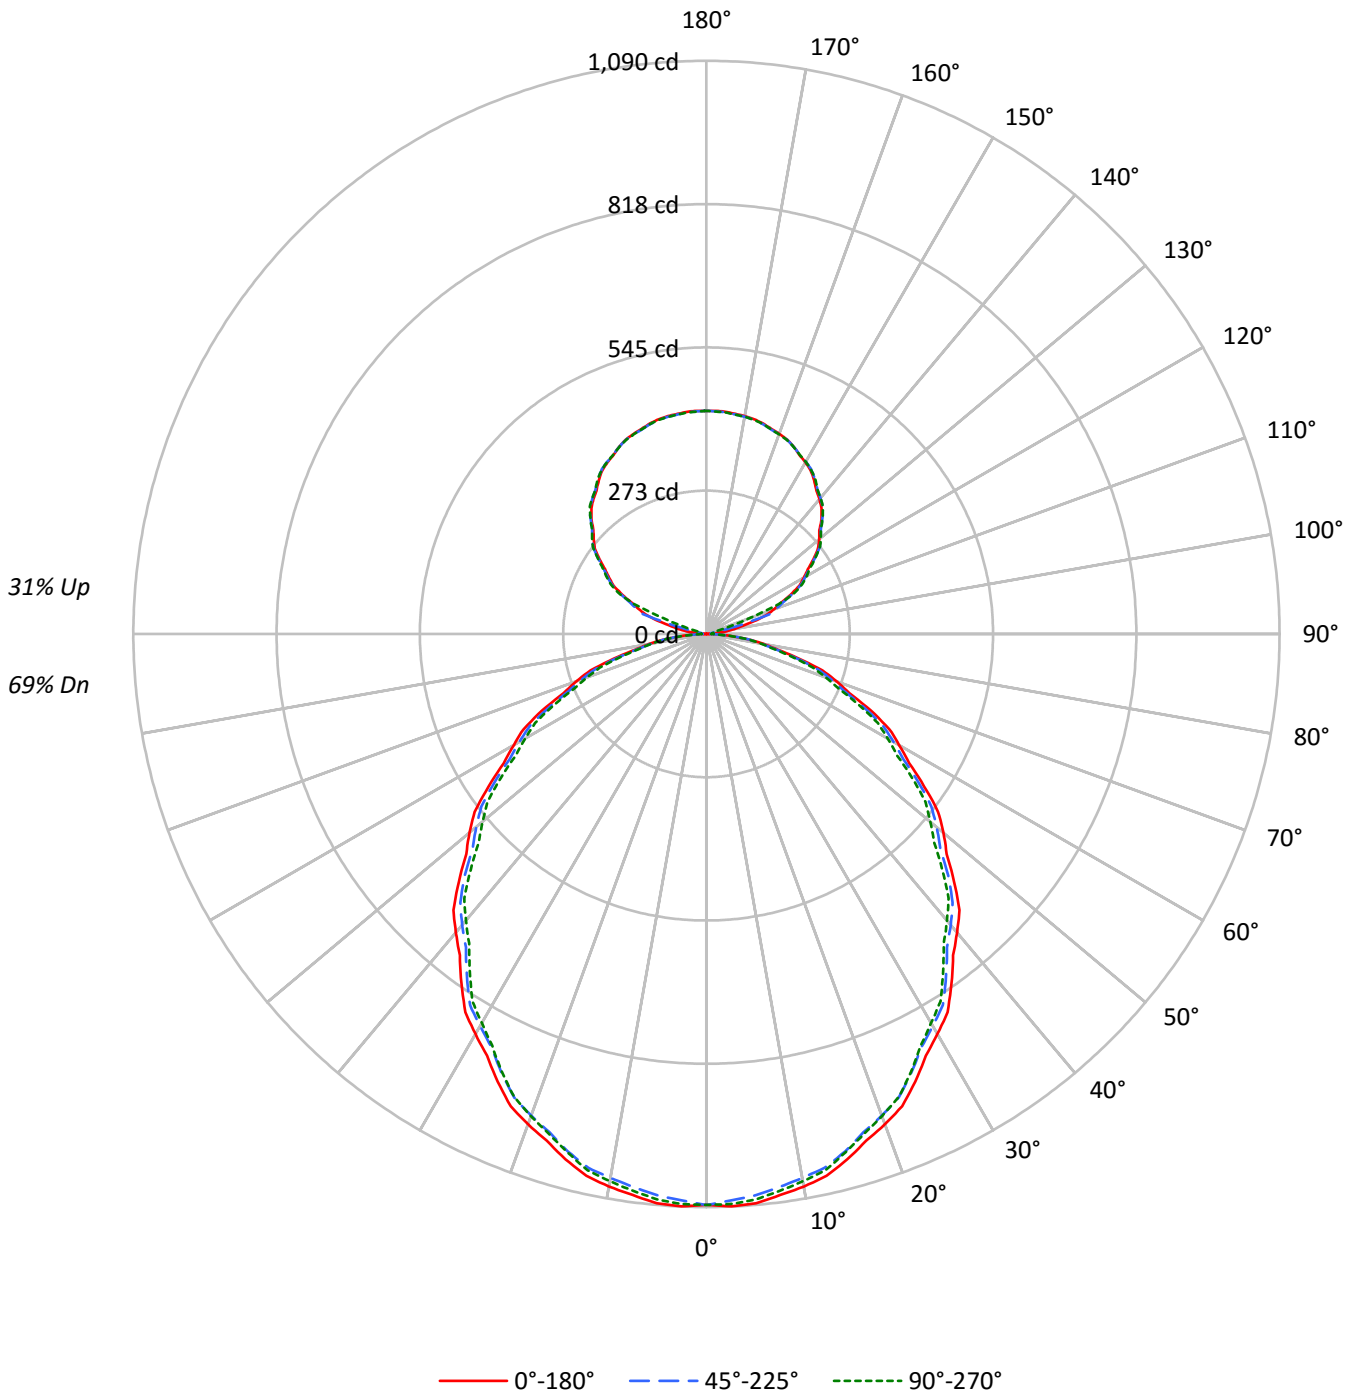



TEST NUMBER: P331961-940

CATALOG NUMBER: S123DIP-S775D365U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	73	73	73	69
1	102	97	93	90	96	92	89	85	82	79	77	73	71	69	65	63	62	58
2	93	85	79	73	87	80	75	70	72	68	64	64	61	58	57	54	52	48
3	85	75	67	61	80	71	64	58	63	58	54	57	52	49	50	47	44	41
4	77	66	58	52	73	63	55	50	56	50	46	51	46	42	45	41	38	35
5	71	59	51	44	67	56	49	43	51	44	39	45	40	36	41	36	33	30
6	66	53	45	39	62	51	43	37	46	39	35	41	36	32	37	33	29	27
7	61	48	40	34	57	46	38	33	41	35	31	37	32	28	34	29	26	24
8	57	44	36	30	53	42	34	29	38	32	27	34	29	25	31	27	23	21
9	53	40	32	27	50	38	31	26	35	29	24	32	26	23	29	24	21	19
10	49	37	29	24	47	35	28	24	32	26	22	29	24	21	26	22	19	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	11689	11689	11689
5°	11743	11581	11662
10°	11664	11481	11552
15°	11529	11352	11373
20°	11369	11165	11176
25°	11156	10946	10923
30°	10920	10700	10618
35°	10674	10441	10306
40°	10418	10153	9997
45°	10135	9893	9651
50°	9851	9568	9302
55°	9481	9233	8955
60°	9104	8844	8564
65°	8777	8420	8155
70°	8286	7934	7582
75°	7573	7303	6991
80°	6831	6540	6484
85°	5990	5768	5545



TEST NUMBER: P331961-940

CATALOG NUMBER: S123DIP-S775D365U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	102.3	2.5
10°-20°	288.8	7.0
20°-30°	426.6	10.4
30°-40°	498.4	12.1
40°-50°	501.0	12.2
50°-60°	440.1	10.7
60°-70°	327.9	8.0
70°-80°	186.8	4.5
80°-90°	54.8	1.3
90°-100°	15.4	0.4
100°-110°	73.5	1.8
110°-120°	176.5	4.3
120°-130°	224.8	5.5
130°-140°	240.2	5.8
140°-150°	224.6	5.5
150°-160°	181.2	4.4
160°-170°	116.9	2.8
170°-180°	40.3	1.0
0°-30°	817.7	19.8
0°-40°	1316.1	31.9
0°-60°	2257.3	54.8
0°-90°	2826.8	68.6
90°-120°	265.4	6.4
90°-150°	955.0	23.2
90°-180°	1293.0	31.4
0°-180°	4120.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1086	1086	1086	1086	1086	
5°	1087	1082	1072	1081	1079	103
15°	1035	1030	1019	1025	1021	292
25°	939	933	922	922	920	432
35°	812	806	795	789	784	508
45°	666	662	650	639	634	514
55°	505	504	492	482	477	452
65°	345	340	331	323	320	340
75°	182	178	176	171	168	195
85°	48	47	47	45	45	53
90°	0	4	8	9	10	4
95°	19	7	10	12	12	24
105°	94	96	69	16	14	100
115°	176	178	181	184	185	174
125°	248	251	252	253	253	222
135°	309	311	312	313	312	238
145°	357	359	360	360	360	223
155°	393	392	393	394	392	181
165°	414	413	413	415	413	117
175°	424	423	423	425	423	40
180°	424	424	424	424	424	



TEST NUMBER: P331961-940

CATALOG NUMBER: S123DIP-S775D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1089.6	1089.0	1088.3	1087.6	1087.0	1085.7	1083.9	1082.1	1080.2	1078.4	1080.0
5°	1086.8	1085.7	1084.8	1083.7	1082.6	1081.0	1078.7	1076.5	1074.2	1071.8	1074.0
7.5°	1076.2	1075.1	1074.1	1073.1	1072.0	1070.3	1067.9	1065.6	1063.2	1060.9	1062.7
10°	1067.2	1066.1	1065.1	1064.1	1063.1	1061.2	1058.5	1055.8	1053.1	1050.4	1052.3
12.5°	1055.3	1054.4	1053.6	1052.7	1051.8	1050.1	1047.6	1045.0	1042.5	1039.9	1041.3
15°	1034.6	1033.7	1032.9	1032.1	1031.2	1029.5	1026.7	1024.0	1021.4	1018.7	1020.3
17.5°	1010.4	1009.3	1008.3	1007.2	1006.1	1004.2	1001.6	998.8	996.1	993.5	994.6
20°	992.5	991.2	990.1	988.8	987.6	985.5	982.8	980.2	977.5	974.7	975.6
22.5°	972.3	971.1	969.8	968.6	967.3	965.4	962.7	960.0	957.3	954.6	955.3
25°	939.3	938.1	936.8	935.6	934.3	932.4	929.6	926.9	924.3	921.6	921.8
27.5°	904.0	902.8	901.6	900.4	899.2	897.2	894.2	891.4	888.4	885.5	885.6
30°	878.6	877.5	876.6	875.5	874.4	872.4	869.6	866.7	863.8	860.9	860.9
32.5°	853.2	851.9	850.4	849.1	847.7	846.0	843.6	841.4	839.2	837.0	835.8
35°	812.3	811.1	809.9	808.6	807.4	805.4	802.6	800.0	797.3	794.6	793.4
37.5°	770.4	768.9	767.3	765.7	764.2	762.1	759.3	756.5	753.8	751.1	749.6
40°	741.4	740.1	738.9	737.6	736.4	734.3	731.4	728.5	725.6	722.6	721.0
42.5°	712.2	710.8	709.4	708.0	706.6	704.5	701.5	698.6	695.7	692.8	691.2
45°	665.8	664.9	664.1	663.3	662.4	660.7	657.9	655.2	652.6	649.9	647.4
47.5°	619.6	618.4	617.2	616.0	614.7	612.9	610.4	607.9	605.3	602.8	600.3
50°	588.3	587.2	586.1	585.1	584.1	582.2	579.5	576.8	574.1	571.4	569.2
52.5°	555.4	554.6	553.9	553.2	552.5	550.7	547.9	545.0	542.2	539.3	537.3
55°	505.2	504.9	504.7	504.5	504.3	502.8	500.2	497.5	494.7	492.0	489.8
57.5°	457.4	456.6	455.9	455.2	454.5	453.1	450.9	448.7	446.6	444.4	442.4
60°	422.9	422.8	422.6	422.3	422.1	420.8	418.3	415.8	413.3	410.8	408.9
62.5°	392.4	391.8	391.3	390.7	390.2	388.7	386.2	383.7	381.2	378.7	376.8
65°	344.6	343.5	342.4	341.4	340.4	338.9	336.7	334.7	332.6	330.6	328.9
67.5°	293.9	293.0	292.1	291.1	290.3	289.0	287.5	285.9	284.3	282.8	281.2
70°	263.3	262.1	260.8	259.6	258.3	257.1	255.8	254.6	253.3	252.1	250.7
72.5°	231.2	230.2	229.3	228.5	227.6	226.4	225.0	223.6	222.1	220.7	219.5
75°	182.1	181.2	180.4	179.6	178.8	178.0	177.4	176.7	176.1	175.6	174.5
77.5°	138.6	138.1	137.7	137.2	136.7	136.2	135.4	134.6	133.9	133.1	132.4
80°	110.2	109.6	109.0	108.3	107.7	107.2	106.7	106.4	105.9	105.5	105.3
82.5°	82.6	82.4	82.3	82.1	82.0	81.9	81.9	81.8	81.7	81.6	81.2
85°	48.5	48.2	47.7	47.3	46.9	46.7	46.7	46.7	46.7	46.7	46.3
87.5°	19.4	19.1	18.7	18.4	18.0	17.9	17.9	17.9	17.9	17.9	17.8
90°	0.4	1.0	1.7	2.4	3.1	3.9	4.8	5.7	6.7	7.6	7.8
92.5°	5.9	5.7	5.4	5.3	5.1	5.4	6.0	6.7	7.4	8.0	8.5
95°	19.3	16.3	13.5	10.6	7.8	6.7	7.5	8.2	9.0	9.8	10.3
97.5°	38.6	37.4	36.0	34.8	33.4	30.3	25.2	20.2	15.2	10.2	10.7
100°	53.2	54.7	56.1	57.4	58.9	54.1	43.2	32.3	21.3	10.4	11.0
102.5°	69.9	70.9	71.9	72.9	73.9	68.5	56.5	44.6	32.6	20.8	19.0
105°	93.9	94.7	95.4	96.2	97.0	94.3	87.9	81.6	75.3	69.0	56.6
107.5°	119.2	119.8	120.5	121.1	121.7	122.5	123.5	124.5	125.5	126.4	117.3
110°	136.2	136.7	137.2	137.8	138.4	139.0	139.8	140.5	141.3	142.1	139.8



TEST NUMBER: P331961-940

CATALOG NUMBER: S123DIP-S775D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	152.2	152.8	153.3	153.7	154.3	154.9	155.7	156.5	157.2	158.0	158.0
115°	176.1	176.6	177.0	177.4	177.8	178.3	179.0	179.6	180.2	180.8	181.6
117.5°	199.3	199.8	200.3	200.8	201.3	201.8	202.1	202.4	202.8	203.0	203.6
120°	213.7	214.3	214.9	215.5	216.2	216.6	216.8	217.0	217.2	217.4	218.0
122.5°	228.3	228.8	229.3	229.8	230.3	230.7	231.0	231.2	231.5	231.8	232.2
125°	248.3	248.9	249.4	249.9	250.6	250.9	251.3	251.6	251.8	252.1	252.3
127.5°	267.7	268.3	268.9	269.4	269.9	270.4	270.7	271.1	271.4	271.7	272.0
130°	279.8	280.4	280.9	281.5	282.0	282.5	282.8	283.0	283.3	283.6	283.8
132.5°	291.4	291.9	292.6	293.1	293.6	294.0	294.3	294.5	294.7	295.0	295.2
135°	309.2	309.5	310.0	310.4	310.8	311.1	311.4	311.7	312.0	312.3	312.5
137.5°	324.2	324.8	325.3	325.8	326.4	326.7	326.9	327.0	327.2	327.3	327.7
140°	334.3	334.7	335.2	335.6	336.0	336.4	336.5	336.7	337.0	337.2	337.4
142.5°	343.7	344.1	344.5	344.9	345.4	345.6	345.9	346.1	346.3	346.5	346.7
145°	356.7	357.2	357.7	358.2	358.6	359.0	359.1	359.3	359.4	359.5	359.7
147.5°	369.0	369.3	369.6	370.0	370.2	370.5	370.7	370.8	371.0	371.0	371.2
150°	376.6	376.7	376.9	377.2	377.4	377.6	377.7	377.8	378.0	378.1	378.3
152.5°	383.3	383.4	383.5	383.6	383.7	383.9	383.9	384.0	384.1	384.1	384.4
155°	393.0	392.8	392.6	392.5	392.4	392.4	392.4	392.4	392.5	392.6	393.0
157.5°	400.4	400.4	400.4	400.3	400.3	400.3	400.2	400.1	400.0	400.0	400.4
160°	404.9	404.8	404.7	404.7	404.7	404.6	404.5	404.4	404.4	404.3	404.7
162.5°	409.2	409.0	408.8	408.7	408.5	408.3	408.2	408.2	408.1	408.0	408.5
165°	414.4	414.1	413.9	413.8	413.5	413.4	413.3	413.2	413.1	413.1	413.7
167.5°	418.4	418.1	417.9	417.6	417.2	417.1	417.1	417.1	417.1	417.1	417.7
170°	420.6	420.4	420.1	419.8	419.5	419.4	419.4	419.4	419.4	419.4	420.0
172.5°	422.1	421.9	421.5	421.2	420.8	420.7	420.7	420.8	420.9	420.9	421.5
175°	424.1	423.7	423.4	423.1	422.8	422.6	422.7	422.8	422.8	422.8	423.4
177.5°	424.6	424.4	424.1	423.8	423.5	423.4	423.5	423.5	423.6	423.7	424.1
180°	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1



TEST NUMBER: P331961-940

CATALOG NUMBER: S123DIP-S775D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1081.7	1083.4	1085.0	1085.8	1085.7	1085.5	1085.3	1085.1
5°	1076.0	1078.1	1080.2	1081.0	1080.6	1080.2	1079.8	1079.3
7.5°	1064.6	1066.5	1068.4	1069.2	1068.9	1068.6	1068.4	1068.2
10°	1054.2	1056.0	1057.8	1058.6	1058.2	1057.7	1057.4	1056.9
12.5°	1042.7	1044.0	1045.4	1046.0	1045.7	1045.4	1045.3	1045.0
15°	1022.0	1023.6	1025.3	1025.5	1024.2	1023.0	1021.8	1020.6
17.5°	995.8	996.9	998.1	998.4	998.0	997.6	997.1	996.7
20°	976.4	977.2	978.1	978.2	977.6	977.0	976.3	975.7
22.5°	955.9	956.6	957.3	957.2	956.4	955.6	954.8	954.0
25°	921.9	922.2	922.4	922.2	921.6	921.0	920.3	919.7
27.5°	885.8	886.0	886.2	885.8	885.1	884.3	883.5	882.7
30°	860.9	860.9	860.9	860.1	858.7	857.2	855.8	854.3
32.5°	834.6	833.5	832.3	831.3	830.5	829.7	828.9	828.2
35°	792.1	790.9	789.6	788.5	787.4	786.4	785.3	784.3
37.5°	748.1	746.5	745.1	744.0	743.3	742.7	742.0	741.4
40°	719.3	717.7	716.0	714.8	714.0	713.1	712.3	711.5
42.5°	689.5	687.8	686.2	684.9	684.1	683.2	682.4	681.6
45°	644.9	642.4	639.9	638.1	637.1	636.1	635.0	634.0
47.5°	597.9	595.5	593.0	591.3	590.4	589.5	588.6	587.6
50°	566.9	564.5	562.3	560.5	559.3	558.0	556.8	555.5
52.5°	535.4	533.4	531.5	529.9	528.7	527.4	526.2	525.0
55°	487.5	485.2	483.0	481.3	480.2	479.2	478.1	477.2
57.5°	440.3	438.4	436.3	434.7	433.5	432.3	431.1	429.9
60°	407.1	405.2	403.3	401.9	400.8	399.8	398.8	397.8
62.5°	375.0	373.1	371.2	370.0	369.3	368.5	367.8	367.1
65°	327.2	325.6	323.9	322.7	322.1	321.5	320.8	320.2
67.5°	279.8	278.4	276.9	275.7	274.9	274.0	273.1	272.2
70°	249.2	247.7	246.3	245.0	244.0	243.0	241.9	240.9
72.5°	218.1	216.9	215.6	214.6	214.1	213.6	213.0	212.5
75°	173.4	172.5	171.4	170.6	170.0	169.3	168.7	168.1
77.5°	131.7	131.0	130.3	130.0	130.0	130.0	130.0	130.0
80°	105.1	104.9	104.7	104.6	104.6	104.6	104.6	104.6
82.5°	80.9	80.5	80.1	79.8	79.7	79.5	79.4	79.2
85°	45.8	45.5	45.0	44.9	44.9	44.9	44.9	44.9
87.5°	17.7	17.7	17.5	17.5	17.5	17.5	17.6	17.6
90°	8.1	8.4	8.6	8.9	9.0	9.2	9.3	9.5
92.5°	9.0	9.5	9.9	10.2	10.2	10.3	10.3	10.4
95°	10.8	11.2	11.8	11.9	11.9	11.9	11.9	11.9
97.5°	11.2	11.9	12.4	12.7	12.8	12.8	12.9	13.0
100°	11.5	12.0	12.7	12.9	13.0	13.1	13.2	13.2
102.5°	17.3	15.5	13.8	13.0	13.1	13.2	13.4	13.5
105°	44.2	31.8	19.4	13.3	13.5	13.6	13.7	13.8
107.5°	108.3	99.2	90.2	80.9	71.6	62.2	52.9	43.5
110°	137.5	135.2	132.9	126.7	116.7	106.6	96.7	86.7



TEST NUMBER: P331961-940

CATALOG NUMBER: S123DIP-S775D365U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	158.1	158.1	158.2	157.1	155.0	152.9	150.8	148.6
115°	182.3	183.0	183.7	184.1	184.4	184.8	185.0	185.3
117.5°	204.2	204.7	205.3	205.6	205.6	205.7	205.8	205.8
120°	218.6	219.1	219.6	220.0	220.0	220.0	220.0	220.0
122.5°	232.6	233.0	233.4	233.5	233.6	233.7	233.7	233.8
125°	252.4	252.5	252.6	252.8	252.9	253.1	253.2	253.3
127.5°	272.2	272.4	272.7	272.7	272.5	272.4	272.2	272.2
130°	284.2	284.5	284.7	284.8	284.6	284.5	284.4	284.2
132.5°	295.5	295.8	296.0	296.1	295.9	295.7	295.5	295.3
135°	312.7	312.9	313.1	313.1	312.9	312.7	312.5	312.3
137.5°	328.0	328.3	328.7	328.8	328.6	328.5	328.3	328.2
140°	337.7	338.0	338.3	338.3	338.2	338.0	338.0	337.8
142.5°	347.0	347.1	347.4	347.4	347.2	347.0	346.8	346.6
145°	359.8	360.0	360.1	360.2	360.2	360.2	360.2	360.2
147.5°	371.3	371.5	371.7	371.6	371.2	370.9	370.6	370.2
150°	378.4	378.5	378.7	378.6	378.4	378.3	378.0	377.8
152.5°	384.7	385.0	385.2	385.1	384.9	384.5	384.1	383.9
155°	393.3	393.7	394.0	394.0	393.6	393.2	392.7	392.3
157.5°	400.8	401.3	401.7	401.6	401.1	400.6	399.9	399.4
160°	405.1	405.6	406.0	405.9	405.5	404.9	404.5	403.9
162.5°	409.0	409.5	409.9	410.0	409.6	409.1	408.7	408.2
165°	414.2	414.8	415.4	415.4	414.9	414.4	413.9	413.4
167.5°	418.2	418.8	419.4	419.4	418.8	418.2	417.7	417.1
170°	420.5	421.1	421.6	421.6	421.1	420.5	420.0	419.4
172.5°	422.0	422.6	423.1	423.1	422.5	421.9	421.2	420.6
175°	423.8	424.4	424.8	424.8	424.3	423.7	423.1	422.6
177.5°	424.5	425.0	425.4	425.3	424.8	424.3	423.7	423.1
180°	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1

(END OF REPORT)