

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P331972-940

Luminaire Tested: **S123DIP-S775D585U940-4F0-1E-UDD-F4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P331972-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S775D585U940-4F0-1E-UDD-F4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4717.8 lumens  
Efficiency: N/A  
Efficacy: 117.1 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.18 / 1.31  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 40.3  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P331972-940

CATALOG NUMBER: S123DIP-S775D585U940-4F0-1E-UDD-F4

### Luminous Intensity Polar Plot

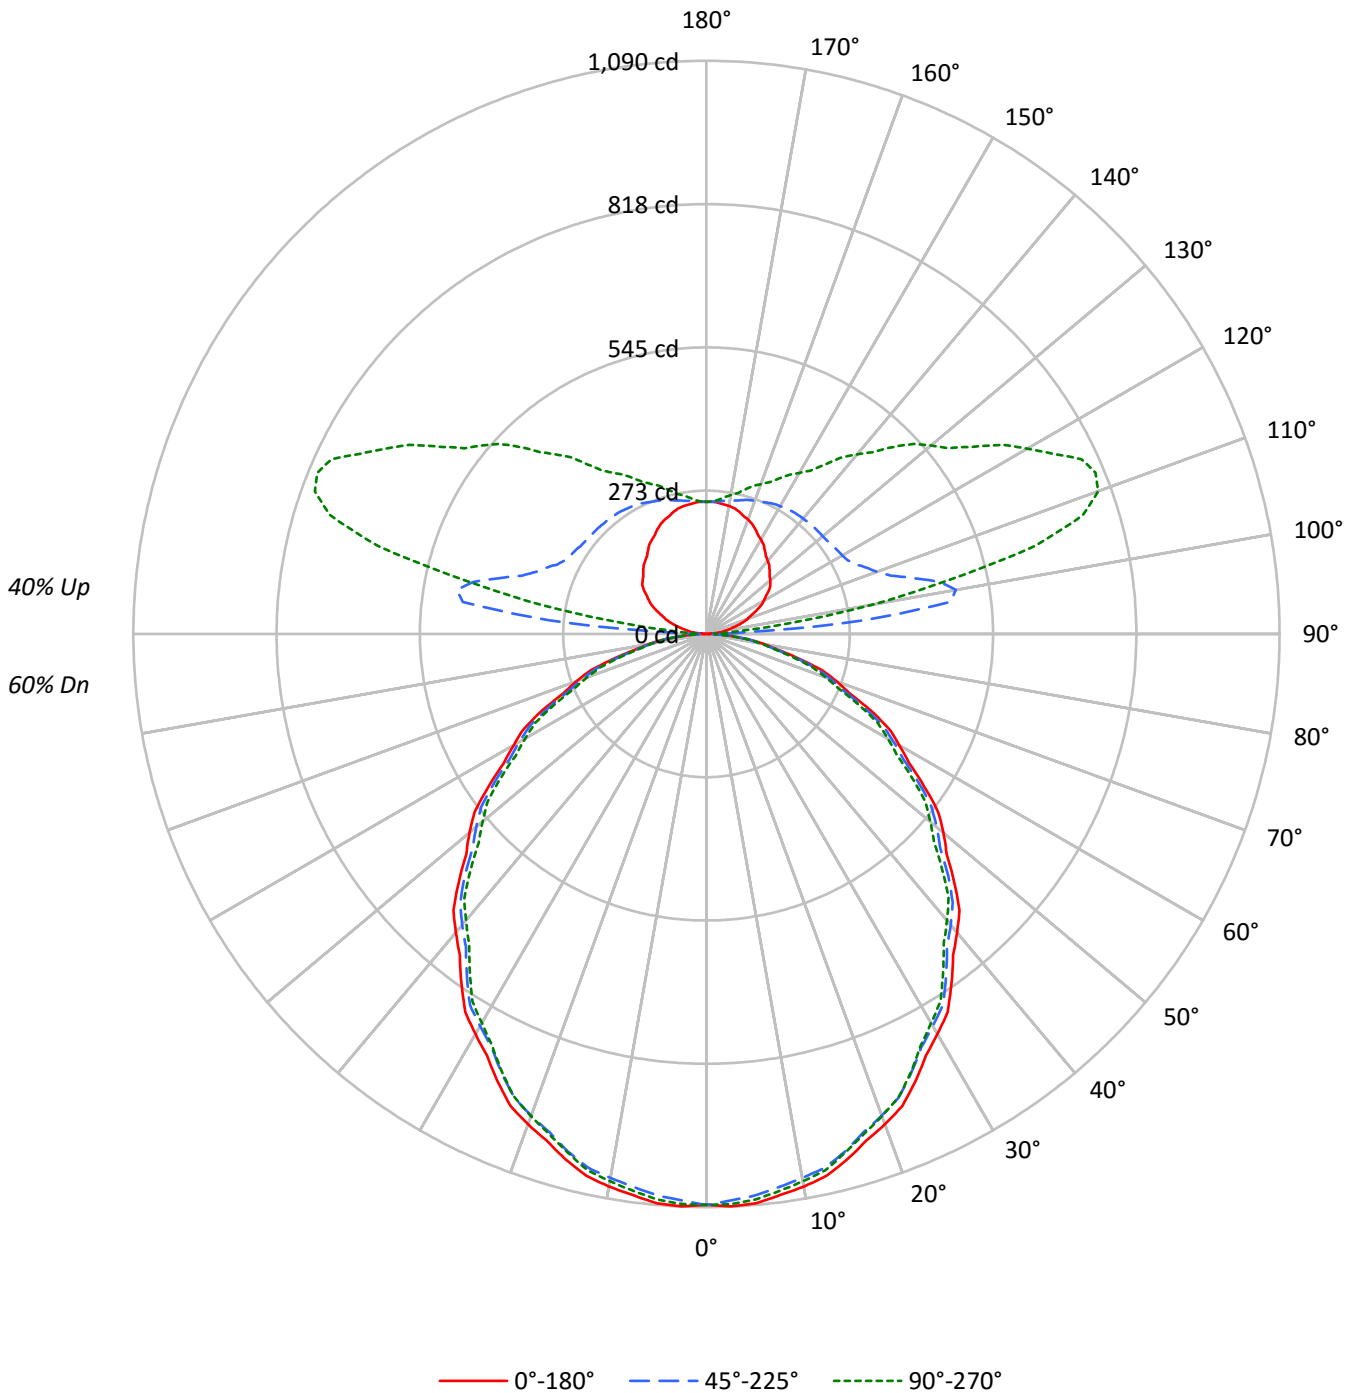



TEST NUMBER: P331972-940

CATALOG NUMBER: S123DIP-S775D585U940-4F0-1E-UDD-F4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									20									
RC	80									70									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																			
RCR																																														
0	110	110	110	110	102	102	102	102	89	89	89	77	77	77	65	65	65	60																												
1	100	96	92	88	93	89	86	83	78	75	73	67	65	64	58	56	55	50																												
2	91	83	77	72	85	78	73	68	68	64	60	59	56	53	51	48	46	42																												
3	83	73	66	60	77	69	62	57	60	55	51	52	48	45	45	42	39	36																												
4	76	65	57	51	71	61	54	48	53	48	43	47	42	38	40	37	34	31																												
5	70	58	50	43	65	54	47	41	48	42	37	42	37	33	36	32	30	26																												
6	64	52	44	38	60	49	41	36	43	37	33	38	33	29	33	29	26	23																												
7	59	47	39	33	55	44	37	32	39	33	29	34	30	26	30	26	23	21																												
8	55	43	35	29	52	40	33	28	36	30	26	31	27	23	27	24	21	18																												
9	51	39	31	26	48	37	30	25	33	27	23	29	24	21	25	22	19	17																												
10	48	36	28	24	45	34	27	23	30	25	21	27	22	19	24	20	17	15																												

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	11689	11689	11689
5°	11743	11581	11662
10°	11664	11481	11552
15°	11529	11352	11373
20°	11369	11165	11176
25°	11156	10946	10923
30°	10920	10700	10618
35°	10674	10441	10306
40°	10418	10153	9997
45°	10135	9893	9651
50°	9851	9568	9302
55°	9481	9233	8955
60°	9104	8844	8564
65°	8777	8420	8155
70°	8286	7934	7582
75°	7573	7303	6991
80°	6831	6540	6484
85°	5990	5768	5545



TEST NUMBER: P331972-940

CATALOG NUMBER: S123DIP-S775D585U940-4F0-1E-UDD-F4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	102.3	2.2
10°-20°	288.8	6.1
20°-30°	426.6	9.0
30°-40°	498.4	10.6
40°-50°	501.0	10.6
50°-60°	440.1	9.3
60°-70°	327.9	6.9
70°-80°	186.8	4.0
80°-90°	55.6	1.2
90°-100°	139.8	3.0
100°-110°	395.9	8.4
110°-120°	389.5	8.3
120°-130°	310.7	6.6
130°-140°	244.9	5.2
140°-150°	182.8	3.9
150°-160°	127.4	2.7
160°-170°	74.9	1.6
170°-180°	24.4	0.5
0°-30°	817.7	17.3
0°-40°	1316.1	27.9
0°-60°	2257.3	47.8
0°-90°	2827.5	59.9
90°-120°	925.2	19.6
90°-150°	1663.7	35.3
90°-180°	1890.0	40.1
0°-180°	4717.8	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1086	1086	1086	1086	1086	
5°	1087	1082	1072	1081	1079	103
15°	1035	1030	1019	1025	1021	292
25°	939	933	922	922	920	432
35°	812	806	795	789	784	508
45°	666	662	650	639	634	514
55°	505	504	492	482	477	452
65°	345	340	331	323	320	340
75°	182	178	176	171	168	195
85°	48	47	47	45	45	53
90°	1	6	13	14	15	4
95°	17	56	302	88	59	19
105°	59	87	409	715	647	63
115°	104	130	313	686	787	103
125°	145	171	292	529	620	129
135°	170	203	288	436	503	131
145°	194	222	284	357	393	121
155°	220	238	275	313	326	101
165°	241	247	264	279	284	68
175°	251	251	253	256	256	24
180°	251	251	251	251	251	



TEST NUMBER: P331972-940

CATALOG NUMBER: S123DIP-S775D585U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1089.6	1089.0	1088.3	1087.6	1087.0	1085.7	1083.9	1082.1	1080.2	1078.4	1080.0
5°	1086.8	1085.7	1084.8	1083.7	1082.6	1081.0	1078.7	1076.5	1074.2	1071.8	1074.0
7.5°	1076.2	1075.1	1074.1	1073.1	1072.0	1070.3	1067.9	1065.6	1063.2	1060.9	1062.7
10°	1067.2	1066.1	1065.1	1064.1	1063.1	1061.2	1058.5	1055.8	1053.1	1050.4	1052.3
12.5°	1055.3	1054.4	1053.6	1052.7	1051.8	1050.1	1047.6	1045.0	1042.5	1039.9	1041.3
15°	1034.6	1033.7	1032.9	1032.1	1031.2	1029.5	1026.7	1024.0	1021.4	1018.7	1020.3
17.5°	1010.4	1009.3	1008.3	1007.2	1006.1	1004.2	1001.6	998.8	996.1	993.5	994.6
20°	992.5	991.2	990.1	988.8	987.6	985.5	982.8	980.2	977.5	974.7	975.6
22.5°	972.3	971.1	969.8	968.6	967.3	965.4	962.7	960.0	957.3	954.6	955.3
25°	939.3	938.1	936.8	935.6	934.3	932.4	929.6	926.9	924.3	921.6	921.8
27.5°	904.0	902.8	901.6	900.4	899.2	897.2	894.2	891.4	888.4	885.5	885.6
30°	878.6	877.5	876.6	875.5	874.4	872.4	869.6	866.7	863.8	860.9	860.9
32.5°	853.2	851.9	850.4	849.1	847.7	846.0	843.6	841.4	839.2	837.0	835.8
35°	812.3	811.1	809.9	808.6	807.4	805.4	802.6	800.0	797.3	794.6	793.4
37.5°	770.4	768.9	767.3	765.7	764.2	762.1	759.3	756.5	753.8	751.1	749.6
40°	741.4	740.1	738.9	737.6	736.4	734.3	731.4	728.5	725.6	722.6	721.0
42.5°	712.2	710.8	709.4	708.0	706.6	704.5	701.5	698.6	695.7	692.8	691.2
45°	665.8	664.9	664.1	663.3	662.4	660.7	657.9	655.2	652.6	649.9	647.4
47.5°	619.6	618.4	617.2	616.0	614.7	612.9	610.4	607.9	605.3	602.8	600.3
50°	588.3	587.2	586.1	585.1	584.1	582.2	579.5	576.8	574.1	571.4	569.2
52.5°	555.4	554.6	553.9	553.2	552.5	550.7	547.9	545.0	542.2	539.3	537.3
55°	505.2	504.9	504.7	504.5	504.3	502.8	500.2	497.5	494.7	492.0	489.8
57.5°	457.4	456.6	455.9	455.2	454.5	453.1	450.9	448.7	446.6	444.4	442.4
60°	422.9	422.8	422.6	422.3	422.1	420.8	418.3	415.8	413.3	410.8	408.9
62.5°	392.4	391.8	391.3	390.7	390.2	388.7	386.2	383.7	381.2	378.7	376.8
65°	344.6	343.5	342.4	341.4	340.4	338.9	336.7	334.7	332.6	330.6	328.9
67.5°	293.9	293.0	292.1	291.1	290.3	289.0	287.5	285.9	284.3	282.8	281.2
70°	263.3	262.1	260.8	259.6	258.3	257.1	255.8	254.6	253.3	252.1	250.7
72.5°	231.2	230.2	229.3	228.5	227.6	226.4	225.0	223.6	222.1	220.7	219.5
75°	182.1	181.2	180.4	179.6	178.8	178.0	177.4	176.7	176.1	175.6	174.5
77.5°	138.6	138.1	137.7	137.2	136.7	136.2	135.4	134.6	133.9	133.1	132.4
80°	110.2	109.6	109.0	108.3	107.7	107.2	106.7	106.4	105.9	105.5	105.3
82.5°	82.6	82.4	82.3	82.1	82.0	81.9	81.9	81.8	81.7	81.6	81.2
85°	48.5	48.2	47.7	47.3	46.9	46.7	46.7	46.7	46.7	46.7	46.3
87.5°	19.6	19.4	19.0	18.8	18.5	18.5	18.5	18.7	18.8	19.0	18.7
90°	1.0	2.1	3.0	4.5	5.6	6.6	8.1	9.6	11.1	12.8	12.2
92.5°	6.3	9.4	13.6	17.6	21.8	29.4	42.7	64.6	86.1	78.2	59.0
95°	17.3	18.8	24.4	33.1	46.3	66.1	109.3	185.1	268.6	301.6	244.6
97.5°	29.5	30.1	34.4	41.9	54.9	76.4	117.7	203.1	342.1	467.4	500.1
100°	37.6	38.2	41.7	48.9	61.0	80.9	116.5	191.7	325.5	481.6	581.8
102.5°	46.2	47.1	50.3	57.0	67.9	86.1	118.1	182.0	301.1	455.2	585.9
105°	59.0	60.5	63.6	69.6	79.4	95.1	122.6	175.0	271.1	408.9	554.9
107.5°	72.6	74.2	77.1	83.1	92.2	106.8	130.9	174.4	252.0	368.0	500.6
110°	82.4	83.9	86.5	92.0	100.7	114.9	137.9	176.5	244.6	344.8	466.4



TEST NUMBER: P331972-940

CATALOG NUMBER: S123DIP-S775D585U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	91.3	92.9	95.4	101.0	109.7	123.5	144.7	180.6	240.6	329.4	436.7
115°	104.2	106.3	109.3	114.4	123.1	136.8	156.1	187.2	239.1	312.8	400.8
117.5°	117.2	119.5	122.1	126.7	136.4	149.1	168.3	195.9	240.0	303.0	379.2
120°	126.2	127.7	130.2	135.3	145.0	157.7	175.9	202.4	241.6	298.5	367.7
122.5°	133.8	135.4	137.9	143.4	152.7	166.2	184.1	208.6	244.4	295.7	358.4
125°	145.0	146.0	149.0	154.6	164.3	178.0	195.8	218.2	248.7	291.9	346.3
127.5°	153.4	154.9	158.7	164.3	175.0	188.8	206.0	226.1	253.6	290.1	335.8
130°	158.7	160.2	164.8	170.9	181.6	195.3	212.0	231.4	256.8	288.9	330.1
132.5°	162.7	164.7	169.7	177.0	187.7	201.0	217.4	236.3	259.3	288.5	324.8
135°	169.9	171.9	177.5	185.1	195.8	209.6	225.3	242.6	263.0	287.8	317.9
137.5°	176.6	178.7	184.2	192.3	203.0	215.6	230.8	247.3	265.4	286.8	311.9
140°	181.1	183.6	188.7	196.8	207.0	219.7	234.4	249.8	267.0	286.3	308.2
142.5°	185.9	188.1	193.6	200.9	211.1	223.0	237.3	252.2	268.2	285.5	305.0
145°	193.8	195.3	199.9	207.5	216.2	227.8	241.1	254.9	269.0	284.3	300.6
147.5°	201.7	202.6	207.1	213.7	222.0	232.0	244.2	256.5	269.0	282.4	296.3
150°	207.0	207.5	211.6	218.2	225.3	234.4	246.2	256.8	269.0	280.7	293.5
152.5°	212.3	212.4	216.5	222.3	228.5	237.3	247.4	257.7	267.9	278.7	290.3
155°	220.3	220.3	223.3	228.4	234.0	241.1	249.8	257.9	266.5	275.2	285.3
157.5°	226.5	226.9	229.3	233.9	238.6	244.2	251.0	258.4	264.7	272.0	279.8
160°	231.4	231.4	233.4	237.6	241.1	246.2	252.3	258.4	263.9	269.6	276.2
162.5°	235.1	235.1	236.7	240.0	243.1	247.4	252.7	258.0	262.3	267.2	272.5
165°	240.6	240.0	241.1	243.6	245.7	249.2	253.2	256.8	259.9	263.5	267.5
167.5°	244.8	244.2	244.6	246.6	248.0	250.2	253.2	256.0	257.4	259.8	262.8
170°	247.2	246.2	246.6	248.2	249.2	250.2	252.8	254.9	255.8	257.3	259.9
172.5°	248.8	248.2	248.3	249.4	250.0	250.7	252.8	254.4	254.6	255.3	257.1
175°	250.7	250.2	249.8	250.7	250.7	251.3	252.3	253.2	252.8	252.8	253.8
177.5°	251.6	251.3	250.8	251.3	251.3	251.3	251.6	252.4	251.6	251.3	251.6
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3



TEST NUMBER: P331972-940

CATALOG NUMBER: S123DIP-S775D585U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9	1085.9
2.5°	1081.7	1083.4	1085.0	1085.8	1085.7	1085.5	1085.3	1085.1
5°	1076.0	1078.1	1080.2	1081.0	1080.6	1080.2	1079.8	1079.3
7.5°	1064.6	1066.5	1068.4	1069.2	1068.9	1068.6	1068.4	1068.2
10°	1054.2	1056.0	1057.8	1058.6	1058.2	1057.7	1057.4	1056.9
12.5°	1042.7	1044.0	1045.4	1046.0	1045.7	1045.4	1045.3	1045.0
15°	1022.0	1023.6	1025.3	1025.5	1024.2	1023.0	1021.8	1020.6
17.5°	995.8	996.9	998.1	998.4	998.0	997.6	997.1	996.7
20°	976.4	977.2	978.1	978.2	977.6	977.0	976.3	975.7
22.5°	955.9	956.6	957.3	957.2	956.4	955.6	954.8	954.0
25°	921.9	922.2	922.4	922.2	921.6	921.0	920.3	919.7
27.5°	885.8	886.0	886.2	885.8	885.1	884.3	883.5	882.7
30°	860.9	860.9	860.9	860.1	858.7	857.2	855.8	854.3
32.5°	834.6	833.5	832.3	831.3	830.5	829.7	828.9	828.2
35°	792.1	790.9	789.6	788.5	787.4	786.4	785.3	784.3
37.5°	748.1	746.5	745.1	744.0	743.3	742.7	742.0	741.4
40°	719.3	717.7	716.0	714.8	714.0	713.1	712.3	711.5
42.5°	689.5	687.8	686.2	684.9	684.1	683.2	682.4	681.6
45°	644.9	642.4	639.9	638.1	637.1	636.1	635.0	634.0
47.5°	597.9	595.5	593.0	591.3	590.4	589.5	588.6	587.6
50°	566.9	564.5	562.3	560.5	559.3	558.0	556.8	555.5
52.5°	535.4	533.4	531.5	529.9	528.7	527.4	526.2	525.0
55°	487.5	485.2	483.0	481.3	480.2	479.2	478.1	477.2
57.5°	440.3	438.4	436.3	434.7	433.5	432.3	431.1	429.9
60°	407.1	405.2	403.3	401.9	400.8	399.8	398.8	397.8
62.5°	375.0	373.1	371.2	370.0	369.3	368.5	367.8	367.1
65°	327.2	325.6	323.9	322.7	322.1	321.5	320.8	320.2
67.5°	279.8	278.4	276.9	275.7	274.9	274.0	273.1	272.2
70°	249.2	247.7	246.3	245.0	244.0	243.0	241.9	240.9
72.5°	218.1	216.9	215.6	214.6	214.1	213.6	213.0	212.5
75°	173.4	172.5	171.4	170.6	170.0	169.3	168.7	168.1
77.5°	131.7	131.0	130.3	130.0	130.0	130.0	130.0	130.0
80°	105.1	104.9	104.7	104.6	104.6	104.6	104.6	104.6
82.5°	80.9	80.5	80.1	79.8	79.7	79.5	79.4	79.2
85°	45.8	45.5	45.0	44.9	44.9	44.9	44.9	44.9
87.5°	18.6	18.5	18.5	18.6	18.5	18.6	18.7	18.6
90°	12.8	13.2	13.7	14.7	14.3	14.7	15.2	14.7
92.5°	42.8	34.0	30.1	27.4	26.5	24.9	25.4	24.5
95°	183.1	124.1	97.1	78.8	69.2	64.6	61.0	59.0
97.5°	456.5	365.6	300.0	239.2	201.6	178.7	165.0	160.6
100°	599.7	558.5	498.9	426.7	375.3	338.2	318.4	318.9
102.5°	647.3	646.0	611.3	565.4	525.5	496.1	479.5	467.8
105°	661.2	712.0	721.8	708.5	685.1	665.8	649.5	646.9
107.5°	621.1	703.7	748.2	766.3	766.8	760.3	754.7	750.1
110°	582.8	676.5	740.6	776.1	790.4	794.4	793.4	792.4





TEST NUMBER: P331972-940

CATALOG NUMBER: S123DIP-S775D585U940-4F0-1E-UDD-F4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	545.0	640.6	712.5	758.2	784.3	796.9	800.8	800.9
115°	494.9	583.4	658.2	713.5	751.7	774.1	784.3	786.8
117.5°	458.5	534.9	602.1	658.4	698.1	723.7	738.4	741.8
120°	439.4	508.1	569.1	620.5	660.7	689.2	701.3	704.5
122.5°	424.4	486.5	543.1	590.8	626.5	652.1	665.6	669.4
125°	404.3	459.8	508.6	549.3	581.8	604.2	617.0	620.5
127.5°	386.8	436.3	480.4	517.4	546.4	565.4	576.9	580.2
130°	375.9	421.6	462.8	497.4	524.4	542.7	553.4	557.4
132.5°	365.7	407.8	446.1	479.1	504.4	522.7	532.2	535.0
135°	352.0	388.1	421.2	450.1	475.0	490.3	499.4	503.0
137.5°	339.5	369.1	397.5	422.7	443.6	459.1	466.8	469.1
140°	332.2	358.0	382.5	404.3	423.7	437.9	446.0	445.5
142.5°	325.2	347.5	368.6	387.6	404.1	416.8	424.1	423.6
145°	316.8	333.7	349.9	364.7	377.4	388.1	392.2	393.2
147.5°	310.0	323.3	336.5	347.0	356.6	363.8	367.7	368.1
150°	305.1	316.8	327.5	337.2	344.8	350.4	353.5	353.5
152.5°	300.7	310.8	320.2	328.2	334.2	339.5	341.3	341.3
155°	294.0	302.1	309.8	315.8	320.4	324.5	325.5	326.0
157.5°	286.9	293.6	299.6	304.3	308.4	311.4	312.2	312.1
160°	282.8	288.4	293.5	297.0	300.6	303.6	303.6	303.1
162.5°	277.9	282.7	287.4	290.5	292.8	295.5	295.5	295.0
165°	271.6	274.6	278.2	280.7	282.8	284.8	284.3	284.3
167.5°	266.1	268.4	270.5	272.3	273.2	274.6	274.1	274.1
170°	262.4	263.9	266.0	267.0	267.5	268.6	268.0	268.0
172.5°	259.2	260.3	261.9	262.5	262.6	263.7	262.8	262.3
175°	254.9	255.3	256.4	256.4	256.4	256.8	256.4	255.8
177.5°	252.1	252.4	252.9	252.9	252.4	252.9	252.1	252.1
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3

(END OF REPORT)