

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332352-940

Luminaire Tested: **S123RDIP-S1000D1025U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332352-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 6523.4 lumens
Efficiency: N/A
Efficacy: 107.8 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: General Diffuse


Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332352-940

CATALOG NUMBER: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1

Luminous Intensity Polar Plot

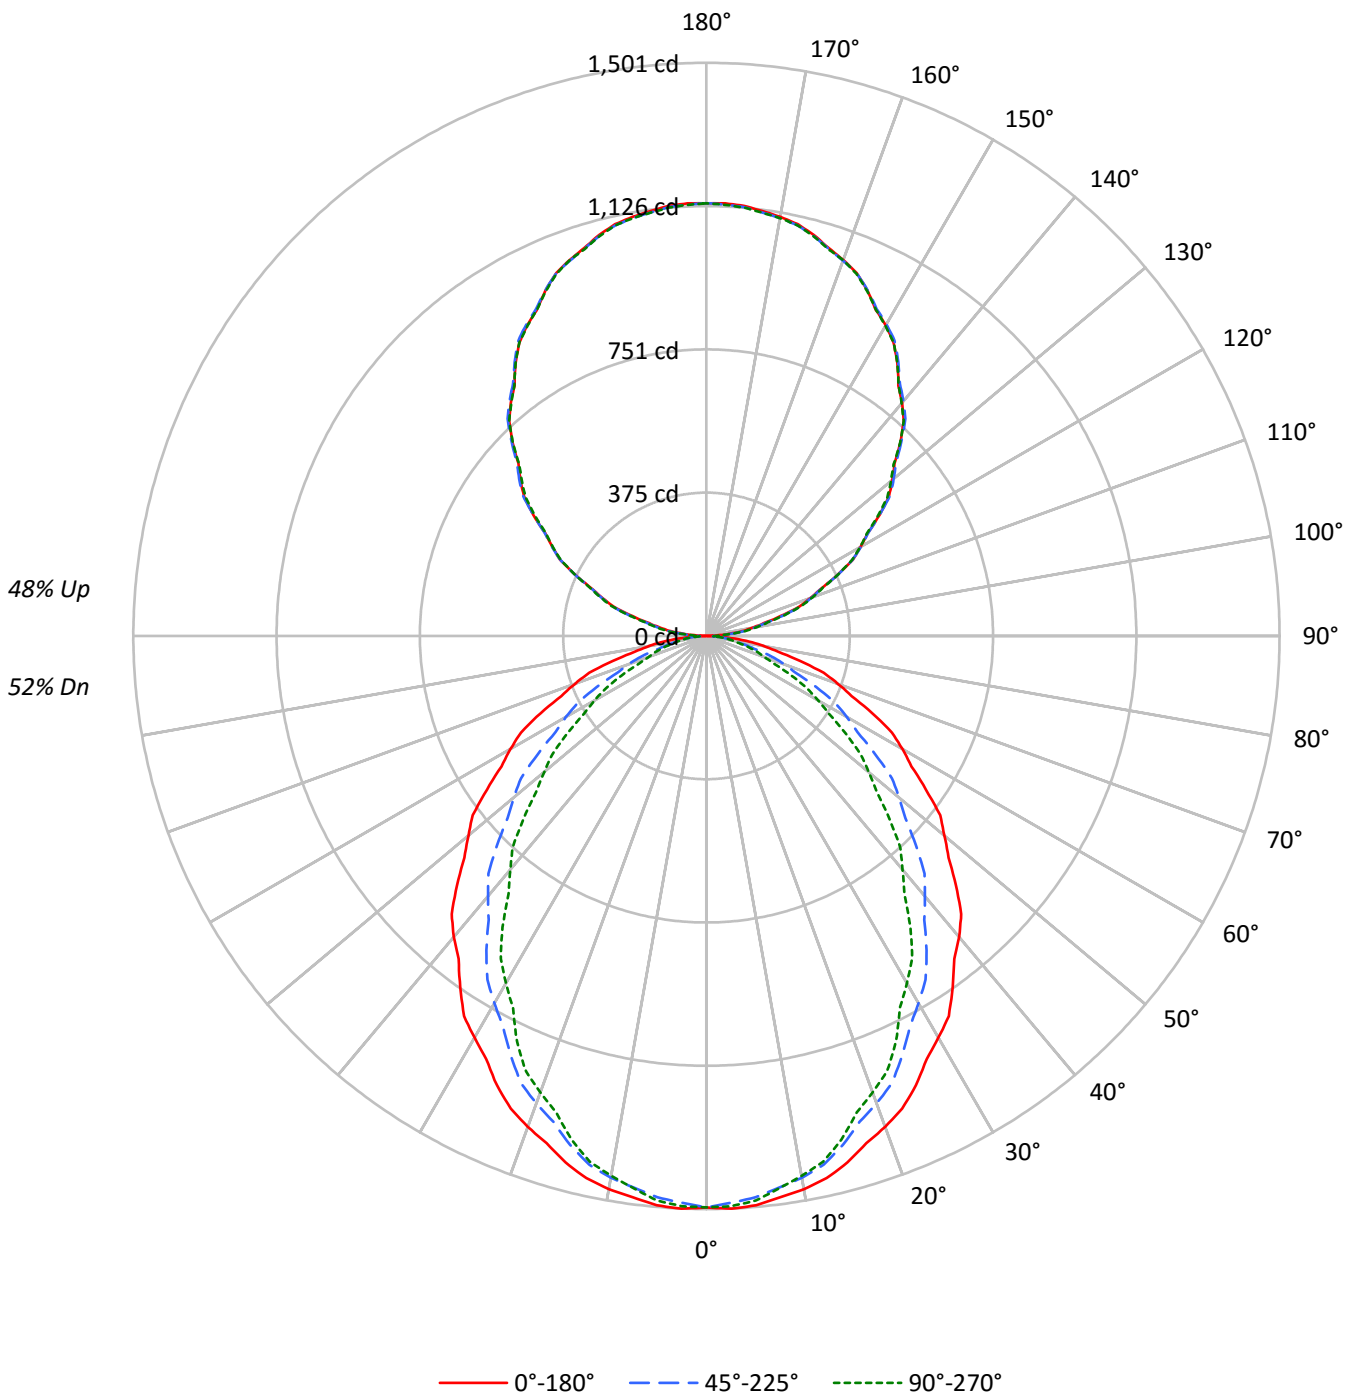



TEST NUMBER: P332352-940

CATALOG NUMBER: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	99	99	99	99	84	84	84	71	71	71	58	58	58
1	99	94	91	87	91	87	84	81	74	72	70	63	61	59	52	51	50
2	90	83	77	72	83	77	72	67	66	62	58	55	53	50	46	44	42
3	82	73	66	60	76	68	62	57	58	53	50	49	46	43	41	38	36
4	75	65	57	51	70	60	54	48	52	47	42	44	40	37	37	34	32
5	69	58	50	44	64	54	47	42	47	41	37	40	35	32	33	30	28
6	64	52	44	38	59	49	41	36	42	36	32	36	32	28	30	27	24
7	59	47	39	34	55	44	37	32	38	33	29	33	28	25	28	24	22
8	55	43	35	30	51	40	33	28	35	29	25	30	26	23	26	22	20
9	51	39	32	27	47	37	30	25	32	27	23	28	23	20	24	20	18
10	48	36	29	24	44	34	27	23	30	24	21	26	21	18	22	19	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	16108	16108	16108
5°	16170	15946	16038
10°	16078	15746	15692
15°	15905	15377	15216
20°	15668	14917	14569
25°	15423	14400	13938
30°	15100	13803	13048
35°	14767	13205	12232
40°	14462	12500	11221
45°	14059	11805	10310
50°	13618	11015	9287
55°	13165	10113	8336
60°	12751	9145	7289
65°	12210	8099	6243
70°	11534	6801	5042
75°	10551	5352	4741
80°	9403	4736	4364
85°	7941	4199	3903



TEST NUMBER: P332352-940

CATALOG NUMBER: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	140.5	2.2
10°-20°	391.0	6.0
20°-30°	563.0	8.6
30°-40°	634.1	9.7
40°-50°	606.7	9.3
50°-60°	496.8	7.6
60°-70°	335.2	5.1
70°-80°	168.6	2.6
80°-90°	48.0	0.7
90°-100°	73.8	1.1
100°-110°	220.9	3.4
110°-120°	375.8	5.8
120°-130°	494.3	7.6
130°-140°	555.6	8.5
140°-150°	546.1	8.4
150°-160°	459.7	7.0
160°-170°	306.0	4.7
170°-180°	107.2	1.6
0°-30°	1094.5	16.8
0°-40°	1728.6	26.5
0°-60°	2832.1	43.4
0°-90°	3384.0	51.9
90°-120°	670.6	10.3
90°-150°	2266.5	34.7
90°-180°	3139.0	48.1
0°-180°	6523.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1496	1496	1496	1496	1496	
5°	1496	1490	1476	1486	1484	142
15°	1427	1413	1380	1374	1365	402
25°	1299	1267	1212	1188	1174	597
35°	1124	1078	1005	954	931	703
45°	924	867	776	709	677	712
55°	702	640	539	471	444	629
65°	479	411	318	261	245	474
75°	254	195	129	117	114	270
85°	64	39	34	32	32	72
90°	1	10	21	25	27	6
95°	52	59	66	69	70	59
105°	200	202	210	210	212	214
115°	378	381	379	380	379	374
125°	554	556	555	551	547	494
135°	718	723	723	719	718	553
145°	871	873	876	875	871	544
155°	998	998	999	1002	996	459
165°	1087	1084	1084	1089	1083	306
175°	1130	1127	1127	1132	1126	107
180°	1133	1133	1133	1133	1133	



TEST NUMBER: P332352-940

CATALOG NUMBER: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5
2.5°	1501.3	1500.4	1499.6	1498.7	1497.8	1496.1	1493.5	1490.9	1488.4	1485.8	1488.1
5°	1496.5	1495.0	1493.7	1492.4	1491.0	1488.7	1485.5	1482.3	1479.1	1475.8	1478.2
7.5°	1482.6	1481.1	1479.7	1478.2	1476.8	1473.9	1469.7	1465.5	1461.3	1457.1	1458.5
10°	1471.0	1469.1	1467.1	1465.3	1463.4	1460.0	1455.2	1450.3	1445.5	1440.6	1440.9
12.5°	1454.5	1452.3	1450.3	1448.1	1446.0	1442.0	1436.1	1430.1	1424.2	1418.3	1418.1
15°	1427.3	1424.3	1421.3	1418.4	1415.4	1410.2	1402.6	1395.0	1387.5	1379.9	1378.6
17.5°	1393.0	1389.6	1386.2	1382.7	1379.2	1372.7	1363.1	1353.5	1343.9	1334.3	1331.4
20°	1367.8	1363.5	1359.1	1354.9	1350.5	1343.3	1333.0	1322.8	1312.5	1302.3	1298.8
22.5°	1339.6	1334.7	1329.7	1324.7	1319.8	1311.9	1300.9	1290.0	1279.2	1268.3	1263.9
25°	1298.6	1291.9	1285.1	1278.4	1271.7	1262.0	1249.6	1237.2	1224.9	1212.5	1206.8
27.5°	1248.8	1241.4	1233.9	1226.5	1219.1	1208.4	1194.6	1180.8	1167.0	1153.2	1145.3
30°	1214.9	1206.8	1198.7	1190.6	1182.5	1170.9	1155.8	1140.7	1125.6	1110.5	1101.4
32.5°	1180.9	1171.7	1162.5	1153.3	1144.2	1131.7	1115.7	1099.7	1083.7	1067.7	1057.7
35°	1123.8	1114.1	1104.4	1094.8	1085.0	1071.7	1055.1	1038.3	1021.6	1004.9	993.3
37.5°	1066.0	1055.3	1044.5	1033.7	1022.9	1008.6	990.8	972.9	955.0	937.2	924.0
40°	1029.2	1017.4	1005.4	993.5	981.7	966.2	947.1	927.9	908.7	889.6	875.6
42.5°	987.4	975.5	963.7	951.8	940.0	924.2	904.4	884.6	864.8	845.0	829.6
45°	923.6	911.4	899.3	887.2	875.0	858.6	837.9	817.1	796.3	775.5	760.2
47.5°	859.8	846.4	833.1	819.7	806.5	789.4	768.7	747.9	727.1	706.3	689.6
50°	813.2	800.5	787.8	775.2	762.4	745.2	723.4	701.5	679.7	657.8	641.1
52.5°	771.4	757.7	743.9	730.1	716.4	698.7	677.1	655.4	633.8	612.2	594.8
55°	701.5	688.3	675.0	661.8	648.6	630.5	607.6	584.7	561.8	538.9	523.3
57.5°	636.9	622.5	608.1	593.7	579.3	560.6	537.5	514.5	491.5	468.5	453.7
60°	592.3	577.5	562.6	547.8	532.9	514.3	492.0	469.6	447.2	424.8	410.2
62.5°	547.6	532.8	517.9	503.1	488.3	469.7	447.3	424.9	402.5	380.1	366.4
65°	479.4	464.6	449.7	434.9	420.1	402.2	381.1	360.1	339.0	318.0	304.8
67.5°	411.2	396.2	381.2	366.2	351.2	333.6	313.4	293.3	273.1	252.9	243.1
70°	366.5	352.0	337.4	322.8	308.3	291.6	272.7	253.8	234.9	216.1	206.6
72.5°	321.8	307.6	293.2	278.8	264.5	248.7	231.6	214.5	197.2	180.1	172.4
75°	253.7	240.7	227.7	214.8	201.9	188.0	173.2	158.3	143.5	128.7	125.9
77.5°	191.5	179.8	168.1	156.4	144.7	134.0	124.5	114.9	105.4	95.9	94.4
80°	151.7	140.6	129.6	118.5	107.5	99.2	93.5	87.7	82.1	76.4	75.6
82.5°	113.9	104.3	94.8	85.2	75.6	69.6	66.9	64.3	61.6	58.9	58.1
85°	64.3	58.4	52.4	46.5	40.6	37.2	36.4	35.6	34.8	34.0	33.4
87.5°	23.5	21.5	19.5	17.6	15.6	14.8	15.3	15.9	16.4	16.9	16.9
90°	0.9	2.9	4.8	6.9	8.8	11.1	13.6	16.2	18.8	21.4	22.1
92.5°	21.6	22.9	24.3	25.6	26.9	28.4	29.8	31.2	32.7	34.2	34.8
95°	52.5	53.9	55.3	56.7	58.1	59.6	61.1	62.7	64.3	65.9	66.7
97.5°	93.3	94.3	95.3	96.4	97.4	98.4	99.6	100.8	101.9	103.1	104.0
100°	121.1	122.3	123.4	124.6	125.8	126.9	127.9	128.9	129.8	130.8	131.4
102.5°	153.1	153.8	154.5	155.2	156.0	156.9	158.3	159.5	160.9	162.2	162.7
105°	200.3	200.6	201.1	201.4	201.9	203.0	204.7	206.5	208.3	210.1	210.1
107.5°	255.1	255.4	255.6	255.8	256.1	256.5	257.3	258.0	258.7	259.4	260.0
110°	289.3	289.7	290.1	290.4	290.9	291.2	291.7	292.0	292.5	292.8	293.6



TEST NUMBER: P332352-940

CATALOG NUMBER: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	324.9	325.1	325.4	325.6	325.8	326.0	326.1	326.2	326.3	326.3	327.3
115°	378.3	378.9	379.5	380.0	380.7	380.8	380.4	380.0	379.6	379.2	379.4
117.5°	432.0	432.5	432.8	433.3	433.6	433.5	433.1	432.6	432.0	431.5	431.5
120°	465.6	466.7	467.9	469.1	470.3	470.4	469.4	468.4	467.4	466.5	466.2
122.5°	500.4	501.3	502.1	503.0	503.9	504.1	503.5	503.0	502.6	502.0	501.5
125°	553.7	554.3	554.8	555.4	556.0	556.2	555.7	555.4	554.9	554.6	553.8
127.5°	602.8	604.0	605.3	606.5	607.9	608.2	607.8	607.4	607.0	606.5	605.4
130°	635.5	637.1	638.7	640.2	641.9	642.4	641.8	641.1	640.6	640.0	639.2
132.5°	668.3	669.9	671.5	673.1	674.7	675.2	674.8	674.3	673.9	673.4	672.5
135°	718.4	719.5	720.7	721.8	723.1	723.5	723.4	723.2	723.0	722.7	722.0
137.5°	764.6	765.6	766.6	767.6	768.6	769.3	769.8	770.3	770.9	771.3	770.5
140°	796.7	797.6	798.6	799.6	800.6	801.2	801.4	801.6	801.8	802.0	801.8
142.5°	825.8	826.8	827.9	828.8	829.8	830.5	830.8	831.2	831.5	831.9	831.7
145°	871.4	871.8	872.2	872.6	873.0	873.5	874.1	874.7	875.3	875.8	875.7
147.5°	911.3	912.0	912.8	913.5	914.2	914.8	915.3	915.9	916.4	917.0	917.0
150°	939.1	939.5	939.9	940.2	940.7	941.0	941.5	941.8	942.3	942.6	942.6
152.5°	961.9	962.4	963.0	963.5	964.0	964.5	964.7	964.9	965.2	965.5	965.7
155°	997.8	997.8	997.8	997.8	997.8	997.9	998.1	998.3	998.5	998.7	999.5
157.5°	1028.4	1028.2	1028.0	1027.7	1027.5	1027.4	1027.6	1027.8	1028.0	1028.1	1028.9
160°	1047.7	1047.2	1046.9	1046.5	1046.1	1045.9	1045.9	1045.9	1045.9	1045.9	1046.9
162.5°	1064.8	1064.2	1063.6	1063.1	1062.6	1062.4	1062.5	1062.7	1062.8	1063.0	1064.0
165°	1086.8	1086.2	1085.7	1085.0	1084.5	1084.1	1084.1	1084.1	1084.1	1084.1	1085.3
167.5°	1104.5	1103.7	1102.9	1102.1	1101.3	1101.0	1101.2	1101.3	1101.4	1101.6	1102.9
170°	1114.5	1113.7	1112.9	1112.1	1111.3	1110.9	1110.9	1110.9	1110.9	1110.9	1112.2
172.5°	1122.2	1121.5	1120.7	1119.9	1119.1	1118.7	1118.7	1118.7	1118.7	1118.7	1119.9
175°	1130.4	1129.6	1128.8	1128.1	1127.3	1126.9	1126.9	1126.9	1126.9	1126.9	1128.1
177.5°	1133.8	1133.2	1132.6	1131.9	1131.3	1131.0	1131.0	1131.0	1131.0	1131.0	1131.9
180°	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1



TEST NUMBER: P332352-940

CATALOG NUMBER: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5	1496.5
2.5°	1490.5	1492.9	1495.2	1496.2	1495.8	1495.4	1495.0	1494.5
5°	1480.7	1483.1	1485.5	1486.5	1485.9	1485.4	1484.9	1484.3
7.5°	1459.8	1461.2	1462.5	1462.8	1461.8	1460.9	1460.0	1459.0
10°	1441.2	1441.5	1441.7	1441.2	1439.8	1438.4	1437.1	1435.7
12.5°	1417.9	1417.8	1417.6	1416.8	1415.2	1413.6	1412.1	1410.5
15°	1377.2	1375.9	1374.6	1372.9	1371.0	1369.1	1367.3	1365.4
17.5°	1328.6	1325.7	1322.9	1320.0	1317.2	1314.4	1311.6	1308.8
20°	1295.2	1291.7	1288.3	1284.9	1281.7	1278.4	1275.1	1271.9
22.5°	1259.5	1255.2	1250.8	1247.1	1244.1	1241.1	1238.1	1235.0
25°	1201.1	1195.4	1189.8	1185.4	1182.5	1179.6	1176.6	1173.6
27.5°	1137.5	1129.6	1121.7	1115.5	1111.0	1106.4	1101.9	1097.4
30°	1092.2	1083.0	1073.8	1067.1	1062.7	1058.5	1054.1	1049.8
32.5°	1047.7	1037.7	1027.6	1020.4	1015.8	1011.3	1006.7	1002.2
35°	981.7	970.1	958.5	950.3	945.5	940.6	935.8	930.9
37.5°	910.9	897.7	884.6	874.9	869.0	863.0	857.0	851.0
40°	861.6	847.6	833.5	823.4	817.2	811.0	804.8	798.6
42.5°	814.3	799.0	783.6	773.2	767.7	762.1	756.5	751.0
45°	744.8	729.4	714.0	703.1	696.6	690.2	683.7	677.3
47.5°	672.9	656.2	639.4	628.2	622.4	616.7	610.9	605.1
50°	624.4	607.6	590.9	579.4	573.3	567.0	560.9	554.6
52.5°	577.5	560.1	542.7	531.2	525.7	520.1	514.6	509.0
55°	507.6	492.0	476.3	465.7	460.4	455.0	449.6	444.2
57.5°	438.9	424.1	409.4	399.7	395.1	390.5	385.9	381.3
60°	395.7	381.1	366.5	357.0	352.4	347.8	343.2	338.6
62.5°	352.7	339.0	325.3	316.0	311.3	306.5	301.7	296.9
65°	291.6	278.3	265.1	257.0	254.0	251.1	248.2	245.1
67.5°	233.2	223.3	213.5	206.9	203.8	200.5	197.3	194.2
70°	197.2	187.7	178.3	172.1	169.1	166.1	163.2	160.2
72.5°	164.7	156.9	149.3	144.8	143.6	142.3	141.1	139.8
75°	123.2	120.6	117.9	116.3	115.7	115.1	114.6	114.0
77.5°	93.0	91.5	90.1	89.1	88.5	88.0	87.5	86.9
80°	74.8	74.0	73.2	72.6	72.1	71.5	70.9	70.4
82.5°	57.3	56.5	55.7	55.3	55.2	55.1	54.9	54.8
85°	32.9	32.4	31.8	31.6	31.6	31.6	31.6	31.6
87.5°	16.8	16.8	16.7	16.6	16.4	16.3	16.1	16.1
90°	22.9	23.7	24.5	25.1	25.5	25.9	26.3	26.7
92.5°	35.5	36.1	36.7	36.9	36.6	36.5	36.2	35.9
95°	67.4	68.2	69.0	69.5	69.5	69.5	69.5	69.5
97.5°	104.9	105.8	106.7	107.1	107.1	107.0	106.9	106.8
100°	132.1	132.6	133.2	133.8	134.1	134.5	134.9	135.3
102.5°	163.4	164.0	164.5	164.8	164.7	164.6	164.6	164.5
105°	210.1	210.1	210.1	210.3	210.6	211.1	211.4	211.9
107.5°	260.6	261.3	261.9	262.1	261.9	261.6	261.4	261.2
110°	294.4	295.2	296.0	296.2	295.8	295.4	295.1	294.6



TEST NUMBER: P332352-940

CATALOG NUMBER: S123RDIP-S1000D1025U940-4F0-1E-UDD-F1

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	328.2	329.1	330.1	330.6	330.5	330.4	330.3	330.2
115°	379.6	379.8	380.0	380.0	379.8	379.6	379.4	379.2
117.5°	431.4	431.4	431.4	431.1	430.5	430.0	429.4	428.8
120°	466.0	465.8	465.7	465.3	464.9	464.6	464.1	463.8
122.5°	501.0	500.5	500.0	499.4	498.9	498.3	497.8	497.2
125°	552.9	552.1	551.3	550.5	549.8	549.0	548.2	547.4
127.5°	604.3	603.2	602.1	601.1	600.2	599.2	598.3	597.4
130°	638.4	637.6	636.9	635.7	634.4	632.9	631.6	630.2
132.5°	671.5	670.7	669.7	668.7	667.6	666.6	665.5	664.4
135°	721.2	720.4	719.6	719.0	718.6	718.2	717.8	717.5
137.5°	769.7	768.9	768.0	767.2	766.5	765.7	765.0	764.3
140°	801.6	801.4	801.2	800.4	799.1	797.6	796.3	794.9
142.5°	831.5	831.3	831.1	830.5	829.4	828.3	827.2	826.2
145°	875.5	875.3	875.0	874.6	873.8	873.0	872.2	871.4
147.5°	917.0	917.0	917.0	916.4	915.3	914.0	912.8	911.7
150°	942.6	942.6	942.6	942.0	940.8	939.7	938.4	937.3
152.5°	966.1	966.3	966.7	966.3	965.3	964.3	963.2	962.2
155°	1000.3	1001.1	1001.8	1001.6	1000.2	998.8	997.4	996.0
157.5°	1029.7	1030.6	1031.4	1031.3	1030.2	1029.0	1028.0	1026.8
160°	1047.8	1048.8	1049.8	1049.9	1049.2	1048.4	1047.6	1046.8
162.5°	1065.0	1066.0	1066.9	1066.8	1065.5	1064.3	1063.0	1061.8
165°	1086.5	1087.7	1088.9	1088.8	1087.4	1086.0	1084.7	1083.3
167.5°	1104.0	1105.3	1106.5	1106.5	1105.3	1104.0	1102.9	1101.6
170°	1113.7	1115.0	1116.4	1116.4	1115.0	1113.7	1112.2	1110.9
172.5°	1121.1	1122.4	1123.6	1123.6	1122.1	1120.8	1119.4	1117.9
175°	1129.3	1130.4	1131.7	1131.5	1130.2	1128.7	1127.4	1126.0
177.5°	1132.9	1133.8	1134.8	1134.7	1133.6	1132.5	1131.4	1130.2
180°	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1	1133.1

(END OF REPORT)