

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332336-940

Luminaire Tested: **S123RDIP-S1000D585U940-4F0-1E-UDD-A**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332336-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S1000D585U940-4F0-1E-UDD-A
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 1000 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING
UPLIGHT 585 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 5619.0 lumens
Efficiency: N/A
Efficacy: 115.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct


Input Watts (W): 48.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

Luminous Intensity Polar Plot

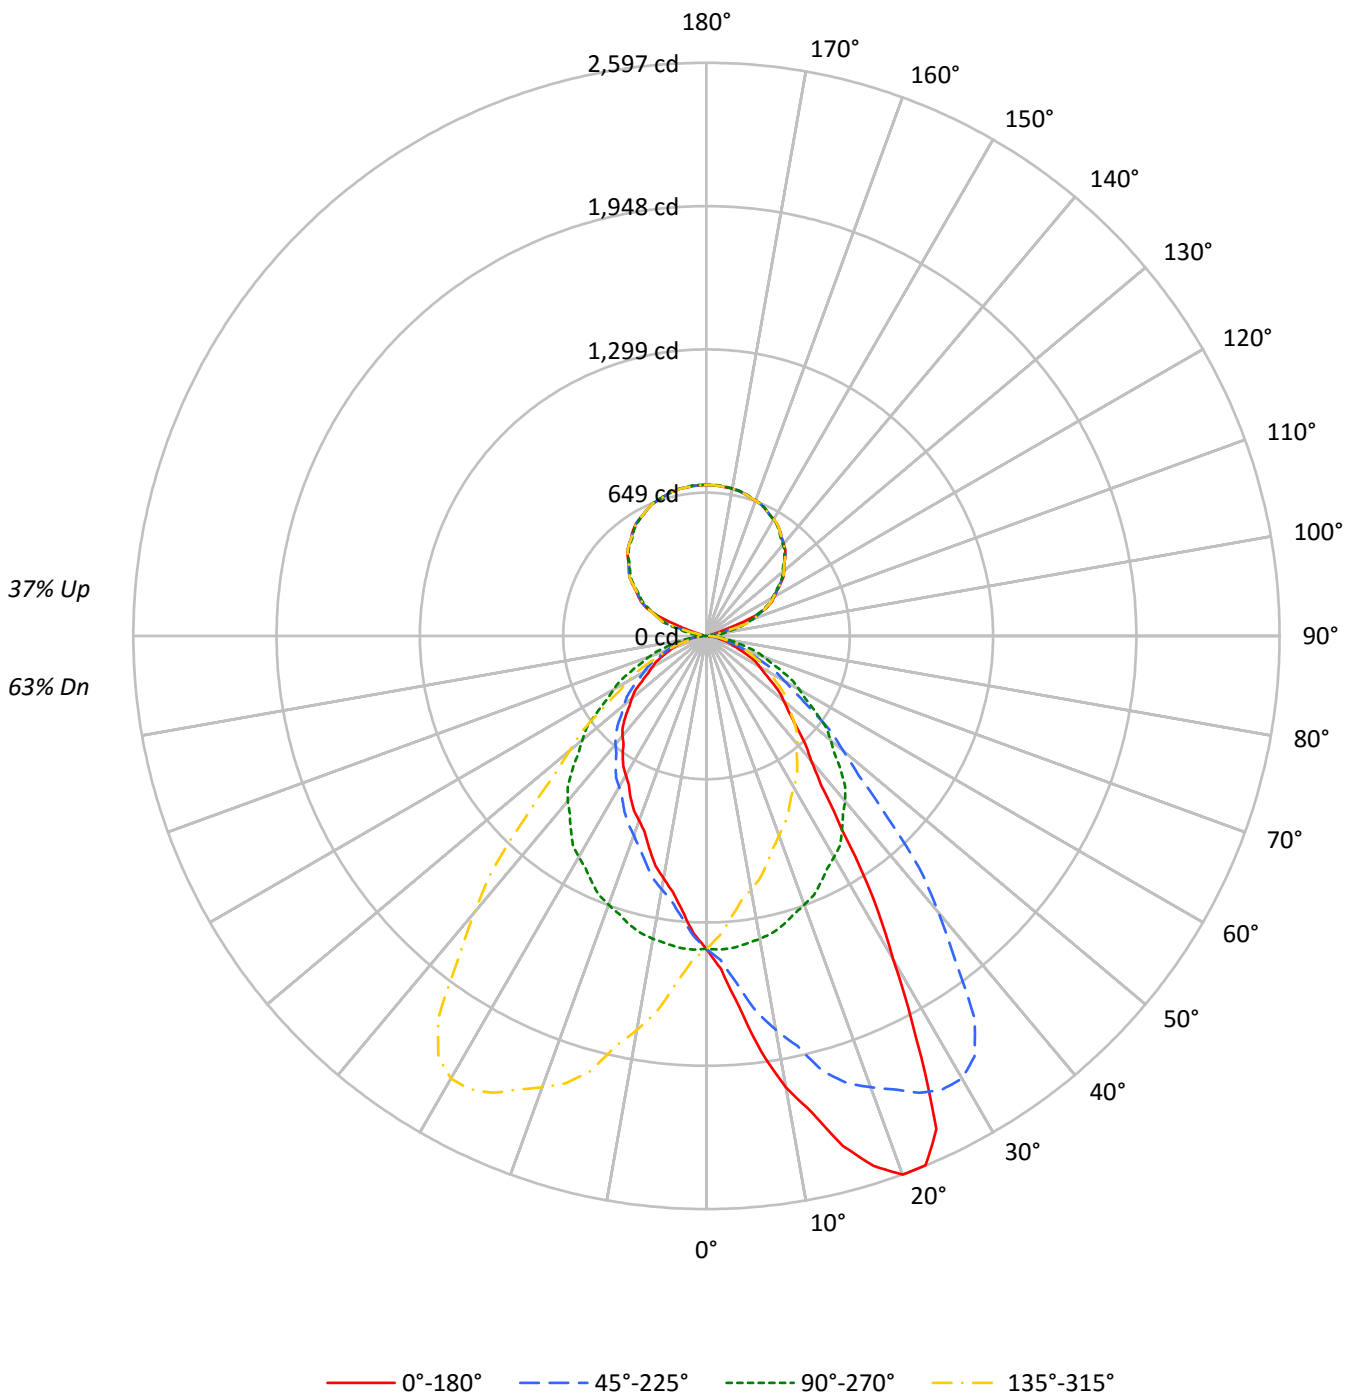



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68	63
1	101	97	94	90	95	91	88	85	81	78	76	70	69	67	61	60	59	54
2	93	86	80	75	87	81	76	71	71	67	64	63	60	57	55	53	51	47
3	85	76	69	63	80	72	66	60	64	59	55	56	52	49	49	46	44	40
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	44	41	39	35
5	72	61	53	47	68	58	51	45	51	46	41	46	41	38	40	37	34	31
6	67	55	47	41	63	52	45	40	47	41	36	42	37	33	37	33	30	28
7	62	50	42	37	58	47	40	35	43	37	32	38	33	30	34	30	27	25
8	58	46	38	33	54	43	36	31	39	33	29	35	30	27	31	27	25	22
9	54	42	34	29	51	40	33	28	36	30	26	32	28	24	29	25	22	20
10	50	38	31	26	47	37	30	26	33	28	24	30	25	22	27	23	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	90°	180°	270°
0°	15259	15259	15259	15259
5°	18189	15324	13493	15324
10°	22710	15235	12191	15235
15°	26658	15081	11117	15081
20°	29751	14848	10204	14848
25°	29276	14602	9644	14602
30°	21044	14375	9066	14375
35°	14051	14082	8692	14082
40°	10352	13728	8304	13728
45°	8683	13108	7926	13108
50°	7661	12295	7398	12295
55°	6718	11365	6673	11365
60°	5983	10478	6114	10478
65°	5254	9521	5687	9521
70°	4126	8670	5196	8670
75°	3635	7573	4741	7573
80°	3161	6434	4668	6434
85°	2544	5175	4940	5175



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.4	2.5
10°-20°	435.5	7.8
20°-30°	684.2	12.2
30°-40°	713.8	12.7
40°-50°	610.9	10.9
50°-60°	465.6	8.3
60°-70°	298.4	5.3
70°-80°	143.6	2.6
80°-90°	39.9	0.7
90°-100°	24.9	0.4
100°-110°	118.6	2.1
110°-120°	284.9	5.1
120°-130°	362.8	6.5
130°-140°	387.7	6.9
140°-150°	362.5	6.5
150°-160°	292.4	5.2
160°-170°	188.7	3.4
170°-180°	65.0	1.2
0°-30°	1259.1	22.4
0°-40°	1973.0	35.1
0°-60°	3049.5	54.3
0°-90°	3531.4	62.8
90°-120°	428.4	7.6
90°-150°	1541.4	27.4
90°-180°	2088.0	37.2
0°-180°	5619.0	100.0

CANDELA DISTRIBUTION:

	0°	90°	180°	270°	360°	Flux
0°	1418	1418	1418	1418	1418	
5°	1683	1418	1249	1418	1683	174
15°	2392	1353	998	1353	2392	678
25°	2465	1230	812	1230	2465	1059
35°	1069	1072	662	1072	1069	701
45°	570	861	521	861	570	449
55°	358	606	356	606	358	324
65°	206	374	223	374	206	203
75°	87	182	114	182	87	94
85°	21	42	40	42	21	24
90°	15	0	15	0	15	8
95°	19	31	19	31	19	16
105°	22	152	22	152	22	51
115°	299	284	299	284	299	276
125°	409	401	409	401	409	365
135°	504	499	504	499	504	389
145°	581	576	581	576	581	363
155°	633	634	633	634	633	292
165°	667	669	667	669	667	188
175°	682	685	682	685	682	65
180°	685	685	685	685	685	



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6
2.5°	1509.8	1511.7	1505.5	1504.5	1497.2	1495.2	1495.2	1485.1	1478.7	1470.5	1465.6
5°	1683.4	1693.1	1688.2	1677.3	1659.1	1654.8	1643.3	1625.1	1604.5	1579.0	1566.8
7.5°	1900.1	1913.3	1908.3	1891.4	1872.3	1856.9	1824.4	1794.2	1751.9	1714.7	1682.9
10°	2077.8	2063.9	2052.9	2036.6	2018.9	1990.4	1956.4	1909.7	1855.7	1813.2	1765.9
12.5°	2210.8	2208.5	2194.7	2177.8	2152.9	2125.8	2084.1	2027.2	1964.4	1903.1	1848.9
15°	2392.2	2395.8	2386.7	2369.1	2333.9	2286.0	2222.9	2199.2	2109.3	2042.6	1975.9
17.5°	2517.7	2516.9	2515.7	2491.4	2455.4	2421.3	2362.8	2300.5	2219.2	2125.1	2035.2
20°	2597.3	2591.2	2592.4	2565.1	2538.4	2498.9	2442.0	2351.5	2284.7	2176.1	2083.3
22.5°	2595.3	2594.1	2598.7	2589.3	2570.0	2539.8	2494.8	2418.5	2333.3	2223.7	2119.2
25°	2465.0	2460.1	2488.7	2496.5	2527.5	2532.9	2519.6	2477.7	2397.0	2284.1	2154.9
27.5°	2063.0	2060.3	2113.3	2179.5	2263.5	2328.8	2391.9	2422.4	2397.0	2316.2	2186.7
30°	1693.1	1750.2	1776.8	1872.7	1979.5	2106.9	2218.6	2324.8	2350.9	2315.7	2209.5
32.5°	1405.7	1455.5	1477.7	1560.0	1659.6	1808.8	1976.4	2126.7	2232.9	2259.9	2195.9
35°	1069.3	1069.9	1120.8	1157.3	1249.5	1403.0	1565.7	1767.1	1967.4	2119.1	2134.8
37.5°	853.2	856.2	887.1	923.4	992.6	1073.7	1216.9	1384.5	1615.8	1848.7	1985.2
40°	736.7	742.2	765.3	801.0	850.8	912.0	1023.8	1181.5	1374.5	1633.6	1845.4
42.5°	661.9	670.8	682.7	710.2	741.1	798.4	888.8	1010.7	1186.2	1431.2	1675.5
45°	570.4	575.2	584.4	597.1	625.0	665.1	725.8	807.7	953.3	1150.6	1395.1
47.5°	503.2	500.6	510.2	520.6	539.1	566.4	607.1	674.0	777.8	936.1	1143.5
50°	457.5	456.9	463.6	471.5	489.1	509.2	542.5	592.9	675.4	806.5	996.4
52.5°	414.8	417.1	421.9	431.7	444.4	460.6	490.5	526.8	597.7	710.9	869.2
55°	358.0	359.9	366.5	372.0	381.1	397.4	416.3	446.7	495.2	574.1	704.5
57.5°	310.0	309.2	315.6	316.9	327.2	340.5	355.1	378.7	413.8	472.5	560.4
60°	277.9	276.1	281.6	285.8	291.3	302.2	314.3	337.4	365.3	408.4	483.7
62.5°	248.8	248.0	252.0	256.2	260.7	270.6	280.9	298.5	320.7	357.0	416.7
65°	206.3	208.1	210.0	211.8	214.2	220.3	230.0	242.1	257.3	282.8	325.8
67.5°	162.1	164.0	164.6	168.4	173.5	177.4	183.2	194.0	204.6	226.1	250.7
70°	131.1	130.5	131.1	132.9	139.6	146.2	154.2	162.0	168.7	183.9	204.5
72.5°	112.6	111.6	113.2	113.5	116.7	118.6	123.6	131.0	139.6	149.9	164.7
75°	87.4	87.4	87.4	87.4	89.8	91.0	92.8	94.7	97.7	102.5	113.5
77.5°	64.6	64.6	65.5	66.2	66.6	67.3	68.5	70.3	71.3	73.9	78.6
80°	51.0	51.5	51.0	51.5	51.5	52.8	53.4	55.2	55.8	58.9	60.7
82.5°	38.3	38.0	38.3	39.0	39.0	40.2	40.3	41.6	41.7	43.3	45.1
85°	20.6	19.4	20.6	20.1	21.2	20.1	20.6	21.8	21.8	22.5	24.9
87.5°	7.9	8.8	7.8	8.3	8.2	8.6	8.6	8.5	9.4	8.7	8.9
90°	15.2	15.1	14.8	14.6	14.4	14.0	13.6	13.1	12.7	12.2	10.7
92.5°	16.9	16.8	16.6	16.5	16.3	15.9	15.2	14.4	13.7	13.0	11.9
95°	19.4	19.4	19.4	19.4	19.4	18.9	18.1	17.4	16.6	15.8	14.5
97.5°	21.0	20.9	20.7	20.6	20.5	20.0	19.1	18.2	17.3	16.4	24.5
100°	21.4	21.2	21.1	21.0	20.9	20.4	19.5	18.5	17.7	16.8	34.4
102.5°	21.8	21.6	21.4	21.1	21.0	22.3	25.1	27.8	30.7	33.4	52.7
105°	22.4	22.1	21.9	21.7	21.5	31.4	51.4	71.3	91.4	111.4	121.5
107.5°	70.3	85.3	100.4	115.5	130.6	145.4	160.2	174.8	189.5	204.1	202.5
110°	139.8	156.0	172.2	188.3	204.5	214.5	218.2	221.9	225.6	229.3	228.1



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	240.0	243.3	246.7	250.2	253.6	255.3	255.2	255.1	255.1	255.0	253.8
115°	299.1	298.6	298.2	297.7	297.2	296.5	295.3	294.2	293.1	291.9	290.9
117.5°	332.3	332.2	332.1	332.0	331.9	331.4	330.5	329.6	328.7	327.7	327.3
120°	355.0	355.0	355.0	355.0	355.0	354.5	353.7	352.8	351.9	350.9	350.6
122.5°	377.4	377.3	377.2	377.1	377.0	376.7	376.0	375.4	374.8	374.2	373.7
125°	408.9	408.7	408.5	408.2	408.0	407.8	407.5	407.3	407.1	406.9	406.4
127.5°	439.3	439.4	439.7	439.9	440.1	440.1	439.7	439.3	439.0	438.6	438.1
130°	458.8	459.0	459.2	459.4	459.7	459.5	459.1	458.6	458.2	457.7	457.3
132.5°	476.6	477.0	477.2	477.6	478.0	477.9	477.4	477.0	476.5	476.1	475.6
135°	504.0	504.4	504.7	505.1	505.3	505.3	505.1	504.7	504.4	504.0	503.5
137.5°	529.8	529.9	530.2	530.4	530.7	530.5	529.9	529.4	528.9	528.3	528.1
140°	545.2	545.5	545.6	545.9	546.1	546.0	545.5	545.1	544.7	544.2	543.9
142.5°	559.5	559.7	560.1	560.4	560.7	560.7	560.4	560.0	559.6	559.3	558.9
145°	581.3	581.3	581.3	581.3	581.3	581.2	580.9	580.8	580.5	580.3	580.1
147.5°	597.6	598.2	598.6	599.1	599.7	599.9	599.6	599.4	599.1	599.0	598.7
150°	609.8	610.1	610.5	610.8	611.2	611.2	611.0	610.7	610.6	610.3	610.1
152.5°	619.6	620.1	620.6	621.2	621.6	621.7	621.3	620.9	620.5	620.1	619.9
155°	633.2	633.9	634.5	635.3	635.9	636.0	635.4	634.8	634.3	633.7	633.6
157.5°	644.7	645.6	646.5	647.3	648.2	648.4	647.6	646.9	646.3	645.6	645.7
160°	652.0	652.8	653.6	654.4	655.1	655.2	654.5	653.9	653.2	652.6	652.6
162.5°	659.0	659.6	660.3	661.0	661.7	661.7	660.9	660.1	659.4	658.6	658.7
165°	667.3	668.1	668.9	669.7	670.5	670.4	669.5	668.6	667.7	666.7	666.9
167.5°	673.2	674.2	675.1	676.0	676.9	676.9	676.0	675.1	674.2	673.2	673.2
170°	676.9	677.9	678.8	679.7	680.6	680.6	679.7	678.8	677.9	676.9	676.9
172.5°	678.9	679.9	681.0	682.0	683.0	683.0	682.1	681.2	680.3	679.4	679.3
175°	682.0	683.0	683.9	684.7	685.6	685.7	684.9	684.1	683.3	682.5	682.4
177.5°	683.0	683.9	684.7	685.6	686.5	686.6	685.9	685.2	684.5	683.8	683.7
180°	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6
2.5°	1463.7	1462.2	1455.5	1447.7	1437.4	1430.7	1425.3	1422.5	1413.7	1403.0	1395.7
5°	1554.1	1535.9	1516.5	1492.8	1471.0	1448.5	1434.6	1418.2	1398.1	1375.7	1359.9
7.5°	1651.0	1615.2	1576.8	1537.1	1497.9	1462.8	1431.6	1405.1	1373.1	1341.0	1318.4
10°	1725.3	1673.0	1619.1	1563.8	1513.4	1466.2	1429.7	1393.9	1355.7	1318.7	1290.8
12.5°	1792.7	1724.0	1661.8	1593.9	1529.5	1472.9	1420.5	1378.4	1332.4	1292.9	1261.1
15°	1878.1	1807.8	1732.5	1629.3	1543.8	1472.2	1408.5	1353.3	1297.4	1248.8	1217.9
17.5°	1958.0	1852.1	1751.0	1664.9	1553.7	1464.3	1386.5	1320.4	1259.2	1207.7	1169.7
20°	1991.0	1888.5	1778.6	1668.8	1559.6	1459.5	1369.0	1296.2	1232.5	1174.2	1139.1
22.5°	2010.9	1894.8	1779.1	1661.1	1545.0	1441.0	1351.6	1271.5	1202.4	1147.0	1103.6
25°	2034.1	1895.8	1768.4	1651.8	1533.5	1420.6	1314.4	1229.5	1154.9	1095.9	1049.8
27.5°	2049.4	1886.7	1736.1	1606.5	1486.5	1374.1	1276.8	1186.7	1111.0	1048.7	999.3
30°	2052.4	1879.4	1711.3	1571.1	1449.1	1345.9	1242.8	1156.6	1076.6	1010.4	964.3
32.5°	2056.2	1861.4	1677.8	1528.8	1404.0	1301.8	1208.4	1126.1	1044.0	978.8	931.7
35°	2040.2	1851.5	1626.9	1455.8	1330.8	1231.9	1147.5	1071.7	991.0	927.8	879.9
37.5°	1971.2	1812.0	1574.2	1373.5	1242.8	1151.2	1082.4	1016.4	942.3	874.2	829.0
40°	1901.8	1773.2	1533.5	1323.5	1187.0	1092.9	1031.0	977.0	905.4	841.7	793.2
42.5°	1798.4	1720.3	1494.7	1271.0	1123.8	1033.2	981.0	930.4	867.5	802.8	757.2
45°	1608.7	1619.1	1415.1	1187.6	1036.4	945.5	896.3	861.1	805.3	751.9	705.2
47.5°	1370.8	1467.3	1321.8	1098.6	944.3	858.9	815.9	785.2	747.6	695.2	652.6
50°	1215.5	1353.3	1247.1	1038.9	886.6	801.6	759.1	734.2	701.5	660.2	619.6
52.5°	1072.3	1220.2	1156.7	972.4	823.9	746.3	704.8	684.3	658.3	619.5	582.6
55°	874.4	1024.3	1009.8	872.0	730.0	660.2	628.7	605.6	588.0	558.9	529.8
57.5°	707.3	849.4	856.9	760.4	647.3	578.3	551.2	533.8	522.3	500.2	473.3
60°	602.0	732.5	758.0	685.1	588.0	527.4	500.6	486.7	477.6	459.9	439.3
62.5°	514.6	625.6	654.5	602.1	531.2	474.4	453.5	440.1	433.9	418.7	400.6
65°	393.9	486.1	514.0	484.8	447.8	402.3	385.3	373.8	368.4	359.9	346.5
67.5°	296.1	363.4	394.0	373.4	360.1	331.4	320.6	314.3	309.5	303.6	292.5
70°	237.9	287.7	319.2	313.7	302.8	287.7	279.7	275.5	270.6	265.8	256.1
72.5°	191.3	225.5	255.1	257.9	249.0	245.9	239.0	237.2	234.3	228.5	223.1
75°	126.8	150.5	171.1	179.1	182.6	185.7	182.6	182.1	181.5	176.6	173.5
77.5°	83.1	95.9	108.9	122.3	128.0	132.2	133.1	135.4	133.8	131.2	129.7
80°	63.8	66.8	75.9	87.4	96.5	100.1	102.5	103.8	103.2	102.5	100.1
82.5°	46.3	48.8	53.1	61.2	68.8	74.9	76.3	76.1	77.4	77.8	75.9
85°	24.9	25.5	26.7	27.9	32.2	38.9	40.7	41.9	43.1	43.1	39.4
87.5°	9.6	8.8	9.5	9.3	10.5	10.8	13.5	15.6	16.3	14.6	14.9
90°	9.3	7.8	6.3	5.0	3.9	2.8	1.6	0.5	1.6	2.8	3.9
92.5°	10.8	9.7	8.6	8.2	8.5	8.8	9.2	9.5	9.2	8.8	8.5
95°	13.3	12.0	10.8	12.5	17.1	21.8	26.4	31.0	26.4	21.8	17.1
97.5°	32.6	40.8	49.0	54.0	56.1	58.2	60.3	62.3	60.3	58.2	56.1
100°	52.1	69.6	87.3	95.0	92.7	90.5	88.2	86.0	88.2	90.5	92.7
102.5°	72.0	91.2	110.5	119.3	117.7	116.1	114.4	112.8	114.4	116.1	117.7
105°	131.7	141.9	152.0	156.5	155.2	154.1	152.8	151.6	152.8	154.1	155.2
107.5°	200.9	199.3	197.7	196.4	195.5	194.5	193.4	192.4	193.4	194.5	195.5
110°	226.9	225.6	224.4	223.3	222.4	221.5	220.6	219.7	220.6	221.5	222.4



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	252.5	251.3	250.0	249.0	248.2	247.4	246.6	245.8	246.6	247.4	248.2
115°	289.9	288.9	287.8	287.0	286.3	285.6	285.0	284.3	285.0	285.6	286.3
117.5°	326.7	326.2	325.7	324.9	324.1	323.3	322.4	321.6	322.4	323.3	324.1
120°	350.3	349.9	349.6	348.9	347.9	346.9	345.8	344.8	345.8	346.9	347.9
122.5°	373.3	372.8	372.4	371.8	371.0	370.1	369.3	368.5	369.3	370.1	371.0
125°	406.0	405.6	405.1	404.4	403.5	402.6	401.7	400.7	401.7	402.6	403.5
127.5°	437.6	436.9	436.4	435.7	434.8	433.9	433.0	432.1	433.0	433.9	434.8
130°	456.8	456.4	455.9	455.2	454.3	453.4	452.5	451.7	452.5	453.4	454.3
132.5°	475.3	474.9	474.6	473.9	473.1	472.2	471.3	470.4	471.3	472.2	473.1
135°	503.1	502.7	502.2	501.7	501.0	500.2	499.6	498.9	499.6	500.2	501.0
137.5°	527.8	527.5	527.4	526.7	525.9	525.0	524.2	523.3	524.2	525.0	525.9
140°	543.5	543.1	542.9	542.3	541.6	541.0	540.3	539.6	540.3	541.0	541.6
142.5°	558.6	558.2	557.9	557.4	556.7	556.1	555.4	554.6	555.4	556.1	556.7
145°	579.9	579.6	579.4	578.9	578.1	577.3	576.5	575.7	576.5	577.3	578.1
147.5°	598.4	598.2	598.0	597.6	597.1	596.6	596.1	595.6	596.1	596.6	597.1
150°	609.8	609.7	609.4	609.1	608.8	608.4	608.1	607.8	608.1	608.4	608.8
152.5°	619.8	619.6	619.6	619.4	619.2	619.0	618.9	618.8	618.9	619.0	619.2
155°	633.5	633.4	633.3	633.3	633.6	633.7	634.0	634.2	634.0	633.7	633.6
157.5°	645.9	646.0	646.0	646.1	646.1	646.1	646.2	646.2	646.2	646.1	646.1
160°	652.7	652.8	653.0	653.1	653.2	653.4	653.4	653.5	653.4	653.4	653.2
162.5°	658.9	659.0	659.1	659.2	659.6	659.9	660.1	660.5	660.1	659.9	659.6
165°	667.0	667.1	667.2	667.4	667.8	668.2	668.4	668.8	668.4	668.2	667.8
167.5°	673.2	673.2	673.2	673.5	674.0	674.4	674.8	675.3	674.8	674.4	674.0
170°	676.9	676.9	676.9	677.2	677.6	678.1	678.5	678.9	678.5	678.1	677.6
172.5°	679.2	679.1	679.0	679.2	679.8	680.3	680.9	681.4	680.9	680.3	679.8
175°	682.3	682.2	682.1	682.3	682.9	683.4	684.0	684.6	684.0	683.4	682.9
177.5°	683.6	683.5	683.4	683.6	684.0	684.5	684.9	685.4	684.9	684.5	684.0
180°	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6
2.5°	1393.3	1387.0	1382.6	1372.9	1366.6	1359.8	1353.0	1357.4	1356.9	1356.4	1356.4
5°	1346.6	1332.6	1319.9	1303.5	1293.2	1280.4	1270.7	1269.5	1271.9	1263.5	1258.6
7.5°	1300.2	1281.1	1263.1	1245.0	1225.8	1210.5	1201.0	1196.4	1190.3	1185.0	1179.6
10°	1267.7	1245.3	1227.6	1205.1	1184.5	1166.4	1154.9	1146.9	1142.6	1138.4	1130.5
12.5°	1234.2	1212.2	1189.8	1164.4	1144.8	1123.6	1115.0	1106.2	1098.1	1093.2	1082.4
15°	1185.2	1156.6	1133.0	1106.3	1084.4	1063.8	1051.7	1034.0	1031.6	1025.6	1014.7
17.5°	1136.0	1105.0	1072.4	1052.7	1028.0	1006.5	988.0	982.1	964.7	958.2	948.7
20°	1097.2	1068.6	1043.7	1017.7	981.9	961.8	947.3	939.4	925.4	916.9	910.9
22.5°	1063.6	1034.7	1005.9	975.4	945.9	923.5	912.8	900.5	892.9	881.0	874.4
25°	1015.8	984.3	949.7	916.9	895.7	878.7	861.7	850.8	839.9	834.4	822.2
27.5°	960.3	927.3	894.9	870.0	844.0	827.2	811.8	802.1	789.0	779.8	773.1
30°	929.7	890.8	862.9	840.4	807.1	791.3	779.8	767.7	758.0	748.2	741.5
32.5°	894.2	858.8	832.3	804.6	778.9	761.7	746.8	736.1	727.8	718.6	711.9
35°	838.7	809.0	781.6	753.7	734.9	717.3	699.7	690.5	682.7	674.2	668.2
37.5°	788.4	760.6	734.7	708.2	684.8	670.6	656.4	649.4	638.7	633.0	626.9
40°	757.3	730.0	702.1	676.6	652.4	641.4	628.7	618.4	608.7	604.4	597.7
42.5°	723.4	696.1	672.5	645.1	625.2	610.4	598.6	587.3	580.1	573.8	570.1
45°	673.0	648.7	625.6	598.3	579.5	566.8	553.4	543.1	536.5	532.2	525.5
47.5°	624.1	599.8	576.4	552.6	534.4	519.8	506.5	499.3	490.4	485.3	480.7
50°	588.6	566.8	541.9	520.0	501.9	487.3	476.4	467.3	459.4	452.7	449.7
52.5°	556.1	532.8	511.3	491.0	471.7	455.2	445.3	435.7	429.8	422.1	418.6
55°	502.5	480.0	461.8	441.8	422.9	409.0	396.9	388.3	382.3	373.8	369.0
57.5°	452.1	431.9	410.2	392.9	373.4	361.7	351.6	340.1	332.7	326.0	321.3
60°	418.1	395.0	376.2	359.9	342.9	327.7	318.6	309.5	301.6	294.9	290.7
62.5°	382.6	362.6	344.6	326.8	311.3	298.1	287.5	279.9	273.0	268.7	264.5
65°	328.3	312.5	294.4	279.7	265.2	255.5	247.0	240.3	235.4	232.4	228.8
67.5°	278.3	263.0	247.1	232.8	223.1	215.7	210.1	204.4	202.0	198.0	195.6
70°	245.8	230.0	216.1	205.1	195.4	189.9	186.3	182.1	179.6	174.8	172.4
72.5°	210.4	198.9	188.9	179.9	172.1	167.1	162.5	157.3	153.4	148.0	145.6
75°	165.7	155.3	147.5	141.4	136.5	129.8	123.1	117.7	115.9	114.0	113.5
77.5°	122.7	116.2	110.5	105.3	99.2	94.4	93.0	91.8	91.4	90.4	90.4
80°	96.5	90.4	86.1	80.1	76.4	76.4	76.4	75.3	75.9	75.9	75.9
82.5°	71.7	66.2	63.8	61.6	60.9	61.4	61.4	61.6	61.3	62.2	61.8
85°	37.0	37.6	38.9	38.3	38.9	38.9	40.0	39.4	40.0	38.9	40.0
87.5°	14.6	16.3	17.1	17.8	18.6	18.5	19.0	19.2	19.7	19.8	19.9
90°	5.0	6.3	7.8	9.3	10.7	12.2	12.7	13.1	13.6	14.0	14.4
92.5°	8.2	8.6	9.7	10.8	11.9	13.0	13.7	14.4	15.2	15.9	16.3
95°	12.5	10.8	12.0	13.3	14.5	15.8	16.6	17.4	18.1	18.9	19.4
97.5°	54.0	49.0	40.8	32.6	24.5	16.4	17.3	18.2	19.1	20.0	20.5
100°	95.0	87.3	69.6	52.1	34.4	16.8	17.7	18.5	19.5	20.4	20.9
102.5°	119.3	110.5	91.2	72.0	52.7	33.4	30.7	27.8	25.1	22.3	21.0
105°	156.5	152.0	141.9	131.7	121.5	111.4	91.4	71.3	51.4	31.4	21.5
107.5°	196.4	197.7	199.3	200.9	202.5	204.1	189.5	174.8	160.2	145.4	130.6
110°	223.3	224.4	225.6	226.9	228.1	229.3	225.6	221.9	218.2	214.5	204.5



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	249.0	250.0	251.3	252.5	253.8	255.0	255.1	255.1	255.2	255.3	253.6
115°	287.0	287.8	288.9	289.9	290.9	291.9	293.1	294.2	295.3	296.5	297.2
117.5°	324.9	325.7	326.2	326.7	327.3	327.7	328.7	329.6	330.5	331.4	331.9
120°	348.9	349.6	349.9	350.3	350.6	350.9	351.9	352.8	353.7	354.5	355.0
122.5°	371.8	372.4	372.8	373.3	373.7	374.2	374.8	375.4	376.0	376.7	377.0
125°	404.4	405.1	405.6	406.0	406.4	406.9	407.1	407.3	407.5	407.8	408.0
127.5°	435.7	436.4	436.9	437.6	438.1	438.6	439.0	439.3	439.7	440.1	440.1
130°	455.2	455.9	456.4	456.8	457.3	457.7	458.2	458.6	459.1	459.5	459.7
132.5°	473.9	474.6	474.9	475.3	475.6	476.1	476.5	477.0	477.4	477.9	478.0
135°	501.7	502.2	502.7	503.1	503.5	504.0	504.4	504.7	505.1	505.3	505.3
137.5°	526.7	527.4	527.5	527.8	528.1	528.3	528.9	529.4	529.9	530.5	530.7
140°	542.3	542.9	543.1	543.5	543.9	544.2	544.7	545.1	545.5	546.0	546.1
142.5°	557.4	557.9	558.2	558.6	558.9	559.3	559.6	560.0	560.4	560.7	560.7
145°	578.9	579.4	579.6	579.9	580.1	580.3	580.5	580.8	580.9	581.2	581.3
147.5°	597.6	598.0	598.2	598.4	598.7	599.0	599.1	599.4	599.6	599.9	599.7
150°	609.1	609.4	609.7	609.8	610.1	610.3	610.6	610.7	611.0	611.2	611.2
152.5°	619.4	619.6	619.6	619.8	619.9	620.1	620.5	620.9	621.3	621.7	621.6
155°	633.3	633.3	633.4	633.5	633.6	633.7	634.3	634.8	635.4	636.0	635.9
157.5°	646.1	646.0	646.0	645.9	645.7	645.6	646.3	646.9	647.6	648.4	648.2
160°	653.1	653.0	652.8	652.7	652.6	652.6	653.2	653.9	654.5	655.2	655.1
162.5°	659.2	659.1	659.0	658.9	658.7	658.6	659.4	660.1	660.9	661.7	661.7
165°	667.4	667.2	667.1	667.0	666.9	666.7	667.7	668.6	669.5	670.4	670.5
167.5°	673.5	673.2	673.2	673.2	673.2	673.2	674.2	675.1	676.0	676.9	676.9
170°	677.2	676.9	676.9	676.9	676.9	676.9	677.9	678.8	679.7	680.6	680.6
172.5°	679.2	679.0	679.1	679.2	679.3	679.4	680.3	681.2	682.1	683.0	683.0
175°	682.3	682.1	682.2	682.3	682.4	682.5	683.3	684.1	684.9	685.7	685.6
177.5°	683.6	683.4	683.5	683.6	683.7	683.8	684.5	685.2	685.9	686.6	686.5
180°	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6
2.5°	1350.6	1350.1	1350.6	1348.6	1350.6	1350.1	1350.6	1356.4	1356.4	1356.9	1357.4
5°	1256.8	1256.2	1254.4	1248.8	1254.4	1256.2	1256.8	1258.6	1263.5	1271.9	1269.5
7.5°	1174.8	1174.0	1168.7	1168.8	1168.7	1174.0	1174.8	1179.6	1185.0	1190.3	1196.4
10°	1126.3	1126.9	1119.6	1115.4	1119.6	1126.9	1126.3	1130.5	1138.4	1142.6	1146.9
12.5°	1079.2	1076.4	1070.6	1065.9	1070.6	1076.4	1079.2	1082.4	1093.2	1098.1	1106.2
15°	1017.1	1011.0	996.4	997.6	996.4	1011.0	1017.1	1014.7	1025.6	1031.6	1034.0
17.5°	943.9	939.4	939.1	930.7	939.1	939.4	943.9	948.7	958.2	964.7	982.1
20°	901.2	898.1	899.3	890.8	899.3	898.1	901.2	910.9	916.9	925.4	939.4
22.5°	867.6	864.6	859.5	856.8	859.5	864.6	867.6	874.4	881.0	892.9	900.5
25°	818.6	813.8	809.0	812.0	809.0	813.8	818.6	822.2	834.4	839.9	850.8
27.5°	769.6	766.0	761.1	760.5	761.1	766.0	769.6	773.1	779.8	789.0	802.1
30°	738.5	734.9	732.5	729.4	732.5	734.9	738.5	741.5	748.2	758.0	767.7
32.5°	706.9	706.2	701.9	701.2	701.9	706.2	706.9	711.9	718.6	727.8	736.1
35°	665.7	662.1	660.8	661.5	660.8	662.1	665.7	668.2	674.2	682.7	690.5
37.5°	626.5	621.6	619.5	617.2	619.5	621.6	626.5	626.9	633.0	638.7	649.4
40°	598.3	593.5	592.3	591.0	592.3	593.5	598.3	597.7	604.4	608.7	618.4
42.5°	566.8	564.8	564.1	562.0	564.1	564.8	566.8	570.1	573.8	580.1	587.3
45°	523.7	523.1	519.4	520.7	519.4	523.1	523.7	525.5	532.2	536.5	543.1
47.5°	478.3	475.6	473.1	474.7	473.1	475.6	478.3	480.7	485.3	490.4	499.3
50°	447.3	446.0	440.6	441.8	440.6	446.0	447.3	449.7	452.7	459.4	467.3
52.5°	416.2	411.5	409.5	408.8	409.5	411.5	416.2	418.6	422.1	429.8	435.7
55°	364.7	359.3	356.9	355.6	356.9	359.3	364.7	369.0	373.8	382.3	388.3
57.5°	314.2	312.7	310.9	312.2	310.9	312.7	314.2	321.3	326.0	332.7	340.1
60°	284.6	284.6	284.6	284.0	284.6	284.6	284.6	290.7	294.9	301.6	309.5
62.5°	261.8	260.3	259.8	260.7	259.8	260.3	261.8	264.5	268.7	273.0	279.9
65°	226.9	226.3	223.9	223.3	223.9	226.3	226.9	228.8	232.4	235.4	240.3
67.5°	194.0	191.9	191.2	190.3	191.2	191.9	194.0	195.6	198.0	202.0	204.4
70°	169.3	168.1	164.4	165.1	164.4	168.1	169.3	172.4	174.8	179.6	182.1
72.5°	142.6	141.4	140.6	139.8	140.6	141.4	142.6	145.6	148.0	153.4	157.3
75°	112.9	112.3	111.6	114.0	111.6	112.3	112.9	113.5	114.0	115.9	117.7
77.5°	90.4	90.4	90.8	89.8	90.8	90.4	90.4	90.4	90.4	91.4	91.8
80°	75.9	75.9	75.3	75.3	75.3	75.9	75.9	75.9	75.9	75.9	75.3
82.5°	60.8	61.3	61.6	60.7	61.6	61.3	60.8	61.8	62.2	61.3	61.6
85°	40.0	39.4	40.7	40.0	40.7	39.4	40.0	40.0	38.9	40.0	39.4
87.5°	20.9	20.0	20.0	20.5	20.0	20.0	20.9	19.9	19.8	19.7	19.2
90°	14.6	14.8	15.1	15.2	15.1	14.8	14.6	14.4	14.0	13.6	13.1
92.5°	16.5	16.6	16.8	16.9	16.8	16.6	16.5	16.3	15.9	15.2	14.4
95°	19.4	19.4	19.4	19.4	19.4	19.4	19.4	19.4	18.9	18.1	17.4
97.5°	20.6	20.7	20.9	21.0	20.9	20.7	20.6	20.5	20.0	19.1	18.2
100°	21.0	21.1	21.2	21.4	21.2	21.1	21.0	20.9	20.4	19.5	18.5
102.5°	21.1	21.4	21.6	21.8	21.6	21.4	21.1	21.0	22.3	25.1	27.8
105°	21.7	21.9	22.1	22.4	22.1	21.9	21.7	21.5	31.4	51.4	71.3
107.5°	115.5	100.4	85.3	70.3	85.3	100.4	115.5	130.6	145.4	160.2	174.8
110°	188.3	172.2	156.0	139.8	156.0	172.2	188.3	204.5	214.5	218.2	221.9



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	250.2	246.7	243.3	240.0	243.3	246.7	250.2	253.6	255.3	255.2	255.1
115°	297.7	298.2	298.6	299.1	298.6	298.2	297.7	297.2	296.5	295.3	294.2
117.5°	332.0	332.1	332.2	332.3	332.2	332.1	332.0	331.9	331.4	330.5	329.6
120°	355.0	355.0	355.0	355.0	355.0	355.0	355.0	355.0	354.5	353.7	352.8
122.5°	377.1	377.2	377.3	377.4	377.3	377.2	377.1	377.0	376.7	376.0	375.4
125°	408.2	408.5	408.7	408.9	408.7	408.5	408.2	408.0	407.8	407.5	407.3
127.5°	439.9	439.7	439.4	439.3	439.4	439.7	439.9	440.1	440.1	439.7	439.3
130°	459.4	459.2	459.0	458.8	459.0	459.2	459.4	459.7	459.5	459.1	458.6
132.5°	477.6	477.2	477.0	476.6	477.0	477.2	477.6	478.0	477.9	477.4	477.0
135°	505.1	504.7	504.4	504.0	504.4	504.7	505.1	505.3	505.3	505.1	504.7
137.5°	530.4	530.2	529.9	529.8	529.9	530.2	530.4	530.7	530.5	529.9	529.4
140°	545.9	545.6	545.5	545.2	545.5	545.6	545.9	546.1	546.0	545.5	545.1
142.5°	560.4	560.1	559.7	559.5	559.7	560.1	560.4	560.7	560.7	560.4	560.0
145°	581.3	581.3	581.3	581.3	581.3	581.3	581.3	581.3	581.2	580.9	580.8
147.5°	599.1	598.6	598.2	597.6	598.2	598.6	599.1	599.7	599.9	599.6	599.4
150°	610.8	610.5	610.1	609.8	610.1	610.5	610.8	611.2	611.2	611.0	610.7
152.5°	621.2	620.6	620.1	619.6	620.1	620.6	621.2	621.6	621.7	621.3	620.9
155°	635.3	634.5	633.9	633.2	633.9	634.5	635.3	635.9	636.0	635.4	634.8
157.5°	647.3	646.5	645.6	644.7	645.6	646.5	647.3	648.2	648.4	647.6	646.9
160°	654.4	653.6	652.8	652.0	652.8	653.6	654.4	655.1	655.2	654.5	653.9
162.5°	661.0	660.3	659.6	659.0	659.6	660.3	661.0	661.7	661.7	660.9	660.1
165°	669.7	668.9	668.1	667.3	668.1	668.9	669.7	670.5	670.4	669.5	668.6
167.5°	676.0	675.1	674.2	673.2	674.2	675.1	676.0	676.9	676.9	676.0	675.1
170°	679.7	678.8	677.9	676.9	677.9	678.8	679.7	680.6	680.6	679.7	678.8
172.5°	682.0	681.0	679.9	678.9	679.9	681.0	682.0	683.0	683.0	682.1	681.2
175°	684.7	683.9	683.0	682.0	683.0	683.9	684.7	685.6	685.7	684.9	684.1
177.5°	685.6	684.7	683.9	683.0	683.9	684.7	685.6	686.5	686.6	685.9	685.2
180°	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6
2.5°	1353.0	1359.8	1366.6	1372.9	1382.6	1387.0	1393.3	1395.7	1403.0	1413.7	1422.5
5°	1270.7	1280.4	1293.2	1303.5	1319.9	1332.6	1346.6	1359.9	1375.7	1398.1	1418.2
7.5°	1201.0	1210.5	1225.8	1245.0	1263.1	1281.1	1300.2	1318.4	1341.0	1373.1	1405.1
10°	1154.9	1166.4	1184.5	1205.1	1227.6	1245.3	1267.7	1290.8	1318.7	1355.7	1393.9
12.5°	1115.0	1123.6	1144.8	1164.4	1189.8	1212.2	1234.2	1261.1	1292.9	1332.4	1378.4
15°	1051.7	1063.8	1084.4	1106.3	1133.0	1156.6	1185.2	1217.9	1248.8	1297.4	1353.3
17.5°	988.0	1006.5	1028.0	1052.7	1072.4	1105.0	1136.0	1169.7	1207.7	1259.2	1320.4
20°	947.3	961.8	981.9	1017.7	1043.7	1068.6	1097.2	1139.1	1174.2	1232.5	1296.2
22.5°	912.8	923.5	945.9	975.4	1005.9	1034.7	1063.6	1103.6	1147.0	1202.4	1271.5
25°	861.7	878.7	895.7	916.9	949.7	984.3	1015.8	1049.8	1095.9	1154.9	1229.5
27.5°	811.8	827.2	844.0	870.0	894.9	927.3	960.3	999.3	1048.7	1111.0	1186.7
30°	779.8	791.3	807.1	840.4	862.9	890.8	929.7	964.3	1010.4	1076.6	1156.6
32.5°	746.8	761.7	778.9	804.6	832.3	858.8	894.2	931.7	978.8	1044.0	1126.1
35°	699.7	717.3	734.9	753.7	781.6	809.0	838.7	879.9	927.8	991.0	1071.7
37.5°	656.4	670.6	684.8	708.2	734.7	760.6	788.4	829.0	874.2	942.3	1016.4
40°	628.7	641.4	652.4	676.6	702.1	730.0	757.3	793.2	841.7	905.4	977.0
42.5°	598.6	610.4	625.2	645.1	672.5	696.1	723.4	757.2	802.8	867.5	930.4
45°	553.4	566.8	579.5	598.3	625.6	648.7	673.0	705.2	751.9	805.3	861.1
47.5°	506.5	519.8	534.4	552.6	576.4	599.8	624.1	652.6	695.2	747.6	785.2
50°	476.4	487.3	501.9	520.0	541.9	566.8	588.6	619.6	660.2	701.5	734.2
52.5°	445.3	455.2	471.7	491.0	511.3	532.8	556.1	582.6	619.5	658.3	684.3
55°	396.9	409.0	422.9	441.8	461.8	480.0	502.5	529.8	558.9	588.0	605.6
57.5°	351.6	361.7	373.4	392.9	410.2	431.9	452.1	473.3	500.2	522.3	533.8
60°	318.6	327.7	342.9	359.9	376.2	395.0	418.1	439.3	459.9	477.6	486.7
62.5°	287.5	298.1	311.3	326.8	344.6	362.6	382.6	400.6	418.7	433.9	440.1
65°	247.0	255.5	265.2	279.7	294.4	312.5	328.3	346.5	359.9	368.4	373.8
67.5°	210.1	215.7	223.1	232.8	247.1	263.0	278.3	292.5	303.6	309.5	314.3
70°	186.3	189.9	195.4	205.1	216.1	230.0	245.8	256.1	265.8	270.6	275.5
72.5°	162.5	167.1	172.1	179.9	188.9	198.9	210.4	223.1	228.5	234.3	237.2
75°	123.1	129.8	136.5	141.4	147.5	155.3	165.7	173.5	176.6	181.5	182.1
77.5°	93.0	94.4	99.2	105.3	110.5	116.2	122.7	129.7	131.2	133.8	135.4
80°	76.4	76.4	76.4	80.1	86.1	90.4	96.5	100.1	102.5	103.2	103.8
82.5°	61.4	61.4	60.9	61.6	63.8	66.2	71.7	75.9	77.8	77.4	76.1
85°	40.0	38.9	38.9	38.3	38.9	37.6	37.0	39.4	43.1	43.1	41.9
87.5°	19.0	18.5	18.6	17.8	17.1	16.3	14.6	14.9	14.6	16.3	15.6
90°	12.7	12.2	10.7	9.3	7.8	6.3	5.0	3.9	2.8	1.6	0.5
92.5°	13.7	13.0	11.9	10.8	9.7	8.6	8.2	8.5	8.8	9.2	9.5
95°	16.6	15.8	14.5	13.3	12.0	10.8	12.5	17.1	21.8	26.4	31.0
97.5°	17.3	16.4	24.5	32.6	40.8	49.0	54.0	56.1	58.2	60.3	62.3
100°	17.7	16.8	34.4	52.1	69.6	87.3	95.0	92.7	90.5	88.2	86.0
102.5°	30.7	33.4	52.7	72.0	91.2	110.5	119.3	117.7	116.1	114.4	112.8
105°	91.4	111.4	121.5	131.7	141.9	152.0	156.5	155.2	154.1	152.8	151.6
107.5°	189.5	204.1	202.5	200.9	199.3	197.7	196.4	195.5	194.5	193.4	192.4
110°	225.6	229.3	228.1	226.9	225.6	224.4	223.3	222.4	221.5	220.6	219.7



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	255.1	255.0	253.8	252.5	251.3	250.0	249.0	248.2	247.4	246.6	245.8
115°	293.1	291.9	290.9	289.9	288.9	287.8	287.0	286.3	285.6	285.0	284.3
117.5°	328.7	327.7	327.3	326.7	326.2	325.7	324.9	324.1	323.3	322.4	321.6
120°	351.9	350.9	350.6	350.3	349.9	349.6	348.9	347.9	346.9	345.8	344.8
122.5°	374.8	374.2	373.7	373.3	372.8	372.4	371.8	371.0	370.1	369.3	368.5
125°	407.1	406.9	406.4	406.0	405.6	405.1	404.4	403.5	402.6	401.7	400.7
127.5°	439.0	438.6	438.1	437.6	436.9	436.4	435.7	434.8	433.9	433.0	432.1
130°	458.2	457.7	457.3	456.8	456.4	455.9	455.2	454.3	453.4	452.5	451.7
132.5°	476.5	476.1	475.6	475.3	474.9	474.6	473.9	473.1	472.2	471.3	470.4
135°	504.4	504.0	503.5	503.1	502.7	502.2	501.7	501.0	500.2	499.6	498.9
137.5°	528.9	528.3	528.1	527.8	527.5	527.4	526.7	525.9	525.0	524.2	523.3
140°	544.7	544.2	543.9	543.5	543.1	542.9	542.3	541.6	541.0	540.3	539.6
142.5°	559.6	559.3	558.9	558.6	558.2	557.9	557.4	556.7	556.1	555.4	554.6
145°	580.5	580.3	580.1	579.9	579.6	579.4	578.9	578.1	577.3	576.5	575.7
147.5°	599.1	599.0	598.7	598.4	598.2	598.0	597.6	597.1	596.6	596.1	595.6
150°	610.6	610.3	610.1	609.8	609.7	609.4	609.1	608.8	608.4	608.1	607.8
152.5°	620.5	620.1	619.9	619.8	619.6	619.6	619.4	619.2	619.0	618.9	618.8
155°	634.3	633.7	633.6	633.5	633.4	633.3	633.3	633.6	633.7	634.0	634.2
157.5°	646.3	645.6	645.7	645.9	646.0	646.0	646.1	646.1	646.1	646.2	646.2
160°	653.2	652.6	652.6	652.7	652.8	653.0	653.1	653.2	653.4	653.4	653.5
162.5°	659.4	658.6	658.7	658.9	659.0	659.1	659.2	659.6	659.9	660.1	660.5
165°	667.7	666.7	666.9	667.0	667.1	667.2	667.4	667.8	668.2	668.4	668.8
167.5°	674.2	673.2	673.2	673.2	673.2	673.2	673.5	674.0	674.4	674.8	675.3
170°	677.9	676.9	676.9	676.9	676.9	676.9	677.2	677.6	678.1	678.5	678.9
172.5°	680.3	679.4	679.3	679.2	679.1	679.0	679.2	679.8	680.3	680.9	681.4
175°	683.3	682.5	682.4	682.3	682.2	682.1	682.3	682.9	683.4	684.0	684.6
177.5°	684.5	683.8	683.7	683.6	683.5	683.4	683.6	684.0	684.5	684.9	685.4
180°	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6
2.5°	1425.3	1430.7	1437.4	1447.7	1455.5	1462.2	1463.7	1465.6	1470.5	1478.7	1485.1
5°	1434.6	1448.5	1471.0	1492.8	1516.5	1535.9	1554.1	1566.8	1579.0	1604.5	1625.1
7.5°	1431.6	1462.8	1497.9	1537.1	1576.8	1615.2	1651.0	1682.9	1714.7	1751.9	1794.2
10°	1429.7	1466.2	1513.4	1563.8	1619.1	1673.0	1725.3	1765.9	1813.2	1855.7	1909.7
12.5°	1420.5	1472.9	1529.5	1593.9	1661.8	1724.0	1792.7	1848.9	1903.1	1964.4	2027.2
15°	1408.5	1472.2	1543.8	1629.3	1732.5	1807.8	1878.1	1975.9	2042.6	2109.3	2199.2
17.5°	1386.5	1464.3	1553.7	1664.9	1751.0	1852.1	1958.0	2035.2	2125.1	2219.2	2300.5
20°	1369.0	1459.5	1559.6	1668.8	1778.6	1888.5	1991.0	2083.3	2176.1	2284.7	2351.5
22.5°	1351.6	1441.0	1545.0	1661.1	1779.1	1894.8	2010.9	2119.2	2223.7	2333.3	2418.5
25°	1314.4	1420.6	1533.5	1651.8	1768.4	1895.8	2034.1	2154.9	2284.1	2397.0	2477.7
27.5°	1276.8	1374.1	1486.5	1606.5	1736.1	1886.7	2049.4	2186.7	2316.2	2397.0	2422.4
30°	1242.8	1345.9	1449.1	1571.1	1711.3	1879.4	2052.4	2209.5	2315.7	2350.9	2324.8
32.5°	1208.4	1301.8	1404.0	1528.8	1677.8	1861.4	2056.2	2195.9	2259.9	2232.9	2126.7
35°	1147.5	1231.9	1330.8	1455.8	1626.9	1851.5	2040.2	2134.8	2119.1	1967.4	1767.1
37.5°	1082.4	1151.2	1242.8	1373.5	1574.2	1812.0	1971.2	1985.2	1848.7	1615.8	1384.5
40°	1031.0	1092.9	1187.0	1323.5	1533.5	1773.2	1901.8	1845.4	1633.6	1374.5	1181.5
42.5°	981.0	1033.2	1123.8	1271.0	1494.7	1720.3	1798.4	1675.5	1431.2	1186.2	1010.7
45°	896.3	945.5	1036.4	1187.6	1415.1	1619.1	1608.7	1395.1	1150.6	953.3	807.7
47.5°	815.9	858.9	944.3	1098.6	1321.8	1467.3	1370.8	1143.5	936.1	777.8	674.0
50°	759.1	801.6	886.6	1038.9	1247.1	1353.3	1215.5	996.4	806.5	675.4	592.9
52.5°	704.8	746.3	823.9	972.4	1156.7	1220.2	1072.3	869.2	710.9	597.7	526.8
55°	628.7	660.2	730.0	872.0	1009.8	1024.3	874.4	704.5	574.1	495.2	446.7
57.5°	551.2	578.3	647.3	760.4	856.9	849.4	707.3	560.4	472.5	413.8	378.7
60°	500.6	527.4	588.0	685.1	758.0	732.5	602.0	483.7	408.4	365.3	337.4
62.5°	453.5	474.4	531.2	602.1	654.5	625.6	514.6	416.7	357.0	320.7	298.5
65°	385.3	402.3	447.8	484.8	514.0	486.1	393.9	325.8	282.8	257.3	242.1
67.5°	320.6	331.4	360.1	373.4	394.0	363.4	296.1	250.7	226.1	204.6	194.0
70°	279.7	287.7	302.8	313.7	319.2	287.7	237.9	204.5	183.9	168.7	162.0
72.5°	239.0	245.9	249.0	257.9	255.1	225.5	191.3	164.7	149.9	139.6	131.0
75°	182.6	185.7	182.6	179.1	171.1	150.5	126.8	113.5	102.5	97.7	94.7
77.5°	133.1	132.2	128.0	122.3	108.9	95.9	83.1	78.6	73.9	71.3	70.3
80°	102.5	100.1	96.5	87.4	75.9	66.8	63.8	60.7	58.9	55.8	55.2
82.5°	76.3	74.9	68.8	61.2	53.1	48.8	46.3	45.1	43.3	41.7	41.6
85°	40.7	38.9	32.2	27.9	26.7	25.5	24.9	24.9	22.5	21.8	21.8
87.5°	13.5	10.8	10.5	9.3	9.5	8.8	9.6	8.9	8.7	9.4	8.5
90°	1.6	2.8	3.9	5.0	6.3	7.8	9.3	10.7	12.2	12.7	13.1
92.5°	9.2	8.8	8.5	8.2	8.6	9.7	10.8	11.9	13.0	13.7	14.4
95°	26.4	21.8	17.1	12.5	10.8	12.0	13.3	14.5	15.8	16.6	17.4
97.5°	60.3	58.2	56.1	54.0	49.0	40.8	32.6	24.5	16.4	17.3	18.2
100°	88.2	90.5	92.7	95.0	87.3	69.6	52.1	34.4	16.8	17.7	18.5
102.5°	114.4	116.1	117.7	119.3	110.5	91.2	72.0	52.7	33.4	30.7	27.8
105°	152.8	154.1	155.2	156.5	152.0	141.9	131.7	121.5	111.4	91.4	71.3
107.5°	193.4	194.5	195.5	196.4	197.7	199.3	200.9	202.5	204.1	189.5	174.8
110°	220.6	221.5	222.4	223.3	224.4	225.6	226.9	228.1	229.3	225.6	221.9



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	246.6	247.4	248.2	249.0	250.0	251.3	252.5	253.8	255.0	255.1	255.1
115°	285.0	285.6	286.3	287.0	287.8	288.9	289.9	290.9	291.9	293.1	294.2
117.5°	322.4	323.3	324.1	324.9	325.7	326.2	326.7	327.3	327.7	328.7	329.6
120°	345.8	346.9	347.9	348.9	349.6	349.9	350.3	350.6	350.9	351.9	352.8
122.5°	369.3	370.1	371.0	371.8	372.4	372.8	373.3	373.7	374.2	374.8	375.4
125°	401.7	402.6	403.5	404.4	405.1	405.6	406.0	406.4	406.9	407.1	407.3
127.5°	433.0	433.9	434.8	435.7	436.4	436.9	437.6	438.1	438.6	439.0	439.3
130°	452.5	453.4	454.3	455.2	455.9	456.4	456.8	457.3	457.7	458.2	458.6
132.5°	471.3	472.2	473.1	473.9	474.6	474.9	475.3	475.6	476.1	476.5	477.0
135°	499.6	500.2	501.0	501.7	502.2	502.7	503.1	503.5	504.0	504.4	504.7
137.5°	524.2	525.0	525.9	526.7	527.4	527.5	527.8	528.1	528.3	528.9	529.4
140°	540.3	541.0	541.6	542.3	542.9	543.1	543.5	543.9	544.2	544.7	545.1
142.5°	555.4	556.1	556.7	557.4	557.9	558.2	558.6	558.9	559.3	559.6	560.0
145°	576.5	577.3	578.1	578.9	579.4	579.6	579.9	580.1	580.3	580.5	580.8
147.5°	596.1	596.6	597.1	597.6	598.0	598.2	598.4	598.7	599.0	599.1	599.4
150°	608.1	608.4	608.8	609.1	609.4	609.7	609.8	610.1	610.3	610.6	610.7
152.5°	618.9	619.0	619.2	619.4	619.6	619.6	619.8	619.9	620.1	620.5	620.9
155°	634.0	633.7	633.6	633.3	633.3	633.4	633.5	633.6	633.7	634.3	634.8
157.5°	646.2	646.1	646.1	646.1	646.0	646.0	645.9	645.7	645.6	646.3	646.9
160°	653.4	653.4	653.2	653.1	653.0	652.8	652.7	652.6	652.6	653.2	653.9
162.5°	660.1	659.9	659.6	659.2	659.1	659.0	658.9	658.7	658.6	659.4	660.1
165°	668.4	668.2	667.8	667.4	667.2	667.1	667.0	666.9	666.7	667.7	668.6
167.5°	674.8	674.4	674.0	673.5	673.2	673.2	673.2	673.2	673.2	674.2	675.1
170°	678.5	678.1	677.6	677.2	676.9	676.9	676.9	676.9	676.9	677.9	678.8
172.5°	680.9	680.3	679.8	679.2	679.0	679.1	679.2	679.3	679.4	680.3	681.2
175°	684.0	683.4	682.9	682.3	682.1	682.2	682.3	682.4	682.5	683.3	684.1
177.5°	684.9	684.5	684.0	683.6	683.4	683.5	683.6	683.7	683.8	684.5	685.2
180°	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6	684.6



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
0°	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6	1417.6
2.5°	1495.2	1495.2	1497.2	1504.5	1505.5	1511.7	1509.8
5°	1643.3	1654.8	1659.1	1677.3	1688.2	1693.1	1683.4
7.5°	1824.4	1856.9	1872.3	1891.4	1908.3	1913.3	1900.1
10°	1956.4	1990.4	2018.9	2036.6	2052.9	2063.9	2077.8
12.5°	2084.1	2125.8	2152.9	2177.8	2194.7	2208.5	2210.8
15°	2222.9	2286.0	2333.9	2369.1	2386.7	2395.8	2392.2
17.5°	2362.8	2421.3	2455.4	2491.4	2515.7	2516.9	2517.7
20°	2442.0	2498.9	2538.4	2565.1	2592.4	2591.2	2597.3
22.5°	2494.8	2539.8	2570.0	2589.3	2598.7	2594.1	2595.3
25°	2519.6	2532.9	2527.5	2496.5	2488.7	2460.1	2465.0
27.5°	2391.9	2328.8	2263.5	2179.5	2113.3	2060.3	2063.0
30°	2218.6	2106.9	1979.5	1872.7	1776.8	1750.2	1693.1
32.5°	1976.4	1808.8	1659.6	1560.0	1477.7	1455.5	1405.7
35°	1565.7	1403.0	1249.5	1157.3	1120.8	1069.9	1069.3
37.5°	1216.9	1073.7	992.6	923.4	887.1	856.2	853.2
40°	1023.8	912.0	850.8	801.0	765.3	742.2	736.7
42.5°	888.8	798.4	741.1	710.2	682.7	670.8	661.9
45°	725.8	665.1	625.0	597.1	584.4	575.2	570.4
47.5°	607.1	566.4	539.1	520.6	510.2	500.6	503.2
50°	542.5	509.2	489.1	471.5	463.6	456.9	457.5
52.5°	490.5	460.6	444.4	431.7	421.9	417.1	414.8
55°	416.3	397.4	381.1	372.0	366.5	359.9	358.0
57.5°	355.1	340.5	327.2	316.9	315.6	309.2	310.0
60°	314.3	302.2	291.3	285.8	281.6	276.1	277.9
62.5°	280.9	270.6	260.7	256.2	252.0	248.0	248.8
65°	230.0	220.3	214.2	211.8	210.0	208.1	206.3
67.5°	183.2	177.4	173.5	168.4	164.6	164.0	162.1
70°	154.2	146.2	139.6	132.9	131.1	130.5	131.1
72.5°	123.6	118.6	116.7	113.5	113.2	111.6	112.6
75°	92.8	91.0	89.8	87.4	87.4	87.4	87.4
77.5°	68.5	67.3	66.6	66.2	65.5	64.6	64.6
80°	53.4	52.8	51.5	51.5	51.0	51.5	51.0
82.5°	40.3	40.2	39.0	39.0	38.3	38.0	38.3
85°	20.6	20.1	21.2	20.1	20.6	19.4	20.6
87.5°	8.6	8.6	8.2	8.3	7.8	8.8	7.9
90°	13.6	14.0	14.4	14.6	14.8	15.1	15.2
92.5°	15.2	15.9	16.3	16.5	16.6	16.8	16.9
95°	18.1	18.9	19.4	19.4	19.4	19.4	19.4
97.5°	19.1	20.0	20.5	20.6	20.7	20.9	21.0
100°	19.5	20.4	20.9	21.0	21.1	21.2	21.4
102.5°	25.1	22.3	21.0	21.1	21.4	21.6	21.8
105°	51.4	31.4	21.5	21.7	21.9	22.1	22.4
107.5°	160.2	145.4	130.6	115.5	100.4	85.3	70.3
110°	218.2	214.5	204.5	188.3	172.2	156.0	139.8



TEST NUMBER: P332336-940

CATALOG NUMBER: S123RDIP-S1000D585U940-4F0-1E-UDD-A

CANDELA DISTRIBUTION (continued):

	330°	335°	340°	345°	350°	355°	360°
112.5°	255.2	255.3	253.6	250.2	246.7	243.3	240.0
115°	295.3	296.5	297.2	297.7	298.2	298.6	299.1
117.5°	330.5	331.4	331.9	332.0	332.1	332.2	332.3
120°	353.7	354.5	355.0	355.0	355.0	355.0	355.0
122.5°	376.0	376.7	377.0	377.1	377.2	377.3	377.4
125°	407.5	407.8	408.0	408.2	408.5	408.7	408.9
127.5°	439.7	440.1	440.1	439.9	439.7	439.4	439.3
130°	459.1	459.5	459.7	459.4	459.2	459.0	458.8
132.5°	477.4	477.9	478.0	477.6	477.2	477.0	476.6
135°	505.1	505.3	505.3	505.1	504.7	504.4	504.0
137.5°	529.9	530.5	530.7	530.4	530.2	529.9	529.8
140°	545.5	546.0	546.1	545.9	545.6	545.5	545.2
142.5°	560.4	560.7	560.7	560.4	560.1	559.7	559.5
145°	580.9	581.2	581.3	581.3	581.3	581.3	581.3
147.5°	599.6	599.9	599.7	599.1	598.6	598.2	597.6
150°	611.0	611.2	611.2	610.8	610.5	610.1	609.8
152.5°	621.3	621.7	621.6	621.2	620.6	620.1	619.6
155°	635.4	636.0	635.9	635.3	634.5	633.9	633.2
157.5°	647.6	648.4	648.2	647.3	646.5	645.6	644.7
160°	654.5	655.2	655.1	654.4	653.6	652.8	652.0
162.5°	660.9	661.7	661.7	661.0	660.3	659.6	659.0
165°	669.5	670.4	670.5	669.7	668.9	668.1	667.3
167.5°	676.0	676.9	676.9	676.0	675.1	674.2	673.2
170°	679.7	680.6	680.6	679.7	678.8	677.9	676.9
172.5°	682.1	683.0	683.0	682.0	681.0	679.9	678.9
175°	684.9	685.7	685.6	684.7	683.9	683.0	682.0
177.5°	685.9	686.6	686.5	685.6	684.7	683.9	683.0
180°	684.6	684.6	684.6	684.6	684.6	684.6	684.6

(END OF REPORT)