

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332387-940

Luminaire Tested: **S123RDIP-S1165D1195U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332387-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1165D1195U940-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1195 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8160.6 lumens  
Efficiency: N/A  
Efficacy: 113.8 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: General Diffuse


Input Watts (W): 71.7  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332387-940

CATALOG NUMBER: S123RDIP-S1165D1195U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

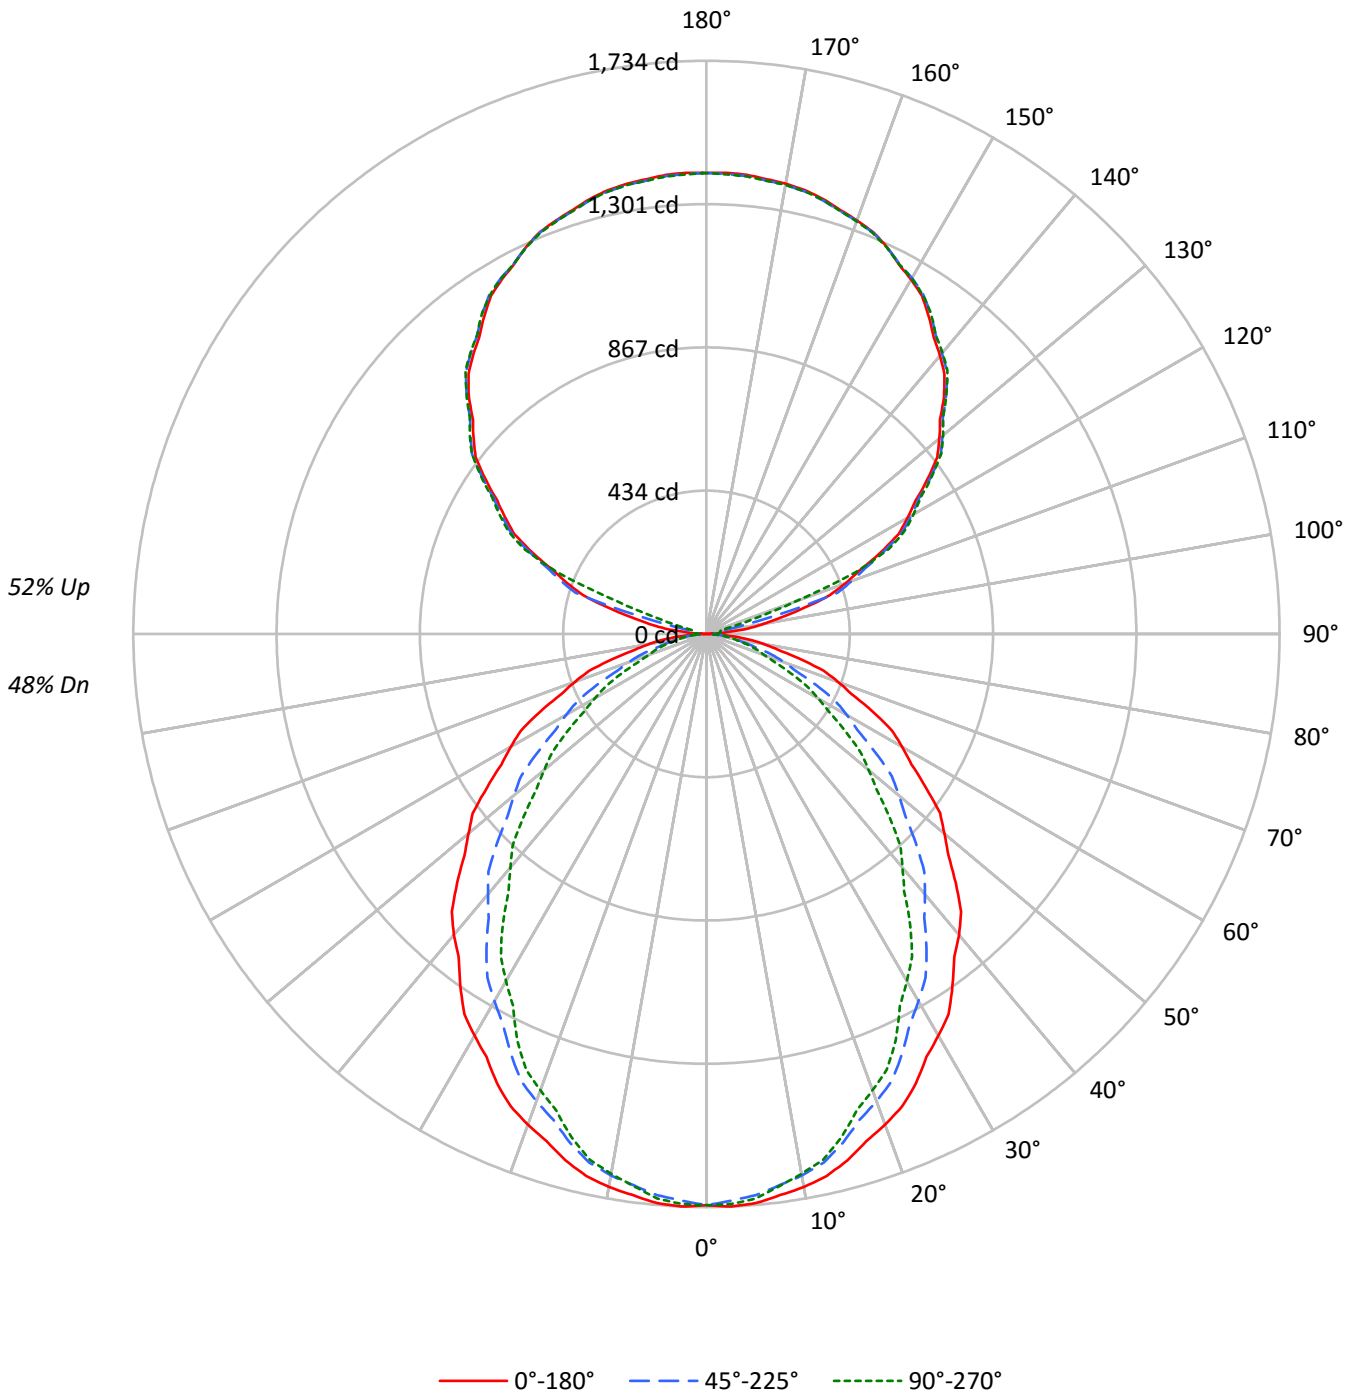



TEST NUMBER: P332387-940

CATALOG NUMBER: S123RDIP-S1165D1195U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	107	107	107	107	98	98	98	98	82	82	82	68	68	68	54	54	54	48
1	98	93	90	86	90	86	83	80	72	70	68	60	58	57	48	47	46	41
2	89	82	76	71	82	76	71	66	64	60	57	53	50	48	43	41	40	35
3	81	72	65	59	75	67	61	56	57	52	48	47	44	41	38	36	34	30
4	75	64	56	51	68	59	53	47	50	45	41	42	38	35	34	32	29	26
5	69	57	49	43	63	53	46	41	45	40	36	38	34	31	31	28	26	23
6	63	51	43	38	58	48	41	36	41	35	31	34	30	27	28	25	23	20
7	59	47	39	33	54	43	36	31	37	32	28	31	27	24	26	23	20	18
8	54	42	35	29	50	39	33	28	34	28	25	29	25	21	24	21	18	16
9	51	39	31	26	47	36	29	25	31	26	22	26	22	19	22	19	17	15
10	47	35	28	24	44	33	27	22	29	24	20	24	20	18	20	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	18603	18603	18603
5°	18674	18416	18522
10°	18569	18185	18124
15°	18369	17761	17572
20°	18095	17228	16827
25°	17813	16631	16098
30°	17439	15940	15070
35°	17056	15251	14127
40°	16703	14436	12960
45°	16238	13633	11905
50°	15726	12722	10727
55°	15204	11678	9627
60°	14725	10562	8420
65°	14103	9352	7210
70°	13322	7852	5822
75°	12181	6180	5481
80°	10860	5473	5040
85°	9176	4841	4508



TEST NUMBER: P332387-940

CATALOG NUMBER: S123RDIP-S1165D1195U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	162.3	2.0
10°-20°	451.6	5.5
20°-30°	650.2	8.0
30°-40°	732.4	9.0
40°-50°	700.7	8.6
50°-60°	573.8	7.0
60°-70°	387.1	4.7
70°-80°	194.8	2.4
80°-90°	55.4	0.7
90°-100°	50.7	0.6
100°-110°	241.6	3.0
110°-120°	580.4	7.1
120°-130°	739.1	9.1
130°-140°	789.7	9.7
140°-150°	738.4	9.0
150°-160°	595.6	7.3
160°-170°	384.4	4.7
170°-180°	132.5	1.6
0°-30°	1264.1	15.5
0°-40°	1996.5	24.5
0°-60°	3270.9	40.1
0°-90°	3908.2	47.9
90°-120°	872.7	10.7
90°-150°	3139.9	38.5
90°-180°	4252.0	52.1
0°-180°	8160.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1728	1728	1728	1728	1728	
5°	1728	1721	1704	1716	1714	164
15°	1648	1632	1594	1587	1577	464
25°	1500	1463	1400	1372	1355	689
35°	1298	1246	1161	1102	1075	812
45°	1067	1001	896	818	782	823
55°	810	739	622	544	513	726
65°	554	475	367	302	283	548
75°	293	225	149	135	132	312
85°	74	45	39	37	36	83
90°	1	12	25	29	31	7
95°	63	24	32	39	39	78
105°	309	314	227	54	46	327
115°	579	586	595	605	609	571
125°	816	824	829	831	833	729
135°	1016	1022	1027	1030	1027	782
145°	1173	1180	1182	1184	1184	734
155°	1292	1290	1291	1295	1290	595
165°	1362	1359	1358	1366	1359	385
175°	1394	1390	1390	1397	1389	133
180°	1394	1394	1394	1394	1394	



TEST NUMBER: P332387-940

CATALOG NUMBER: S123RDIP-S1165D1195U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3
2.5°	1733.9	1732.9	1731.9	1730.9	1729.9	1727.9	1724.9	1721.9	1719.0	1715.9	1718.7
5°	1728.3	1726.7	1725.2	1723.6	1722.1	1719.4	1715.7	1711.9	1708.2	1704.4	1707.3
7.5°	1712.3	1710.7	1709.0	1707.3	1705.6	1702.3	1697.5	1692.6	1687.7	1682.8	1684.4
10°	1698.9	1696.7	1694.5	1692.3	1690.1	1686.2	1680.6	1675.0	1669.4	1663.8	1664.1
12.5°	1679.8	1677.4	1674.9	1672.5	1670.1	1665.4	1658.6	1651.7	1644.8	1638.0	1637.8
15°	1648.4	1644.9	1641.6	1638.1	1634.7	1628.6	1619.9	1611.1	1602.4	1593.8	1592.1
17.5°	1608.8	1604.9	1600.9	1596.9	1593.0	1585.4	1574.3	1563.2	1552.1	1541.1	1537.8
20°	1579.7	1574.8	1569.8	1564.8	1559.8	1551.4	1539.5	1527.7	1515.8	1504.0	1499.9
22.5°	1547.2	1541.4	1535.7	1530.0	1524.3	1515.1	1502.5	1490.0	1477.4	1464.7	1459.7
25°	1499.8	1492.0	1484.3	1476.4	1468.6	1457.6	1443.2	1429.0	1414.6	1400.3	1393.7
27.5°	1442.3	1433.8	1425.1	1416.6	1407.9	1395.7	1379.7	1363.8	1347.8	1331.9	1322.8
30°	1403.1	1393.7	1384.4	1375.0	1365.7	1352.3	1334.9	1317.4	1300.0	1282.5	1271.9
32.5°	1363.9	1353.3	1342.6	1332.0	1321.5	1307.0	1288.5	1270.1	1251.6	1233.2	1221.6
35°	1298.0	1286.7	1275.5	1264.4	1253.1	1237.9	1218.5	1199.3	1179.9	1160.6	1147.2
37.5°	1231.3	1218.8	1206.3	1193.8	1181.4	1164.8	1144.2	1123.6	1103.0	1082.4	1067.2
40°	1188.7	1174.9	1161.2	1147.5	1133.8	1115.9	1093.8	1071.7	1049.5	1027.4	1011.2
42.5°	1140.4	1126.7	1113.0	1099.3	1085.6	1067.3	1044.5	1021.5	998.7	975.9	958.1
45°	1066.7	1052.7	1038.7	1024.7	1010.6	991.6	967.6	943.6	919.6	895.6	877.9
47.5°	992.9	977.6	962.2	946.8	931.4	911.7	887.7	863.7	839.7	815.8	796.5
50°	939.1	924.5	909.8	895.2	880.6	860.7	835.4	810.2	785.0	759.7	740.4
52.5°	890.9	875.0	859.2	843.3	827.3	806.9	781.9	757.0	732.0	707.0	687.0
55°	810.2	794.9	779.6	764.4	749.1	728.3	701.8	675.3	648.8	622.3	604.3
57.5°	735.6	719.0	702.3	685.7	669.1	647.5	620.9	594.2	567.7	541.1	524.0
60°	684.0	666.9	649.8	632.7	615.5	594.0	568.1	542.3	516.5	490.6	473.8
62.5°	632.4	615.3	598.2	581.0	563.9	542.4	516.6	490.7	464.8	439.0	423.2
65°	553.7	536.5	519.4	502.3	485.2	464.4	440.1	415.8	391.6	367.2	352.0
67.5°	474.9	457.5	440.2	422.9	405.6	385.3	362.0	338.7	315.4	292.1	280.7
70°	423.3	406.5	389.7	372.8	356.1	336.7	315.0	293.1	271.3	249.5	238.6
72.5°	371.8	355.2	338.6	322.0	305.4	287.2	267.4	247.6	227.8	208.0	199.1
75°	292.9	278.0	263.1	248.1	233.2	217.1	200.0	182.8	165.7	148.6	145.4
77.5°	221.1	207.7	194.1	180.7	167.1	154.8	143.8	132.8	121.7	110.8	109.1
80°	175.2	162.5	149.6	136.9	124.1	114.5	107.9	101.4	94.9	88.3	87.4
82.5°	131.4	120.5	109.4	98.4	87.4	80.3	77.3	74.2	71.2	68.1	67.1
85°	74.3	67.4	60.5	53.8	46.9	43.0	42.1	41.1	40.2	39.2	38.6
87.5°	27.1	24.9	22.6	20.2	18.0	17.1	17.7	18.4	19.0	19.5	19.5
90°	1.1	3.3	5.6	7.9	10.3	12.9	15.9	18.9	21.8	24.9	25.8
92.5°	19.3	18.6	18.0	17.3	16.7	17.5	19.8	22.0	24.3	26.5	28.0
95°	63.2	53.8	44.3	34.9	25.4	22.0	24.5	27.0	29.6	32.1	33.7
97.5°	127.0	122.8	118.5	114.3	110.0	99.7	83.1	66.5	49.9	33.3	35.2
100°	175.0	179.7	184.3	188.9	193.5	177.8	142.0	106.0	70.1	34.2	36.0
102.5°	229.8	233.1	236.4	239.7	243.1	225.1	185.8	146.6	107.4	68.1	62.4
105°	308.7	311.3	313.8	316.3	318.9	309.8	289.0	268.3	247.6	226.9	186.1
107.5°	392.0	394.0	396.1	398.1	400.1	402.8	406.1	409.3	412.6	415.9	385.9
110°	447.5	449.4	451.2	453.1	455.0	457.1	459.7	462.2	464.7	467.3	459.7



TEST NUMBER: P332387-940

CATALOG NUMBER: S123RDIP-S1165D1195U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	500.6	502.2	503.9	505.6	507.2	509.3	511.8	514.4	516.9	519.4	519.6
115°	579.2	580.5	581.8	583.3	584.6	586.4	588.4	590.5	592.6	594.7	597.0
117.5°	655.1	656.8	658.5	660.3	662.0	663.3	664.4	665.5	666.6	667.6	669.4
120°	702.4	704.5	706.6	708.6	710.7	712.1	712.7	713.5	714.2	714.8	716.7
122.5°	750.5	752.2	753.9	755.5	757.3	758.6	759.5	760.4	761.2	762.1	763.4
125°	816.4	818.2	820.0	821.9	823.8	825.1	826.0	827.0	827.9	828.8	829.3
127.5°	880.2	882.0	883.9	885.7	887.5	889.0	890.1	891.3	892.3	893.4	894.2
130°	920.0	921.9	923.6	925.5	927.3	928.7	929.6	930.6	931.5	932.4	933.4
132.5°	958.1	959.9	961.8	963.6	965.5	966.7	967.5	968.2	968.9	969.7	970.6
135°	1016.3	1017.7	1019.0	1020.5	1021.8	1023.0	1024.0	1024.8	1025.7	1026.7	1027.3
137.5°	1066.0	1067.8	1069.5	1071.3	1073.1	1074.2	1074.7	1075.2	1075.7	1076.2	1077.3
140°	1099.2	1100.5	1102.0	1103.3	1104.7	1105.7	1106.4	1107.1	1107.9	1108.5	1109.5
142.5°	1129.9	1131.2	1132.7	1134.0	1135.4	1136.4	1137.1	1137.8	1138.5	1139.2	1140.0
145°	1172.8	1174.4	1176.0	1177.6	1179.2	1180.3	1180.7	1181.2	1181.6	1182.1	1182.5
147.5°	1213.2	1214.2	1215.3	1216.3	1217.4	1218.2	1218.6	1219.1	1219.5	1219.9	1220.5
150°	1238.1	1238.7	1239.4	1240.1	1240.8	1241.4	1241.8	1242.2	1242.8	1243.2	1243.7
152.5°	1260.4	1260.7	1261.1	1261.3	1261.7	1261.9	1262.2	1262.6	1262.8	1263.1	1263.9
155°	1291.9	1291.5	1290.9	1290.5	1290.0	1289.9	1290.1	1290.4	1290.7	1290.8	1292.0
157.5°	1316.3	1316.3	1316.3	1316.2	1316.2	1316.0	1315.8	1315.5	1315.4	1315.1	1316.5
160°	1331.2	1331.1	1330.8	1330.6	1330.3	1330.1	1329.9	1329.6	1329.5	1329.2	1330.6
162.5°	1345.3	1344.8	1344.2	1343.5	1342.9	1342.6	1342.3	1342.1	1341.8	1341.6	1343.2
165°	1362.4	1361.6	1360.9	1360.3	1359.6	1359.1	1358.9	1358.6	1358.4	1358.2	1360.0
167.5°	1375.6	1374.7	1373.8	1372.9	1371.9	1371.5	1371.5	1371.5	1371.5	1371.5	1373.3
170°	1383.0	1382.2	1381.3	1380.3	1379.4	1378.9	1378.9	1378.9	1378.9	1378.9	1380.7
172.5°	1388.0	1387.0	1385.8	1384.7	1383.6	1383.1	1383.3	1383.5	1383.7	1383.8	1385.7
175°	1394.5	1393.3	1392.1	1391.0	1389.8	1389.4	1389.6	1389.8	1390.1	1390.3	1392.0
177.5°	1396.2	1395.2	1394.3	1393.4	1392.4	1392.0	1392.2	1392.4	1392.6	1392.8	1394.3
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5



TEST NUMBER: P332387-940

CATALOG NUMBER: S123RDIP-S1165D1195U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3	1728.3
2.5°	1721.4	1724.2	1726.9	1728.0	1727.5	1727.1	1726.5	1726.0
5°	1710.0	1712.9	1715.7	1716.7	1716.1	1715.5	1714.8	1714.2
7.5°	1686.0	1687.6	1689.1	1689.3	1688.3	1687.2	1686.1	1685.1
10°	1664.5	1664.7	1665.1	1664.5	1662.9	1661.3	1659.7	1658.2
12.5°	1637.6	1637.4	1637.3	1636.3	1634.5	1632.6	1630.8	1629.1
15°	1590.6	1589.0	1587.5	1585.6	1583.4	1581.3	1579.0	1576.9
17.5°	1534.5	1531.1	1527.8	1524.6	1521.3	1518.0	1514.8	1511.5
20°	1495.9	1491.8	1487.8	1483.9	1480.2	1476.4	1472.7	1469.0
22.5°	1454.6	1449.7	1444.6	1440.3	1436.8	1433.3	1429.9	1426.4
25°	1387.2	1380.6	1374.1	1369.1	1365.7	1362.3	1358.9	1355.4
27.5°	1313.7	1304.6	1295.5	1288.3	1283.1	1277.9	1272.6	1267.4
30°	1261.3	1250.8	1240.2	1232.4	1227.4	1222.4	1217.5	1212.5
32.5°	1210.1	1198.5	1186.9	1178.5	1173.2	1168.0	1162.8	1157.5
35°	1133.8	1120.4	1107.1	1097.5	1091.9	1086.3	1080.7	1075.1
37.5°	1052.0	1036.8	1021.5	1010.5	1003.6	996.7	989.8	982.8
40°	995.1	978.8	962.7	951.0	943.8	936.7	929.5	922.3
42.5°	940.5	922.7	905.1	893.0	886.6	880.2	873.8	867.4
45°	860.1	842.4	824.7	812.1	804.6	797.1	789.6	782.1
47.5°	777.1	757.9	738.5	725.6	718.9	712.2	705.5	698.9
50°	721.1	701.8	682.4	669.2	662.1	654.9	647.7	640.6
52.5°	666.9	646.8	626.8	613.5	607.1	600.7	594.3	587.9
55°	586.2	568.1	550.1	538.0	531.7	525.5	519.2	513.0
57.5°	506.9	489.8	472.8	461.5	456.3	451.0	445.7	440.4
60°	456.9	440.1	423.3	412.2	407.0	401.6	396.4	391.1
62.5°	407.3	391.6	375.7	365.1	359.4	353.9	348.4	342.9
65°	336.7	321.5	306.2	296.9	293.5	290.0	286.6	283.1
67.5°	269.3	257.9	246.5	239.0	235.3	231.6	227.9	224.3
70°	227.7	216.8	205.9	198.8	195.3	191.9	188.4	185.0
72.5°	190.2	181.3	172.4	167.2	165.8	164.3	162.9	161.5
75°	142.3	139.2	136.1	134.3	133.7	133.0	132.4	131.8
77.5°	107.4	105.7	104.0	102.8	102.2	101.6	100.9	100.3
80°	86.4	85.5	84.5	83.8	83.2	82.6	81.9	81.3
82.5°	66.3	65.4	64.4	63.8	63.8	63.6	63.5	63.4
85°	38.0	37.4	36.7	36.5	36.5	36.5	36.5	36.5
87.5°	19.4	19.4	19.3	19.2	19.0	18.9	18.7	18.5
90°	26.7	27.6	28.5	29.2	29.7	30.1	30.6	31.1
92.5°	29.4	30.9	32.5	33.3	33.5	33.9	34.2	34.4
95°	35.3	36.9	38.5	39.3	39.3	39.3	39.3	39.3
97.5°	37.0	38.9	40.8	41.7	42.0	42.3	42.4	42.7
100°	37.9	39.7	41.6	42.6	42.8	43.1	43.2	43.5
102.5°	56.7	51.0	45.3	42.7	43.1	43.5	44.0	44.3
105°	145.3	104.6	63.8	43.8	44.2	44.7	45.1	45.6
107.5°	356.1	326.2	296.3	266.0	235.3	204.6	173.9	143.2
110°	452.0	444.4	436.8	416.6	383.7	350.7	317.8	284.9





TEST NUMBER: P332387-940

CATALOG NUMBER: S123RDIP-S1165D1195U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	519.7	519.9	520.0	516.6	509.6	502.7	495.7	488.7
115°	599.2	601.5	603.9	605.5	606.4	607.3	608.2	609.1
117.5°	671.3	673.2	674.9	676.0	676.2	676.4	676.5	676.7
120°	718.5	720.3	722.2	723.1	723.1	723.1	723.1	723.1
122.5°	764.6	766.0	767.2	767.9	768.1	768.3	768.6	768.7
125°	829.7	830.2	830.6	831.1	831.5	832.1	832.5	832.9
127.5°	894.9	895.6	896.3	896.5	896.1	895.6	895.2	894.7
130°	934.2	935.1	936.1	936.3	935.9	935.4	935.0	934.5
132.5°	971.5	972.5	973.4	973.5	972.9	972.2	971.6	970.9
135°	1028.1	1028.8	1029.5	1029.5	1028.8	1028.1	1027.3	1026.7
137.5°	1078.4	1079.5	1080.6	1080.9	1080.5	1080.0	1079.6	1079.1
140°	1110.4	1111.3	1112.2	1112.4	1112.0	1111.5	1111.1	1110.6
142.5°	1140.7	1141.4	1142.1	1142.2	1141.6	1140.9	1140.2	1139.6
145°	1183.0	1183.5	1183.9	1184.1	1184.1	1184.1	1184.1	1184.1
147.5°	1220.9	1221.4	1221.8	1221.6	1220.5	1219.4	1218.3	1217.3
150°	1244.1	1244.6	1245.0	1244.9	1244.2	1243.6	1242.9	1242.2
152.5°	1264.7	1265.6	1266.4	1266.3	1265.2	1264.2	1263.1	1262.0
155°	1293.2	1294.3	1295.5	1295.3	1294.0	1292.6	1291.2	1289.9
157.5°	1317.9	1319.2	1320.6	1320.4	1318.7	1316.8	1315.0	1313.2
160°	1331.9	1333.3	1334.7	1334.6	1333.0	1331.4	1329.7	1328.1
162.5°	1344.8	1346.3	1347.9	1347.9	1346.5	1345.1	1343.6	1342.2
165°	1361.9	1363.7	1365.6	1365.7	1364.1	1362.4	1360.8	1359.2
167.5°	1375.1	1377.0	1378.9	1378.9	1377.0	1375.1	1373.3	1371.5
170°	1382.6	1384.5	1386.3	1386.3	1384.5	1382.6	1380.7	1378.9
172.5°	1387.6	1389.4	1391.2	1391.2	1389.1	1387.1	1385.1	1383.0
175°	1393.6	1395.2	1396.8	1396.6	1394.8	1392.9	1391.2	1389.3
177.5°	1395.7	1397.2	1398.6	1398.5	1396.7	1394.8	1392.9	1391.2
180°	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5	1394.5

(END OF REPORT)