

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332368-940

Luminaire Tested: **S123RDIP-S1165D585U940-4F0-1E-UDD-A4**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332368-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-17,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S1165D585U940-4F0-1E-UDD-A4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, ASYMMETRIC DIFFUSER, REGRESSED HOUSING  
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5968.6 lumens  
Efficiency: N/A  
Efficacy: 108.3 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.22 / 1.36  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 55.1  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

### Luminous Intensity Polar Plot

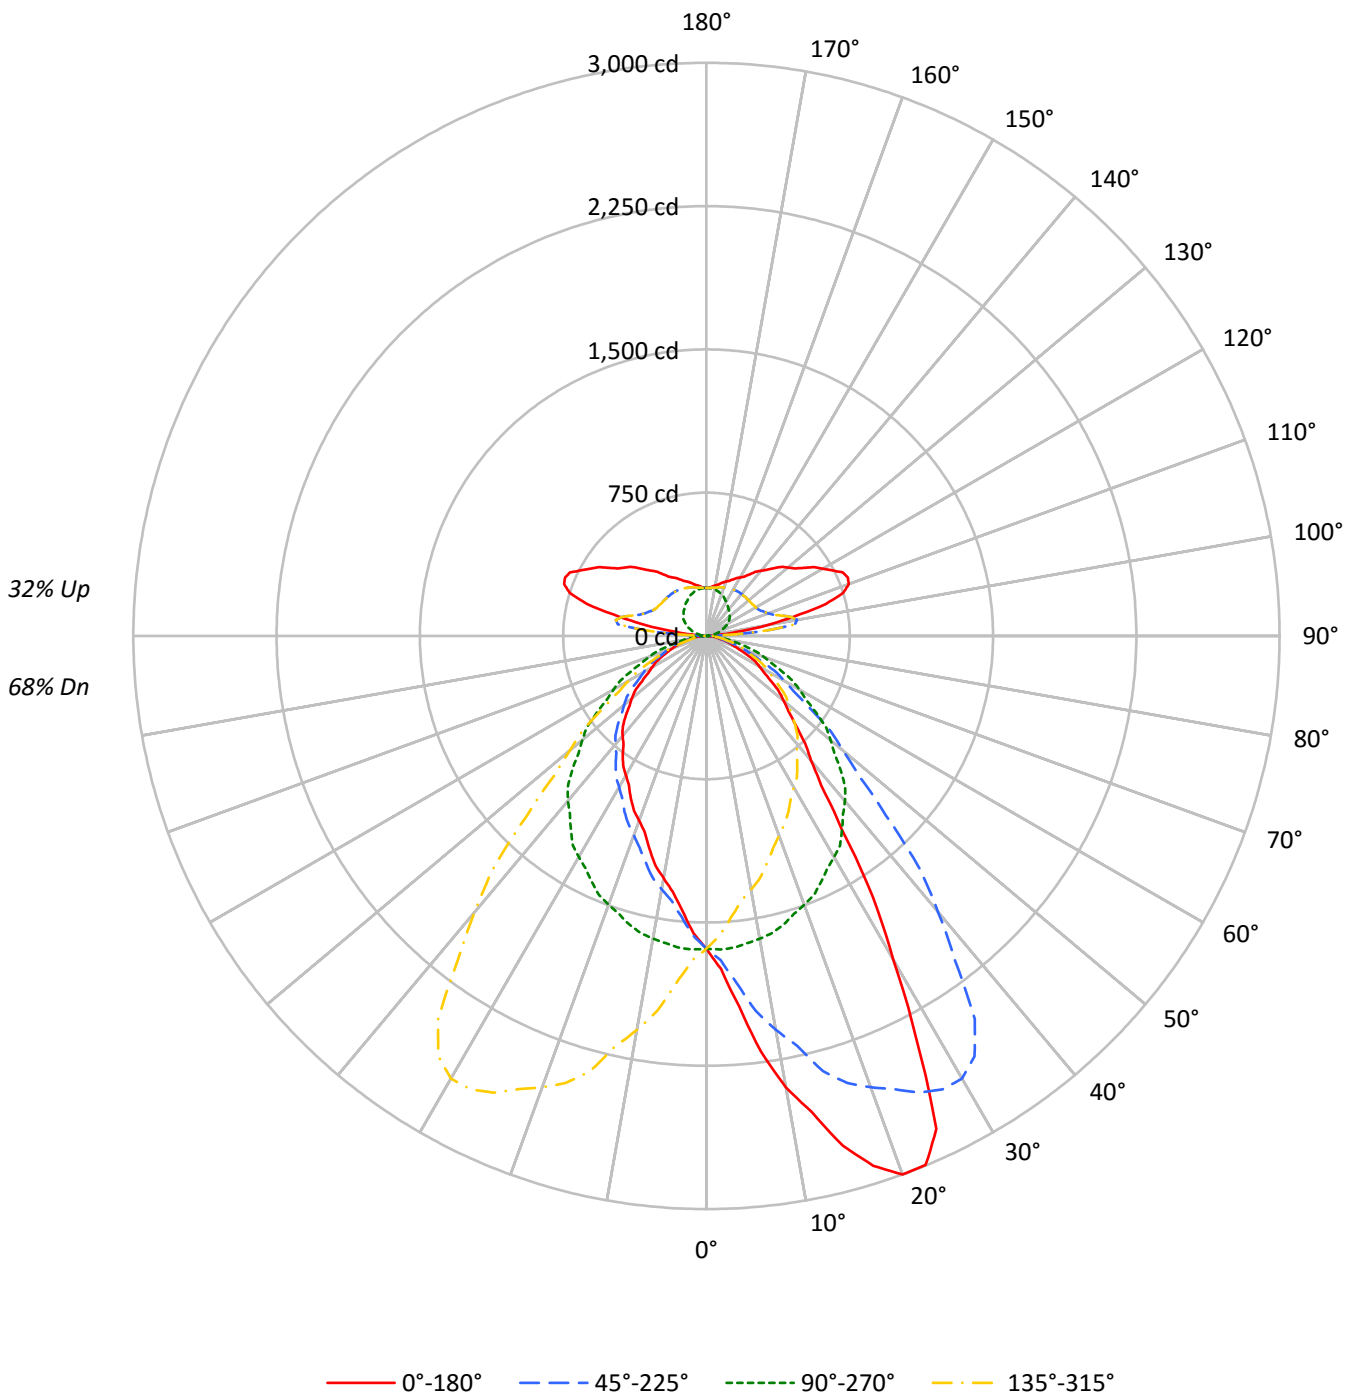



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	112	112	112	112	105	105	105	105	94	94	94	83	83	83	73	73	73	68
1	103	99	95	92	97	93	90	87	83	81	79	74	72	71	66	64	63	59
2	94	87	81	76	89	82	77	73	74	70	66	66	63	60	59	57	54	51
3	86	77	70	64	81	73	67	62	66	61	57	59	55	52	53	50	47	44
4	80	69	61	55	75	66	59	53	59	54	49	53	49	45	48	44	41	38
5	73	62	54	48	69	59	52	46	53	48	43	48	43	40	43	40	37	34
6	68	56	48	42	64	53	46	41	48	42	38	44	39	35	40	36	33	30
7	63	51	43	37	60	49	41	36	44	38	34	40	35	32	36	32	29	27
8	59	46	39	33	55	44	37	32	41	35	30	37	32	28	34	29	26	24
9	55	43	35	30	52	41	34	29	37	32	27	34	29	26	31	27	24	22
10	51	39	32	27	49	38	31	26	35	29	25	32	27	23	29	25	22	20

**AVERAGE LUMINANCE (cd/sqm):**

	0°	90°	180°	270°
0°	17623	17623	17623	17623
5°	21007	17698	15584	17698
10°	26230	17596	14080	17596
15°	30788	17416	12840	17416
20°	34360	17148	11786	17148
25°	33812	16865	11137	16865
30°	24304	16604	10470	16604
35°	16227	16264	10038	16264
40°	11956	15855	9591	15855
45°	10029	15139	9155	15139
50°	8848	14200	8544	14200
55°	7760	13127	7707	13127
60°	6910	12099	7061	12099
65°	6069	10998	6569	10998
70°	4765	10014	5998	10014
75°	4196	8746	5481	8746
80°	3651	7426	5387	7426
85°	2939	5965	5718	5965



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	161.0	2.7
10°-20°	503.0	8.4
20°-30°	790.2	13.2
30°-40°	824.4	13.8
40°-50°	705.6	11.8
50°-60°	537.8	9.0
60°-70°	344.7	5.8
70°-80°	165.8	2.8
80°-90°	45.8	0.8
90°-100°	139.8	2.3
100°-110°	395.9	6.6
110°-120°	389.5	6.5
120°-130°	310.7	5.2
130°-140°	244.9	4.1
140°-150°	182.8	3.1
150°-160°	127.4	2.1
160°-170°	74.9	1.3
170°-180°	24.4	0.4
0°-30°	1454.2	24.4
0°-40°	2278.7	38.2
0°-60°	3522.0	59.0
0°-90°	4078.3	68.3
90°-120°	925.2	15.5
90°-150°	1663.7	27.9
90°-180°	1890.0	31.7
0°-180°	5968.6	100.0

**CANDELA DISTRIBUTION:**

	0°	90°	180°	270°	360°	Flux
0°	1637	1637	1637	1637	1637	
5°	1944	1638	1442	1638	1944	201
15°	2763	1563	1152	1563	2763	783
25°	2847	1420	938	1420	2847	1224
35°	1235	1238	764	1238	1235	810
45°	659	994	601	994	659	518
55°	414	700	411	700	414	374
65°	238	432	258	432	238	234
75°	101	210	132	210	101	108
85°	24	48	46	48	24	28
90°	15	1	15	1	15	9
95°	59	17	59	17	59	106
105°	647	59	647	59	647	638
115°	787	104	787	104	787	764
125°	620	145	620	145	620	562
135°	503	170	503	170	503	390
145°	393	194	393	194	393	250
155°	326	220	326	220	326	152
165°	284	241	284	241	284	81
175°	256	251	256	251	256	25
180°	251	251	251	251	251	



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2
2.5°	1743.7	1746.0	1738.7	1737.6	1729.1	1726.9	1726.9	1715.1	1707.8	1698.4	1692.7
5°	1944.2	1955.4	1949.8	1937.2	1916.1	1911.2	1897.9	1876.9	1853.1	1823.6	1809.6
7.5°	2194.5	2209.8	2204.0	2184.4	2162.4	2144.7	2107.0	2072.2	2023.2	1980.3	1943.6
10°	2399.8	2383.6	2371.0	2352.1	2331.7	2298.8	2259.6	2205.6	2143.2	2094.2	2039.5
12.5°	2553.3	2550.7	2534.7	2515.2	2486.5	2455.2	2407.0	2341.3	2268.8	2197.9	2135.4
15°	2762.8	2767.0	2756.5	2736.1	2695.5	2640.1	2567.2	2539.9	2436.2	2359.1	2282.0
17.5°	2907.7	2906.9	2905.5	2877.3	2835.8	2796.4	2728.8	2656.9	2563.0	2454.4	2350.5
20°	2999.6	2992.7	2994.1	2962.5	2931.7	2886.1	2820.2	2715.8	2638.8	2513.3	2406.0
22.5°	2997.4	2996.1	3001.3	2990.5	2968.1	2933.2	2881.4	2793.2	2694.8	2568.2	2447.6
25°	2846.9	2841.3	2874.3	2883.3	2919.1	2925.3	2909.9	2861.6	2768.4	2638.0	2488.8
27.5°	2382.7	2379.5	2440.7	2517.2	2614.2	2689.6	2762.5	2797.7	2768.4	2675.0	2525.5
30°	1955.4	2021.2	2052.1	2162.8	2286.2	2433.4	2562.3	2684.9	2715.1	2674.5	2551.8
32.5°	1623.4	1681.0	1706.7	1801.8	1916.7	2089.1	2282.5	2456.2	2578.9	2609.9	2536.1
35°	1234.9	1235.6	1294.5	1336.5	1443.1	1620.4	1808.2	2040.9	2272.2	2447.4	2465.6
37.5°	985.4	988.9	1024.5	1066.4	1146.3	1240.1	1405.5	1598.9	1866.1	2135.1	2292.8
40°	850.9	857.1	883.8	925.1	982.6	1053.4	1182.3	1364.6	1587.4	1886.7	2131.3
42.5°	764.5	774.7	788.5	820.3	855.9	922.2	1026.4	1167.2	1369.9	1652.9	1935.1
45°	658.8	664.4	674.9	689.6	721.8	768.1	838.2	932.8	1101.1	1328.8	1611.2
47.5°	581.1	578.2	589.2	601.2	622.7	654.2	701.2	778.4	898.4	1081.1	1320.7
50°	528.4	527.7	535.5	544.6	564.9	588.0	626.6	684.7	780.1	931.5	1150.8
52.5°	479.1	481.8	487.2	498.6	513.3	532.0	566.6	608.5	690.4	821.0	1003.9
55°	413.5	415.6	423.3	429.6	440.1	459.1	480.8	515.9	571.9	663.0	813.7
57.5°	358.0	357.0	364.4	366.0	377.9	393.3	410.1	437.3	478.0	545.7	647.2
60°	321.0	318.9	325.2	330.1	336.4	349.0	363.0	389.7	422.0	471.7	558.6
62.5°	287.3	286.3	291.0	295.9	301.1	312.5	324.3	344.8	370.3	412.2	481.2
65°	238.3	240.4	242.5	244.6	247.4	254.4	265.6	279.6	297.2	326.6	376.4
67.5°	187.3	189.4	190.1	194.4	200.5	204.8	211.7	224.2	236.3	261.2	289.4
70°	151.4	150.7	151.4	153.5	161.2	168.9	178.0	187.2	194.8	212.3	236.2
72.5°	130.1	128.9	130.6	131.1	134.8	137.0	142.7	151.2	161.2	173.1	190.2
75°	100.9	100.9	100.9	100.9	103.7	105.1	107.3	109.3	112.8	118.4	131.1
77.5°	74.5	74.7	75.7	76.4	77.0	77.8	79.1	81.1	82.4	85.3	90.9
80°	58.9	59.6	58.9	59.6	59.6	61.0	61.7	63.8	64.5	67.9	70.1
82.5°	44.3	43.9	44.3	45.0	45.0	46.4	46.5	48.1	48.2	50.0	52.2
85°	23.8	22.5	23.8	23.1	24.5	23.1	23.8	25.2	25.2	25.9	28.7
87.5°	8.6	9.8	8.6	9.0	9.1	9.5	9.4	9.3	10.3	9.8	10.1
90°	14.7	15.2	14.7	14.3	14.7	13.7	13.2	12.8	12.2	12.8	11.1
92.5°	24.5	25.4	24.9	26.5	27.4	30.1	34.0	42.8	59.0	78.2	86.1
95°	59.0	61.0	64.6	69.2	78.8	97.1	124.1	183.1	244.6	301.6	268.6
97.5°	160.6	165.0	178.7	201.6	239.2	300.0	365.6	456.5	500.1	467.4	342.1
100°	318.9	318.4	338.2	375.3	426.7	498.9	558.5	599.7	581.8	481.6	325.5
102.5°	467.8	479.5	496.1	525.5	565.4	611.3	646.0	647.3	585.9	455.2	301.1
105°	646.9	649.5	665.8	685.1	708.5	721.8	712.0	661.2	554.9	408.9	271.1
107.5°	750.1	754.7	760.3	766.8	766.3	748.2	703.7	621.1	500.6	368.0	252.0
110°	792.4	793.4	794.4	790.4	776.1	740.6	676.5	582.8	466.4	344.8	244.6



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	800.9	800.8	796.9	784.3	758.2	712.5	640.6	545.0	436.7	329.4	240.6
115°	786.8	784.3	774.1	751.7	713.5	658.2	583.4	494.9	400.8	312.8	239.1
117.5°	741.8	738.4	723.7	698.1	658.4	602.1	534.9	458.5	379.2	303.0	240.0
120°	704.5	701.3	689.2	660.7	620.5	569.1	508.1	439.4	367.7	298.5	241.6
122.5°	669.4	665.6	652.1	626.5	590.8	543.1	486.5	424.4	358.4	295.7	244.4
125°	620.5	617.0	604.2	581.8	549.3	508.6	459.8	404.3	346.3	291.9	248.7
127.5°	580.2	576.9	565.4	546.4	517.4	480.4	436.3	386.8	335.8	290.1	253.6
130°	557.4	553.4	542.7	524.4	497.4	462.8	421.6	375.9	330.1	288.9	256.8
132.5°	535.0	532.2	522.7	504.4	479.1	446.1	407.8	365.7	324.8	288.5	259.3
135°	503.0	499.4	490.3	475.0	450.1	421.2	388.1	352.0	317.9	287.8	263.0
137.5°	469.1	466.8	459.1	443.6	422.7	397.5	369.1	339.5	311.9	286.8	265.4
140°	445.5	446.0	437.9	423.7	404.3	382.5	358.0	332.2	308.2	286.3	267.0
142.5°	423.6	424.1	416.8	404.1	387.6	368.6	347.5	325.2	305.0	285.5	268.2
145°	393.2	392.2	388.1	377.4	364.7	349.9	333.7	316.8	300.6	284.3	269.0
147.5°	368.1	367.7	363.8	356.6	347.0	336.5	323.3	310.0	296.3	282.4	269.0
150°	353.5	353.5	350.4	344.8	337.2	327.5	316.8	305.1	293.5	280.7	269.0
152.5°	341.3	341.3	339.5	334.2	328.2	320.2	310.8	300.7	290.3	278.7	267.9
155°	326.0	325.5	324.5	320.4	315.8	309.8	302.1	294.0	285.3	275.2	266.5
157.5°	312.1	312.2	311.4	308.4	304.3	299.6	293.6	286.9	279.8	272.0	264.7
160°	303.1	303.6	303.6	300.6	297.0	293.5	288.4	282.8	276.2	269.6	263.9
162.5°	295.0	295.5	295.5	292.8	290.5	287.4	282.7	277.9	272.5	267.2	262.3
165°	284.3	284.3	284.8	282.8	280.7	278.2	274.6	271.6	267.5	263.5	259.9
167.5°	274.1	274.1	274.6	273.2	272.3	270.5	268.4	266.1	262.8	259.8	257.4
170°	268.0	268.0	268.6	267.5	267.0	266.0	263.9	262.4	259.9	257.3	255.8
172.5°	262.3	262.8	263.7	262.6	262.5	261.9	260.3	259.2	257.1	255.3	254.6
175°	255.8	256.4	256.8	256.4	256.4	256.4	255.3	254.9	253.8	252.8	252.8
177.5°	252.1	252.1	252.9	252.4	252.9	252.9	252.4	252.1	251.6	251.3	251.6
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2
2.5°	1690.5	1688.8	1681.0	1672.0	1660.2	1652.3	1646.2	1642.8	1632.7	1620.4	1611.9
5°	1794.9	1773.9	1751.4	1724.1	1698.9	1672.9	1656.8	1637.9	1614.8	1588.9	1570.7
7.5°	1906.7	1865.5	1821.1	1775.3	1730.0	1689.3	1653.5	1622.7	1585.9	1548.7	1522.7
10°	1992.5	1932.2	1869.9	1806.1	1747.9	1693.3	1651.2	1609.9	1565.8	1523.0	1490.8
12.5°	2070.5	1991.1	1919.2	1840.8	1766.5	1701.1	1640.6	1591.9	1538.8	1493.3	1456.5
15°	2169.2	2087.9	2000.9	1881.8	1783.0	1700.3	1626.7	1562.9	1498.4	1442.3	1406.6
17.5°	2261.4	2139.0	2022.2	1922.9	1794.5	1691.1	1601.3	1525.1	1454.3	1394.8	1350.9
20°	2299.5	2181.0	2054.2	1927.3	1801.2	1685.6	1581.1	1497.0	1423.4	1356.1	1315.5
22.5°	2322.5	2188.3	2054.8	1918.4	1784.4	1664.3	1560.9	1468.5	1388.7	1324.7	1274.6
25°	2349.3	2189.5	2042.3	1907.7	1771.0	1640.7	1518.0	1420.0	1333.7	1265.8	1212.5
27.5°	2367.0	2179.0	2005.0	1855.5	1716.8	1587.0	1474.6	1370.6	1283.2	1211.2	1154.1
30°	2370.3	2170.5	1976.4	1814.5	1673.7	1554.5	1435.4	1335.9	1243.3	1166.9	1113.7
32.5°	2374.8	2149.8	1937.7	1765.8	1621.5	1503.5	1395.5	1300.5	1205.8	1130.5	1076.1
35°	2356.3	2138.3	1879.0	1681.3	1537.0	1422.7	1325.3	1237.7	1144.5	1071.6	1016.3
37.5°	2276.6	2092.8	1818.2	1586.4	1435.4	1329.5	1250.2	1173.8	1088.3	1009.7	957.5
40°	2196.5	2047.9	1771.0	1528.6	1370.9	1262.2	1190.8	1128.4	1045.7	972.1	916.1
42.5°	2077.1	1986.8	1726.2	1468.0	1298.0	1193.3	1133.0	1074.5	1001.9	927.2	874.5
45°	1858.0	1869.9	1634.4	1371.5	1197.0	1091.9	1035.2	994.5	930.1	868.3	814.4
47.5°	1583.2	1694.7	1526.6	1268.8	1090.7	992.0	942.4	906.9	863.4	802.9	753.7
50°	1403.8	1562.9	1440.3	1199.9	1024.0	925.9	876.7	848.0	810.2	762.5	715.6
52.5°	1238.4	1409.3	1336.0	1123.0	951.6	861.9	814.0	790.3	760.3	715.4	673.0
55°	1010.0	1183.0	1166.3	1007.1	843.1	762.5	726.1	699.5	679.1	645.5	611.9
57.5°	816.9	981.1	989.7	878.2	747.5	667.9	636.5	616.4	603.2	577.8	546.7
60°	695.3	846.0	875.4	791.3	679.1	609.0	578.2	562.0	551.6	531.3	507.4
62.5°	594.3	722.6	755.9	695.4	613.5	548.0	523.8	508.3	501.1	483.6	462.5
65°	454.9	561.4	593.6	560.0	517.2	464.7	445.1	431.8	425.4	415.6	400.2
67.5°	342.1	419.6	455.0	431.3	415.9	382.6	370.1	363.0	357.4	350.7	337.8
70°	274.7	332.2	368.6	362.3	349.7	332.2	323.1	318.2	312.5	307.0	295.8
72.5°	220.9	260.5	294.6	297.8	287.5	284.0	276.0	273.9	270.5	263.8	257.6
75°	146.5	173.8	197.6	206.8	211.0	214.5	211.0	210.3	209.6	203.9	200.5
77.5°	96.0	110.8	125.7	141.3	147.8	152.7	153.7	156.3	154.4	151.5	149.8
80°	73.6	77.1	87.6	100.9	111.5	115.7	118.4	119.8	119.1	118.4	115.7
82.5°	53.4	56.4	61.3	70.6	79.5	86.5	88.2	87.9	89.4	89.9	87.6
85°	28.7	29.4	30.9	32.3	37.2	44.9	47.0	48.3	49.8	49.8	45.6
87.5°	10.9	10.1	10.9	10.6	12.1	12.4	15.5	18.1	18.9	16.9	17.2
90°	9.6	8.1	6.6	5.6	4.5	3.0	2.1	1.0	2.1	3.0	4.5
92.5°	64.6	42.7	29.4	21.8	17.6	13.6	9.4	6.3	9.4	13.6	17.6
95°	185.1	109.3	66.1	46.3	33.1	24.4	18.8	17.3	18.8	24.4	33.1
97.5°	203.1	117.7	76.4	54.9	41.9	34.4	30.1	29.5	30.1	34.4	41.9
100°	191.7	116.5	80.9	61.0	48.9	41.7	38.2	37.6	38.2	41.7	48.9
102.5°	182.0	118.1	86.1	67.9	57.0	50.3	47.1	46.2	47.1	50.3	57.0
105°	175.0	122.6	95.1	79.4	69.6	63.6	60.5	59.0	60.5	63.6	69.6
107.5°	174.4	130.9	106.8	92.2	83.1	77.1	74.2	72.6	74.2	77.1	83.1
110°	176.5	137.9	114.9	100.7	92.0	86.5	83.9	82.4	83.9	86.5	92.0





TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	180.6	144.7	123.5	109.7	101.0	95.4	92.9	91.3	92.9	95.4	101.0
115°	187.2	156.1	136.8	123.1	114.4	109.3	106.3	104.2	106.3	109.3	114.4
117.5°	195.9	168.3	149.1	136.4	126.7	122.1	119.5	117.2	119.5	122.1	126.7
120°	202.4	175.9	157.7	145.0	135.3	130.2	127.7	126.2	127.7	130.2	135.3
122.5°	208.6	184.1	166.2	152.7	143.4	137.9	135.4	133.8	135.4	137.9	143.4
125°	218.2	195.8	178.0	164.3	154.6	149.0	146.0	145.0	146.0	149.0	154.6
127.5°	226.1	206.0	188.8	175.0	164.3	158.7	154.9	153.4	154.9	158.7	164.3
130°	231.4	212.0	195.3	181.6	170.9	164.8	160.2	158.7	160.2	164.8	170.9
132.5°	236.3	217.4	201.0	187.7	177.0	169.7	164.7	162.7	164.7	169.7	177.0
135°	242.6	225.3	209.6	195.8	185.1	177.5	171.9	169.9	171.9	177.5	185.1
137.5°	247.3	230.8	215.6	203.0	192.3	184.2	178.7	176.6	178.7	184.2	192.3
140°	249.8	234.4	219.7	207.0	196.8	188.7	183.6	181.1	183.6	188.7	196.8
142.5°	252.2	237.3	223.0	211.1	200.9	193.6	188.1	185.9	188.1	193.6	200.9
145°	254.9	241.1	227.8	216.2	207.5	199.9	195.3	193.8	195.3	199.9	207.5
147.5°	256.5	244.2	232.0	222.0	213.7	207.1	202.6	201.7	202.6	207.1	213.7
150°	256.8	246.2	234.4	225.3	218.2	211.6	207.5	207.0	207.5	211.6	218.2
152.5°	257.7	247.4	237.3	228.5	222.3	216.5	212.4	212.3	212.4	216.5	222.3
155°	257.9	249.8	241.1	234.0	228.4	223.3	220.3	220.3	220.3	223.3	228.4
157.5°	258.4	251.0	244.2	238.6	233.9	229.3	226.9	226.5	226.9	229.3	233.9
160°	258.4	252.3	246.2	241.1	237.6	233.4	231.4	231.4	231.4	233.4	237.6
162.5°	258.0	252.7	247.4	243.1	240.0	236.7	235.1	235.1	235.1	236.7	240.0
165°	256.8	253.2	249.2	245.7	243.6	241.1	240.0	240.6	240.0	241.1	243.6
167.5°	256.0	253.2	250.2	248.0	246.6	244.6	244.2	244.8	244.2	244.6	246.6
170°	254.9	252.8	250.2	249.2	248.2	246.6	246.2	247.2	246.2	246.6	248.2
172.5°	254.4	252.8	250.7	250.0	249.4	248.3	248.2	248.8	248.2	248.3	249.4
175°	253.2	252.3	251.3	250.7	250.7	249.8	250.2	250.7	250.2	249.8	250.7
177.5°	252.4	251.6	251.3	251.3	251.3	250.8	251.3	251.6	251.3	250.8	251.3
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2
2.5°	1609.2	1601.9	1596.9	1585.6	1578.3	1570.5	1562.6	1567.7	1567.1	1566.6	1566.6
5°	1555.2	1539.1	1524.4	1505.5	1493.5	1478.8	1467.6	1466.2	1469.0	1459.2	1453.6
7.5°	1501.6	1479.6	1458.7	1437.9	1415.8	1398.1	1387.0	1381.8	1374.7	1368.6	1362.4
10°	1464.1	1438.2	1417.8	1391.9	1368.1	1347.0	1333.7	1324.6	1319.7	1314.8	1305.7
12.5°	1425.4	1400.1	1374.1	1344.8	1322.1	1297.7	1287.7	1277.6	1268.1	1262.7	1250.2
15°	1368.8	1335.9	1308.5	1277.6	1252.4	1228.6	1214.6	1194.3	1191.4	1184.5	1171.8
17.5°	1312.0	1276.2	1238.6	1215.7	1187.2	1162.4	1141.1	1134.3	1114.2	1106.6	1095.7
20°	1267.1	1234.2	1205.5	1175.4	1134.0	1110.9	1094.0	1084.9	1068.8	1059.0	1052.0
22.5°	1228.4	1195.0	1161.7	1126.6	1092.5	1066.6	1054.3	1040.1	1031.3	1017.5	1010.0
25°	1173.2	1136.8	1096.8	1059.0	1034.5	1014.9	995.2	982.6	970.0	963.7	949.7
27.5°	1109.0	1070.9	1033.6	1004.9	974.7	955.4	937.6	926.4	911.2	900.6	892.9
30°	1073.7	1028.9	996.6	970.7	932.1	913.9	900.6	886.6	875.4	864.2	856.5
32.5°	1032.8	991.8	961.3	929.2	899.6	879.7	862.5	850.2	840.6	829.9	822.2
35°	968.6	934.2	902.7	870.5	848.7	828.4	808.1	797.5	788.5	778.6	771.7
37.5°	910.5	878.4	848.5	817.9	790.9	774.5	758.0	750.0	737.7	731.1	724.0
40°	874.7	843.1	810.9	781.5	753.4	740.8	726.1	714.2	702.9	698.0	690.4
42.5°	835.4	803.9	776.7	745.0	722.0	704.9	691.3	678.3	669.9	662.7	658.4
45°	777.2	749.2	722.6	691.1	669.3	654.6	639.2	627.2	619.6	614.7	606.9
47.5°	720.8	692.8	665.7	638.2	617.2	600.4	585.0	576.7	566.4	560.4	555.2
50°	679.8	654.6	625.9	600.7	579.6	562.8	550.2	539.7	530.6	522.8	519.3
52.5°	642.3	615.4	590.6	566.9	544.8	525.8	514.2	503.2	496.3	487.5	483.5
55°	580.3	554.4	533.3	510.2	488.5	472.3	458.3	448.5	441.6	431.8	426.1
57.5°	522.1	498.9	473.8	453.7	431.3	417.7	406.1	392.8	384.2	376.5	371.0
60°	482.9	456.3	434.5	415.6	396.0	378.4	367.9	357.4	348.3	340.6	335.7
62.5°	441.9	418.7	398.1	377.5	359.5	344.3	332.1	323.2	315.2	310.3	305.4
65°	379.2	361.0	339.9	323.1	306.3	295.1	285.3	277.5	272.0	268.4	264.2
67.5°	321.4	303.7	285.3	268.9	257.6	249.1	242.6	236.0	233.3	228.7	226.0
70°	283.8	265.6	249.5	236.9	225.7	219.4	215.2	210.3	207.4	201.9	199.0
72.5°	242.9	229.7	218.1	207.8	198.8	193.1	187.7	181.6	177.2	171.0	168.2
75°	191.4	179.4	170.3	163.3	157.7	150.0	142.3	136.0	133.8	131.8	131.1
77.5°	141.7	134.1	127.5	121.6	114.7	109.1	107.4	105.9	105.6	104.4	104.4
80°	111.5	104.4	99.5	92.5	88.3	88.3	88.3	86.9	87.6	87.6	87.6
82.5°	82.8	76.4	73.7	71.2	70.4	70.9	70.9	71.2	70.8	71.9	71.3
85°	42.7	43.4	44.9	44.1	44.9	44.9	46.3	45.6	46.3	44.9	46.3
87.5°	16.9	18.7	19.5	20.4	21.3	21.0	21.5	21.6	22.3	22.4	22.6
90°	5.6	6.6	8.1	9.6	11.1	12.8	12.2	12.8	13.2	13.7	14.7
92.5°	21.8	29.4	42.7	64.6	86.1	78.2	59.0	42.8	34.0	30.1	27.4
95°	46.3	66.1	109.3	185.1	268.6	301.6	244.6	183.1	124.1	97.1	78.8
97.5°	54.9	76.4	117.7	203.1	342.1	467.4	500.1	456.5	365.6	300.0	239.2
100°	61.0	80.9	116.5	191.7	325.5	481.6	581.8	599.7	558.5	498.9	426.7
102.5°	67.9	86.1	118.1	182.0	301.1	455.2	585.9	647.3	646.0	611.3	565.4
105°	79.4	95.1	122.6	175.0	271.1	408.9	554.9	661.2	712.0	721.8	708.5
107.5°	92.2	106.8	130.9	174.4	252.0	368.0	500.6	621.1	703.7	748.2	766.3
110°	100.7	114.9	137.9	176.5	244.6	344.8	466.4	582.8	676.5	740.6	776.1



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	109.7	123.5	144.7	180.6	240.6	329.4	436.7	545.0	640.6	712.5	758.2
115°	123.1	136.8	156.1	187.2	239.1	312.8	400.8	494.9	583.4	658.2	713.5
117.5°	136.4	149.1	168.3	195.9	240.0	303.0	379.2	458.5	534.9	602.1	658.4
120°	145.0	157.7	175.9	202.4	241.6	298.5	367.7	439.4	508.1	569.1	620.5
122.5°	152.7	166.2	184.1	208.6	244.4	295.7	358.4	424.4	486.5	543.1	590.8
125°	164.3	178.0	195.8	218.2	248.7	291.9	346.3	404.3	459.8	508.6	549.3
127.5°	175.0	188.8	206.0	226.1	253.6	290.1	335.8	386.8	436.3	480.4	517.4
130°	181.6	195.3	212.0	231.4	256.8	288.9	330.1	375.9	421.6	462.8	497.4
132.5°	187.7	201.0	217.4	236.3	259.3	288.5	324.8	365.7	407.8	446.1	479.1
135°	195.8	209.6	225.3	242.6	263.0	287.8	317.9	352.0	388.1	421.2	450.1
137.5°	203.0	215.6	230.8	247.3	265.4	286.8	311.9	339.5	369.1	397.5	422.7
140°	207.0	219.7	234.4	249.8	267.0	286.3	308.2	332.2	358.0	382.5	404.3
142.5°	211.1	223.0	237.3	252.2	268.2	285.5	305.0	325.2	347.5	368.6	387.6
145°	216.2	227.8	241.1	254.9	269.0	284.3	300.6	316.8	333.7	349.9	364.7
147.5°	222.0	232.0	244.2	256.5	269.0	282.4	296.3	310.0	323.3	336.5	347.0
150°	225.3	234.4	246.2	256.8	269.0	280.7	293.5	305.1	316.8	327.5	337.2
152.5°	228.5	237.3	247.4	257.7	267.9	278.7	290.3	300.7	310.8	320.2	328.2
155°	234.0	241.1	249.8	257.9	266.5	275.2	285.3	294.0	302.1	309.8	315.8
157.5°	238.6	244.2	251.0	258.4	264.7	272.0	279.8	286.9	293.6	299.6	304.3
160°	241.1	246.2	252.3	258.4	263.9	269.6	276.2	282.8	288.4	293.5	297.0
162.5°	243.1	247.4	252.7	258.0	262.3	267.2	272.5	277.9	282.7	287.4	290.5
165°	245.7	249.2	253.2	256.8	259.9	263.5	267.5	271.6	274.6	278.2	280.7
167.5°	248.0	250.2	253.2	256.0	257.4	259.8	262.8	266.1	268.4	270.5	272.3
170°	249.2	250.2	252.8	254.9	255.8	257.3	259.9	262.4	263.9	266.0	267.0
172.5°	250.0	250.7	252.8	254.4	254.6	255.3	257.1	259.2	260.3	261.9	262.5
175°	250.7	251.3	252.3	253.2	252.8	252.8	253.8	254.9	255.3	256.4	256.4
177.5°	251.3	251.3	251.6	252.4	251.6	251.3	251.6	252.1	252.4	252.9	252.9
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
0°	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2
2.5°	1559.9	1559.2	1559.9	1557.6	1559.9	1559.2	1559.9	1566.6	1566.6	1567.1	1567.7
5°	1451.4	1450.8	1448.7	1442.3	1448.7	1450.8	1451.4	1453.6	1459.2	1469.0	1466.2
7.5°	1356.8	1355.8	1349.7	1349.9	1349.7	1355.8	1356.8	1362.4	1368.6	1374.7	1381.8
10°	1300.8	1301.5	1293.1	1288.2	1293.1	1301.5	1300.8	1305.7	1314.8	1319.7	1324.6
12.5°	1246.4	1243.2	1236.4	1231.0	1236.4	1243.2	1246.4	1250.2	1262.7	1268.1	1277.6
15°	1174.7	1167.6	1150.8	1152.2	1150.8	1167.6	1174.7	1171.8	1184.5	1191.4	1194.3
17.5°	1090.1	1084.9	1084.7	1074.9	1084.7	1084.9	1090.1	1095.7	1106.6	1114.2	1134.3
20°	1040.8	1037.2	1038.7	1028.9	1038.7	1037.2	1040.8	1052.0	1059.0	1068.8	1084.9
22.5°	1002.1	998.5	992.7	989.6	992.7	998.5	1002.1	1010.0	1017.5	1031.3	1040.1
25°	945.5	939.9	934.2	937.7	934.2	939.9	945.5	949.7	963.7	970.0	982.6
27.5°	888.9	884.7	879.0	878.3	879.0	884.7	888.9	892.9	900.6	911.2	926.4
30°	852.9	848.7	846.0	842.4	846.0	848.7	852.9	856.5	864.2	875.4	886.6
32.5°	816.5	815.6	810.7	809.9	810.7	815.6	816.5	822.2	829.9	840.6	850.2
35°	768.8	764.6	763.2	763.9	763.2	764.6	768.8	771.7	778.6	788.5	797.5
37.5°	723.5	717.9	715.4	712.9	715.4	717.9	723.5	724.0	731.1	737.7	750.0
40°	691.1	685.5	684.0	682.6	684.0	685.5	691.1	690.4	698.0	702.9	714.2
42.5°	654.6	652.4	651.5	649.0	651.5	652.4	654.6	658.4	662.7	669.9	678.3
45°	604.8	604.1	599.9	601.4	599.9	604.1	604.8	606.9	614.7	619.6	627.2
47.5°	552.4	549.3	546.4	548.3	546.4	549.3	552.4	555.2	560.4	566.4	576.7
50°	516.6	515.1	508.8	510.2	508.8	515.1	516.6	519.3	522.8	530.6	539.7
52.5°	480.6	475.3	473.0	472.1	473.0	475.3	480.6	483.5	487.5	496.3	503.2
55°	421.2	414.9	412.1	410.7	412.1	414.9	421.2	426.1	431.8	441.6	448.5
57.5°	362.9	361.2	359.0	360.5	359.0	361.2	362.9	371.0	376.5	384.2	392.8
60°	328.7	328.7	328.7	328.0	328.7	328.7	328.7	335.7	340.6	348.3	357.4
62.5°	302.4	300.7	300.1	301.1	300.1	300.7	302.4	305.4	310.3	315.2	323.2
65°	262.2	261.4	258.6	257.9	258.6	261.4	262.2	264.2	268.4	272.0	277.5
67.5°	224.2	221.6	220.8	219.8	220.8	221.6	224.2	226.0	228.7	233.3	236.0
70°	195.6	194.1	189.9	190.6	189.9	194.1	195.6	199.0	201.9	207.4	210.3
72.5°	164.7	163.3	162.5	161.5	162.5	163.3	164.7	168.2	171.0	177.2	181.6
75°	130.4	129.7	128.9	131.8	128.9	129.7	130.4	131.1	131.8	133.8	136.0
77.5°	104.4	104.4	104.9	103.7	104.9	104.4	104.4	104.4	104.4	105.6	105.9
80°	87.6	87.6	86.9	86.9	86.9	87.6	87.6	87.6	87.6	87.6	86.9
82.5°	70.3	70.8	71.2	70.1	71.2	70.8	70.3	71.3	71.9	70.8	71.2
85°	46.3	45.6	47.0	46.3	47.0	45.6	46.3	46.3	44.9	46.3	45.6
87.5°	23.6	22.6	22.6	23.1	22.6	22.6	23.6	22.6	22.4	22.3	21.6
90°	14.3	14.7	15.2	14.7	15.2	14.7	14.3	14.7	13.7	13.2	12.8
92.5°	26.5	24.9	25.4	24.5	25.4	24.9	26.5	27.4	30.1	34.0	42.8
95°	69.2	64.6	61.0	59.0	61.0	64.6	69.2	78.8	97.1	124.1	183.1
97.5°	201.6	178.7	165.0	160.6	165.0	178.7	201.6	239.2	300.0	365.6	456.5
100°	375.3	338.2	318.4	318.9	318.4	338.2	375.3	426.7	498.9	558.5	599.7
102.5°	525.5	496.1	479.5	467.8	479.5	496.1	525.5	565.4	611.3	646.0	647.3
105°	685.1	665.8	649.5	646.9	649.5	665.8	685.1	708.5	721.8	712.0	661.2
107.5°	766.8	760.3	754.7	750.1	754.7	760.3	766.8	766.3	748.2	703.7	621.1
110°	790.4	794.4	793.4	792.4	793.4	794.4	790.4	776.1	740.6	676.5	582.8



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°	185°	190°	195°	200°	205°	210°	215°
112.5°	784.3	796.9	800.8	800.9	800.8	796.9	784.3	758.2	712.5	640.6	545.0
115°	751.7	774.1	784.3	786.8	784.3	774.1	751.7	713.5	658.2	583.4	494.9
117.5°	698.1	723.7	738.4	741.8	738.4	723.7	698.1	658.4	602.1	534.9	458.5
120°	660.7	689.2	701.3	704.5	701.3	689.2	660.7	620.5	569.1	508.1	439.4
122.5°	626.5	652.1	665.6	669.4	665.6	652.1	626.5	590.8	543.1	486.5	424.4
125°	581.8	604.2	617.0	620.5	617.0	604.2	581.8	549.3	508.6	459.8	404.3
127.5°	546.4	565.4	576.9	580.2	576.9	565.4	546.4	517.4	480.4	436.3	386.8
130°	524.4	542.7	553.4	557.4	553.4	542.7	524.4	497.4	462.8	421.6	375.9
132.5°	504.4	522.7	532.2	535.0	532.2	522.7	504.4	479.1	446.1	407.8	365.7
135°	475.0	490.3	499.4	503.0	499.4	490.3	475.0	450.1	421.2	388.1	352.0
137.5°	443.6	459.1	466.8	469.1	466.8	459.1	443.6	422.7	397.5	369.1	339.5
140°	423.7	437.9	446.0	445.5	446.0	437.9	423.7	404.3	382.5	358.0	332.2
142.5°	404.1	416.8	424.1	423.6	424.1	416.8	404.1	387.6	368.6	347.5	325.2
145°	377.4	388.1	392.2	393.2	392.2	388.1	377.4	364.7	349.9	333.7	316.8
147.5°	356.6	363.8	367.7	368.1	367.7	363.8	356.6	347.0	336.5	323.3	310.0
150°	344.8	350.4	353.5	353.5	353.5	350.4	344.8	337.2	327.5	316.8	305.1
152.5°	334.2	339.5	341.3	341.3	341.3	339.5	334.2	328.2	320.2	310.8	300.7
155°	320.4	324.5	325.5	326.0	325.5	324.5	320.4	315.8	309.8	302.1	294.0
157.5°	308.4	311.4	312.2	312.1	312.2	311.4	308.4	304.3	299.6	293.6	286.9
160°	300.6	303.6	303.6	303.1	303.6	303.6	300.6	297.0	293.5	288.4	282.8
162.5°	292.8	295.5	295.5	295.0	295.5	295.5	292.8	290.5	287.4	282.7	277.9
165°	282.8	284.8	284.3	284.3	284.3	284.8	282.8	280.7	278.2	274.6	271.6
167.5°	273.2	274.6	274.1	274.1	274.1	274.6	273.2	272.3	270.5	268.4	266.1
170°	267.5	268.6	268.0	268.0	268.0	268.6	267.5	267.0	266.0	263.9	262.4
172.5°	262.6	263.7	262.8	262.3	262.8	263.7	262.6	262.5	261.9	260.3	259.2
175°	256.4	256.8	256.4	255.8	256.4	256.8	256.4	256.4	256.4	255.3	254.9
177.5°	252.4	252.9	252.1	252.1	252.1	252.9	252.4	252.9	252.9	252.4	252.1
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
0°	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2
2.5°	1562.6	1570.5	1578.3	1585.6	1596.9	1601.9	1609.2	1611.9	1620.4	1632.7	1642.8
5°	1467.6	1478.8	1493.5	1505.5	1524.4	1539.1	1555.2	1570.7	1588.9	1614.8	1637.9
7.5°	1387.0	1398.1	1415.8	1437.9	1458.7	1479.6	1501.6	1522.7	1548.7	1585.9	1622.7
10°	1333.7	1347.0	1368.1	1391.9	1417.8	1438.2	1464.1	1490.8	1523.0	1565.8	1609.9
12.5°	1287.7	1297.7	1322.1	1344.8	1374.1	1400.1	1425.4	1456.5	1493.3	1538.8	1591.9
15°	1214.6	1228.6	1252.4	1277.6	1308.5	1335.9	1368.8	1406.6	1442.3	1498.4	1562.9
17.5°	1141.1	1162.4	1187.2	1215.7	1238.6	1276.2	1312.0	1350.9	1394.8	1454.3	1525.1
20°	1094.0	1110.9	1134.0	1175.4	1205.5	1234.2	1267.1	1315.5	1356.1	1423.4	1497.0
22.5°	1054.3	1066.6	1092.5	1126.6	1161.7	1195.0	1228.4	1274.6	1324.7	1388.7	1468.5
25°	995.2	1014.9	1034.5	1059.0	1096.8	1136.8	1173.2	1212.5	1265.8	1333.7	1420.0
27.5°	937.6	955.4	974.7	1004.9	1033.6	1070.9	1109.0	1154.1	1211.2	1283.2	1370.6
30°	900.6	913.9	932.1	970.7	996.6	1028.9	1073.7	1113.7	1166.9	1243.3	1335.9
32.5°	862.5	879.7	899.6	929.2	961.3	991.8	1032.8	1076.1	1130.5	1205.8	1300.5
35°	808.1	828.4	848.7	870.5	902.7	934.2	968.6	1016.3	1071.6	1144.5	1237.7
37.5°	758.0	774.5	790.9	817.9	848.5	878.4	910.5	957.5	1009.7	1088.3	1173.8
40°	726.1	740.8	753.4	781.5	810.9	843.1	874.7	916.1	972.1	1045.7	1128.4
42.5°	691.3	704.9	722.0	745.0	776.7	803.9	835.4	874.5	927.2	1001.9	1074.5
45°	639.2	654.6	669.3	691.1	722.6	749.2	777.2	814.4	868.3	930.1	994.5
47.5°	585.0	600.4	617.2	638.2	665.7	692.8	720.8	753.7	802.9	863.4	906.9
50°	550.2	562.8	579.6	600.7	625.9	654.6	679.8	715.6	762.5	810.2	848.0
52.5°	514.2	525.8	544.8	566.9	590.6	615.4	642.3	673.0	715.4	760.3	790.3
55°	458.3	472.3	488.5	510.2	533.3	554.4	580.3	611.9	645.5	679.1	699.5
57.5°	406.1	417.7	431.3	453.7	473.8	498.9	522.1	546.7	577.8	603.2	616.4
60°	367.9	378.4	396.0	415.6	434.5	456.3	482.9	507.4	531.3	551.6	562.0
62.5°	332.1	344.3	359.5	377.5	398.1	418.7	441.9	462.5	483.6	501.1	508.3
65°	285.3	295.1	306.3	323.1	339.9	361.0	379.2	400.2	415.6	425.4	431.8
67.5°	242.6	249.1	257.6	268.9	285.3	303.7	321.4	337.8	350.7	357.4	363.0
70°	215.2	219.4	225.7	236.9	249.5	265.6	283.8	295.8	307.0	312.5	318.2
72.5°	187.7	193.1	198.8	207.8	218.1	229.7	242.9	257.6	263.8	270.5	273.9
75°	142.3	150.0	157.7	163.3	170.3	179.4	191.4	200.5	203.9	209.6	210.3
77.5°	107.4	109.1	114.7	121.6	127.5	134.1	141.7	149.8	151.5	154.4	156.3
80°	88.3	88.3	88.3	92.5	99.5	104.4	111.5	115.7	118.4	119.1	119.8
82.5°	70.9	70.9	70.4	71.2	73.7	76.4	82.8	87.6	89.9	89.4	87.9
85°	46.3	44.9	44.9	44.1	44.9	43.4	42.7	45.6	49.8	49.8	48.3
87.5°	21.5	21.0	21.3	20.4	19.5	18.7	16.9	17.2	16.9	18.9	18.1
90°	12.2	12.8	11.1	9.6	8.1	6.6	5.6	4.5	3.0	2.1	1.0
92.5°	59.0	78.2	86.1	64.6	42.7	29.4	21.8	17.6	13.6	9.4	6.3
95°	244.6	301.6	268.6	185.1	109.3	66.1	46.3	33.1	24.4	18.8	17.3
97.5°	500.1	467.4	342.1	203.1	117.7	76.4	54.9	41.9	34.4	30.1	29.5
100°	581.8	481.6	325.5	191.7	116.5	80.9	61.0	48.9	41.7	38.2	37.6
102.5°	585.9	455.2	301.1	182.0	118.1	86.1	67.9	57.0	50.3	47.1	46.2
105°	554.9	408.9	271.1	175.0	122.6	95.1	79.4	69.6	63.6	60.5	59.0
107.5°	500.6	368.0	252.0	174.4	130.9	106.8	92.2	83.1	77.1	74.2	72.6
110°	466.4	344.8	244.6	176.5	137.9	114.9	100.7	92.0	86.5	83.9	82.4



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	220°	225°	230°	235°	240°	245°	250°	255°	260°	265°	270°
112.5°	436.7	329.4	240.6	180.6	144.7	123.5	109.7	101.0	95.4	92.9	91.3
115°	400.8	312.8	239.1	187.2	156.1	136.8	123.1	114.4	109.3	106.3	104.2
117.5°	379.2	303.0	240.0	195.9	168.3	149.1	136.4	126.7	122.1	119.5	117.2
120°	367.7	298.5	241.6	202.4	175.9	157.7	145.0	135.3	130.2	127.7	126.2
122.5°	358.4	295.7	244.4	208.6	184.1	166.2	152.7	143.4	137.9	135.4	133.8
125°	346.3	291.9	248.7	218.2	195.8	178.0	164.3	154.6	149.0	146.0	145.0
127.5°	335.8	290.1	253.6	226.1	206.0	188.8	175.0	164.3	158.7	154.9	153.4
130°	330.1	288.9	256.8	231.4	212.0	195.3	181.6	170.9	164.8	160.2	158.7
132.5°	324.8	288.5	259.3	236.3	217.4	201.0	187.7	177.0	169.7	164.7	162.7
135°	317.9	287.8	263.0	242.6	225.3	209.6	195.8	185.1	177.5	171.9	169.9
137.5°	311.9	286.8	265.4	247.3	230.8	215.6	203.0	192.3	184.2	178.7	176.6
140°	308.2	286.3	267.0	249.8	234.4	219.7	207.0	196.8	188.7	183.6	181.1
142.5°	305.0	285.5	268.2	252.2	237.3	223.0	211.1	200.9	193.6	188.1	185.9
145°	300.6	284.3	269.0	254.9	241.1	227.8	216.2	207.5	199.9	195.3	193.8
147.5°	296.3	282.4	269.0	256.5	244.2	232.0	222.0	213.7	207.1	202.6	201.7
150°	293.5	280.7	269.0	256.8	246.2	234.4	225.3	218.2	211.6	207.5	207.0
152.5°	290.3	278.7	267.9	257.7	247.4	237.3	228.5	222.3	216.5	212.4	212.3
155°	285.3	275.2	266.5	257.9	249.8	241.1	234.0	228.4	223.3	220.3	220.3
157.5°	279.8	272.0	264.7	258.4	251.0	244.2	238.6	233.9	229.3	226.9	226.5
160°	276.2	269.6	263.9	258.4	252.3	246.2	241.1	237.6	233.4	231.4	231.4
162.5°	272.5	267.2	262.3	258.0	252.7	247.4	243.1	240.0	236.7	235.1	235.1
165°	267.5	263.5	259.9	256.8	253.2	249.2	245.7	243.6	241.1	240.0	240.6
167.5°	262.8	259.8	257.4	256.0	253.2	250.2	248.0	246.6	244.6	244.2	244.8
170°	259.9	257.3	255.8	254.9	252.8	250.2	249.2	248.2	246.6	246.2	247.2
172.5°	257.1	255.3	254.6	254.4	252.8	250.7	250.0	249.4	248.3	248.2	248.8
175°	253.8	252.8	252.8	253.2	252.3	251.3	250.7	250.7	249.8	250.2	250.7
177.5°	251.6	251.3	251.6	252.4	251.6	251.3	251.3	251.3	250.8	251.3	251.6
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
0°	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2
2.5°	1646.2	1652.3	1660.2	1672.0	1681.0	1688.8	1690.5	1692.7	1698.4	1707.8	1715.1
5°	1656.8	1672.9	1698.9	1724.1	1751.4	1773.9	1794.9	1809.6	1823.6	1853.1	1876.9
7.5°	1653.5	1689.3	1730.0	1775.3	1821.1	1865.5	1906.7	1943.6	1980.3	2023.2	2072.2
10°	1651.2	1693.3	1747.9	1806.1	1869.9	1932.2	1992.5	2039.5	2094.2	2143.2	2205.6
12.5°	1640.6	1701.1	1766.5	1840.8	1919.2	1991.1	2070.5	2135.4	2197.9	2268.8	2341.3
15°	1626.7	1700.3	1783.0	1881.8	2000.9	2087.9	2169.2	2282.0	2359.1	2436.2	2539.9
17.5°	1601.3	1691.1	1794.5	1922.9	2022.2	2139.0	2261.4	2350.5	2454.4	2563.0	2656.9
20°	1581.1	1685.6	1801.2	1927.3	2054.2	2181.0	2299.5	2406.0	2513.3	2638.8	2715.8
22.5°	1560.9	1664.3	1784.4	1918.4	2054.8	2188.3	2322.5	2447.6	2568.2	2694.8	2793.2
25°	1518.0	1640.7	1771.0	1907.7	2042.3	2189.5	2349.3	2488.8	2638.0	2768.4	2861.6
27.5°	1474.6	1587.0	1716.8	1855.5	2005.0	2179.0	2367.0	2525.5	2675.0	2768.4	2797.7
30°	1435.4	1554.5	1673.7	1814.5	1976.4	2170.5	2370.3	2551.8	2674.5	2715.1	2684.9
32.5°	1395.5	1503.5	1621.5	1765.8	1937.7	2149.8	2374.8	2536.1	2609.9	2578.9	2456.2
35°	1325.3	1422.7	1537.0	1681.3	1879.0	2138.3	2356.3	2465.6	2447.4	2272.2	2040.9
37.5°	1250.2	1329.5	1435.4	1586.4	1818.2	2092.8	2276.6	2292.8	2135.1	1866.1	1598.9
40°	1190.8	1262.2	1370.9	1528.6	1771.0	2047.9	2196.5	2131.3	1886.7	1587.4	1364.6
42.5°	1133.0	1193.3	1298.0	1468.0	1726.2	1986.8	2077.1	1935.1	1652.9	1369.9	1167.2
45°	1035.2	1091.9	1197.0	1371.5	1634.4	1869.9	1858.0	1611.2	1328.8	1101.1	932.8
47.5°	942.4	992.0	1090.7	1268.8	1526.6	1694.7	1583.2	1320.7	1081.1	898.4	778.4
50°	876.7	925.9	1024.0	1199.9	1440.3	1562.9	1403.8	1150.8	931.5	780.1	684.7
52.5°	814.0	861.9	951.6	1123.0	1336.0	1409.3	1238.4	1003.9	821.0	690.4	608.5
55°	726.1	762.5	843.1	1007.1	1166.3	1183.0	1010.0	813.7	663.0	571.9	515.9
57.5°	636.5	667.9	747.5	878.2	989.7	981.1	816.9	647.2	545.7	478.0	437.3
60°	578.2	609.0	679.1	791.3	875.4	846.0	695.3	558.6	471.7	422.0	389.7
62.5°	523.8	548.0	613.5	695.4	755.9	722.6	594.3	481.2	412.2	370.3	344.8
65°	445.1	464.7	517.2	560.0	593.6	561.4	454.9	376.4	326.6	297.2	279.6
67.5°	370.1	382.6	415.9	431.3	455.0	419.6	342.1	289.4	261.2	236.3	224.2
70°	323.1	332.2	349.7	362.3	368.6	332.2	274.7	236.2	212.3	194.8	187.2
72.5°	276.0	284.0	287.5	297.8	294.6	260.5	220.9	190.2	173.1	161.2	151.2
75°	211.0	214.5	211.0	206.8	197.6	173.8	146.5	131.1	118.4	112.8	109.3
77.5°	153.7	152.7	147.8	141.3	125.7	110.8	96.0	90.9	85.3	82.4	81.1
80°	118.4	115.7	111.5	100.9	87.6	77.1	73.6	70.1	67.9	64.5	63.8
82.5°	88.2	86.5	79.5	70.6	61.3	56.4	53.4	52.2	50.0	48.2	48.1
85°	47.0	44.9	37.2	32.3	30.9	29.4	28.7	28.7	25.9	25.2	25.2
87.5°	15.5	12.4	12.1	10.6	10.9	10.1	10.9	10.1	9.8	10.3	9.3
90°	2.1	3.0	4.5	5.6	6.6	8.1	9.6	11.1	12.8	12.2	12.8
92.5°	9.4	13.6	17.6	21.8	29.4	42.7	64.6	86.1	78.2	59.0	42.8
95°	18.8	24.4	33.1	46.3	66.1	109.3	185.1	268.6	301.6	244.6	183.1
97.5°	30.1	34.4	41.9	54.9	76.4	117.7	203.1	342.1	467.4	500.1	456.5
100°	38.2	41.7	48.9	61.0	80.9	116.5	191.7	325.5	481.6	581.8	599.7
102.5°	47.1	50.3	57.0	67.9	86.1	118.1	182.0	301.1	455.2	585.9	647.3
105°	60.5	63.6	69.6	79.4	95.1	122.6	175.0	271.1	408.9	554.9	661.2
107.5°	74.2	77.1	83.1	92.2	106.8	130.9	174.4	252.0	368.0	500.6	621.1
110°	83.9	86.5	92.0	100.7	114.9	137.9	176.5	244.6	344.8	466.4	582.8





TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	275°	280°	285°	290°	295°	300°	305°	310°	315°	320°	325°
112.5°	92.9	95.4	101.0	109.7	123.5	144.7	180.6	240.6	329.4	436.7	545.0
115°	106.3	109.3	114.4	123.1	136.8	156.1	187.2	239.1	312.8	400.8	494.9
117.5°	119.5	122.1	126.7	136.4	149.1	168.3	195.9	240.0	303.0	379.2	458.5
120°	127.7	130.2	135.3	145.0	157.7	175.9	202.4	241.6	298.5	367.7	439.4
122.5°	135.4	137.9	143.4	152.7	166.2	184.1	208.6	244.4	295.7	358.4	424.4
125°	146.0	149.0	154.6	164.3	178.0	195.8	218.2	248.7	291.9	346.3	404.3
127.5°	154.9	158.7	164.3	175.0	188.8	206.0	226.1	253.6	290.1	335.8	386.8
130°	160.2	164.8	170.9	181.6	195.3	212.0	231.4	256.8	288.9	330.1	375.9
132.5°	164.7	169.7	177.0	187.7	201.0	217.4	236.3	259.3	288.5	324.8	365.7
135°	171.9	177.5	185.1	195.8	209.6	225.3	242.6	263.0	287.8	317.9	352.0
137.5°	178.7	184.2	192.3	203.0	215.6	230.8	247.3	265.4	286.8	311.9	339.5
140°	183.6	188.7	196.8	207.0	219.7	234.4	249.8	267.0	286.3	308.2	332.2
142.5°	188.1	193.6	200.9	211.1	223.0	237.3	252.2	268.2	285.5	305.0	325.2
145°	195.3	199.9	207.5	216.2	227.8	241.1	254.9	269.0	284.3	300.6	316.8
147.5°	202.6	207.1	213.7	222.0	232.0	244.2	256.5	269.0	282.4	296.3	310.0
150°	207.5	211.6	218.2	225.3	234.4	246.2	256.8	269.0	280.7	293.5	305.1
152.5°	212.4	216.5	222.3	228.5	237.3	247.4	257.7	267.9	278.7	290.3	300.7
155°	220.3	223.3	228.4	234.0	241.1	249.8	257.9	266.5	275.2	285.3	294.0
157.5°	226.9	229.3	233.9	238.6	244.2	251.0	258.4	264.7	272.0	279.8	286.9
160°	231.4	233.4	237.6	241.1	246.2	252.3	258.4	263.9	269.6	276.2	282.8
162.5°	235.1	236.7	240.0	243.1	247.4	252.7	258.0	262.3	267.2	272.5	277.9
165°	240.0	241.1	243.6	245.7	249.2	253.2	256.8	259.9	263.5	267.5	271.6
167.5°	244.2	244.6	246.6	248.0	250.2	253.2	256.0	257.4	259.8	262.8	266.1
170°	246.2	246.6	248.2	249.2	250.2	252.8	254.9	255.8	257.3	259.9	262.4
172.5°	248.2	248.3	249.4	250.0	250.7	252.8	254.4	254.6	255.3	257.1	259.2
175°	250.2	249.8	250.7	250.7	251.3	252.3	253.2	252.8	252.8	253.8	254.9
177.5°	251.3	250.8	251.3	251.3	251.3	251.6	252.4	251.6	251.3	251.6	252.1
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3	251.3



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
0°	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2	1637.2
2.5°	1726.9	1726.9	1729.1	1737.6	1738.7	1746.0	1743.7
5°	1897.9	1911.2	1916.1	1937.2	1949.8	1955.4	1944.2
7.5°	2107.0	2144.7	2162.4	2184.4	2204.0	2209.8	2194.5
10°	2259.6	2298.8	2331.7	2352.1	2371.0	2383.6	2399.8
12.5°	2407.0	2455.2	2486.5	2515.2	2534.7	2550.7	2553.3
15°	2567.2	2640.1	2695.5	2736.1	2756.5	2767.0	2762.8
17.5°	2728.8	2796.4	2835.8	2877.3	2905.5	2906.9	2907.7
20°	2820.2	2886.1	2931.7	2962.5	2994.1	2992.7	2999.6
22.5°	2881.4	2933.2	2968.1	2990.5	3001.3	2996.1	2997.4
25°	2909.9	2925.3	2919.1	2883.3	2874.3	2841.3	2846.9
27.5°	2762.5	2689.6	2614.2	2517.2	2440.7	2379.5	2382.7
30°	2562.3	2433.4	2286.2	2162.8	2052.1	2021.2	1955.4
32.5°	2282.5	2089.1	1916.7	1801.8	1706.7	1681.0	1623.4
35°	1808.2	1620.4	1443.1	1336.5	1294.5	1235.6	1234.9
37.5°	1405.5	1240.1	1146.3	1066.4	1024.5	988.9	985.4
40°	1182.3	1053.4	982.6	925.1	883.8	857.1	850.9
42.5°	1026.4	922.2	855.9	820.3	788.5	774.7	764.5
45°	838.2	768.1	721.8	689.6	674.9	664.4	658.8
47.5°	701.2	654.2	622.7	601.2	589.2	578.2	581.1
50°	626.6	588.0	564.9	544.6	535.5	527.7	528.4
52.5°	566.6	532.0	513.3	498.6	487.2	481.8	479.1
55°	480.8	459.1	440.1	429.6	423.3	415.6	413.5
57.5°	410.1	393.3	377.9	366.0	364.4	357.0	358.0
60°	363.0	349.0	336.4	330.1	325.2	318.9	321.0
62.5°	324.3	312.5	301.1	295.9	291.0	286.3	287.3
65°	265.6	254.4	247.4	244.6	242.5	240.4	238.3
67.5°	211.7	204.8	200.5	194.4	190.1	189.4	187.3
70°	178.0	168.9	161.2	153.5	151.4	150.7	151.4
72.5°	142.7	137.0	134.8	131.1	130.6	128.9	130.1
75°	107.3	105.1	103.7	100.9	100.9	100.9	100.9
77.5°	79.1	77.8	77.0	76.4	75.7	74.7	74.5
80°	61.7	61.0	59.6	59.6	58.9	59.6	58.9
82.5°	46.5	46.4	45.0	45.0	44.3	43.9	44.3
85°	23.8	23.1	24.5	23.1	23.8	22.5	23.8
87.5°	9.4	9.5	9.1	9.0	8.6	9.8	8.6
90°	13.2	13.7	14.7	14.3	14.7	15.2	14.7
92.5°	34.0	30.1	27.4	26.5	24.9	25.4	24.5
95°	124.1	97.1	78.8	69.2	64.6	61.0	59.0
97.5°	365.6	300.0	239.2	201.6	178.7	165.0	160.6
100°	558.5	498.9	426.7	375.3	338.2	318.4	318.9
102.5°	646.0	611.3	565.4	525.5	496.1	479.5	467.8
105°	712.0	721.8	708.5	685.1	665.8	649.5	646.9
107.5°	703.7	748.2	766.3	766.8	760.3	754.7	750.1
110°	676.5	740.6	776.1	790.4	794.4	793.4	792.4



TEST NUMBER: P332368-940

CATALOG NUMBER: S123RDIP-S1165D585U940-4F0-1E-UDD-A4

**CANDELA DISTRIBUTION (continued):**

	330°	335°	340°	345°	350°	355°	360°
112.5°	640.6	712.5	758.2	784.3	796.9	800.8	800.9
115°	583.4	658.2	713.5	751.7	774.1	784.3	786.8
117.5°	534.9	602.1	658.4	698.1	723.7	738.4	741.8
120°	508.1	569.1	620.5	660.7	689.2	701.3	704.5
122.5°	486.5	543.1	590.8	626.5	652.1	665.6	669.4
125°	459.8	508.6	549.3	581.8	604.2	617.0	620.5
127.5°	436.3	480.4	517.4	546.4	565.4	576.9	580.2
130°	421.6	462.8	497.4	524.4	542.7	553.4	557.4
132.5°	407.8	446.1	479.1	504.4	522.7	532.2	535.0
135°	388.1	421.2	450.1	475.0	490.3	499.4	503.0
137.5°	369.1	397.5	422.7	443.6	459.1	466.8	469.1
140°	358.0	382.5	404.3	423.7	437.9	446.0	445.5
142.5°	347.5	368.6	387.6	404.1	416.8	424.1	423.6
145°	333.7	349.9	364.7	377.4	388.1	392.2	393.2
147.5°	323.3	336.5	347.0	356.6	363.8	367.7	368.1
150°	316.8	327.5	337.2	344.8	350.4	353.5	353.5
152.5°	310.8	320.2	328.2	334.2	339.5	341.3	341.3
155°	302.1	309.8	315.8	320.4	324.5	325.5	326.0
157.5°	293.6	299.6	304.3	308.4	311.4	312.2	312.1
160°	288.4	293.5	297.0	300.6	303.6	303.6	303.1
162.5°	282.7	287.4	290.5	292.8	295.5	295.5	295.0
165°	274.6	278.2	280.7	282.8	284.8	284.3	284.3
167.5°	268.4	270.5	272.3	273.2	274.6	274.1	274.1
170°	263.9	266.0	267.0	267.5	268.6	268.0	268.0
172.5°	260.3	261.9	262.5	262.6	263.7	262.8	262.3
175°	255.3	256.4	256.4	256.4	256.8	256.4	255.8
177.5°	252.4	252.9	252.9	252.4	252.9	252.1	252.1
180°	251.3	251.3	251.3	251.3	251.3	251.3	251.3

(END OF REPORT)