

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332261-940

Luminaire Tested: **S123RDIP-S340D1025U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

Test Information

Test Method: LM-79-08
Report Number: P332261-940
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,
Test Lab: INNOVATION CENTER
Issue Date: 3/3/2020
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: NEO-RAY
Catalog Number: S123RDIP-S340D1025U940-4F0-1E-UDD-F
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED
HOUSING
UPLIGHT 1025 LUMENS PER FOOT, NO LENS
Light Source: -
Ballast/Driver: ELECTRONIC DRIVER

Summary

Lumens per Lamp: N/A
Luminaire Lumens: 4814.1 lumens
Efficiency: N/A
Efficacy: 129.1 lumens/watt
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')
CIE Type: Semi-Indirect


Input Watts (W): 37.3
Input Voltage (V): 120
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT



TEST NUMBER: P332261-940

CATALOG NUMBER: S123RDIP-S340D1025U940-4F0-1E-UDD-F

Luminous Intensity Polar Plot

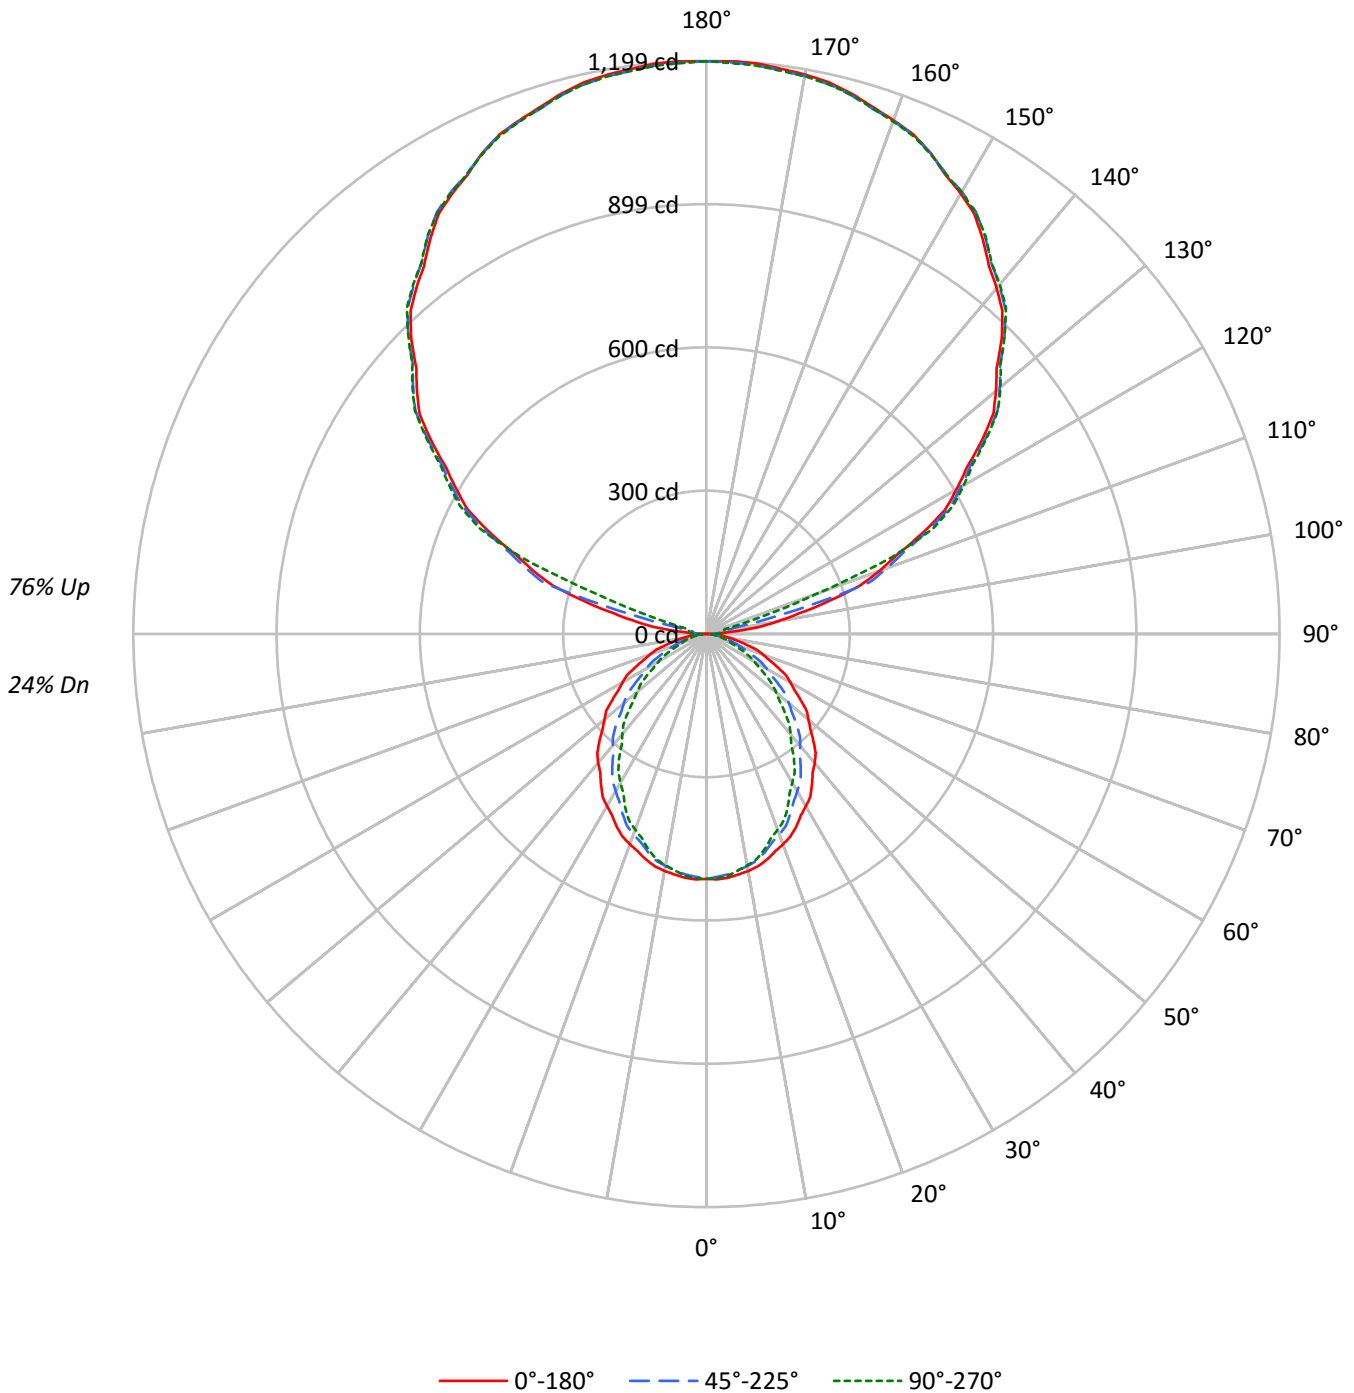



TEST NUMBER: P332261-940

CATALOG NUMBER: S123RDIP-S340D1025U940-4F0-1E-UDD-F

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	28	21
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	55	68	61	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	52	47	62	54	47	42	42	37	34	31	28	25	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	27	24	22	18	17	15	11
6	59	48	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10
7	55	43	35	30	48	39	32	27	30	26	22	22	19	17	15	13	12	9
8	50	39	31	26	45	35	29	24	27	23	20	21	17	15	14	12	11	8
9	47	35	28	23	42	32	26	21	25	21	17	19	16	13	13	11	10	7
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5514	5514	5514
5°	5535	5459	5491
10°	5503	5391	5372
15°	5446	5264	5209
20°	5363	5108	4987
25°	5280	4930	4772
30°	5169	4724	4467
35°	5056	4520	4188
40°	4950	4279	3842
45°	4813	4042	3529
50°	4662	3771	3178
55°	4506	3462	2852
60°	4366	3130	2495
65°	4182	2774	2137
70°	3950	2326	1725
75°	3614	1834	1626
80°	3217	1624	1494
85°	2717	1433	1334



TEST NUMBER: P332261-940

CATALOG NUMBER: S123RDIP-S340D1025U940-4F0-1E-UDD-F

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.1	1.0
10°-20°	133.9	2.8
20°-30°	192.7	4.0
30°-40°	217.1	4.5
40°-50°	207.7	4.3
50°-60°	170.1	3.5
60°-70°	114.8	2.4
70°-80°	57.7	1.2
80°-90°	18.6	0.4
90°-100°	43.6	0.9
100°-110°	207.6	4.3
110°-120°	498.6	10.4
120°-130°	634.9	13.2
130°-140°	678.4	14.1
140°-150°	634.4	13.2
150°-160°	511.7	10.6
160°-170°	330.3	6.9
170°-180°	113.8	2.4
0°-30°	374.7	7.8
0°-40°	591.8	12.3
0°-60°	969.6	20.1
0°-90°	1160.7	24.1
90°-120°	749.8	15.6
90°-150°	2697.6	56.0
90°-180°	3653.0	75.9
0°-180°	4814.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	512	512	512	512	512	
5°	512	510	505	509	508	49
15°	489	484	472	470	467	138
25°	445	434	415	407	402	204
35°	385	369	344	327	319	241
45°	316	297	266	243	232	244
55°	240	219	184	161	152	215
65°	164	141	109	89	84	162
75°	87	67	44	40	39	93
85°	22	13	12	11	11	25
90°	1	10	21	25	27	4
95°	54	20	28	34	34	67
105°	265	270	195	46	39	281
115°	498	503	511	520	523	491
125°	701	708	712	714	716	626
135°	873	878	882	884	882	672
145°	1008	1014	1016	1017	1017	630
155°	1110	1108	1109	1113	1108	511
165°	1170	1168	1167	1173	1168	331
175°	1198	1194	1194	1200	1194	114
180°	1198	1198	1198	1198	1198	



TEST NUMBER: P332261-940

CATALOG NUMBER: S123RDIP-S340D1025U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3
2.5°	514.0	513.6	513.4	513.1	512.8	512.2	511.3	510.4	509.5	508.6	509.4
5°	512.3	511.8	511.4	511.0	510.4	509.7	508.5	507.5	506.3	505.2	506.0
7.5°	507.6	507.0	506.6	506.0	505.6	504.6	503.2	501.8	500.2	498.8	499.3
10°	503.5	502.9	502.3	501.7	501.0	499.8	498.2	496.5	494.8	493.2	493.3
12.5°	497.9	497.2	496.5	495.8	495.1	493.7	491.6	489.6	487.6	485.5	485.4
15°	488.7	487.6	486.6	485.5	484.6	482.8	480.2	477.6	475.0	472.4	472.0
17.5°	476.9	475.7	474.6	473.3	472.2	469.9	466.6	463.3	460.1	456.8	455.8
20°	468.2	466.8	465.3	463.9	462.4	459.9	456.4	452.8	449.3	445.9	444.6
22.5°	458.6	456.9	455.2	453.5	451.8	449.2	445.4	441.7	437.9	434.2	432.7
25°	444.6	442.3	440.0	437.7	435.3	432.0	427.8	423.6	419.3	415.1	413.1
27.5°	427.6	425.0	422.4	419.9	417.3	413.8	409.0	404.2	399.5	394.8	392.1
30°	415.9	413.1	410.4	407.6	404.8	400.8	395.7	390.5	385.3	380.1	377.0
32.5°	404.3	401.1	398.0	394.8	391.7	387.4	381.9	376.5	371.0	365.5	362.1
35°	384.8	381.4	378.1	374.8	371.5	366.9	361.2	355.4	349.7	344.0	340.1
37.5°	365.0	361.2	357.6	353.9	350.2	345.3	339.2	333.1	327.0	320.8	316.4
40°	352.3	348.3	344.2	340.2	336.1	330.7	324.2	317.6	311.1	304.5	299.8
42.5°	338.0	333.9	329.9	325.8	321.8	316.4	309.6	302.8	296.0	289.3	284.0
45°	316.2	312.0	307.9	303.7	299.5	293.9	286.9	279.7	272.6	265.5	260.2
47.5°	294.4	289.8	285.2	280.6	276.1	270.3	263.1	256.0	249.0	241.8	236.1
50°	278.4	274.0	269.7	265.4	261.0	255.1	247.6	240.1	232.6	225.2	219.5
52.5°	264.1	259.4	254.7	249.9	245.2	239.2	231.8	224.4	217.0	209.6	203.7
55°	240.1	235.6	231.1	226.6	222.0	215.9	208.0	200.2	192.3	184.5	179.1
57.5°	218.0	213.1	208.2	203.2	198.3	191.9	184.0	176.1	168.3	160.4	155.3
60°	202.8	197.7	192.6	187.5	182.4	176.1	168.4	160.8	153.1	145.4	140.4
62.5°	187.4	182.4	177.3	172.3	167.2	160.8	153.1	145.4	137.8	130.1	125.5
65°	164.2	159.1	154.0	148.9	143.8	137.7	130.5	123.2	116.1	108.9	104.3
67.5°	140.8	135.6	130.5	125.4	120.2	114.2	107.3	100.4	93.5	86.6	83.2
70°	125.5	120.5	115.5	110.5	105.6	99.8	93.4	86.9	80.4	73.9	70.7
72.5°	110.2	105.3	100.4	95.4	90.5	85.2	79.3	73.4	67.5	61.6	59.0
75°	86.9	82.4	77.9	73.6	69.1	64.4	59.3	54.2	49.1	44.1	43.2
77.5°	65.5	61.5	57.5	53.5	49.6	45.9	42.6	39.3	36.1	32.8	32.4
80°	51.9	48.2	44.4	40.6	36.8	34.0	32.0	30.1	28.1	26.2	25.9
82.5°	39.0	35.7	32.5	29.2	25.9	23.8	22.9	22.0	21.1	20.2	19.9
85°	22.0	20.0	17.9	16.0	13.9	12.8	12.5	12.2	11.9	11.6	11.4
87.5°	8.1	7.8	7.3	6.9	6.5	6.5	7.0	7.6	8.1	8.6	8.6
90°	0.9	2.9	4.8	6.9	8.8	11.1	13.6	16.2	18.8	21.4	22.1
92.5°	16.6	16.0	15.4	14.9	14.4	15.1	16.9	18.9	20.9	22.8	24.1
95°	54.3	46.2	38.1	30.0	21.8	18.9	21.0	23.3	25.4	27.6	29.0
97.5°	109.1	105.5	101.8	98.2	94.5	85.6	71.4	57.2	42.9	28.6	30.2
100°	150.4	154.4	158.4	162.3	166.2	152.8	121.9	91.0	60.2	29.3	30.9
102.5°	197.4	200.3	203.1	206.0	208.8	193.4	159.7	126.0	92.3	58.6	53.7
105°	265.2	267.4	269.6	271.8	273.9	266.1	248.3	230.5	212.8	194.9	159.9
107.5°	336.8	338.6	340.3	342.1	343.8	346.1	348.8	351.7	354.5	357.3	331.6
110°	384.5	386.1	387.6	389.2	390.8	392.7	394.8	397.1	399.2	401.4	394.8



TEST NUMBER: P332261-940

CATALOG NUMBER: S123RDIP-S340D1025U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	430.1	431.5	432.9	434.4	435.8	437.6	439.8	441.9	444.1	446.3	446.4
115°	497.6	498.7	499.9	501.1	502.3	503.8	505.5	507.3	509.1	510.9	512.9
117.5°	562.8	564.4	565.8	567.3	568.7	569.9	570.8	571.8	572.7	573.5	575.2
120°	603.4	605.2	607.0	608.8	610.6	611.8	612.3	613.0	613.6	614.1	615.7
122.5°	644.8	646.2	647.6	649.2	650.6	651.8	652.5	653.3	654.0	654.7	655.9
125°	701.3	702.9	704.5	706.1	707.7	708.9	709.7	710.4	711.2	712.0	712.5
127.5°	756.2	757.8	759.4	760.9	762.5	763.8	764.7	765.7	766.6	767.6	768.2
130°	790.4	791.9	793.5	795.1	796.7	797.9	798.7	799.5	800.2	801.0	801.8
132.5°	823.1	824.7	826.3	827.9	829.5	830.5	831.2	831.8	832.5	833.1	833.9
135°	873.2	874.3	875.5	876.7	877.9	878.9	879.7	880.5	881.3	882.1	882.6
137.5°	915.9	917.4	918.9	920.4	921.9	922.8	923.3	923.7	924.2	924.6	925.5
140°	944.3	945.6	946.7	947.9	949.1	950.0	950.6	951.2	951.8	952.3	953.1
142.5°	970.7	971.9	973.0	974.3	975.4	976.3	977.0	977.5	978.1	978.7	979.4
145°	1007.5	1009.0	1010.3	1011.7	1013.1	1014.0	1014.4	1014.8	1015.1	1015.6	1015.9
147.5°	1042.2	1043.2	1044.1	1045.0	1045.9	1046.5	1047.0	1047.3	1047.8	1048.1	1048.6
150°	1063.6	1064.3	1064.8	1065.4	1066.0	1066.5	1066.8	1067.3	1067.6	1068.1	1068.4
152.5°	1082.8	1083.2	1083.4	1083.7	1084.0	1084.2	1084.4	1084.7	1084.9	1085.1	1085.8
155°	1109.9	1109.5	1109.1	1108.8	1108.3	1108.2	1108.4	1108.6	1108.8	1109.0	1110.0
157.5°	1130.9	1130.9	1130.9	1130.8	1130.8	1130.6	1130.4	1130.2	1130.1	1129.8	1131.0
160°	1143.7	1143.5	1143.4	1143.2	1142.9	1142.7	1142.5	1142.4	1142.1	1141.9	1143.2
162.5°	1155.8	1155.3	1154.8	1154.3	1153.8	1153.4	1153.2	1153.0	1152.8	1152.6	1154.0
165°	1170.5	1169.8	1169.2	1168.7	1168.1	1167.7	1167.4	1167.2	1167.1	1166.9	1168.4
167.5°	1181.8	1181.1	1180.3	1179.5	1178.7	1178.2	1178.2	1178.2	1178.2	1178.2	1179.8
170°	1188.2	1187.4	1186.7	1185.9	1185.1	1184.6	1184.6	1184.6	1184.6	1184.6	1186.2
172.5°	1192.5	1191.6	1190.6	1189.6	1188.7	1188.3	1188.5	1188.7	1188.7	1188.9	1190.5
175°	1198.0	1197.0	1196.1	1195.1	1194.1	1193.6	1193.8	1194.1	1194.3	1194.4	1195.9
177.5°	1199.4	1198.6	1197.8	1197.0	1196.3	1196.0	1196.1	1196.3	1196.4	1196.6	1197.8
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0



TEST NUMBER: P332261-940

CATALOG NUMBER: S123RDIP-S340D1025U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
0°	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3
2.5°	510.2	511.0	511.9	512.2	512.1	511.9	511.8	511.7
5°	506.9	507.7	508.5	508.9	508.7	508.5	508.4	508.2
7.5°	499.8	500.2	500.7	500.8	500.4	500.2	499.8	499.5
10°	493.4	493.5	493.6	493.4	492.9	492.5	492.0	491.5
12.5°	485.4	485.4	485.4	485.0	484.5	483.9	483.4	482.9
15°	471.4	471.0	470.6	470.0	469.4	468.7	468.1	467.4
17.5°	454.9	453.9	452.9	451.9	450.9	450.0	449.1	448.1
20°	443.4	442.2	441.0	439.9	438.7	437.7	436.6	435.4
22.5°	431.2	429.7	428.2	427.0	425.9	424.9	423.8	422.8
25°	411.2	409.3	407.3	405.8	404.8	403.9	402.8	401.8
27.5°	389.4	386.7	384.1	381.9	380.3	378.8	377.3	375.7
30°	373.9	370.8	367.7	365.3	363.8	362.4	360.9	359.4
32.5°	358.6	355.3	351.8	349.3	347.8	346.3	344.6	343.1
35°	336.1	332.1	328.1	325.3	323.7	322.0	320.3	318.7
37.5°	311.8	307.3	302.8	299.5	297.5	295.4	293.4	291.3
40°	295.0	290.2	285.3	281.9	279.7	277.7	275.5	273.4
42.5°	278.7	273.6	268.3	264.7	262.8	260.9	259.0	257.1
45°	254.9	249.7	244.4	240.7	238.5	236.3	234.1	231.8
47.5°	230.3	224.6	218.9	215.1	213.1	211.2	209.1	207.1
50°	213.7	208.0	202.3	198.4	196.3	194.1	192.0	189.8
52.5°	197.7	191.7	185.8	181.9	179.9	178.1	176.2	174.2
55°	173.8	168.4	163.1	159.4	157.7	155.8	153.9	152.0
57.5°	150.3	145.2	140.2	136.8	135.3	133.7	132.2	130.5
60°	135.5	130.5	125.5	122.2	120.6	119.0	117.5	115.9
62.5°	120.7	116.1	111.4	108.2	106.6	105.0	103.3	101.7
65°	99.8	95.3	90.8	88.0	86.9	86.0	85.0	83.9
67.5°	79.8	76.4	73.0	70.8	69.7	68.7	67.6	66.5
70°	67.5	64.3	61.0	58.9	57.9	56.9	55.8	54.8
72.5°	56.4	53.8	51.1	49.6	49.1	48.7	48.3	47.9
75°	42.2	41.3	40.3	39.8	39.6	39.4	39.2	39.1
77.5°	31.8	31.3	30.9	30.5	30.3	30.1	30.0	29.8
80°	25.6	25.3	25.1	24.9	24.6	24.4	24.3	24.1
82.5°	19.6	19.4	19.1	18.9	18.9	18.8	18.8	18.8
85°	11.2	11.1	10.9	10.8	10.8	10.8	10.8	10.8
87.5°	8.7	8.8	8.9	9.0	9.0	9.0	9.0	9.0
90°	22.9	23.7	24.5	25.1	25.5	25.9	26.3	26.7
92.5°	25.3	26.6	27.8	28.6	28.8	29.1	29.3	29.5
95°	30.3	31.7	33.2	33.8	33.8	33.8	33.8	33.8
97.5°	31.8	33.4	35.0	35.8	36.1	36.3	36.5	36.6
100°	32.5	34.2	35.7	36.6	36.8	37.0	37.2	37.4
102.5°	48.8	43.9	39.0	36.6	37.0	37.4	37.7	38.1
105°	124.9	89.9	54.9	37.5	38.0	38.3	38.8	39.1
107.5°	305.9	280.3	254.6	228.5	202.2	175.8	149.4	123.0
110°	388.3	381.8	375.3	357.9	329.6	301.3	273.0	244.8



TEST NUMBER: P332261-940

CATALOG NUMBER: S123RDIP-S340D1025U940-4F0-1E-UDD-F

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	446.5	446.7	446.7	443.8	437.8	431.9	425.9	419.9
115°	514.9	516.8	518.8	520.2	520.9	521.7	522.5	523.3
117.5°	576.8	578.3	579.9	580.8	580.9	581.0	581.2	581.4
120°	617.3	618.8	620.5	621.3	621.3	621.3	621.3	621.3
122.5°	656.9	658.1	659.2	659.8	660.0	660.1	660.2	660.4
125°	712.8	713.2	713.6	714.0	714.4	714.8	715.2	715.6
127.5°	768.8	769.5	770.1	770.3	769.8	769.5	769.0	768.7
130°	802.6	803.4	804.2	804.4	804.1	803.6	803.3	802.8
132.5°	834.6	835.4	836.2	836.3	835.8	835.3	834.7	834.2
135°	883.2	883.9	884.4	884.4	883.9	883.2	882.6	882.1
137.5°	926.5	927.5	928.4	928.6	928.3	927.9	927.5	927.1
140°	954.0	954.8	955.6	955.7	955.3	954.9	954.6	954.1
142.5°	980.0	980.6	981.2	981.2	980.7	980.2	979.6	979.1
145°	1016.4	1016.7	1017.2	1017.4	1017.4	1017.4	1017.4	1017.4
147.5°	1048.9	1049.3	1049.7	1049.5	1048.6	1047.7	1046.7	1045.8
150°	1068.9	1069.3	1069.7	1069.5	1069.0	1068.4	1067.7	1067.2
152.5°	1086.5	1087.3	1088.0	1087.9	1087.0	1086.1	1085.2	1084.2
155°	1111.0	1112.0	1112.9	1112.9	1111.7	1110.5	1109.3	1108.1
157.5°	1132.2	1133.4	1134.6	1134.4	1132.8	1131.3	1129.8	1128.3
160°	1144.3	1145.5	1146.7	1146.6	1145.2	1143.8	1142.5	1141.0
162.5°	1155.3	1156.6	1158.0	1158.1	1156.8	1155.6	1154.4	1153.2
165°	1170.0	1171.6	1173.2	1173.3	1171.9	1170.5	1169.1	1167.8
167.5°	1181.4	1183.0	1184.5	1184.5	1183.0	1181.4	1179.8	1178.2
170°	1187.8	1189.5	1191.0	1191.0	1189.5	1187.8	1186.2	1184.6
172.5°	1192.1	1193.6	1195.2	1195.2	1193.5	1191.7	1190.0	1188.2
175°	1197.2	1198.6	1200.0	1199.9	1198.3	1196.8	1195.2	1193.6
177.5°	1199.1	1200.4	1201.7	1201.5	1199.9	1198.4	1196.8	1195.2
180°	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0	1198.0

(END OF REPORT)