

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332268-940

Luminaire Tested: **S123RDIP-S340D1195U940-4F0-1E-UDD-F1**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332268-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-9,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S340D1195U940-4F0-1E-UDD-F1  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 340 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 1195 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 4815.5 lumens  
Efficiency: N/A  
Efficacy: 114.1 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Indirect


Input Watts (W): 42.2  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332268-940

CATALOG NUMBER: S123RDIP-S340D1195U940-4F0-1E-UDD-F1

### Luminous Intensity Polar Plot

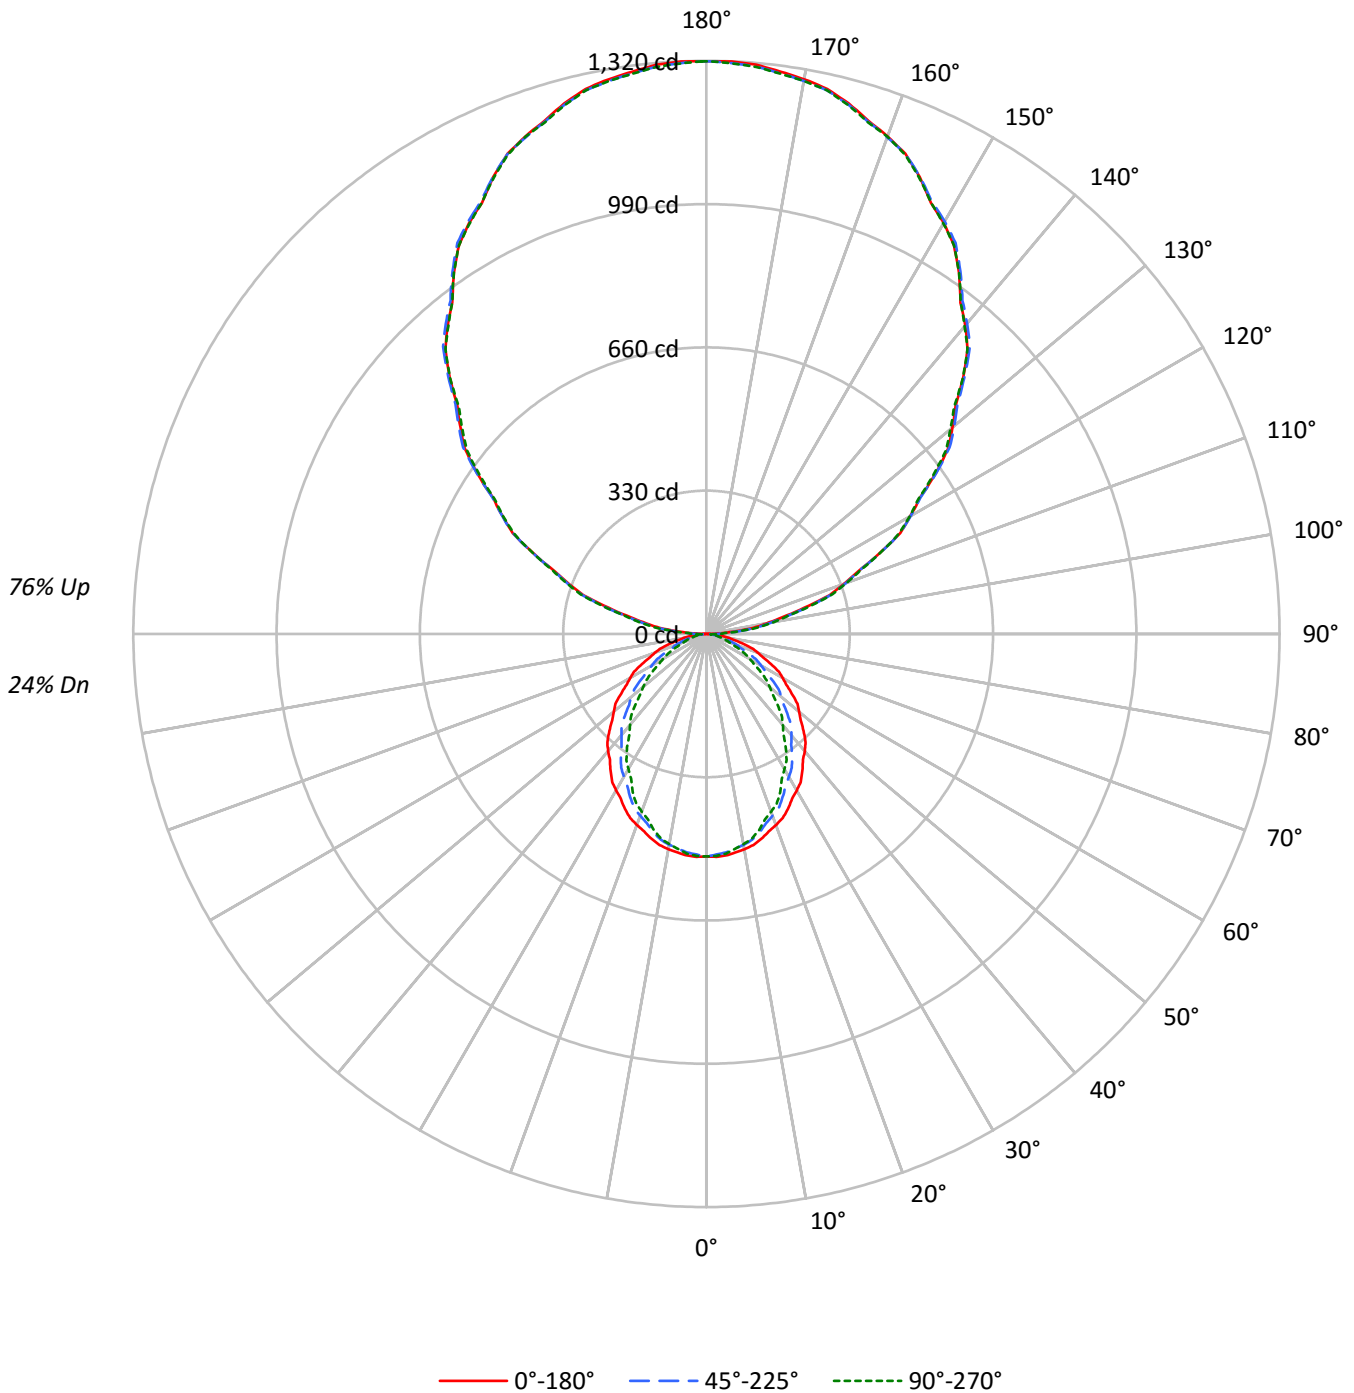



TEST NUMBER: P332268-940

CATALOG NUMBER: S123RDIP-S340D1195U940-4F0-1E-UDD-F1

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	101	101	101	101	90	90	90	90	69	69	69	50	50	50	32	32	32	24
1	92	88	84	81	82	78	75	73	60	58	57	44	43	42	29	28	28	21
2	84	77	71	66	74	69	64	60	53	50	47	39	37	35	25	24	23	17
3	77	68	61	55	68	60	55	50	47	43	40	34	32	30	23	21	20	15
4	70	60	52	47	62	54	47	42	42	37	34	31	28	25	20	19	17	13
5	64	53	46	40	57	48	41	36	37	33	29	27	24	22	18	17	15	11
6	59	48	40	34	52	43	36	31	33	29	25	25	22	19	17	15	13	10
7	55	43	35	30	48	39	32	27	30	26	22	22	19	17	15	13	12	9
8	50	39	31	26	45	35	29	24	27	23	20	21	17	15	14	12	11	8
9	47	35	28	23	42	32	26	21	25	21	17	19	16	13	13	11	10	7
10	44	32	25	21	39	29	23	19	23	19	16	17	14	12	12	10	9	7

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	5514	5514	5514
5°	5535	5459	5491
10°	5503	5391	5372
15°	5446	5264	5209
20°	5363	5108	4987
25°	5280	4930	4772
30°	5169	4724	4467
35°	5056	4520	4188
40°	4950	4279	3842
45°	4813	4042	3529
50°	4662	3771	3178
55°	4506	3462	2852
60°	4366	3130	2495
65°	4182	2774	2137
70°	3950	2326	1725
75°	3614	1834	1626
80°	3217	1624	1494
85°	2717	1433	1334



TEST NUMBER: P332268-940

CATALOG NUMBER: S123RDIP-S340D1195U940-4F0-1E-UDD-F1

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	48.1	1.0
10°-20°	133.9	2.8
20°-30°	192.7	4.0
30°-40°	217.1	4.5
40°-50°	207.7	4.3
50°-60°	170.1	3.5
60°-70°	114.8	2.4
70°-80°	57.7	1.2
80°-90°	19.2	0.4
90°-100°	85.9	1.8
100°-110°	257.2	5.3
110°-120°	437.4	9.1
120°-130°	575.3	11.9
130°-140°	646.7	13.4
140°-150°	635.6	13.2
150°-160°	535.1	11.1
160°-170°	356.2	7.4
170°-180°	124.7	2.6
0°-30°	374.7	7.8
0°-40°	591.8	12.3
0°-60°	969.6	20.1
0°-90°	1161.2	24.1
90°-120°	780.5	16.2
90°-150°	2638.1	54.8
90°-180°	3654.0	75.9
0°-180°	4815.5	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	512	512	512	512	512	
5°	512	510	505	509	508	49
15°	489	484	472	470	467	138
25°	445	434	415	407	402	204
35°	385	369	344	327	319	241
45°	316	297	266	243	232	244
55°	240	219	184	161	152	215
65°	164	141	109	89	84	162
75°	87	67	44	40	39	93
85°	22	13	12	11	11	25
90°	1	12	25	29	31	5
95°	61	68	77	81	81	69
105°	233	236	244	245	247	250
115°	440	443	441	442	441	436
125°	644	647	646	641	637	574
135°	836	842	841	837	835	644
145°	1014	1016	1020	1018	1014	633
155°	1162	1162	1162	1166	1159	534
165°	1265	1262	1262	1267	1261	357
175°	1316	1312	1312	1317	1311	125
180°	1319	1319	1319	1319	1319	



TEST NUMBER: P332268-940

CATALOG NUMBER: S123RDIP-S340D1195U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3
2.5°	514.0	513.6	513.4	513.1	512.8	512.2	511.3	510.4	509.5	508.6	509.4
5°	512.3	511.8	511.4	511.0	510.4	509.7	508.5	507.5	506.3	505.2	506.0
7.5°	507.6	507.0	506.6	506.0	505.6	504.6	503.2	501.8	500.2	498.8	499.3
10°	503.5	502.9	502.3	501.7	501.0	499.8	498.2	496.5	494.8	493.2	493.3
12.5°	497.9	497.2	496.5	495.8	495.1	493.7	491.6	489.6	487.6	485.5	485.4
15°	488.7	487.6	486.6	485.5	484.6	482.8	480.2	477.6	475.0	472.4	472.0
17.5°	476.9	475.7	474.6	473.3	472.2	469.9	466.6	463.3	460.1	456.8	455.8
20°	468.2	466.8	465.3	463.9	462.4	459.9	456.4	452.8	449.3	445.9	444.6
22.5°	458.6	456.9	455.2	453.5	451.8	449.2	445.4	441.7	437.9	434.2	432.7
25°	444.6	442.3	440.0	437.7	435.3	432.0	427.8	423.6	419.3	415.1	413.1
27.5°	427.6	425.0	422.4	419.9	417.3	413.8	409.0	404.2	399.5	394.8	392.1
30°	415.9	413.1	410.4	407.6	404.8	400.8	395.7	390.5	385.3	380.1	377.0
32.5°	404.3	401.1	398.0	394.8	391.7	387.4	381.9	376.5	371.0	365.5	362.1
35°	384.8	381.4	378.1	374.8	371.5	366.9	361.2	355.4	349.7	344.0	340.1
37.5°	365.0	361.2	357.6	353.9	350.2	345.3	339.2	333.1	327.0	320.8	316.4
40°	352.3	348.3	344.2	340.2	336.1	330.7	324.2	317.6	311.1	304.5	299.8
42.5°	338.0	333.9	329.9	325.8	321.8	316.4	309.6	302.8	296.0	289.3	284.0
45°	316.2	312.0	307.9	303.7	299.5	293.9	286.9	279.7	272.6	265.5	260.2
47.5°	294.4	289.8	285.2	280.6	276.1	270.3	263.1	256.0	249.0	241.8	236.1
50°	278.4	274.0	269.7	265.4	261.0	255.1	247.6	240.1	232.6	225.2	219.5
52.5°	264.1	259.4	254.7	249.9	245.2	239.2	231.8	224.4	217.0	209.6	203.7
55°	240.1	235.6	231.1	226.6	222.0	215.9	208.0	200.2	192.3	184.5	179.1
57.5°	218.0	213.1	208.2	203.2	198.3	191.9	184.0	176.1	168.3	160.4	155.3
60°	202.8	197.7	192.6	187.5	182.4	176.1	168.4	160.8	153.1	145.4	140.4
62.5°	187.4	182.4	177.3	172.3	167.2	160.8	153.1	145.4	137.8	130.1	125.5
65°	164.2	159.1	154.0	148.9	143.8	137.7	130.5	123.2	116.1	108.9	104.3
67.5°	140.8	135.6	130.5	125.4	120.2	114.2	107.3	100.4	93.5	86.6	83.2
70°	125.5	120.5	115.5	110.5	105.6	99.8	93.4	86.9	80.4	73.9	70.7
72.5°	110.2	105.3	100.4	95.4	90.5	85.2	79.3	73.4	67.5	61.6	59.0
75°	86.9	82.4	77.9	73.6	69.1	64.4	59.3	54.2	49.1	44.1	43.2
77.5°	65.5	61.5	57.5	53.5	49.6	45.9	42.6	39.3	36.1	32.8	32.4
80°	51.9	48.2	44.4	40.6	36.8	34.0	32.0	30.1	28.1	26.2	25.9
82.5°	39.0	35.7	32.5	29.2	25.9	23.8	22.9	22.0	21.1	20.2	19.9
85°	22.0	20.0	17.9	16.0	13.9	12.8	12.5	12.2	11.9	11.6	11.4
87.5°	8.2	7.8	7.5	7.1	6.8	6.9	7.5	8.1	8.7	9.3	9.4
90°	1.1	3.3	5.6	7.9	10.3	12.9	15.9	18.9	21.8	24.9	25.8
92.5°	25.1	26.7	28.2	29.8	31.3	33.0	34.7	36.4	38.1	39.8	40.5
95°	61.2	62.8	64.4	66.0	67.6	69.3	71.2	72.9	74.8	76.7	77.6
97.5°	108.6	109.8	111.0	112.2	113.3	114.7	116.0	117.3	118.6	119.9	121.0
100°	140.9	142.3	143.7	145.1	146.4	147.7	148.8	150.0	151.1	152.3	153.0
102.5°	178.2	179.1	179.9	180.7	181.6	182.7	184.2	185.7	187.3	188.8	189.5
105°	233.1	233.5	234.1	234.5	235.0	236.2	238.3	240.4	242.5	244.5	244.5
107.5°	296.9	297.2	297.5	297.7	298.0	298.6	299.4	300.2	301.0	301.9	302.6
110°	336.7	337.2	337.6	338.1	338.6	339.0	339.5	339.9	340.4	340.9	341.8



TEST NUMBER: P332268-940

CATALOG NUMBER: S123RDIP-S340D1195U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	378.2	378.4	378.7	379.0	379.2	379.4	379.5	379.6	379.7	379.8	380.9
115°	440.3	441.0	441.7	442.4	443.1	443.2	442.7	442.3	441.8	441.4	441.6
117.5°	502.9	503.4	503.8	504.3	504.7	504.7	504.1	503.5	502.9	502.3	502.2
120°	541.9	543.2	544.7	546.0	547.4	547.5	546.4	545.2	544.0	542.9	542.7
122.5°	582.5	583.4	584.5	585.5	586.6	586.7	586.1	585.5	585.0	584.3	583.7
125°	644.4	645.2	645.8	646.5	647.2	647.3	646.8	646.4	646.0	645.5	644.5
127.5°	701.6	703.1	704.5	706.1	707.5	708.0	707.5	706.9	706.5	706.0	704.7
130°	739.8	741.5	743.4	745.3	747.1	747.7	747.0	746.3	745.6	744.9	744.0
132.5°	777.8	779.7	781.6	783.4	785.2	786.0	785.4	784.9	784.3	783.9	782.7
135°	836.1	837.5	838.8	840.3	841.6	842.2	842.0	841.8	841.5	841.2	840.3
137.5°	890.0	891.1	892.2	893.4	894.6	895.5	896.1	896.6	897.2	897.9	896.9
140°	927.3	928.4	929.6	930.8	931.8	932.6	932.8	933.0	933.3	933.5	933.3
142.5°	961.3	962.4	963.6	964.7	965.9	966.6	967.1	967.5	967.9	968.3	968.0
145°	1014.3	1014.8	1015.2	1015.7	1016.1	1016.7	1017.4	1018.1	1018.8	1019.5	1019.2
147.5°	1060.7	1061.6	1062.4	1063.2	1064.1	1064.8	1065.4	1066.0	1066.7	1067.4	1067.4
150°	1093.1	1093.5	1094.0	1094.4	1094.9	1095.4	1095.8	1096.3	1096.7	1097.2	1097.2
152.5°	1119.5	1120.3	1120.9	1121.5	1122.1	1122.6	1122.8	1123.2	1123.5	1123.7	1124.1
155°	1161.5	1161.5	1161.5	1161.5	1161.5	1161.5	1161.8	1162.0	1162.3	1162.4	1163.4
157.5°	1197.0	1196.8	1196.5	1196.2	1196.0	1195.9	1196.1	1196.3	1196.5	1196.7	1197.7
160°	1219.4	1219.0	1218.5	1218.1	1217.6	1217.4	1217.4	1217.4	1217.4	1217.4	1218.5
162.5°	1239.3	1238.7	1238.1	1237.4	1236.8	1236.5	1236.7	1236.9	1237.1	1237.2	1238.4
165°	1265.1	1264.4	1263.6	1262.9	1262.3	1261.9	1261.9	1261.9	1261.9	1261.9	1263.3
167.5°	1285.6	1284.6	1283.7	1282.8	1281.8	1281.5	1281.7	1281.8	1282.0	1282.2	1283.6
170°	1297.2	1296.2	1295.3	1294.4	1293.4	1293.0	1293.0	1293.0	1293.0	1293.0	1294.6
172.5°	1306.3	1305.4	1304.4	1303.5	1302.6	1302.2	1302.2	1302.2	1302.2	1302.2	1303.6
175°	1315.8	1314.9	1313.9	1313.0	1312.2	1311.6	1311.6	1311.6	1311.6	1311.6	1313.0
177.5°	1319.7	1319.0	1318.3	1317.5	1316.8	1316.4	1316.4	1316.4	1316.4	1316.4	1317.5
180°	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9



TEST NUMBER: P332268-940

CATALOG NUMBER: S123RDIP-S340D1195U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	512.3	512.3	512.3	512.3	512.3	512.3	512.3	512.3
2.5°	510.2	511.0	511.9	512.2	512.1	511.9	511.8	511.7
5°	506.9	507.7	508.5	508.9	508.7	508.5	508.4	508.2
7.5°	499.8	500.2	500.7	500.8	500.4	500.2	499.8	499.5
10°	493.4	493.5	493.6	493.4	492.9	492.5	492.0	491.5
12.5°	485.4	485.4	485.4	485.0	484.5	483.9	483.4	482.9
15°	471.4	471.0	470.6	470.0	469.4	468.7	468.1	467.4
17.5°	454.9	453.9	452.9	451.9	450.9	450.0	449.1	448.1
20°	443.4	442.2	441.0	439.9	438.7	437.7	436.6	435.4
22.5°	431.2	429.7	428.2	427.0	425.9	424.9	423.8	422.8
25°	411.2	409.3	407.3	405.8	404.8	403.9	402.8	401.8
27.5°	389.4	386.7	384.1	381.9	380.3	378.8	377.3	375.7
30°	373.9	370.8	367.7	365.3	363.8	362.4	360.9	359.4
32.5°	358.6	355.3	351.8	349.3	347.8	346.3	344.6	343.1
35°	336.1	332.1	328.1	325.3	323.7	322.0	320.3	318.7
37.5°	311.8	307.3	302.8	299.5	297.5	295.4	293.4	291.3
40°	295.0	290.2	285.3	281.9	279.7	277.7	275.5	273.4
42.5°	278.7	273.6	268.3	264.7	262.8	260.9	259.0	257.1
45°	254.9	249.7	244.4	240.7	238.5	236.3	234.1	231.8
47.5°	230.3	224.6	218.9	215.1	213.1	211.2	209.1	207.1
50°	213.7	208.0	202.3	198.4	196.3	194.1	192.0	189.8
52.5°	197.7	191.7	185.8	181.9	179.9	178.1	176.2	174.2
55°	173.8	168.4	163.1	159.4	157.7	155.8	153.9	152.0
57.5°	150.3	145.2	140.2	136.8	135.3	133.7	132.2	130.5
60°	135.5	130.5	125.5	122.2	120.6	119.0	117.5	115.9
62.5°	120.7	116.1	111.4	108.2	106.6	105.0	103.3	101.7
65°	99.8	95.3	90.8	88.0	86.9	86.0	85.0	83.9
67.5°	79.8	76.4	73.0	70.8	69.7	68.7	67.6	66.5
70°	67.5	64.3	61.0	58.9	57.9	56.9	55.8	54.8
72.5°	56.4	53.8	51.1	49.6	49.1	48.7	48.3	47.9
75°	42.2	41.3	40.3	39.8	39.6	39.4	39.2	39.1
77.5°	31.8	31.3	30.9	30.5	30.3	30.1	30.0	29.8
80°	25.6	25.3	25.1	24.9	24.6	24.4	24.3	24.1
82.5°	19.6	19.4	19.1	18.9	18.9	18.8	18.8	18.8
85°	11.2	11.1	10.9	10.8	10.8	10.8	10.8	10.8
87.5°	9.5	9.6	9.7	9.8	9.8	9.8	9.9	9.9
90°	26.8	27.6	28.5	29.2	29.7	30.1	30.6	31.1
92.5°	41.3	42.0	42.7	43.0	42.7	42.4	42.1	41.8
95°	78.5	79.5	80.3	80.8	80.8	80.8	80.8	80.8
97.5°	122.1	123.1	124.2	124.7	124.6	124.5	124.4	124.3
100°	153.6	154.4	155.1	155.6	156.1	156.6	157.0	157.5
102.5°	190.1	190.8	191.5	191.8	191.7	191.6	191.5	191.5
105°	244.5	244.5	244.5	244.8	245.2	245.7	246.1	246.6
107.5°	303.4	304.2	304.9	305.1	304.8	304.5	304.3	304.0
110°	342.7	343.7	344.6	344.7	344.3	343.8	343.4	343.0





TEST NUMBER: P332268-940

CATALOG NUMBER: S123RDIP-S340D1195U940-4F0-1E-UDD-F1

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	382.0	383.2	384.2	384.8	384.7	384.6	384.5	384.4
115°	441.8	442.0	442.3	442.3	442.0	441.8	441.6	441.4
117.5°	502.2	502.1	502.1	501.8	501.1	500.4	499.8	499.2
120°	542.4	542.2	542.0	541.6	541.2	540.7	540.3	539.8
122.5°	583.2	582.6	581.9	581.3	580.7	580.1	579.3	578.7
125°	643.6	642.7	641.8	640.9	640.0	639.0	638.1	637.2
127.5°	703.4	702.1	700.8	699.6	698.6	697.5	696.4	695.4
130°	743.1	742.2	741.3	739.9	738.3	736.7	735.1	733.5
132.5°	781.7	780.6	779.4	778.3	777.0	775.8	774.5	773.3
135°	839.5	838.5	837.6	836.9	836.4	836.0	835.5	835.1
137.5°	895.9	894.9	893.9	893.0	892.2	891.4	890.5	889.6
140°	933.0	932.8	932.6	931.7	930.1	928.4	926.8	925.2
142.5°	967.9	967.6	967.4	966.6	965.4	964.1	963.0	961.7
145°	1019.0	1018.8	1018.6	1018.0	1017.1	1016.1	1015.2	1014.3
147.5°	1067.4	1067.4	1067.4	1066.7	1065.2	1063.9	1062.5	1061.1
150°	1097.2	1097.2	1097.2	1096.5	1095.1	1093.8	1092.3	1091.0
152.5°	1124.4	1124.8	1125.2	1124.8	1123.6	1122.4	1121.1	1120.0
155°	1164.3	1165.2	1166.2	1165.8	1164.2	1162.6	1161.0	1159.3
157.5°	1198.5	1199.5	1200.5	1200.3	1199.1	1197.7	1196.5	1195.2
160°	1219.7	1220.8	1222.0	1222.1	1221.2	1220.2	1219.3	1218.4
162.5°	1239.6	1240.7	1241.9	1241.7	1240.2	1238.8	1237.2	1235.8
165°	1264.7	1266.1	1267.5	1267.3	1265.7	1264.1	1262.5	1260.9
167.5°	1285.0	1286.5	1287.9	1287.9	1286.5	1285.0	1283.6	1282.2
170°	1296.2	1297.9	1299.5	1299.5	1297.9	1296.2	1294.6	1293.0
172.5°	1305.0	1306.4	1307.9	1307.8	1306.1	1304.5	1302.9	1301.3
175°	1314.4	1315.8	1317.1	1317.1	1315.5	1313.8	1312.2	1310.6
177.5°	1318.7	1319.7	1320.8	1320.7	1319.5	1318.1	1316.9	1315.6
180°	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9	1318.9

(END OF REPORT)