

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P832193

Luminaire Tested: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P832193
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-17)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S560D1025U940-4F0-1E-UDD-G4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 560 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5469.2 lumens
Efficiency: N/A
Efficacy: 120.2 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Indirect

Input Watts (W): 45.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

Luminous Intensity Polar Plot

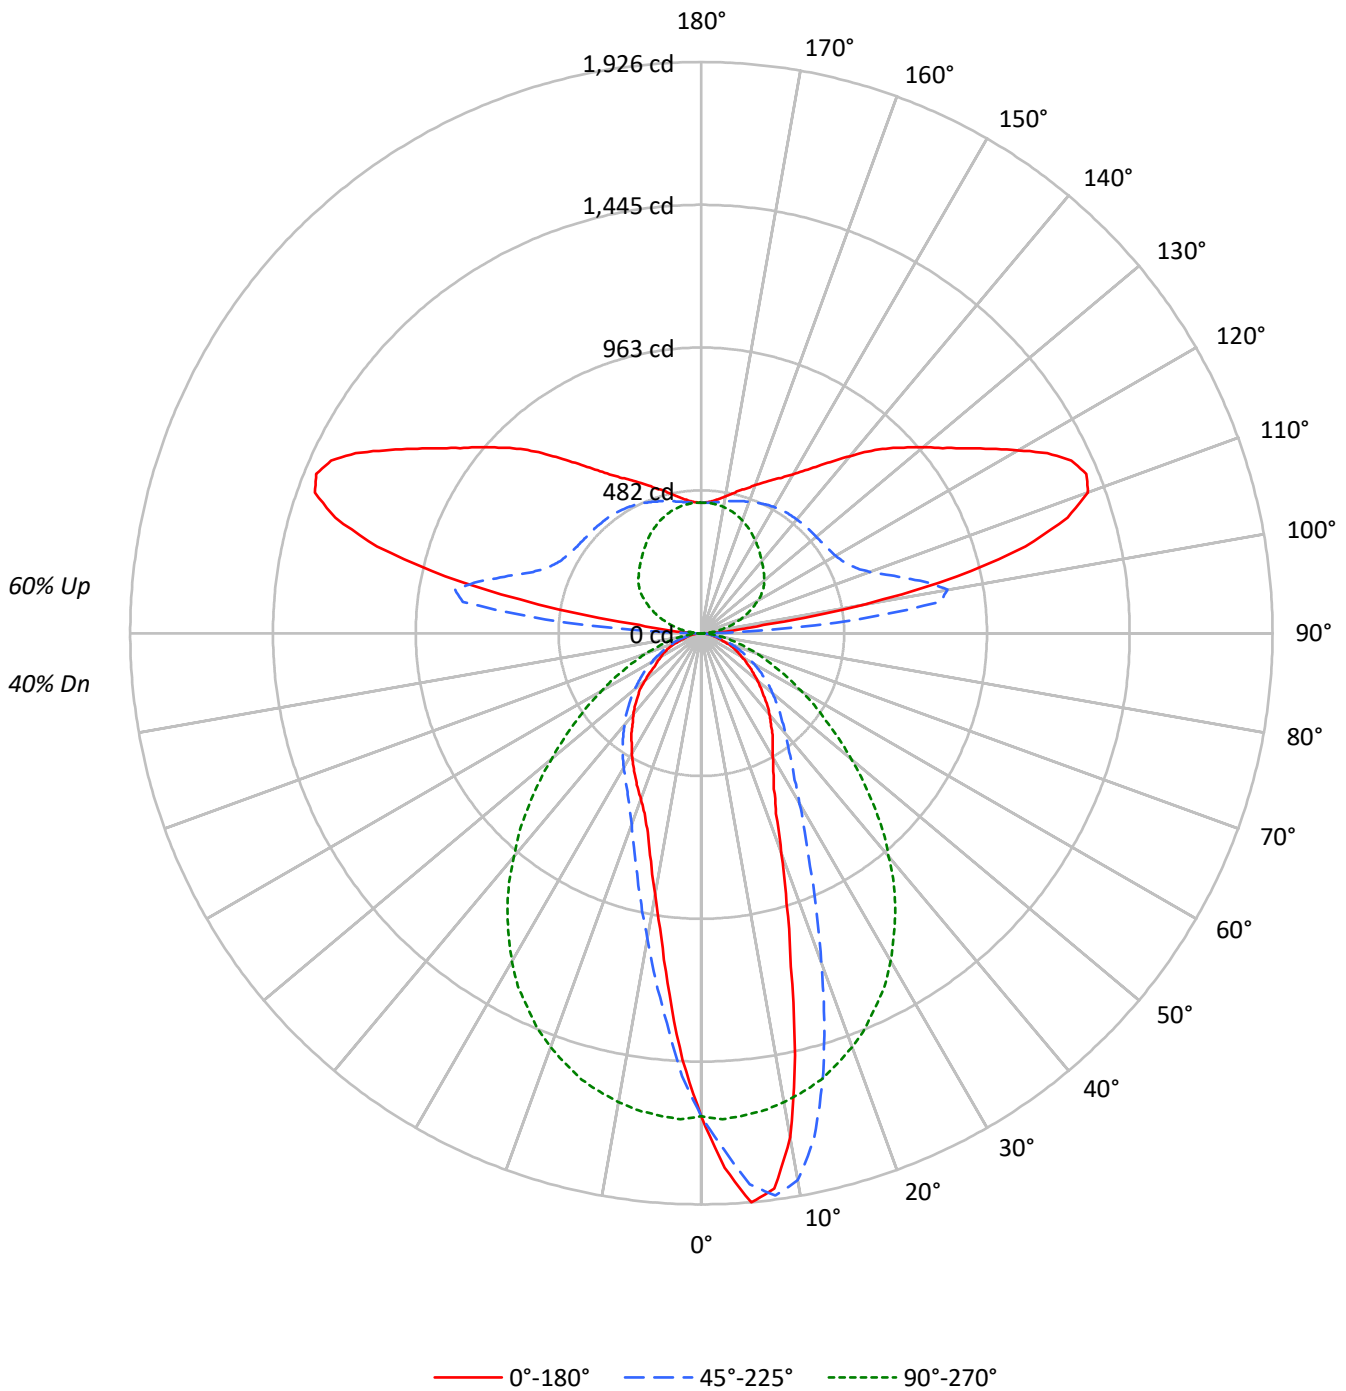



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	105	105	105	105	95	95	95	95	78	78	78	61	61	61	47	47	47	40				
1	96	92	88	85	87	84	81	78	69	67	65	55	53	52	42	41	40	35				
2	88	81	75	71	80	74	69	65	61	58	55	49	47	45	38	36	35	30				
3	81	72	65	60	73	66	60	55	54	50	47	44	41	39	34	32	31	26				
4	74	64	57	51	67	59	52	48	49	44	41	40	36	34	31	29	27	23				
5	68	57	50	44	62	53	46	41	44	39	35	36	32	30	28	26	24	21				
6	63	52	44	39	58	48	41	36	40	35	31	33	29	26	26	24	22	19				
7	59	47	40	34	53	43	37	32	37	32	28	30	26	24	24	22	20	17				
8	55	43	36	31	50	40	33	29	34	29	25	28	24	21	22	20	18	16				
9	51	39	32	28	47	36	30	26	31	26	23	26	22	20	21	18	16	14				
10	48	36	29	25	44	34	28	23	29	24	21	24	20	18	19	17	15	13				

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	17530	17530	17530	17530	17530
5°	20815	20151	17640	14260	13239
10°	18859	20467	17552	11425	9802
15°	12985	17549	17367	9338	7754
20°	9033	13511	17018	7874	6814
25°	6884	10297	16511	6999	6280
30°	5992	8233	15877	6498	5818
35°	5502	6945	14977	6076	5397
40°	5019	6202	13801	5663	5011
45°	4533	5672	12533	5270	4625
50°	4114	5233	11035	4886	4148
55°	3721	4806	9599	4511	3558
60°	3335	4370	8338	4097	3363
65°	3079	3876	7177	3683	3181
70°	2502	3352	6263	3330	2584
75°	2196	2666	5303	2761	2279
80°	1990	2256	4345	2318	2151
85°	1815	1976	3298	2100	1976

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 13224 cd/sqm



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	148.4	2.7
10°-20°	343.5	6.3
20°-30°	394.1	7.2
30°-40°	388.5	7.1
40°-50°	342.6	6.3
50°-60°	263.5	4.8
60°-70°	173.3	3.2
70°-80°	84.2	1.5
80°-90°	23.6	0.4
90°-100°	238.6	4.4
100°-110°	698.6	12.8
110°-120°	682.2	12.5
120°-130°	543.3	9.9
130°-140°	428.6	7.8
140°-150°	319.8	5.8
150°-160°	222.9	4.1
160°-170°	131.0	2.4
170°-180°	42.6	0.8
0°-30°	886.1	16.2
0°-40°	1274.5	23.3
0°-60°	1880.6	34.4
0°-90°	2161.7	39.5
90°-120°	1619.3	29.6
90°-150°	2911.0	53.2
90°-180°	3308.0	60.5
0°-180°	5469.2	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	1629	1629	1629	1629	1629	
5°	1926	1865	1633	1320	1225	176
15°	1165	1575	1558	838	696	329
25°	580	867	1390	589	529	274
35°	419	528	1140	462	411	261
45°	298	373	823	346	304	231
55°	198	256	512	240	190	178
65°	121	152	282	145	125	118
75°	53	64	128	66	55	57
85°	15	16	27	17	16	16
90°	26	22	2	22	26	14
95°	103	528	30	528	103	168
105°	1132	716	103	716	1132	1130
115°	1377	547	182	547	1377	1343
125°	1086	511	254	511	1086	983
135°	880	504	297	504	880	683
145°	688	498	339	498	688	437
155°	570	482	385	482	570	266
165°	498	461	421	461	498	142
175°	448	442	439	442	448	43
180°	440	440	440	440	440	



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6
2.5°	1804.9	1799.2	1793.5	1791.8	1790.2	1784.8	1779.5	1767.5	1755.5	1743.1	1730.8
5°	1926.4	1927.1	1927.7	1926.1	1924.4	1917.4	1910.4	1895.7	1881.0	1865.0	1848.9
7.5°	1889.0	1899.7	1910.4	1912.4	1914.4	1919.7	1925.1	1921.7	1918.4	1912.4	1906.4
10°	1725.4	1724.7	1724.1	1736.1	1748.1	1783.8	1819.6	1837.9	1856.3	1872.6	1889.0
12.5°	1458.3	1459.3	1460.3	1499.7	1539.1	1572.8	1606.6	1653.3	1700.0	1750.4	1800.9
15°	1165.2	1181.5	1197.9	1233.0	1268.0	1318.8	1369.5	1432.3	1495.0	1574.8	1654.6
17.5°	956.9	963.9	970.9	1004.6	1038.3	1086.4	1134.5	1205.6	1276.7	1379.5	1482.4
20°	788.6	794.9	801.3	825.6	850.0	896.1	942.2	1009.9	1077.7	1179.5	1281.4
22.5°	658.4	670.7	683.1	699.4	715.8	749.2	782.6	851.7	920.8	1013.6	1106.4
25°	579.6	585.3	590.9	605.0	619.0	651.0	683.1	728.8	774.6	867.0	959.5
27.5°	526.2	527.8	529.5	539.9	550.2	570.9	591.6	634.0	676.4	752.5	828.7
30°	482.1	485.1	488.1	496.1	504.1	519.2	534.2	564.2	594.3	662.4	730.5
32.5°	448.0	449.7	451.4	458.1	464.7	475.8	486.8	510.5	534.2	586.3	638.3
35°	418.7	419.0	419.3	424.3	429.3	440.0	450.7	470.4	490.1	528.5	566.9
37.5°	385.3	387.6	390.0	393.6	397.3	406.6	416.0	432.0	448.0	479.8	511.5
40°	357.2	359.2	361.2	365.6	369.9	377.3	384.6	399.3	414.0	441.4	468.7
42.5°	329.2	330.5	331.9	336.2	340.5	349.6	358.6	370.3	381.9	404.6	427.3
45°	297.8	301.1	304.5	309.2	313.8	321.5	329.2	341.2	353.2	372.6	392.0
47.5°	271.8	273.4	275.1	279.1	283.1	292.5	301.8	312.5	323.2	341.2	359.2
50°	245.7	246.4	247.1	250.7	254.4	262.8	271.1	283.5	295.8	312.5	329.2
52.5°	221.0	222.7	224.4	228.0	231.7	237.4	243.1	255.7	268.4	284.8	301.1
55°	198.3	199.3	200.3	203.0	205.7	212.3	219.0	230.0	241.0	256.1	271.1
57.5°	176.9	178.3	179.6	181.6	183.6	189.6	195.6	205.3	215.0	230.0	245.1
60°	154.9	156.6	158.3	160.6	162.9	167.6	172.3	181.0	189.6	203.0	216.3
62.5°	138.9	139.2	139.6	141.6	143.6	146.9	150.2	157.2	164.3	177.6	191.0
65°	120.9	121.9	122.9	123.9	124.9	127.5	130.2	136.2	142.2	152.2	162.3
67.5°	102.2	103.2	104.2	105.8	107.5	109.8	112.2	116.2	120.2	129.5	138.9
70°	79.5	79.5	79.5	82.1	84.8	88.8	92.8	95.8	98.8	106.5	114.2
72.5°	64.8	65.1	65.4	65.8	66.1	68.4	70.8	75.8	80.8	85.5	90.1
75°	52.8	53.1	53.4	53.8	54.1	54.8	55.4	57.1	58.8	64.1	69.4
77.5°	42.1	42.4	42.7	43.1	43.4	44.1	44.7	45.4	46.1	48.1	50.1
80°	32.1	32.4	32.7	33.1	33.4	33.7	34.1	34.7	35.4	36.4	37.4
82.5°	23.4	23.4	23.4	23.4	23.4	24.0	24.7	24.7	24.7	25.4	26.0
85°	14.7	14.7	14.7	15.0	15.4	15.4	15.4	15.7	16.0	16.0	16.0
87.5°	6.7	6.3	6.0	6.3	6.7	6.7	6.7	7.0	7.3	7.3	7.3
90°	25.8	26.7	25.8	24.9	25.8	24.0	23.1	22.3	21.4	22.3	19.6
92.5°	47.2	49.0	48.1	51.6	53.4	59.6	68.5	88.1	123.7	165.6	183.4
95°	103.3	106.8	113.0	121.1	138.0	170.0	217.2	320.4	428.1	527.8	470.0
97.5°	211.8	221.6	243.0	276.8	336.5	437.9	555.4	736.1	839.4	811.8	606.1
100°	558.1	557.2	591.9	656.9	746.8	873.2	977.3	1049.4	1018.3	842.9	569.7
102.5°	883.9	909.7	937.3	985.3	1050.3	1118.8	1168.7	1153.6	1027.2	785.1	516.3
105°	1132.2	1136.6	1165.1	1198.9	1239.9	1263.0	1246.1	1157.1	971.1	715.6	474.4
107.5°	1294.2	1304.0	1315.5	1331.6	1336.9	1312.9	1243.5	1103.7	891.0	654.2	444.2
110°	1386.8	1388.5	1390.3	1383.2	1358.3	1296.0	1183.8	1020.0	816.2	603.5	428.1



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1405.4	1404.6	1395.7	1369.8	1319.1	1234.6	1105.5	937.3	751.2	569.7	419.2
115°	1377.0	1372.5	1354.7	1315.5	1248.8	1151.8	1020.9	866.1	701.4	547.4	418.3
117.5°	1314.7	1308.4	1281.7	1238.1	1168.7	1068.1	947.9	810.9	668.5	532.3	419.2
120°	1232.8	1227.4	1206.1	1156.2	1085.9	996.0	889.2	769.0	643.5	522.5	422.8
122.5°	1156.2	1149.1	1125.1	1081.5	1020.9	939.0	842.0	736.1	623.1	516.3	429.0
125°	1085.9	1079.7	1057.4	1018.3	961.3	890.1	804.6	707.6	606.1	510.9	435.3
127.5°	1025.4	1020.0	999.6	965.7	914.1	848.3	769.9	681.8	590.1	508.2	442.4
130°	975.5	968.4	949.7	917.7	870.5	810.0	737.9	657.8	577.7	505.6	449.5
132.5°	926.6	922.1	906.1	874.1	830.5	773.5	707.6	635.5	566.1	504.7	454.8
135°	880.3	874.1	858.0	831.3	787.7	737.0	679.1	615.9	556.3	503.8	460.2
137.5°	831.3	826.0	812.6	785.1	747.7	702.3	650.7	597.2	547.4	502.0	463.7
140°	779.7	780.6	766.4	741.4	707.6	669.3	626.6	581.2	539.4	501.1	467.3
142.5°	731.7	732.5	720.1	698.7	671.1	639.1	603.5	566.1	532.3	499.3	470.0
145°	688.0	686.3	679.1	660.4	638.2	612.4	583.9	554.5	526.0	497.6	470.9
147.5°	650.7	649.8	642.6	629.3	611.5	592.8	568.8	544.7	519.8	494.9	470.9
150°	618.6	618.6	613.3	603.5	590.1	573.2	554.5	534.1	513.6	491.3	470.9
152.5°	591.9	591.9	589.2	580.3	570.5	557.2	541.2	524.3	506.5	486.9	468.2
155°	570.5	569.7	567.9	560.8	552.7	542.1	528.7	514.5	499.3	481.5	466.4
157.5°	550.1	550.1	548.3	543.0	535.8	526.9	516.3	503.8	491.3	477.1	463.7
160°	530.5	531.4	531.4	526.0	519.8	513.6	504.7	494.9	483.3	471.7	462.0
162.5°	512.7	513.6	513.6	509.1	505.6	500.2	492.2	484.2	475.3	466.4	458.4
165°	497.6	497.6	498.4	494.9	491.3	486.9	480.6	475.3	468.2	461.1	454.8
167.5°	482.4	482.4	483.3	480.6	478.9	475.3	471.7	467.3	461.1	455.7	451.3
170°	469.1	469.1	470.0	468.2	467.3	465.5	462.0	459.3	454.8	450.4	447.7
172.5°	456.6	457.5	459.3	457.5	457.5	456.6	453.9	452.2	448.6	445.9	445.0
175°	447.7	448.6	449.5	448.6	448.6	448.6	446.8	445.9	444.2	442.4	442.4
177.5°	441.5	441.5	443.3	442.4	443.3	443.3	442.4	441.5	440.6	439.7	440.6
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6
2.5°	1729.1	1727.4	1711.4	1695.4	1679.7	1664.0	1652.3	1640.6	1620.9	1601.2	1588.9
5°	1836.3	1823.6	1798.2	1772.8	1734.8	1696.7	1664.6	1632.6	1591.9	1551.1	1517.1
7.5°	1896.0	1885.7	1854.9	1824.2	1773.8	1723.4	1673.3	1623.2	1563.2	1503.1	1451.6
10°	1897.7	1906.4	1881.0	1855.6	1798.9	1742.1	1674.0	1605.9	1525.1	1444.3	1377.9
12.5°	1838.3	1875.6	1870.3	1865.0	1807.2	1749.4	1666.6	1583.9	1484.7	1385.5	1302.4
15°	1727.1	1799.5	1820.9	1842.3	1794.5	1746.8	1652.6	1558.5	1442.0	1325.4	1230.0
17.5°	1583.9	1685.3	1741.8	1798.2	1763.5	1728.7	1625.6	1522.4	1391.2	1260.0	1156.2
20°	1414.2	1547.1	1635.6	1724.1	1711.4	1698.7	1592.2	1485.7	1344.1	1202.6	1090.1
22.5°	1246.6	1386.9	1509.1	1631.3	1644.3	1657.3	1549.8	1442.3	1287.4	1132.5	1018.0
25°	1102.1	1244.6	1390.2	1535.8	1565.2	1594.5	1492.4	1390.2	1229.6	1069.0	955.2
27.5°	964.2	1099.7	1260.0	1420.3	1473.7	1527.1	1433.6	1340.1	1172.9	1005.6	892.1
30°	851.7	972.9	1136.5	1300.1	1374.5	1449.0	1363.2	1277.4	1111.4	945.5	834.3
32.5°	746.9	855.4	1019.6	1183.9	1270.4	1356.8	1282.7	1208.6	1049.0	889.4	779.6
35°	664.1	761.2	914.5	1067.7	1164.5	1261.3	1200.6	1139.8	983.9	828.0	724.2
37.5°	592.9	674.4	818.3	962.2	1065.0	1167.9	1117.1	1066.4	919.8	773.2	675.1
40°	534.2	599.6	733.5	867.4	968.2	1069.0	1025.6	982.2	851.0	719.8	628.0
42.5°	483.8	540.2	660.4	780.6	873.1	965.5	936.8	908.1	789.3	670.4	585.3
45°	439.4	486.8	592.6	698.4	783.6	868.7	846.0	823.3	720.8	618.3	540.2
47.5°	400.0	440.7	535.2	629.7	706.1	782.6	761.5	740.5	655.7	570.9	499.8
50°	363.9	398.6	477.4	556.2	625.0	693.8	676.4	659.0	588.9	518.8	457.4
52.5°	329.9	358.6	429.3	500.1	555.5	611.0	597.6	584.3	530.2	476.1	420.3
55°	297.5	323.8	383.6	443.4	490.8	538.2	524.8	511.5	469.4	427.3	378.3
57.5°	268.1	291.1	339.5	388.0	425.7	463.4	457.1	450.7	415.7	380.6	340.2
60°	237.0	257.7	299.5	341.2	371.6	402.0	394.6	387.3	362.2	337.2	302.5
62.5°	209.3	227.7	261.1	294.5	319.2	343.9	338.5	333.2	314.2	295.1	266.4
65°	180.3	198.3	225.4	252.4	271.8	291.1	286.5	281.8	267.4	253.1	230.0
67.5°	153.9	168.9	192.3	215.7	228.7	241.7	239.0	236.4	225.4	214.3	196.3
70°	127.2	140.2	159.6	179.0	188.0	197.0	198.0	199.0	189.0	179.0	165.6
72.5°	100.5	110.8	128.9	146.9	153.9	160.9	160.6	160.3	154.2	148.2	136.2
75°	77.1	84.8	98.8	112.8	118.9	124.9	126.2	127.5	121.9	116.2	109.5
77.5°	55.4	60.8	71.4	82.1	88.8	95.5	96.2	96.8	94.1	91.5	85.1
80°	39.1	40.7	47.4	54.1	61.1	68.1	69.1	70.1	67.4	64.8	60.8
82.5°	27.0	28.0	30.4	32.7	38.4	44.1	45.4	46.7	45.4	44.1	39.7
85°	16.4	16.7	17.7	18.7	21.4	24.0	25.4	26.7	26.0	25.4	23.0
87.5°	7.3	7.3	7.7	8.0	8.7	9.3	11.0	12.7	11.7	10.7	9.7
90°	16.9	14.2	11.6	9.8	8.0	5.3	3.6	1.8	3.6	5.3	8.0
92.5°	137.1	89.9	61.4	45.4	36.5	28.5	19.6	13.4	19.6	28.5	36.5
95°	324.0	191.4	115.7	81.0	57.9	42.7	32.9	30.3	32.9	42.7	57.9
97.5°	360.5	206.5	131.7	93.5	70.3	57.0	49.0	48.1	49.0	57.0	70.3
100°	335.6	203.8	141.5	106.8	85.4	73.0	66.8	65.9	66.8	73.0	85.4
102.5°	314.2	207.4	153.1	121.9	103.3	91.7	86.3	84.6	86.3	91.7	103.3
105°	306.2	214.5	166.4	138.9	121.9	111.3	105.9	103.3	105.9	111.3	121.9
107.5°	304.4	226.1	183.4	157.5	141.5	130.8	125.5	122.8	125.5	130.8	141.5
110°	308.9	241.2	201.2	176.2	161.1	151.3	146.9	144.2	146.9	151.3	161.1



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	317.8	256.3	219.9	195.8	180.7	170.9	166.4	163.8	166.4	170.9	180.7
115°	327.6	273.3	239.4	215.4	200.3	191.4	186.0	182.5	186.0	191.4	200.3
117.5°	340.0	291.1	257.2	235.0	218.1	210.1	205.6	201.2	205.6	210.1	218.1
120°	354.3	308.0	275.9	253.7	236.8	227.9	223.4	220.7	223.4	227.9	236.8
122.5°	367.6	325.8	294.6	270.6	254.6	244.8	240.3	237.7	240.3	244.8	254.6
125°	381.8	342.7	311.5	287.5	270.6	260.8	255.5	253.7	255.5	260.8	270.6
127.5°	393.4	357.8	327.6	303.5	284.8	275.0	268.8	266.1	268.8	275.0	284.8
130°	405.0	371.2	341.8	317.8	299.1	288.4	280.4	277.7	280.4	288.4	299.1
132.5°	415.7	382.7	354.3	331.1	312.4	299.1	290.2	286.6	290.2	299.1	312.4
135°	424.6	394.3	366.7	342.7	324.0	310.6	300.8	297.3	300.8	310.6	324.0
137.5°	431.7	402.3	375.6	353.4	334.7	320.4	310.6	307.1	310.6	320.4	334.7
140°	437.0	410.3	384.5	362.3	344.5	330.2	321.3	316.9	321.3	330.2	344.5
142.5°	442.4	416.6	391.6	371.2	353.4	340.9	331.1	327.6	331.1	340.9	353.4
145°	445.9	421.9	398.8	378.3	363.2	349.8	341.8	339.1	341.8	349.8	363.2
147.5°	448.6	426.4	405.0	387.2	372.1	360.5	352.5	350.7	352.5	360.5	372.1
150°	449.5	430.8	410.3	394.3	381.8	370.3	363.2	362.3	363.2	370.3	381.8
152.5°	451.3	433.5	416.6	401.4	390.7	381.0	373.8	373.8	373.8	381.0	390.7
155°	451.3	437.0	421.9	409.4	399.6	390.7	385.4	385.4	385.4	390.7	399.6
157.5°	452.2	438.8	426.4	416.6	407.7	399.6	395.2	394.3	395.2	399.6	407.7
160°	452.2	441.5	430.8	421.9	415.7	408.5	405.0	405.0	405.0	408.5	415.7
162.5°	451.3	442.4	433.5	426.4	421.0	415.7	413.0	413.0	413.0	415.7	421.0
165°	449.5	443.3	436.1	429.9	426.4	421.9	420.1	421.0	420.1	421.9	426.4
167.5°	448.6	443.3	437.9	433.5	430.8	427.2	426.4	427.2	426.4	427.2	430.8
170°	445.9	442.4	437.9	436.1	434.4	431.7	430.8	432.6	430.8	431.7	434.4
172.5°	445.0	442.4	438.8	437.9	437.0	435.3	435.3	436.1	435.3	435.3	437.0
175°	443.3	441.5	439.7	438.8	438.8	437.0	437.9	438.8	437.9	437.0	438.8
177.5°	442.4	440.6	439.7	439.7	439.7	438.8	439.7	440.6	439.7	438.8	439.7
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6	1628.6
2.5°	1576.5	1557.5	1538.4	1524.8	1511.1	1494.0	1477.0	1476.3	1475.7	1463.0	1450.3
5°	1483.0	1450.0	1416.9	1384.5	1352.1	1319.8	1287.4	1280.0	1272.7	1261.7	1250.7
7.5°	1400.2	1347.5	1294.7	1253.3	1211.9	1179.5	1147.2	1125.1	1103.1	1086.1	1069.0
10°	1311.4	1246.0	1180.5	1130.5	1080.4	1045.3	1010.3	984.9	959.5	947.5	935.5
12.5°	1219.3	1148.2	1077.0	1028.0	978.9	936.8	894.8	871.7	848.7	832.0	815.3
15°	1134.5	1058.0	981.6	929.5	877.4	838.0	798.6	775.6	752.5	735.8	719.1
17.5°	1052.3	975.2	898.1	845.3	792.6	756.9	721.1	698.8	676.4	666.1	655.7
20°	977.6	899.8	822.0	772.2	722.5	687.4	652.4	640.4	628.3	618.7	609.0
22.5°	903.4	828.7	753.9	706.1	658.4	633.0	607.6	598.0	588.3	580.9	573.6
25°	841.3	766.9	692.4	650.7	609.0	589.3	569.6	563.2	556.9	549.5	542.2
27.5°	778.6	707.8	637.0	603.6	570.2	554.2	538.2	530.2	522.2	516.2	510.1
30°	723.1	657.7	592.3	564.6	536.9	522.8	508.8	500.1	491.4	485.8	480.1
32.5°	669.7	611.6	553.5	529.8	506.1	492.4	478.8	470.4	462.1	455.4	448.7
35°	620.3	569.9	519.5	497.8	476.1	462.4	448.7	440.4	432.0	425.3	418.7
37.5°	576.9	531.2	485.4	465.1	444.7	432.7	420.7	412.0	403.3	396.3	389.3
40°	536.2	495.8	455.4	435.7	416.0	403.0	390.0	382.3	374.6	368.3	361.9
42.5°	500.1	463.1	426.0	406.6	387.3	374.9	362.6	353.6	344.5	340.9	337.2
45°	462.1	429.3	396.6	377.9	359.2	346.2	333.2	325.5	317.8	314.5	311.2
47.5°	428.7	398.3	367.9	349.6	331.2	319.5	307.8	301.8	295.8	291.1	286.5
50°	396.0	366.6	337.2	319.5	301.8	291.8	281.8	274.4	267.1	263.8	260.4
52.5°	364.6	337.9	311.2	293.1	275.1	265.4	255.7	249.4	243.1	236.0	229.0
55°	329.2	305.8	282.4	266.4	250.4	240.4	230.4	223.0	215.7	208.3	201.0
57.5°	299.8	276.8	253.7	239.4	225.0	215.3	205.7	197.6	189.6	183.6	177.6
60°	267.8	247.7	227.7	213.7	199.7	190.3	181.0	173.3	165.6	162.6	159.6
62.5°	237.7	219.0	200.3	188.0	175.6	166.6	157.6	152.6	147.6	145.6	143.6
65°	207.0	191.0	174.9	163.6	152.2	144.6	136.9	134.5	132.2	130.5	128.9
67.5°	178.3	164.6	150.9	140.9	130.9	125.5	120.2	117.5	114.8	112.8	110.8
70°	152.2	140.2	128.2	119.5	110.8	105.8	100.8	98.5	96.2	92.5	88.8
72.5°	124.2	114.8	105.5	98.8	92.1	87.8	83.5	78.8	74.1	70.8	67.4
75°	102.8	93.5	84.1	77.8	71.4	66.4	61.4	59.8	58.1	57.1	56.1
77.5°	78.8	70.8	62.8	57.8	52.8	50.4	48.1	47.1	46.1	45.7	45.4
80°	56.8	50.1	43.4	40.7	38.1	37.4	36.7	36.1	35.4	35.1	34.7
82.5°	35.4	32.1	28.7	28.0	27.4	27.0	26.7	26.4	26.0	25.7	25.4
85°	20.7	19.4	18.0	17.7	17.4	17.0	16.7	16.7	16.7	16.7	16.7
87.5°	8.7	8.7	8.7	8.7	8.7	8.7	8.7	8.7	8.7	8.3	8.0
90°	9.8	11.6	14.2	16.9	19.6	22.3	21.4	22.3	23.1	24.0	25.8
92.5°	45.4	61.4	89.9	137.1	183.4	165.6	123.7	88.1	68.5	59.6	53.4
95°	81.0	115.7	191.4	324.0	470.0	527.8	428.1	320.4	217.2	170.0	138.0
97.5°	93.5	131.7	206.5	360.5	606.1	811.8	839.4	736.1	555.4	437.9	336.5
100°	106.8	141.5	203.8	335.6	569.7	842.9	1018.3	1049.4	977.3	873.2	746.8
102.5°	121.9	153.1	207.4	314.2	516.3	785.1	1027.2	1153.6	1168.7	1118.8	1050.3
105°	138.9	166.4	214.5	306.2	474.4	715.6	971.1	1157.1	1246.1	1263.0	1239.9
107.5°	157.5	183.4	226.1	304.4	444.2	654.2	891.0	1103.7	1243.5	1312.9	1336.9
110°	176.2	201.2	241.2	308.9	428.1	603.5	816.2	1020.0	1183.8	1296.0	1358.3



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	195.8	219.9	256.3	317.8	419.2	569.7	751.2	937.3	1105.5	1234.6	1319.1
115°	215.4	239.4	273.3	327.6	418.3	547.4	701.4	866.1	1020.9	1151.8	1248.8
117.5°	235.0	257.2	291.1	340.0	419.2	532.3	668.5	810.9	947.9	1068.1	1168.7
120°	253.7	275.9	308.0	354.3	422.8	522.5	643.5	769.0	889.2	996.0	1085.9
122.5°	270.6	294.6	325.8	367.6	429.0	516.3	623.1	736.1	842.0	939.0	1020.9
125°	287.5	311.5	342.7	381.8	435.3	510.9	606.1	707.6	804.6	890.1	961.3
127.5°	303.5	327.6	357.8	393.4	442.4	508.2	590.1	681.8	769.9	848.3	914.1
130°	317.8	341.8	371.2	405.0	449.5	505.6	577.7	657.8	737.9	810.0	870.5
132.5°	331.1	354.3	382.7	415.7	454.8	504.7	566.1	635.5	707.6	773.5	830.5
135°	342.7	366.7	394.3	424.6	460.2	503.8	556.3	615.9	679.1	737.0	787.7
137.5°	353.4	375.6	402.3	431.7	463.7	502.0	547.4	597.2	650.7	702.3	747.7
140°	362.3	384.5	410.3	437.0	467.3	501.1	539.4	581.2	626.6	669.3	707.6
142.5°	371.2	391.6	416.6	442.4	470.0	499.3	532.3	566.1	603.5	639.1	671.1
145°	378.3	398.8	421.9	445.9	470.9	497.6	526.0	554.5	583.9	612.4	638.2
147.5°	387.2	405.0	426.4	448.6	470.9	494.9	519.8	544.7	568.8	592.8	611.5
150°	394.3	410.3	430.8	449.5	470.9	491.3	513.6	534.1	554.5	573.2	590.1
152.5°	401.4	416.6	433.5	451.3	468.2	486.9	506.5	524.3	541.2	557.2	570.5
155°	409.4	421.9	437.0	451.3	466.4	481.5	499.3	514.5	528.7	542.1	552.7
157.5°	416.6	426.4	438.8	452.2	463.7	477.1	491.3	503.8	516.3	526.9	535.8
160°	421.9	430.8	441.5	452.2	462.0	471.7	483.3	494.9	504.7	513.6	519.8
162.5°	426.4	433.5	442.4	451.3	458.4	466.4	475.3	484.2	492.2	500.2	505.6
165°	429.9	436.1	443.3	449.5	454.8	461.1	468.2	475.3	480.6	486.9	491.3
167.5°	433.5	437.9	443.3	448.6	451.3	455.7	461.1	467.3	471.7	475.3	478.9
170°	436.1	437.9	442.4	445.9	447.7	450.4	454.8	459.3	462.0	465.5	467.3
172.5°	437.9	438.8	442.4	445.0	445.0	445.9	448.6	452.2	453.9	456.6	457.5
175°	438.8	439.7	441.5	443.3	442.4	442.4	444.2	445.9	446.8	448.6	448.6
177.5°	439.7	439.7	440.6	442.4	440.6	439.7	440.6	441.5	442.4	443.3	443.3
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	1628.6	1628.6	1628.6	1628.6
2.5°	1447.0	1443.6	1442.3	1441.0
5°	1240.3	1230.0	1227.6	1225.3
7.5°	1064.7	1060.4	1046.0	1031.6
10°	922.1	908.8	902.8	896.8
12.5°	802.9	790.6	788.6	786.6
15°	710.5	701.8	698.8	695.8
17.5°	649.7	643.7	640.0	636.3
20°	604.6	600.3	597.6	594.9
22.5°	570.2	566.9	564.9	562.9
25°	537.2	532.2	530.5	528.8
27.5°	505.8	501.5	499.8	498.1
30°	476.4	472.8	470.4	468.1
32.5°	444.4	440.0	438.7	437.4
35°	416.0	413.3	412.0	410.7
37.5°	385.9	382.6	380.6	378.6
40°	360.2	358.6	357.6	356.6
42.5°	334.2	331.2	330.9	330.5
45°	308.2	305.2	304.5	303.8
47.5°	283.8	281.1	280.8	280.4
50°	256.7	253.1	250.4	247.7
52.5°	225.7	222.4	220.0	217.7
55°	197.3	193.6	191.6	189.6
57.5°	175.9	174.3	173.3	172.3
60°	158.6	157.6	156.9	156.2
62.5°	142.6	141.6	141.6	141.6
65°	127.9	126.9	125.9	124.9
67.5°	108.8	106.8	106.5	106.2
70°	85.8	82.8	82.5	82.1
72.5°	67.1	66.8	66.1	65.4
75°	55.4	54.8	54.8	54.8
77.5°	44.7	44.1	44.1	44.1
80°	34.4	34.1	34.4	34.7
82.5°	25.4	25.4	25.0	24.7
85°	16.4	16.0	16.0	16.0
87.5°	8.0	8.0	8.0	8.0
90°	24.9	25.8	26.7	25.8
92.5°	51.6	48.1	49.0	47.2
95°	121.1	113.0	106.8	103.3
97.5°	276.8	243.0	221.6	211.8
100°	656.9	591.9	557.2	558.1
102.5°	985.3	937.3	909.7	883.9
105°	1198.9	1165.1	1136.6	1132.2
107.5°	1331.6	1315.5	1304.0	1294.2
110°	1383.2	1390.3	1388.5	1386.8



TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	1369.8	1395.7	1404.6	1405.4
115°	1315.5	1354.7	1372.5	1377.0
117.5°	1238.1	1281.7	1308.4	1314.7
120°	1156.2	1206.1	1227.4	1232.8
122.5°	1081.5	1125.1	1149.1	1156.2
125°	1018.3	1057.4	1079.7	1085.9
127.5°	965.7	999.6	1020.0	1025.4
130°	917.7	949.7	968.4	975.5
132.5°	874.1	906.1	922.1	926.6
135°	831.3	858.0	874.1	880.3
137.5°	785.1	812.6	826.0	831.3
140°	741.4	766.4	780.6	779.7
142.5°	698.7	720.1	732.5	731.7
145°	660.4	679.1	686.3	688.0
147.5°	629.3	642.6	649.8	650.7
150°	603.5	613.3	618.6	618.6
152.5°	580.3	589.2	591.9	591.9
155°	560.8	567.9	569.7	570.5
157.5°	543.0	548.3	550.1	550.1
160°	526.0	531.4	531.4	530.5
162.5°	509.1	513.6	513.6	512.7
165°	494.9	498.4	497.6	497.6
167.5°	480.6	483.3	482.4	482.4
170°	468.2	470.0	469.1	469.1
172.5°	457.5	459.3	457.5	456.6
175°	448.6	449.5	448.6	447.7
177.5°	442.4	443.3	441.5	441.5
180°	439.7	439.7	439.7	439.7

TEST NUMBER: P832193

CATALOG NUMBER: S123RDIP-S560D1025U940-4F0-1E-UDD-G4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.63	10.36	10.68	11.41	12.83	14.29	15.02	15.34	16.07	17.49
	3H	10.84	11.50	11.90	12.55	13.99	15.78	16.44	16.84	17.50	18.93
	4H	11.22	11.84	12.29	12.90	14.34	16.27	16.89	17.34	17.95	19.39
	6H	11.50	12.07	12.58	13.13	14.59	16.57	17.15	17.66	18.21	19.66
	8H	11.58	12.12	12.67	13.20	14.65	16.65	17.19	17.74	18.27	19.72
	12H	11.63	12.14	12.72	13.22	14.69	16.68	17.20	17.77	18.27	19.74
4H	2H	10.34	10.96	11.42	12.02	13.46	14.27	14.89	15.35	15.96	17.40
	3H	11.70	12.21	12.78	13.30	14.76	15.92	16.44	17.01	17.53	18.98
	4H	12.15	12.62	13.24	13.70	15.18	16.53	17.00	17.62	18.08	19.56
	6H	12.51	12.92	13.61	14.02	15.49	16.96	17.36	18.06	18.47	19.94
	8H	12.64	13.02	13.74	14.11	15.60	17.09	17.47	18.19	18.56	20.05
	12H	12.71	13.05	13.83	14.16	15.65	17.15	17.49	18.26	18.59	20.09
8H	4H	12.46	12.84	13.56	13.93	15.42	16.49	16.86	17.59	17.96	19.44
	6H	12.92	13.23	14.04	14.37	15.85	16.98	17.29	18.10	18.43	19.91
	8H	13.11	13.39	14.24	14.50	16.01	17.17	17.44	18.29	18.56	20.06
	12H	13.25	13.49	14.38	14.60	16.14	17.28	17.52	18.41	18.63	20.17
12H	4H	12.46	12.81	13.58	13.91	15.40	16.43	16.77	17.55	17.88	19.37
	6H	12.98	13.25	14.11	14.37	15.87	16.95	17.23	18.08	18.34	19.85
	8H	13.19	13.43	14.32	14.54	16.09	17.14	17.38	18.27	18.50	20.04