

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P832328

Luminaire Tested: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P832328
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-17)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S775D1025U940-4F0-1E-UDD-G4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 1025 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6261.5 lumens
Efficiency: N/A
Efficacy: 120.9 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: General Diffuse

Input Watts (W): 51.8
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

Luminous Intensity Polar Plot

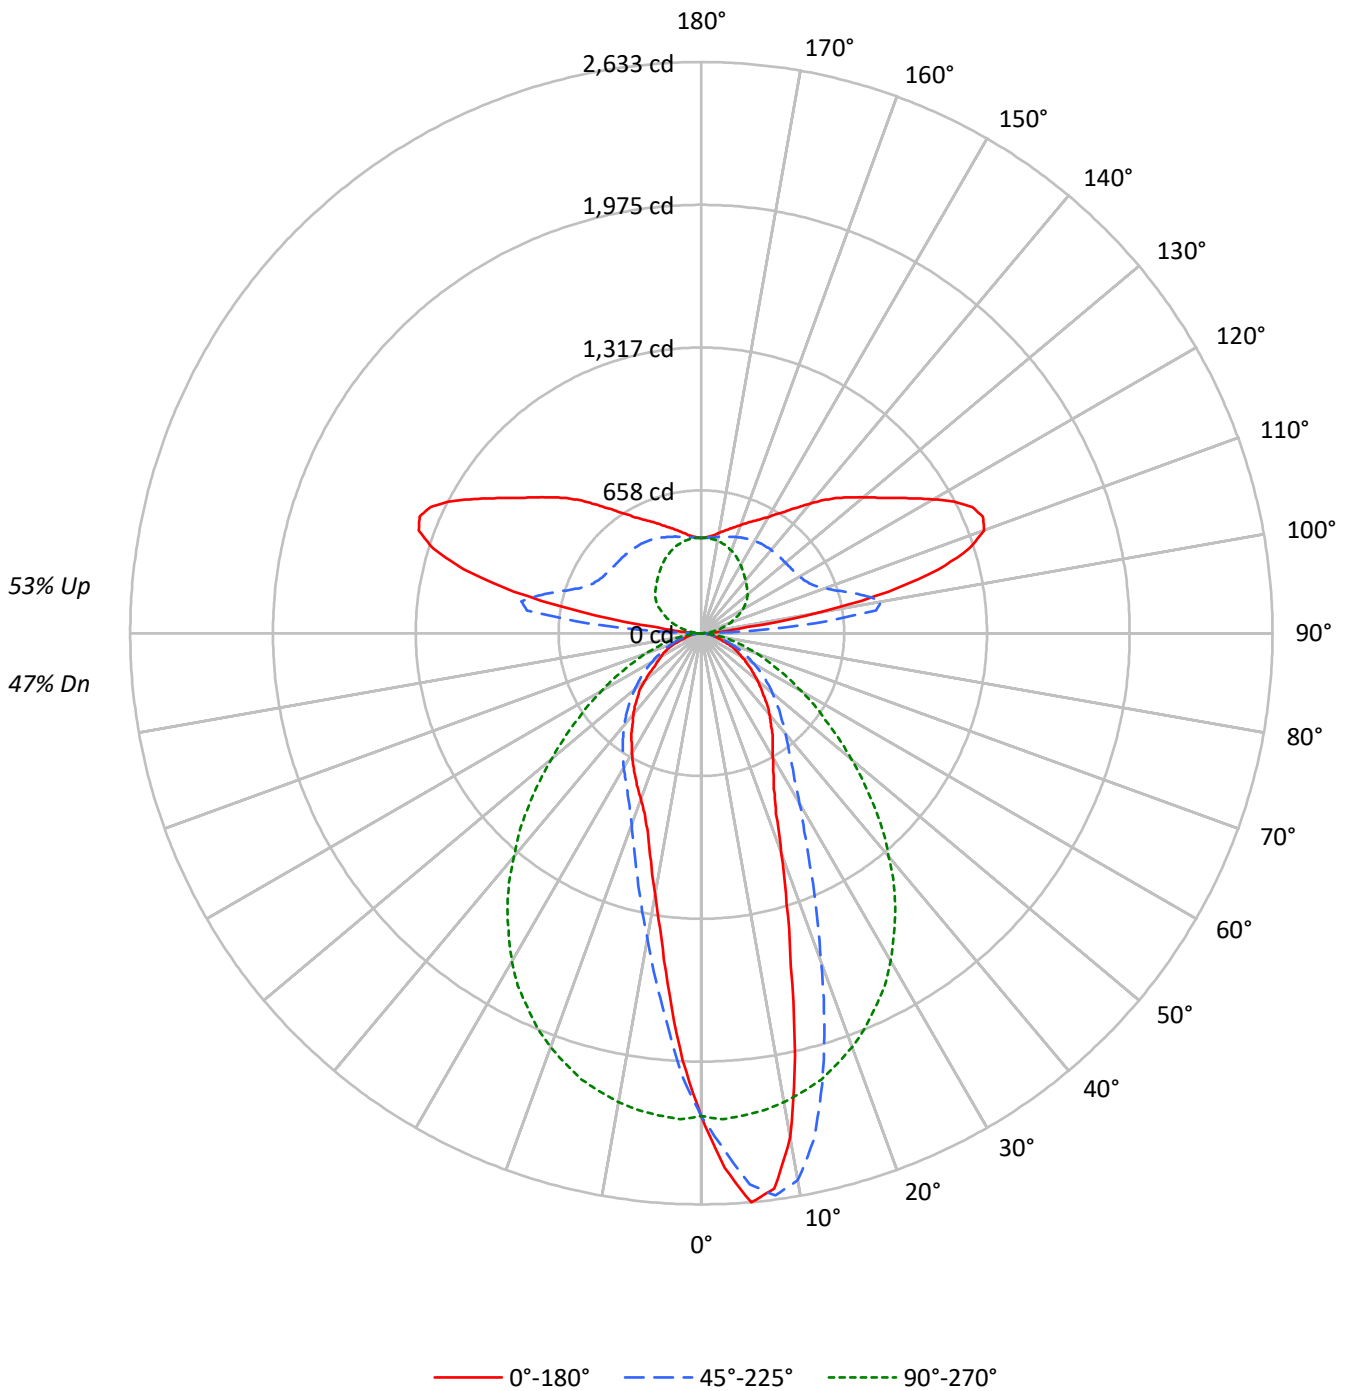



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	106	106	106	106	98	98	98	98	82	82	82	67	67	67	54	54	54	47				47
1	98	94	90	87	90	87	83	81	73	71	69	60	59	57	48	47	47				41	
2	90	83	77	72	82	77	72	67	65	61	58	54	51	49	44	42	40				36	
3	82	74	67	61	76	68	62	57	58	53	50	48	45	43	39	37	35				31	
4	76	66	58	53	70	61	55	50	52	47	43	44	40	37	36	33	31				28	
5	70	59	51	46	64	55	48	43	47	42	38	40	36	33	33	30	28				25	
6	65	53	46	40	60	50	43	38	43	38	34	36	32	29	30	27	25				22	
7	60	49	41	36	55	45	39	34	39	34	30	33	29	26	28	25	23				20	
8	56	44	37	32	52	42	35	30	36	31	27	31	27	24	26	23	21				19	
9	52	41	34	29	48	38	32	27	33	28	25	29	25	22	24	21	19				17	
10	49	38	31	26	45	35	29	25	31	26	23	27	23	20	23	20	18				16	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	23962	23962	23962	23962	23962
5°	28452	27544	24113	19492	18096
10°	25778	27977	23992	15618	13398
15°	17748	23989	23739	12765	10599
20°	12347	18468	23262	10763	9315
25°	9409	14076	22569	9567	8586
30°	8191	11253	21701	8883	7952
35°	7520	9493	20473	8306	7376
40°	6861	8477	18865	7739	6849
45°	6197	7753	17131	7203	6322
50°	5625	7154	15086	6680	5670
55°	5088	6568	13120	6167	4864
60°	4560	5974	11397	5599	4598
65°	4208	5300	9811	5033	4348
70°	3418	4582	8560	4554	3534
75°	2999	3643	7249	3776	3111
80°	2715	3081	5938	3168	2944
85°	2482	2705	4508	2878	2705

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 18077 cd/sqm



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.9	3.2
10°-20°	469.5	7.5
20°-30°	538.7	8.6
30°-40°	531.0	8.5
40°-50°	468.3	7.5
50°-60°	360.2	5.8
60°-70°	236.8	3.8
70°-80°	115.0	1.8
80°-90°	31.4	0.5
90°-100°	238.6	3.8
100°-110°	698.6	11.2
110°-120°	682.2	10.9
120°-130°	543.3	8.7
130°-140°	428.6	6.8
140°-150°	319.8	5.1
150°-160°	222.9	3.6
160°-170°	131.0	2.1
170°-180°	42.6	0.7
0°-30°	1211.1	19.3
0°-40°	1742.1	27.8
0°-60°	2570.6	41.1
0°-90°	2953.9	47.2
90°-120°	1619.3	25.9
90°-150°	2911.0	46.5
90°-180°	3308.0	52.8
0°-180°	6261.5	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2226	2226	2226	2226	2226	
5°	2633	2549	2232	1804	1675	241
15°	1593	2153	2130	1146	951	450
25°	792	1185	1900	806	723	374
35°	572	722	1558	632	561	357
45°	407	509	1125	473	415	316
55°	271	350	699	329	259	243
65°	165	208	385	198	171	162
75°	72	88	174	91	75	78
85°	20	22	36	23	22	21
90°	26	22	2	22	26	15
95°	103	528	30	528	103	168
105°	1132	716	103	716	1132	1130
115°	1377	547	182	547	1377	1343
125°	1086	511	254	511	1086	983
135°	880	504	297	504	880	683
145°	688	498	339	498	688	437
155°	570	482	385	482	570	266
165°	498	461	421	461	498	142
175°	448	442	439	442	448	43
180°	440	440	440	440	440	



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1
2.5°	2467.1	2459.3	2451.6	2449.3	2447.0	2439.7	2432.4	2416.0	2399.5	2382.7	2365.8
5°	2633.2	2634.1	2635.0	2632.7	2630.5	2620.9	2611.3	2591.2	2571.1	2549.2	2527.3
7.5°	2582.1	2596.7	2611.3	2614.0	2616.8	2624.1	2631.4	2626.8	2622.3	2614.0	2605.8
10°	2358.5	2357.6	2356.6	2373.1	2389.5	2438.3	2487.2	2512.3	2537.4	2559.7	2582.1
12.5°	1993.4	1994.8	1996.1	2050.0	2103.8	2149.9	2196.0	2259.9	2323.8	2392.7	2461.6
15°	1592.7	1615.1	1637.4	1685.3	1733.3	1802.6	1872.0	1957.8	2043.6	2152.7	2261.7
17.5°	1307.9	1317.5	1327.1	1373.2	1419.3	1485.0	1550.7	1647.9	1745.1	1885.7	2026.2
20°	1077.9	1086.6	1095.3	1128.6	1161.9	1224.9	1287.9	1380.5	1473.1	1612.3	1751.5
22.5°	899.9	916.8	933.7	956.1	978.4	1024.1	1069.7	1164.2	1258.6	1385.5	1512.4
25°	792.2	800.0	807.8	826.9	846.1	889.9	933.7	996.2	1058.8	1185.2	1311.6
27.5°	719.2	721.5	723.8	737.9	752.1	780.4	808.7	866.6	924.6	1028.6	1132.7
30°	659.0	663.1	667.2	678.2	689.1	709.6	730.2	771.3	812.3	905.4	998.5
32.5°	612.4	614.7	617.0	626.1	635.3	650.3	665.4	697.8	730.2	801.4	872.6
35°	572.3	572.7	573.2	580.0	586.9	601.5	616.1	643.0	669.9	722.4	774.9
37.5°	526.6	529.8	533.0	538.0	543.1	555.8	568.6	590.5	612.4	655.8	699.1
40°	488.3	491.0	493.8	499.7	505.6	515.7	525.7	545.8	565.9	603.3	640.7
42.5°	450.0	451.8	453.6	459.6	465.5	477.8	490.1	506.1	522.1	553.1	584.1
45°	407.1	411.6	416.2	422.6	429.0	439.5	450.0	466.4	482.8	509.3	535.8
47.5°	371.5	373.8	376.0	381.5	387.0	399.8	412.6	427.2	441.8	466.4	491.0
50°	335.9	336.8	337.7	342.7	347.7	359.2	370.6	387.5	404.3	427.2	450.0
52.5°	302.1	304.4	306.7	311.7	316.7	324.5	332.2	349.6	366.9	389.3	411.6
55°	271.1	272.4	273.8	277.5	281.1	290.2	299.4	314.4	329.5	350.0	370.6
57.5°	241.9	243.7	245.5	248.3	251.0	259.2	267.4	280.7	293.9	314.4	335.0
60°	211.8	214.0	216.3	219.5	222.7	229.1	235.5	247.3	259.2	277.5	295.7
62.5°	189.8	190.3	190.8	193.5	196.2	200.8	205.4	214.9	224.5	242.8	261.0
65°	165.2	166.6	167.9	169.3	170.7	174.3	178.0	186.2	194.4	208.1	221.8
67.5°	139.6	141.0	142.4	144.7	146.9	150.1	153.3	158.8	164.3	177.1	189.8
70°	108.6	108.6	108.6	112.3	115.9	121.4	126.9	131.0	135.1	145.6	156.1
72.5°	88.5	89.0	89.4	89.9	90.4	93.6	96.7	103.6	110.4	116.8	123.2
75°	72.1	72.6	73.0	73.5	73.9	74.8	75.8	78.0	80.3	87.6	94.9
77.5°	57.5	58.0	58.4	58.9	59.3	60.2	61.2	62.1	63.0	65.7	68.5
80°	43.8	44.3	44.7	45.2	45.6	46.1	46.5	47.5	48.4	49.7	51.1
82.5°	31.9	31.9	31.9	31.9	31.9	32.9	33.8	33.8	33.8	34.7	35.6
85°	20.1	20.1	20.1	20.5	21.0	21.0	21.0	21.4	21.9	21.9	21.9
87.5°	9.1	8.7	8.2	8.7	9.1	9.1	9.1	9.6	10.0	10.0	10.0
90°	25.8	26.7	25.8	24.9	25.8	24.0	23.1	22.3	21.4	22.3	19.6
92.5°	47.2	49.0	48.1	51.6	53.4	59.6	68.5	88.1	123.7	165.6	183.4
95°	103.3	106.8	113.0	121.1	138.0	170.0	217.2	320.4	428.1	527.8	470.0
97.5°	211.8	221.6	243.0	276.8	336.5	437.9	555.4	736.1	839.4	811.8	606.1
100°	558.1	557.2	591.9	656.9	746.8	873.2	977.3	1049.4	1018.3	842.9	569.7
102.5°	883.9	909.7	937.3	985.3	1050.3	1118.8	1168.7	1153.6	1027.2	785.1	516.3
105°	1132.2	1136.6	1165.1	1198.9	1239.9	1263.0	1246.1	1157.1	971.1	715.6	474.4
107.5°	1294.2	1304.0	1315.5	1331.6	1336.9	1312.9	1243.5	1103.7	891.0	654.2	444.2
110°	1386.8	1388.5	1390.3	1383.2	1358.3	1296.0	1183.8	1020.0	816.2	603.5	428.1



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	1405.4	1404.6	1395.7	1369.8	1319.1	1234.6	1105.5	937.3	751.2	569.7	419.2
115°	1377.0	1372.5	1354.7	1315.5	1248.8	1151.8	1020.9	866.1	701.4	547.4	418.3
117.5°	1314.7	1308.4	1281.7	1238.1	1168.7	1068.1	947.9	810.9	668.5	532.3	419.2
120°	1232.8	1227.4	1206.1	1156.2	1085.9	996.0	889.2	769.0	643.5	522.5	422.8
122.5°	1156.2	1149.1	1125.1	1081.5	1020.9	939.0	842.0	736.1	623.1	516.3	429.0
125°	1085.9	1079.7	1057.4	1018.3	961.3	890.1	804.6	707.6	606.1	510.9	435.3
127.5°	1025.4	1020.0	999.6	965.7	914.1	848.3	769.9	681.8	590.1	508.2	442.4
130°	975.5	968.4	949.7	917.7	870.5	810.0	737.9	657.8	577.7	505.6	449.5
132.5°	926.6	922.1	906.1	874.1	830.5	773.5	707.6	635.5	566.1	504.7	454.8
135°	880.3	874.1	858.0	831.3	787.7	737.0	679.1	615.9	556.3	503.8	460.2
137.5°	831.3	826.0	812.6	785.1	747.7	702.3	650.7	597.2	547.4	502.0	463.7
140°	779.7	780.6	766.4	741.4	707.6	669.3	626.6	581.2	539.4	501.1	467.3
142.5°	731.7	732.5	720.1	698.7	671.1	639.1	603.5	566.1	532.3	499.3	470.0
145°	688.0	686.3	679.1	660.4	638.2	612.4	583.9	554.5	526.0	497.6	470.9
147.5°	650.7	649.8	642.6	629.3	611.5	592.8	568.8	544.7	519.8	494.9	470.9
150°	618.6	618.6	613.3	603.5	590.1	573.2	554.5	534.1	513.6	491.3	470.9
152.5°	591.9	591.9	589.2	580.3	570.5	557.2	541.2	524.3	506.5	486.9	468.2
155°	570.5	569.7	567.9	560.8	552.7	542.1	528.7	514.5	499.3	481.5	466.4
157.5°	550.1	550.1	548.3	543.0	535.8	526.9	516.3	503.8	491.3	477.1	463.7
160°	530.5	531.4	531.4	526.0	519.8	513.6	504.7	494.9	483.3	471.7	462.0
162.5°	512.7	513.6	513.6	509.1	505.6	500.2	492.2	484.2	475.3	466.4	458.4
165°	497.6	497.6	498.4	494.9	491.3	486.9	480.6	475.3	468.2	461.1	454.8
167.5°	482.4	482.4	483.3	480.6	478.9	475.3	471.7	467.3	461.1	455.7	451.3
170°	469.1	469.1	470.0	468.2	467.3	465.5	462.0	459.3	454.8	450.4	447.7
172.5°	456.6	457.5	459.3	457.5	457.5	456.6	453.9	452.2	448.6	445.9	445.0
175°	447.7	448.6	449.5	448.6	448.6	448.6	446.8	445.9	444.2	442.4	442.4
177.5°	441.5	441.5	443.3	442.4	443.3	443.3	442.4	441.5	440.6	439.7	440.6
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1
2.5°	2363.5	2361.2	2339.3	2317.4	2296.0	2274.5	2258.5	2242.6	2215.6	2188.7	2171.8
5°	2510.0	2492.6	2458.0	2423.3	2371.3	2319.2	2275.4	2231.6	2175.9	2120.3	2073.7
7.5°	2591.7	2577.5	2535.5	2493.6	2424.6	2355.7	2287.3	2218.8	2136.7	2054.5	1984.3
10°	2594.0	2605.8	2571.1	2536.5	2458.9	2381.3	2288.2	2195.1	2084.7	1974.2	1883.4
12.5°	2512.7	2563.8	2556.5	2549.2	2470.3	2391.3	2278.2	2165.0	2029.4	1893.9	1780.3
15°	2360.8	2459.8	2489.0	2518.2	2452.9	2387.7	2259.0	2130.3	1971.0	1811.8	1681.2
17.5°	2165.0	2303.7	2380.8	2458.0	2410.5	2363.0	2222.0	2081.0	1901.7	1722.3	1580.4
20°	1933.1	2114.8	2235.7	2356.6	2339.3	2322.0	2176.4	2030.8	1837.3	1643.8	1490.0
22.5°	1704.1	1895.7	2062.8	2229.8	2247.6	2265.4	2118.4	1971.5	1759.7	1548.0	1391.4
25°	1506.4	1701.3	1900.3	2099.3	2139.4	2179.6	2039.9	1900.3	1680.8	1461.3	1305.6
27.5°	1318.0	1503.3	1722.3	1941.4	2014.4	2087.4	1959.6	1831.8	1603.2	1374.6	1219.4
30°	1164.2	1329.8	1553.5	1777.1	1878.8	1980.6	1863.3	1746.0	1519.2	1292.4	1140.4
32.5°	1020.9	1169.2	1393.7	1618.3	1736.5	1854.7	1753.3	1652.0	1433.9	1215.7	1065.6
35°	907.7	1040.5	1250.0	1459.4	1591.8	1724.1	1641.1	1558.0	1344.9	1131.8	989.8
37.5°	810.5	921.8	1118.5	1315.2	1455.8	1596.4	1527.0	1457.6	1257.3	1056.9	922.8
40°	730.2	819.6	1002.6	1185.6	1323.4	1461.3	1401.9	1342.6	1163.3	983.9	858.4
42.5°	661.3	738.4	902.7	1067.0	1193.4	1319.8	1280.5	1241.3	1078.8	916.4	800.0
45°	600.6	665.4	810.0	954.7	1071.1	1187.5	1156.4	1125.4	985.3	845.2	738.4
47.5°	546.7	602.4	731.5	860.7	965.2	1069.7	1041.0	1012.2	896.3	780.4	683.2
50°	497.4	544.9	652.6	760.3	854.3	948.3	924.6	900.9	805.0	709.2	625.2
52.5°	450.9	490.1	586.9	683.6	759.4	835.1	816.9	798.6	724.7	650.8	574.6
55°	406.6	442.7	524.4	606.0	670.9	735.7	717.4	699.1	641.6	584.1	517.1
57.5°	366.5	397.9	464.1	530.3	581.9	633.4	624.8	616.1	568.2	520.3	465.0
60°	324.0	352.3	409.4	466.4	507.9	549.5	539.4	529.4	495.2	460.9	413.5
62.5°	286.1	311.2	356.9	402.5	436.3	470.1	462.8	455.4	429.4	403.4	364.2
65°	246.4	271.1	308.0	345.0	371.5	397.9	391.6	385.2	365.5	345.9	314.4
67.5°	210.4	230.9	262.9	294.8	312.6	330.4	326.8	323.1	308.0	293.0	268.3
70°	173.9	191.7	218.1	244.6	256.9	269.3	270.6	272.0	258.3	244.6	226.4
72.5°	137.4	151.5	176.2	200.8	210.4	220.0	219.5	219.1	210.8	202.6	186.2
75°	105.4	115.9	135.1	154.3	162.5	170.7	172.5	174.3	166.6	158.8	149.7
77.5°	75.8	83.1	97.7	112.3	121.4	130.5	131.4	132.3	128.7	125.0	116.4
80°	53.4	55.7	64.8	73.9	83.5	93.1	94.5	95.8	92.2	88.5	83.1
82.5°	37.0	38.3	41.5	44.7	52.5	60.2	62.1	63.9	62.1	60.2	54.3
85°	22.4	22.8	24.2	25.6	29.2	32.9	34.7	36.5	35.6	34.7	31.5
87.5°	10.0	10.0	10.5	11.0	11.9	12.8	15.1	17.3	16.0	14.6	13.2
90°	16.9	14.2	11.6	9.8	8.0	5.3	3.6	1.8	3.6	5.3	8.0
92.5°	137.1	89.9	61.4	45.4	36.5	28.5	19.6	13.4	19.6	28.5	36.5
95°	324.0	191.4	115.7	81.0	57.9	42.7	32.9	30.3	32.9	42.7	57.9
97.5°	360.5	206.5	131.7	93.5	70.3	57.0	49.0	48.1	49.0	57.0	70.3
100°	335.6	203.8	141.5	106.8	85.4	73.0	66.8	65.9	66.8	73.0	85.4
102.5°	314.2	207.4	153.1	121.9	103.3	91.7	86.3	84.6	86.3	91.7	103.3
105°	306.2	214.5	166.4	138.9	121.9	111.3	105.9	103.3	105.9	111.3	121.9
107.5°	304.4	226.1	183.4	157.5	141.5	130.8	125.5	122.8	125.5	130.8	141.5
110°	308.9	241.2	201.2	176.2	161.1	151.3	146.9	144.2	146.9	151.3	161.1



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	317.8	256.3	219.9	195.8	180.7	170.9	166.4	163.8	166.4	170.9	180.7
115°	327.6	273.3	239.4	215.4	200.3	191.4	186.0	182.5	186.0	191.4	200.3
117.5°	340.0	291.1	257.2	235.0	218.1	210.1	205.6	201.2	205.6	210.1	218.1
120°	354.3	308.0	275.9	253.7	236.8	227.9	223.4	220.7	223.4	227.9	236.8
122.5°	367.6	325.8	294.6	270.6	254.6	244.8	240.3	237.7	240.3	244.8	254.6
125°	381.8	342.7	311.5	287.5	270.6	260.8	255.5	253.7	255.5	260.8	270.6
127.5°	393.4	357.8	327.6	303.5	284.8	275.0	268.8	266.1	268.8	275.0	284.8
130°	405.0	371.2	341.8	317.8	299.1	288.4	280.4	277.7	280.4	288.4	299.1
132.5°	415.7	382.7	354.3	331.1	312.4	299.1	290.2	286.6	290.2	299.1	312.4
135°	424.6	394.3	366.7	342.7	324.0	310.6	300.8	297.3	300.8	310.6	324.0
137.5°	431.7	402.3	375.6	353.4	334.7	320.4	310.6	307.1	310.6	320.4	334.7
140°	437.0	410.3	384.5	362.3	344.5	330.2	321.3	316.9	321.3	330.2	344.5
142.5°	442.4	416.6	391.6	371.2	353.4	340.9	331.1	327.6	331.1	340.9	353.4
145°	445.9	421.9	398.8	378.3	363.2	349.8	341.8	339.1	341.8	349.8	363.2
147.5°	448.6	426.4	405.0	387.2	372.1	360.5	352.5	350.7	352.5	360.5	372.1
150°	449.5	430.8	410.3	394.3	381.8	370.3	363.2	362.3	363.2	370.3	381.8
152.5°	451.3	433.5	416.6	401.4	390.7	381.0	373.8	373.8	373.8	381.0	390.7
155°	451.3	437.0	421.9	409.4	399.6	390.7	385.4	385.4	385.4	390.7	399.6
157.5°	452.2	438.8	426.4	416.6	407.7	399.6	395.2	394.3	395.2	399.6	407.7
160°	452.2	441.5	430.8	421.9	415.7	408.5	405.0	405.0	405.0	408.5	415.7
162.5°	451.3	442.4	433.5	426.4	421.0	415.7	413.0	413.0	413.0	415.7	421.0
165°	449.5	443.3	436.1	429.9	426.4	421.9	420.1	421.0	420.1	421.9	426.4
167.5°	448.6	443.3	437.9	433.5	430.8	427.2	426.4	427.2	426.4	427.2	430.8
170°	445.9	442.4	437.9	436.1	434.4	431.7	430.8	432.6	430.8	431.7	434.4
172.5°	445.0	442.4	438.8	437.9	437.0	435.3	435.3	436.1	435.3	435.3	437.0
175°	443.3	441.5	439.7	438.8	438.8	437.0	437.9	438.8	437.9	437.0	438.8
177.5°	442.4	440.6	439.7	439.7	439.7	438.8	439.7	440.6	439.7	438.8	439.7
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1
2.5°	2154.9	2128.9	2102.9	2084.2	2065.5	2042.2	2018.9	2018.0	2017.1	1999.8	1982.4
5°	2027.2	1982.0	1936.8	1892.5	1848.3	1804.0	1759.7	1749.7	1739.6	1724.6	1709.5
7.5°	1914.0	1841.9	1769.8	1713.2	1656.6	1612.3	1568.1	1537.9	1507.8	1484.5	1461.3
10°	1792.6	1703.1	1613.7	1545.2	1476.8	1428.9	1380.9	1346.3	1311.6	1295.2	1278.7
12.5°	1666.6	1569.4	1472.2	1405.1	1338.1	1280.5	1223.0	1191.6	1160.1	1137.3	1114.4
15°	1550.7	1446.2	1341.7	1270.5	1199.3	1145.5	1091.6	1060.1	1028.6	1005.8	983.0
17.5°	1438.5	1333.0	1227.6	1155.5	1083.4	1034.6	985.7	955.2	924.6	910.4	896.3
20°	1336.2	1229.9	1123.6	1055.6	987.6	939.6	891.7	875.3	858.9	845.6	832.4
22.5°	1234.9	1132.7	1030.5	965.2	899.9	865.3	830.6	817.3	804.1	794.1	784.0
25°	1150.0	1048.3	946.5	889.4	832.4	805.5	778.6	769.9	761.2	751.2	741.1
27.5°	1064.2	967.5	870.7	825.1	779.5	757.6	735.7	724.7	713.7	705.5	697.3
30°	988.5	899.0	809.6	771.7	733.8	714.7	695.5	683.6	671.8	664.0	656.2
32.5°	915.5	836.1	756.6	724.2	691.8	673.1	654.4	643.0	631.6	622.5	613.3
35°	847.9	779.0	710.1	680.4	650.8	632.1	613.3	601.9	590.5	581.4	572.3
37.5°	788.6	726.1	663.5	635.7	607.9	591.4	575.0	563.1	551.3	541.7	532.1
40°	732.9	677.7	622.5	595.6	568.6	550.8	533.0	522.5	512.0	503.4	494.7
42.5°	683.6	633.0	582.3	555.8	529.4	512.5	495.6	483.3	471.0	465.9	460.9
45°	631.6	586.9	542.2	516.6	491.0	473.2	455.4	445.0	434.5	429.9	425.3
47.5°	586.0	544.4	502.9	477.8	452.7	436.7	420.8	412.6	404.3	397.9	391.6
50°	541.2	501.1	460.9	436.7	412.6	398.9	385.2	375.1	365.1	360.5	356.0
52.5°	498.3	461.8	425.3	400.7	376.0	362.8	349.6	340.9	332.2	322.6	313.1
55°	450.0	418.0	386.1	364.2	342.3	328.6	314.9	304.8	294.8	284.8	274.7
57.5°	409.8	378.3	346.8	327.2	307.6	294.4	281.1	270.2	259.2	251.0	242.8
60°	366.0	338.6	311.2	292.1	272.9	260.1	247.3	236.9	226.4	222.2	218.1
62.5°	324.9	299.4	273.8	256.9	240.0	227.7	215.4	208.6	201.7	199.0	196.2
65°	282.9	261.0	239.1	223.6	208.1	197.6	187.1	183.9	180.7	178.4	176.2
67.5°	243.7	225.0	206.3	192.6	178.9	171.6	164.3	160.6	157.0	154.3	151.5
70°	208.1	191.7	175.2	163.4	151.5	144.7	137.8	134.6	131.4	126.4	121.4
72.5°	169.8	157.0	144.2	135.1	126.0	120.0	114.1	107.7	101.3	96.7	92.2
75°	140.6	127.8	115.0	106.3	97.7	90.8	84.0	81.7	79.4	78.0	76.7
77.5°	107.7	96.7	85.8	79.0	72.1	68.9	65.7	64.3	63.0	62.5	62.1
80°	77.6	68.5	59.3	55.7	52.0	51.1	50.2	49.3	48.4	47.9	47.5
82.5°	48.4	43.8	39.2	38.3	37.4	37.0	36.5	36.1	35.6	35.1	34.7
85°	28.3	26.5	24.6	24.2	23.7	23.3	22.8	22.8	22.8	22.8	22.8
87.5°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.4	11.0
90°	9.8	11.6	14.2	16.9	19.6	22.3	21.4	22.3	23.1	24.0	25.8
92.5°	45.4	61.4	89.9	137.1	183.4	165.6	123.7	88.1	68.5	59.6	53.4
95°	81.0	115.7	191.4	324.0	470.0	527.8	428.1	320.4	217.2	170.0	138.0
97.5°	93.5	131.7	206.5	360.5	606.1	811.8	839.4	736.1	555.4	437.9	336.5
100°	106.8	141.5	203.8	335.6	569.7	842.9	1018.3	1049.4	977.3	873.2	746.8
102.5°	121.9	153.1	207.4	314.2	516.3	785.1	1027.2	1153.6	1168.7	1118.8	1050.3
105°	138.9	166.4	214.5	306.2	474.4	715.6	971.1	1157.1	1246.1	1263.0	1239.9
107.5°	157.5	183.4	226.1	304.4	444.2	654.2	891.0	1103.7	1243.5	1312.9	1336.9
110°	176.2	201.2	241.2	308.9	428.1	603.5	816.2	1020.0	1183.8	1296.0	1358.3



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	195.8	219.9	256.3	317.8	419.2	569.7	751.2	937.3	1105.5	1234.6	1319.1
115°	215.4	239.4	273.3	327.6	418.3	547.4	701.4	866.1	1020.9	1151.8	1248.8
117.5°	235.0	257.2	291.1	340.0	419.2	532.3	668.5	810.9	947.9	1068.1	1168.7
120°	253.7	275.9	308.0	354.3	422.8	522.5	643.5	769.0	889.2	996.0	1085.9
122.5°	270.6	294.6	325.8	367.6	429.0	516.3	623.1	736.1	842.0	939.0	1020.9
125°	287.5	311.5	342.7	381.8	435.3	510.9	606.1	707.6	804.6	890.1	961.3
127.5°	303.5	327.6	357.8	393.4	442.4	508.2	590.1	681.8	769.9	848.3	914.1
130°	317.8	341.8	371.2	405.0	449.5	505.6	577.7	657.8	737.9	810.0	870.5
132.5°	331.1	354.3	382.7	415.7	454.8	504.7	566.1	635.5	707.6	773.5	830.5
135°	342.7	366.7	394.3	424.6	460.2	503.8	556.3	615.9	679.1	737.0	787.7
137.5°	353.4	375.6	402.3	431.7	463.7	502.0	547.4	597.2	650.7	702.3	747.7
140°	362.3	384.5	410.3	437.0	467.3	501.1	539.4	581.2	626.6	669.3	707.6
142.5°	371.2	391.6	416.6	442.4	470.0	499.3	532.3	566.1	603.5	639.1	671.1
145°	378.3	398.8	421.9	445.9	470.9	497.6	526.0	554.5	583.9	612.4	638.2
147.5°	387.2	405.0	426.4	448.6	470.9	494.9	519.8	544.7	568.8	592.8	611.5
150°	394.3	410.3	430.8	449.5	470.9	491.3	513.6	534.1	554.5	573.2	590.1
152.5°	401.4	416.6	433.5	451.3	468.2	486.9	506.5	524.3	541.2	557.2	570.5
155°	409.4	421.9	437.0	451.3	466.4	481.5	499.3	514.5	528.7	542.1	552.7
157.5°	416.6	426.4	438.8	452.2	463.7	477.1	491.3	503.8	516.3	526.9	535.8
160°	421.9	430.8	441.5	452.2	462.0	471.7	483.3	494.9	504.7	513.6	519.8
162.5°	426.4	433.5	442.4	451.3	458.4	466.4	475.3	484.2	492.2	500.2	505.6
165°	429.9	436.1	443.3	449.5	454.8	461.1	468.2	475.3	480.6	486.9	491.3
167.5°	433.5	437.9	443.3	448.6	451.3	455.7	461.1	467.3	471.7	475.3	478.9
170°	436.1	437.9	442.4	445.9	447.7	450.4	454.8	459.3	462.0	465.5	467.3
172.5°	437.9	438.8	442.4	445.0	445.0	445.9	448.6	452.2	453.9	456.6	457.5
175°	438.8	439.7	441.5	443.3	442.4	442.4	444.2	445.9	446.8	448.6	448.6
177.5°	439.7	439.7	440.6	442.4	440.6	439.7	440.6	441.5	442.4	443.3	443.3
180°	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7	439.7



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	2226.1	2226.1	2226.1	2226.1
2.5°	1977.9	1973.3	1971.5	1969.7
5°	1695.4	1681.2	1678.0	1674.8
7.5°	1455.3	1449.4	1429.8	1410.2
10°	1260.5	1242.2	1234.0	1225.8
12.5°	1097.5	1080.7	1077.9	1075.2
15°	971.1	959.3	955.2	951.1
17.5°	888.1	879.9	874.8	869.8
20°	826.5	820.5	816.9	813.2
22.5°	779.5	774.9	772.2	769.4
25°	734.3	727.4	725.2	722.9
27.5°	691.4	685.5	683.2	680.9
30°	651.2	646.2	643.0	639.8
32.5°	607.4	601.5	599.7	597.8
35°	568.6	565.0	563.1	561.3
37.5°	527.6	523.0	520.3	517.5
40°	492.4	490.1	488.8	487.4
42.5°	456.8	452.7	452.3	451.8
45°	421.2	417.1	416.2	415.3
47.5°	387.9	384.3	383.8	383.3
50°	350.9	345.9	342.3	338.6
52.5°	308.5	303.9	300.7	297.5
55°	269.7	264.7	262.0	259.2
57.5°	240.5	238.2	236.9	235.5
60°	216.8	215.4	214.5	213.6
62.5°	194.9	193.5	193.5	193.5
65°	174.8	173.4	172.0	170.7
67.5°	148.8	146.0	145.6	145.1
70°	117.3	113.2	112.7	112.3
72.5°	91.7	91.3	90.4	89.4
75°	75.8	74.8	74.8	74.8
77.5°	61.2	60.2	60.2	60.2
80°	47.0	46.5	47.0	47.5
82.5°	34.7	34.7	34.2	33.8
85°	22.4	21.9	21.9	21.9
87.5°	11.0	11.0	11.0	11.0
90°	24.9	25.8	26.7	25.8
92.5°	51.6	48.1	49.0	47.2
95°	121.1	113.0	106.8	103.3
97.5°	276.8	243.0	221.6	211.8
100°	656.9	591.9	557.2	558.1
102.5°	985.3	937.3	909.7	883.9
105°	1198.9	1165.1	1136.6	1132.2
107.5°	1331.6	1315.5	1304.0	1294.2
110°	1383.2	1390.3	1388.5	1386.8



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	1369.8	1395.7	1404.6	1405.4
115°	1315.5	1354.7	1372.5	1377.0
117.5°	1238.1	1281.7	1308.4	1314.7
120°	1156.2	1206.1	1227.4	1232.8
122.5°	1081.5	1125.1	1149.1	1156.2
125°	1018.3	1057.4	1079.7	1085.9
127.5°	965.7	999.6	1020.0	1025.4
130°	917.7	949.7	968.4	975.5
132.5°	874.1	906.1	922.1	926.6
135°	831.3	858.0	874.1	880.3
137.5°	785.1	812.6	826.0	831.3
140°	741.4	766.4	780.6	779.7
142.5°	698.7	720.1	732.5	731.7
145°	660.4	679.1	686.3	688.0
147.5°	629.3	642.6	649.8	650.7
150°	603.5	613.3	618.6	618.6
152.5°	580.3	589.2	591.9	591.9
155°	560.8	567.9	569.7	570.5
157.5°	543.0	548.3	550.1	550.1
160°	526.0	531.4	531.4	530.5
162.5°	509.1	513.6	513.6	512.7
165°	494.9	498.4	497.6	497.6
167.5°	480.6	483.3	482.4	482.4
170°	468.2	470.0	469.1	469.1
172.5°	457.5	459.3	457.5	456.6
175°	448.6	449.5	448.6	447.7
177.5°	442.4	443.3	441.5	441.5
180°	439.7	439.7	439.7	439.7



TEST NUMBER: P832328

CATALOG NUMBER: S123RDIP-S775D1025U940-4F0-1E-UDD-G4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.51	12.30	12.50	13.29	14.61	16.17	16.96	17.17	17.96	19.27
	3H	12.73	13.43	13.73	14.44	15.77	17.67	18.37	18.67	19.38	20.72
	4H	13.11	13.77	14.12	14.78	16.13	18.16	18.82	19.17	19.83	21.18
	6H	13.39	14.00	14.41	15.01	16.37	18.47	19.08	19.49	20.09	21.45
	8H	13.47	14.05	14.50	15.08	16.44	18.54	19.13	19.58	20.16	21.51
	12H	13.52	14.08	14.56	15.10	16.47	18.58	19.13	19.61	20.15	21.53
4H	2H	12.23	12.89	13.25	13.90	15.25	16.16	16.83	17.19	17.84	19.18
	3H	13.59	14.15	14.62	15.18	16.54	17.82	18.37	18.85	19.41	20.77
	4H	14.05	14.55	15.08	15.58	16.96	18.42	18.93	19.46	19.96	21.34
	6H	14.41	14.85	15.46	15.90	17.28	18.86	19.29	19.91	20.34	21.72
	8H	14.54	14.94	15.58	15.99	17.38	18.99	19.39	20.04	20.44	21.83
	12H	14.61	14.98	15.68	16.04	17.43	19.05	19.41	20.11	20.47	21.87
8H	4H	14.36	14.76	15.41	15.81	17.20	18.39	18.79	19.43	19.84	21.23
	6H	14.82	15.15	15.89	16.24	17.63	18.88	19.21	19.95	20.30	21.69
	8H	15.01	15.31	16.09	16.38	17.79	19.07	19.36	20.15	20.43	21.84
	12H	15.15	15.41	16.23	16.47	17.92	19.18	19.44	20.26	20.50	21.95
12H	4H	14.37	14.73	15.43	15.79	17.19	18.34	18.70	19.40	19.76	21.16
	6H	14.88	15.17	15.96	16.24	17.65	18.86	19.15	19.93	20.22	21.63
	8H	15.10	15.35	16.18	16.42	17.87	19.05	19.30	20.13	20.37	21.82