

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: NEO-RAY

Report Number: P332303-940

Luminaire Tested: **S123RDIP-S775D365U940-4F0-1E-UDD-F**

Issue Date: 3/3/2020

**Test Information**

Test Method: LM-79-08  
Report Number: P332303-940  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-1807-864-5,  
Test Lab: INNOVATION CENTER  
Issue Date: 3/3/2020  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: NEO-RAY  
Catalog Number: S123RDIP-S775D365U940-4F0-1E-UDD-F  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 775 LUMENS PER FOOT, FLUSH SATIN WHITE DIFFUSER, REGRESSED  
HOUSING  
UPLIGHT 365 LUMENS PER FOOT, NO LENS  
Light Source: -  
Ballast/Driver: ELECTRONIC DRIVER

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3895.3 lumens  
Efficiency: N/A  
Efficacy: 111.3 lumens/watt  
Spacing Criteria (0/90/45): 1.21 / 1.06 / 1.22  
Luminous Opening: Rectangular (W 0.25' x L: 4' x H: 0')  
CIE Type: Semi-Direct


Input Watts (W): 35  
Input Voltage (V): 120  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT



TEST NUMBER: P332303-940

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-F

### Luminous Intensity Polar Plot

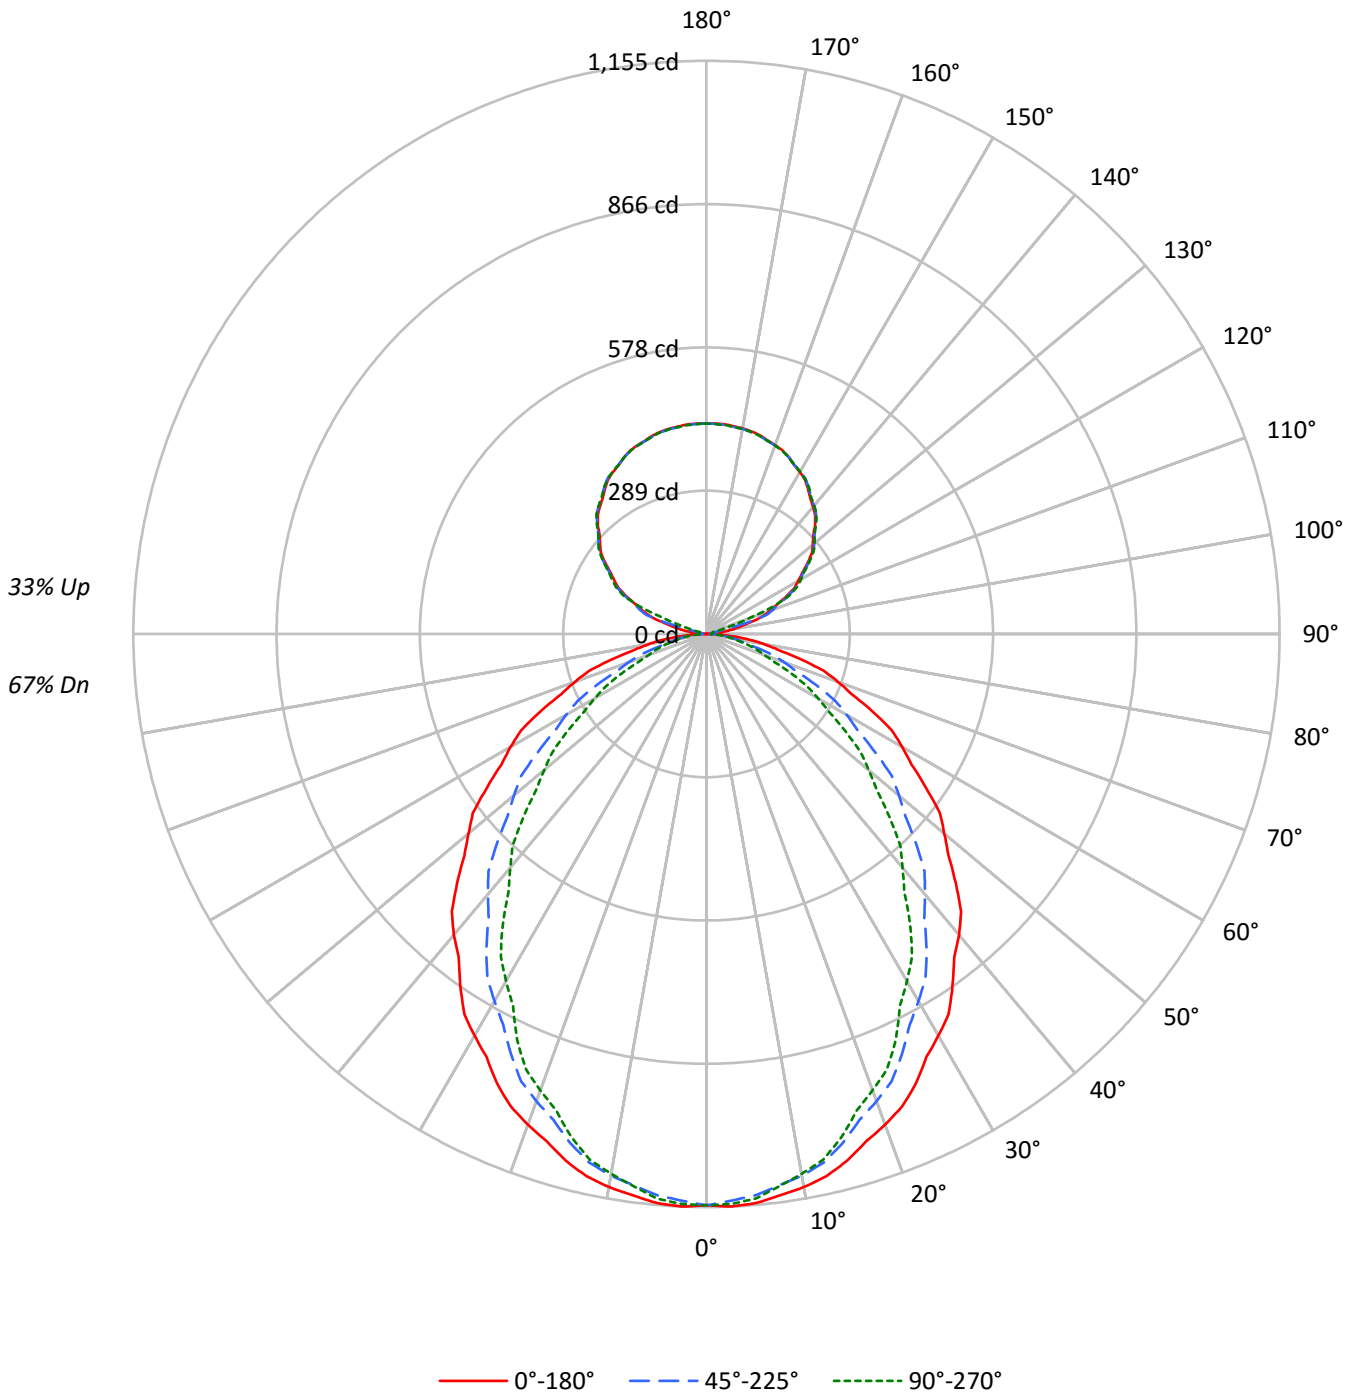



TEST NUMBER: P332303-940

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-F

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	111	111	111	111	105	105	105	105	93	93	93	82	82	82	72	72	72	67
1	102	98	94	90	96	92	89	86	82	79	77	73	71	69	64	63	61	57
2	93	86	80	75	88	81	76	71	72	68	65	64	61	58	57	54	52	49
3	85	76	69	63	80	72	65	60	64	59	55	57	53	50	51	48	45	42
4	78	67	60	53	74	64	57	51	57	52	47	51	47	43	46	42	39	36
5	72	60	52	46	68	57	50	44	52	46	41	46	41	38	41	37	34	32
6	67	54	46	40	63	52	44	39	47	41	36	42	37	33	38	34	30	28
7	62	49	41	36	58	47	40	34	43	36	32	38	33	30	34	30	27	25
8	57	45	37	32	54	43	36	31	39	33	29	35	30	27	32	28	25	22
9	54	41	34	29	51	39	32	28	36	30	26	33	28	24	29	25	22	20
10	50	38	31	26	47	36	30	25	33	27	23	30	25	22	27	23	20	18

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	12392	12392	12392
5°	12440	12268	12338
10°	12369	12114	12073
15°	12237	11830	11705
20°	12054	11475	11208
25°	11866	11077	10723
30°	11616	10618	10038
35°	11361	10159	9410
40°	11126	9617	8633
45°	10816	9082	7931
50°	10474	8473	7145
55°	10128	7781	6412
60°	9810	7035	5608
65°	9393	6230	4804
70°	8875	5231	3877
75°	8114	4117	3647
80°	7234	3651	3353
85°	6113	3223	3001



TEST NUMBER: P332303-940

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-F

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	108.1	2.8
10°-20°	300.8	7.7
20°-30°	433.1	11.1
30°-40°	487.9	12.5
40°-50°	466.7	12.0
50°-60°	382.2	9.8
60°-70°	257.9	6.6
70°-80°	129.7	3.3
80°-90°	35.5	0.9
90°-100°	15.4	0.4
100°-110°	73.5	1.9
110°-120°	176.5	4.5
120°-130°	224.8	5.8
130°-140°	240.2	6.2
140°-150°	224.6	5.8
150°-160°	181.2	4.7
160°-170°	116.9	3.0
170°-180°	40.3	1.0
0°-30°	842.0	21.6
0°-40°	1329.9	34.1
0°-60°	2178.8	55.9
0°-90°	2602.0	66.8
90°-120°	265.4	6.8
90°-150°	955.0	24.5
90°-180°	1293.0	33.2
0°-180°	3895.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1151	1151	1151	1151	1151	
5°	1151	1146	1135	1143	1142	109
15°	1098	1087	1062	1057	1050	309
25°	999	975	933	914	903	459
35°	865	830	773	734	716	541
45°	710	667	597	545	521	548
55°	540	492	415	362	342	484
65°	369	316	245	201	189	365
75°	195	150	99	90	88	208
85°	50	30	26	24	24	56
90°	0	4	8	9	10	3
95°	19	7	10	12	12	24
105°	94	96	69	16	14	100
115°	176	178	181	184	185	174
125°	248	251	252	253	253	222
135°	309	311	312	313	312	238
145°	357	359	360	360	360	223
155°	393	392	393	394	392	181
165°	414	413	413	415	413	117
175°	424	423	423	425	423	40
180°	424	424	424	424	424	



TEST NUMBER: P332303-940

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3
2.5°	1154.9	1154.3	1153.6	1153.0	1152.4	1151.0	1149.0	1147.0	1145.0	1143.0	1144.9
5°	1151.3	1150.2	1149.1	1148.2	1147.1	1145.3	1142.8	1140.3	1137.8	1135.4	1137.2
7.5°	1140.6	1139.5	1138.4	1137.2	1136.1	1133.9	1130.7	1127.5	1124.3	1121.0	1122.0
10°	1131.7	1130.2	1128.7	1127.3	1125.8	1123.2	1119.5	1115.8	1112.1	1108.3	1108.5
12.5°	1118.9	1117.3	1115.7	1114.1	1112.5	1109.4	1104.8	1100.3	1095.6	1091.1	1091.0
15°	1098.1	1095.7	1093.4	1091.2	1088.9	1084.9	1079.1	1073.3	1067.4	1061.6	1060.6
17.5°	1071.7	1069.1	1066.4	1063.7	1061.0	1056.1	1048.7	1041.3	1033.8	1026.5	1024.3
20°	1052.3	1048.9	1045.6	1042.3	1039.0	1033.4	1025.5	1017.6	1009.8	1001.8	999.2
22.5°	1030.6	1026.8	1023.0	1019.1	1015.3	1009.2	1000.9	992.5	984.1	975.7	972.3
25°	999.1	993.9	988.6	983.5	978.3	970.9	961.4	951.8	942.3	932.7	928.4
27.5°	960.7	955.0	949.3	943.6	937.9	929.7	919.1	908.5	897.8	887.2	881.1
30°	934.6	928.4	922.2	916.0	909.7	900.8	889.2	877.5	865.9	854.3	847.3
32.5°	908.5	901.4	894.4	887.3	880.3	870.6	858.3	846.1	833.7	821.4	813.8
35°	864.6	857.1	849.6	842.2	834.7	824.6	811.7	798.8	786.0	773.1	764.2
37.5°	820.2	811.8	803.5	795.2	786.9	776.0	762.2	748.5	734.8	721.0	710.9
40°	791.8	782.7	773.5	764.4	755.3	743.3	728.6	713.9	699.1	684.4	673.6
42.5°	759.6	750.6	741.4	732.3	723.2	711.0	695.7	680.5	665.3	650.1	638.3
45°	710.5	701.2	691.9	682.5	673.2	660.6	644.5	628.6	612.6	596.6	584.8
47.5°	661.5	651.2	641.0	630.7	620.5	607.3	591.4	575.3	559.4	543.4	530.6
50°	625.5	615.8	606.1	596.3	586.6	573.3	556.5	539.7	522.9	506.0	493.2
52.5°	593.4	582.9	572.3	561.7	551.2	537.5	520.8	504.3	487.6	470.9	457.6
55°	539.7	529.5	519.3	509.2	499.0	485.1	467.4	449.9	432.2	414.6	402.5
57.5°	490.0	478.9	467.9	456.7	445.7	431.3	413.6	395.8	378.1	360.4	349.0
60°	455.7	444.3	432.8	421.4	410.0	395.7	378.4	361.2	344.0	326.8	315.6
62.5°	421.2	409.8	398.4	387.0	375.7	361.3	344.1	326.9	309.7	292.4	281.9
65°	368.8	357.4	346.0	334.6	323.2	309.3	293.2	277.0	260.8	244.6	234.4
67.5°	316.4	304.8	293.3	281.7	270.2	256.6	241.1	225.6	210.1	194.6	187.0
70°	282.0	270.8	259.6	248.3	237.2	224.3	209.7	195.3	180.7	166.2	158.9
72.5°	247.6	236.6	225.5	214.5	203.5	191.4	178.2	165.0	151.8	138.6	132.6
75°	195.1	185.2	175.2	165.2	155.3	144.6	133.2	121.8	110.4	99.0	96.9
77.5°	147.3	138.3	129.3	120.3	111.3	103.2	95.8	88.5	81.1	73.7	72.7
80°	116.7	108.2	99.7	91.2	82.7	76.2	71.9	67.5	63.2	58.9	58.2
82.5°	87.6	80.3	72.9	65.5	58.2	53.5	51.5	49.4	47.4	45.4	44.8
85°	49.5	44.9	40.4	35.8	31.2	28.6	28.0	27.4	26.8	26.1	25.8
87.5°	18.0	16.3	14.6	12.9	11.2	10.5	10.7	10.9	11.1	11.2	11.1
90°	0.4	1.0	1.7	2.4	3.1	3.9	4.8	5.7	6.7	7.6	7.8
92.5°	5.9	5.7	5.4	5.3	5.1	5.4	6.0	6.7	7.4	8.0	8.5
95°	19.3	16.3	13.5	10.6	7.8	6.7	7.5	8.2	9.0	9.8	10.3
97.5°	38.6	37.4	36.0	34.8	33.4	30.3	25.2	20.2	15.2	10.2	10.7
100°	53.2	54.7	56.1	57.4	58.9	54.1	43.2	32.3	21.3	10.4	11.0
102.5°	69.9	70.9	71.9	72.9	73.9	68.5	56.5	44.6	32.6	20.8	19.0
105°	93.9	94.7	95.4	96.2	97.0	94.3	87.9	81.6	75.3	69.0	56.6
107.5°	119.2	119.8	120.5	121.1	121.7	122.5	123.5	124.5	125.5	126.4	117.3
110°	136.2	136.7	137.2	137.8	138.4	139.0	139.8	140.5	141.3	142.1	139.8



TEST NUMBER: P332303-940

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	152.2	152.8	153.3	153.7	154.3	154.9	155.7	156.5	157.2	158.0	158.0
115°	176.1	176.6	177.0	177.4	177.8	178.3	179.0	179.6	180.2	180.8	181.6
117.5°	199.3	199.8	200.3	200.8	201.3	201.8	202.1	202.4	202.8	203.0	203.6
120°	213.7	214.3	214.9	215.5	216.2	216.6	216.8	217.0	217.2	217.4	218.0
122.5°	228.3	228.8	229.3	229.8	230.3	230.7	231.0	231.2	231.5	231.8	232.2
125°	248.3	248.9	249.4	249.9	250.6	250.9	251.3	251.6	251.8	252.1	252.3
127.5°	267.7	268.3	268.9	269.4	269.9	270.4	270.7	271.1	271.4	271.7	272.0
130°	279.8	280.4	280.9	281.5	282.0	282.5	282.8	283.0	283.3	283.6	283.8
132.5°	291.4	291.9	292.6	293.1	293.6	294.0	294.3	294.5	294.7	295.0	295.2
135°	309.2	309.5	310.0	310.4	310.8	311.1	311.4	311.7	312.0	312.3	312.5
137.5°	324.2	324.8	325.3	325.8	326.4	326.7	326.9	327.0	327.2	327.3	327.7
140°	334.3	334.7	335.2	335.6	336.0	336.4	336.5	336.7	337.0	337.2	337.4
142.5°	343.7	344.1	344.5	344.9	345.4	345.6	345.9	346.1	346.3	346.5	346.7
145°	356.7	357.2	357.7	358.2	358.6	359.0	359.1	359.3	359.4	359.5	359.7
147.5°	369.0	369.3	369.6	370.0	370.2	370.5	370.7	370.8	371.0	371.0	371.2
150°	376.6	376.7	376.9	377.2	377.4	377.6	377.7	377.8	378.0	378.1	378.3
152.5°	383.3	383.4	383.5	383.6	383.7	383.9	383.9	384.0	384.1	384.1	384.4
155°	393.0	392.8	392.6	392.5	392.4	392.4	392.4	392.4	392.5	392.6	393.0
157.5°	400.4	400.4	400.4	400.3	400.3	400.3	400.2	400.1	400.0	400.0	400.4
160°	404.9	404.8	404.7	404.7	404.7	404.6	404.5	404.4	404.4	404.3	404.7
162.5°	409.2	409.0	408.8	408.7	408.5	408.3	408.2	408.2	408.1	408.0	408.5
165°	414.4	414.1	413.9	413.8	413.5	413.4	413.3	413.2	413.1	413.1	413.7
167.5°	418.4	418.1	417.9	417.6	417.2	417.1	417.1	417.1	417.1	417.1	417.7
170°	420.6	420.4	420.1	419.8	419.5	419.4	419.4	419.4	419.4	419.4	420.0
172.5°	422.1	421.9	421.5	421.2	420.8	420.7	420.7	420.8	420.9	420.9	421.5
175°	424.1	423.7	423.4	423.1	422.8	422.6	422.7	422.8	422.8	422.8	423.4
177.5°	424.6	424.4	424.1	423.8	423.5	423.4	423.5	423.5	423.6	423.7	424.1
180°	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1



TEST NUMBER: P332303-940

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
0°	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3	1151.3
2.5°	1146.7	1148.5	1150.3	1151.1	1150.8	1150.4	1150.0	1149.8
5°	1139.1	1140.9	1142.8	1143.5	1143.2	1142.7	1142.3	1141.9
7.5°	1123.1	1124.1	1125.2	1125.3	1124.6	1123.9	1123.2	1122.5
10°	1108.8	1108.9	1109.1	1108.8	1107.7	1106.6	1105.6	1104.6
12.5°	1090.8	1090.7	1090.7	1089.9	1088.8	1087.5	1086.4	1085.1
15°	1059.5	1058.5	1057.5	1056.2	1054.8	1053.3	1051.9	1050.4
17.5°	1022.1	1019.9	1017.7	1015.6	1013.3	1011.2	1009.1	1006.9
20°	996.5	993.7	991.0	988.5	986.0	983.5	981.0	978.5
22.5°	969.0	965.6	962.2	959.4	957.1	954.8	952.4	950.1
25°	924.1	919.7	915.3	912.0	909.7	907.4	905.2	902.9
27.5°	875.0	869.1	863.0	858.2	854.7	851.2	847.7	844.3
30°	840.3	833.1	826.1	820.9	817.6	814.3	810.9	807.6
32.5°	806.0	798.3	790.6	785.0	781.5	778.0	774.5	771.1
35°	755.3	746.4	737.4	731.1	727.4	723.6	719.9	716.1
37.5°	700.7	690.6	680.5	673.2	668.5	663.9	659.3	654.7
40°	662.8	652.0	641.2	633.5	628.7	623.9	619.1	614.4
42.5°	626.4	614.7	602.9	594.9	590.6	586.3	582.0	577.7
45°	573.0	561.2	549.3	540.9	535.9	530.9	526.0	521.0
47.5°	517.6	504.8	492.0	483.3	478.8	474.4	470.0	465.6
50°	480.4	467.4	454.6	445.8	441.0	436.2	431.5	426.7
52.5°	444.3	430.9	417.5	408.7	404.4	400.1	395.8	391.6
55°	390.5	378.4	366.4	358.3	354.2	350.0	345.9	341.7
57.5°	337.7	326.3	315.0	307.5	304.0	300.4	296.9	293.4
60°	304.3	293.2	282.0	274.6	271.1	267.5	264.0	260.5
62.5°	271.3	260.8	250.3	243.2	239.4	235.8	232.1	228.4
65°	224.3	214.1	203.9	197.7	195.5	193.1	190.9	188.6
67.5°	179.4	171.8	164.2	159.2	156.8	154.3	151.9	149.4
70°	151.7	144.4	137.1	132.4	130.1	127.8	125.6	123.2
72.5°	126.7	120.7	114.9	111.4	110.4	109.5	108.5	107.5
75°	94.8	92.7	90.7	89.4	89.0	88.6	88.2	87.7
77.5°	71.5	70.4	69.3	68.5	68.1	67.7	67.2	66.9
80°	57.6	57.0	56.4	55.8	55.4	55.0	54.6	54.1
82.5°	44.1	43.5	42.9	42.5	42.4	42.4	42.3	42.2
85°	25.3	24.9	24.5	24.3	24.3	24.3	24.3	24.3
87.5°	11.0	10.9	10.8	10.7	10.5	10.3	10.3	10.1
90°	8.1	8.4	8.6	8.9	9.0	9.2	9.3	9.5
92.5°	9.0	9.5	9.9	10.2	10.2	10.3	10.3	10.4
95°	10.8	11.2	11.8	11.9	11.9	11.9	11.9	11.9
97.5°	11.2	11.9	12.4	12.7	12.8	12.8	12.9	13.0
100°	11.5	12.0	12.7	12.9	13.0	13.1	13.2	13.2
102.5°	17.3	15.5	13.8	13.0	13.1	13.2	13.4	13.5
105°	44.2	31.8	19.4	13.3	13.5	13.6	13.7	13.8
107.5°	108.3	99.2	90.2	80.9	71.6	62.2	52.9	43.5
110°	137.5	135.2	132.9	126.7	116.7	106.6	96.7	86.7





TEST NUMBER: P332303-940

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-F

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°
112.5°	158.1	158.1	158.2	157.1	155.0	152.9	150.8	148.6
115°	182.3	183.0	183.7	184.1	184.4	184.8	185.0	185.3
117.5°	204.2	204.7	205.3	205.6	205.6	205.7	205.8	205.8
120°	218.6	219.1	219.6	220.0	220.0	220.0	220.0	220.0
122.5°	232.6	233.0	233.4	233.5	233.6	233.7	233.7	233.8
125°	252.4	252.5	252.6	252.8	252.9	253.1	253.2	253.3
127.5°	272.2	272.4	272.7	272.7	272.5	272.4	272.2	272.2
130°	284.2	284.5	284.7	284.8	284.6	284.5	284.4	284.2
132.5°	295.5	295.8	296.0	296.1	295.9	295.7	295.5	295.3
135°	312.7	312.9	313.1	313.1	312.9	312.7	312.5	312.3
137.5°	328.0	328.3	328.7	328.8	328.6	328.5	328.3	328.2
140°	337.7	338.0	338.3	338.3	338.2	338.0	338.0	337.8
142.5°	347.0	347.1	347.4	347.4	347.2	347.0	346.8	346.6
145°	359.8	360.0	360.1	360.2	360.2	360.2	360.2	360.2
147.5°	371.3	371.5	371.7	371.6	371.2	370.9	370.6	370.2
150°	378.4	378.5	378.7	378.6	378.4	378.3	378.0	377.8
152.5°	384.7	385.0	385.2	385.1	384.9	384.5	384.1	383.9
155°	393.3	393.7	394.0	394.0	393.6	393.2	392.7	392.3
157.5°	400.8	401.3	401.7	401.6	401.1	400.6	399.9	399.4
160°	405.1	405.6	406.0	405.9	405.5	404.9	404.5	403.9
162.5°	409.0	409.5	409.9	410.0	409.6	409.1	408.7	408.2
165°	414.2	414.8	415.4	415.4	414.9	414.4	413.9	413.4
167.5°	418.2	418.8	419.4	419.4	418.8	418.2	417.7	417.1
170°	420.5	421.1	421.6	421.6	421.1	420.5	420.0	419.4
172.5°	422.0	422.6	423.1	423.1	422.5	421.9	421.2	420.6
175°	423.8	424.4	424.8	424.8	424.3	423.7	423.1	422.6
177.5°	424.5	425.0	425.4	425.3	424.8	424.3	423.7	423.1
180°	424.1	424.1	424.1	424.1	424.1	424.1	424.1	424.1

(END OF REPORT)