

Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P832382

Luminaire Tested: S123RDIP-S775D365U940-4F0-1E-UDD-G4

Issue Date: 05/03/2024

Test Information

Test Method: LM-79-2019
Report Number: P832382
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-2, G3-1807-864-17)
Test Lab: INNOVATION CENTER
Issue Date: 05/03/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: S123RDIP-S775D365U940-4F0-1E-UDD-G4
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE
DOWNLIGHT 775 LUMENS PER FOOT, GRAZE OPTIC
UPLIGHT 365 LUMENS PER FOOT, BATWING OPTIC
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4123.3 lumens
Efficiency: N/A
Efficacy: 114.9 lumens/watt
Spacing Criteria (0/90/45): 0.55 / 1.17 / 0.8
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')
CIE Type: Semi-Direct

Input Watts (W): 35.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

Luminous Intensity Polar Plot

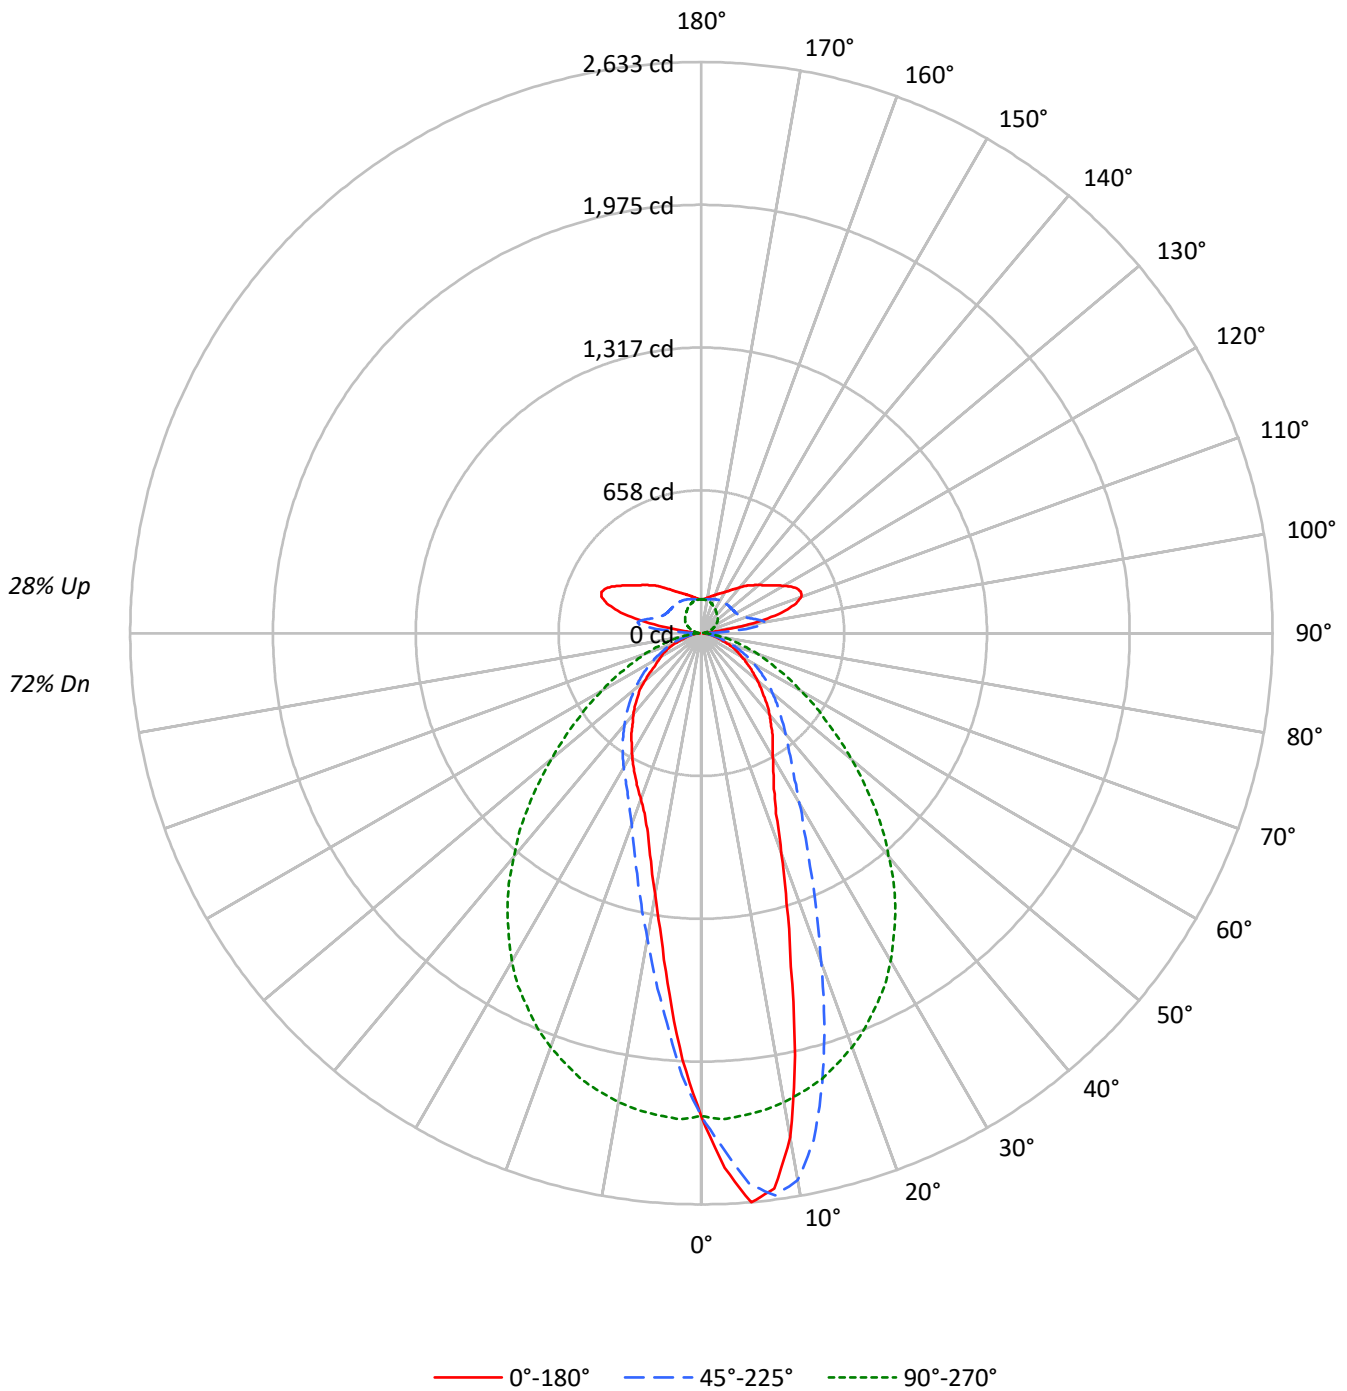



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	72	
1	104	100	96	93	98	95	92	89	85	83	81	77	75	73	69	68	66	66	66	66	63	
2	95	89	83	78	90	84	79	75	76	72	69	69	66	63	62	60	58	58	58	58	54	
3	88	79	72	67	83	75	69	64	69	64	60	62	58	55	56	53	51	51	51	51	48	
4	81	71	63	58	77	68	61	56	62	56	52	56	52	48	51	48	45	45	45	45	42	
5	75	64	56	51	71	61	54	49	56	51	46	51	47	43	47	43	40	40	40	40	38	
6	70	58	51	45	66	56	49	44	51	46	41	47	42	39	43	39	36	36	36	36	34	
7	65	53	46	40	62	51	44	39	47	41	37	44	39	35	40	36	33	33	33	33	31	
8	61	49	42	37	58	47	40	36	44	38	34	40	36	32	37	33	30	30	30	30	28	
9	57	45	38	33	55	44	37	32	41	35	31	38	33	29	35	31	28	28	28	28	26	
10	54	42	35	31	51	41	34	30	38	32	28	35	30	27	33	29	26	26	26	26	24	

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°	135°	180°
0°	23962	23962	23962	23962	23962
5°	28452	27544	24113	19492	18096
10°	25778	27977	23992	15618	13398
15°	17748	23989	23739	12765	10599
20°	12347	18468	23262	10763	9315
25°	9409	14076	22569	9567	8586
30°	8191	11253	21701	8883	7952
35°	7520	9493	20473	8306	7376
40°	6861	8477	18865	7739	6849
45°	6197	7753	17131	7203	6322
50°	5625	7154	15086	6680	5670
55°	5088	6568	13120	6167	4864
60°	4560	5974	11397	5599	4598
65°	4208	5300	9811	5033	4348
70°	3418	4582	8560	4554	3534
75°	2999	3643	7249	3776	3111
80°	2715	3081	5938	3168	2944
85°	2482	2705	4508	2878	2705

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 80°
 Vertical Angle: 45°
 Luminance: 18077 cd/sqm



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	202.9	4.9
10°-20°	469.5	11.4
20°-30°	538.7	13.1
30°-40°	531.0	12.9
40°-50°	468.3	11.4
50°-60°	360.2	8.7
60°-70°	236.8	5.7
70°-80°	115.0	2.8
80°-90°	29.9	0.7
90°-100°	84.5	2.0
100°-110°	247.3	6.0
110°-120°	241.5	5.9
120°-130°	192.3	4.7
130°-140°	151.7	3.7
140°-150°	113.2	2.7
150°-160°	78.9	1.9
160°-170°	46.4	1.1
170°-180°	15.1	0.4
0°-30°	1211.1	29.4
0°-40°	1742.1	42.3
0°-60°	2570.6	62.3
0°-90°	2952.4	71.6
90°-120°	573.3	13.9
90°-150°	1030.6	25.0
90°-180°	1171.0	28.4
0°-180°	4123.3	100.0

CANDELA DISTRIBUTION:

	0°	45°	90°	135°	180°	Flux
0°	2226	2226	2226	2226	2226	
5°	2633	2549	2232	1804	1675	241
15°	1593	2153	2130	1146	951	450
25°	792	1185	1900	806	723	374
35°	572	722	1558	632	561	357
45°	407	509	1125	473	415	316
55°	271	350	699	329	259	243
65°	165	208	385	198	171	162
75°	72	88	174	91	75	78
85°	20	22	36	23	22	21
90°	9	8	1	8	9	6
95°	37	187	11	187	37	59
105°	401	253	37	253	401	400
115°	488	194	65	194	488	475
125°	384	181	90	181	384	348
135°	312	178	105	178	312	242
145°	244	176	120	176	244	155
155°	202	170	136	170	202	94
165°	176	163	149	163	176	50
175°	158	157	155	157	158	15
180°	156	156	156	156	156	



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (FULL):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1
2.5°	2467.1	2459.3	2451.6	2449.3	2447.0	2439.7	2432.4	2416.0	2399.5	2382.7	2365.8
5°	2633.2	2634.1	2635.0	2632.7	2630.5	2620.9	2611.3	2591.2	2571.1	2549.2	2527.3
7.5°	2582.1	2596.7	2611.3	2614.0	2616.8	2624.1	2631.4	2626.8	2622.3	2614.0	2605.8
10°	2358.5	2357.6	2356.6	2373.1	2389.5	2438.3	2487.2	2512.3	2537.4	2559.7	2582.1
12.5°	1993.4	1994.8	1996.1	2050.0	2103.8	2149.9	2196.0	2259.9	2323.8	2392.7	2461.6
15°	1592.7	1615.1	1637.4	1685.3	1733.3	1802.6	1872.0	1957.8	2043.6	2152.7	2261.7
17.5°	1307.9	1317.5	1327.1	1373.2	1419.3	1485.0	1550.7	1647.9	1745.1	1885.7	2026.2
20°	1077.9	1086.6	1095.3	1128.6	1161.9	1224.9	1287.9	1380.5	1473.1	1612.3	1751.5
22.5°	899.9	916.8	933.7	956.1	978.4	1024.1	1069.7	1164.2	1258.6	1385.5	1512.4
25°	792.2	800.0	807.8	826.9	846.1	889.9	933.7	996.2	1058.8	1185.2	1311.6
27.5°	719.2	721.5	723.8	737.9	752.1	780.4	808.7	866.6	924.6	1028.6	1132.7
30°	659.0	663.1	667.2	678.2	689.1	709.6	730.2	771.3	812.3	905.4	998.5
32.5°	612.4	614.7	617.0	626.1	635.3	650.3	665.4	697.8	730.2	801.4	872.6
35°	572.3	572.7	573.2	580.0	586.9	601.5	616.1	643.0	669.9	722.4	774.9
37.5°	526.6	529.8	533.0	538.0	543.1	555.8	568.6	590.5	612.4	655.8	699.1
40°	488.3	491.0	493.8	499.7	505.6	515.7	525.7	545.8	565.9	603.3	640.7
42.5°	450.0	451.8	453.6	459.6	465.5	477.8	490.1	506.1	522.1	553.1	584.1
45°	407.1	411.6	416.2	422.6	429.0	439.5	450.0	466.4	482.8	509.3	535.8
47.5°	371.5	373.8	376.0	381.5	387.0	399.8	412.6	427.2	441.8	466.4	491.0
50°	335.9	336.8	337.7	342.7	347.7	359.2	370.6	387.5	404.3	427.2	450.0
52.5°	302.1	304.4	306.7	311.7	316.7	324.5	332.2	349.6	366.9	389.3	411.6
55°	271.1	272.4	273.8	277.5	281.1	290.2	299.4	314.4	329.5	350.0	370.6
57.5°	241.9	243.7	245.5	248.3	251.0	259.2	267.4	280.7	293.9	314.4	335.0
60°	211.8	214.0	216.3	219.5	222.7	229.1	235.5	247.3	259.2	277.5	295.7
62.5°	189.8	190.3	190.8	193.5	196.2	200.8	205.4	214.9	224.5	242.8	261.0
65°	165.2	166.6	167.9	169.3	170.7	174.3	178.0	186.2	194.4	208.1	221.8
67.5°	139.6	141.0	142.4	144.7	146.9	150.1	153.3	158.8	164.3	177.1	189.8
70°	108.6	108.6	108.6	112.3	115.9	121.4	126.9	131.0	135.1	145.6	156.1
72.5°	88.5	89.0	89.4	89.9	90.4	93.6	96.7	103.6	110.4	116.8	123.2
75°	72.1	72.6	73.0	73.5	73.9	74.8	75.8	78.0	80.3	87.6	94.9
77.5°	57.5	58.0	58.4	58.9	59.3	60.2	61.2	62.1	63.0	65.7	68.5
80°	43.8	44.3	44.7	45.2	45.6	46.1	46.5	47.5	48.4	49.7	51.1
82.5°	31.9	31.9	31.9	31.9	31.9	32.9	33.8	33.8	33.8	34.7	35.6
85°	20.1	20.1	20.1	20.5	21.0	21.0	21.0	21.4	21.9	21.9	21.9
87.5°	9.1	8.7	8.2	8.7	9.1	9.1	9.1	9.6	10.0	10.0	10.0
90°	9.1	9.5	9.1	8.8	9.1	8.5	8.2	7.9	7.6	7.9	6.9
92.5°	16.7	17.3	17.0	18.3	18.9	21.1	24.3	31.2	43.8	58.6	64.9
95°	36.6	37.8	40.0	42.9	48.8	60.2	76.9	113.4	151.6	186.9	166.4
97.5°	75.0	78.5	86.0	98.0	119.1	155.0	196.6	260.6	297.2	287.4	214.6
100°	197.6	197.3	209.6	232.6	264.4	309.1	346.0	371.5	360.5	298.4	201.7
102.5°	312.9	322.0	331.8	348.8	371.8	396.1	413.7	408.4	363.6	277.9	182.8
105°	400.8	402.4	412.5	424.5	439.0	447.1	441.2	409.6	343.8	253.4	168.0
107.5°	458.2	461.6	465.7	471.4	473.3	464.8	440.2	390.7	315.4	231.6	157.2
110°	490.9	491.6	492.2	489.7	480.9	458.8	419.1	361.1	289.0	213.6	151.6



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	497.6	497.2	494.1	485.0	467.0	437.1	391.4	331.8	266.0	201.7	148.4
115°	487.5	485.9	479.6	465.7	442.1	407.8	361.4	306.6	248.3	193.8	148.1
117.5°	465.4	463.2	453.8	438.3	413.7	378.1	335.6	287.1	236.7	188.4	148.4
120°	436.4	434.5	427.0	409.3	384.4	352.6	314.8	272.3	227.8	185.0	149.7
122.5°	409.3	406.8	398.3	382.9	361.4	332.4	298.1	260.6	220.6	182.8	151.9
125°	384.4	382.2	374.4	360.5	340.3	315.1	284.9	250.5	214.6	180.9	154.1
127.5°	363.0	361.1	353.9	341.9	323.6	300.3	272.6	241.4	208.9	179.9	156.6
130°	345.4	342.8	336.2	324.9	308.2	286.8	261.2	232.9	204.5	179.0	159.1
132.5°	328.0	326.5	320.8	309.4	294.0	273.8	250.5	225.0	200.4	178.7	161.0
135°	311.6	309.4	303.8	294.3	278.9	260.9	240.4	218.1	196.9	178.4	162.9
137.5°	294.3	292.4	287.7	277.9	264.7	248.6	230.3	211.4	193.8	177.7	164.2
140°	276.0	276.4	271.3	262.5	250.5	237.0	221.8	205.8	191.0	177.4	165.4
142.5°	259.0	259.3	254.9	247.4	237.6	226.3	213.6	200.4	188.4	176.8	166.4
145°	243.6	243.0	240.4	233.8	225.9	216.8	206.7	196.3	186.2	176.1	166.7
147.5°	230.3	230.0	227.5	222.8	216.5	209.9	201.4	192.8	184.0	175.2	166.7
150°	219.0	219.0	217.1	213.6	208.9	202.9	196.3	189.1	181.8	173.9	166.7
152.5°	209.6	209.6	208.6	205.5	202.0	197.3	191.6	185.6	179.3	172.4	165.7
155°	202.0	201.7	201.0	198.5	195.7	191.9	187.2	182.1	176.8	170.5	165.1
157.5°	194.7	194.7	194.1	192.2	189.7	186.5	182.8	178.4	173.9	168.9	164.2
160°	187.8	188.1	188.1	186.2	184.0	181.8	178.7	175.2	171.1	167.0	163.5
162.5°	181.5	181.8	181.8	180.2	179.0	177.1	174.3	171.4	168.3	165.1	162.3
165°	176.1	176.1	176.5	175.2	173.9	172.4	170.2	168.3	165.7	163.2	161.0
167.5°	170.8	170.8	171.1	170.2	169.5	168.3	167.0	165.4	163.2	161.3	159.8
170°	166.1	166.1	166.4	165.7	165.4	164.8	163.5	162.6	161.0	159.4	158.5
172.5°	161.7	162.0	162.6	162.0	162.0	161.7	160.7	160.1	158.8	157.9	157.6
175°	158.5	158.8	159.1	158.8	158.8	158.8	158.2	157.9	157.2	156.6	156.6
177.5°	156.3	156.3	156.9	156.6	156.9	156.9	156.6	156.3	156.0	155.7	156.0
180°	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1
2.5°	2363.5	2361.2	2339.3	2317.4	2296.0	2274.5	2258.5	2242.6	2215.6	2188.7	2171.8
5°	2510.0	2492.6	2458.0	2423.3	2371.3	2319.2	2275.4	2231.6	2175.9	2120.3	2073.7
7.5°	2591.7	2577.5	2535.5	2493.6	2424.6	2355.7	2287.3	2218.8	2136.7	2054.5	1984.3
10°	2594.0	2605.8	2571.1	2536.5	2458.9	2381.3	2288.2	2195.1	2084.7	1974.2	1883.4
12.5°	2512.7	2563.8	2556.5	2549.2	2470.3	2391.3	2278.2	2165.0	2029.4	1893.9	1780.3
15°	2360.8	2459.8	2489.0	2518.2	2452.9	2387.7	2259.0	2130.3	1971.0	1811.8	1681.2
17.5°	2165.0	2303.7	2380.8	2458.0	2410.5	2363.0	2222.0	2081.0	1901.7	1722.3	1580.4
20°	1933.1	2114.8	2235.7	2356.6	2339.3	2322.0	2176.4	2030.8	1837.3	1643.8	1490.0
22.5°	1704.1	1895.7	2062.8	2229.8	2247.6	2265.4	2118.4	1971.5	1759.7	1548.0	1391.4
25°	1506.4	1701.3	1900.3	2099.3	2139.4	2179.6	2039.9	1900.3	1680.8	1461.3	1305.6
27.5°	1318.0	1503.3	1722.3	1941.4	2014.4	2087.4	1959.6	1831.8	1603.2	1374.6	1219.4
30°	1164.2	1329.8	1553.5	1777.1	1878.8	1980.6	1863.3	1746.0	1519.2	1292.4	1140.4
32.5°	1020.9	1169.2	1393.7	1618.3	1736.5	1854.7	1753.3	1652.0	1433.9	1215.7	1065.6
35°	907.7	1040.5	1250.0	1459.4	1591.8	1724.1	1641.1	1558.0	1344.9	1131.8	989.8
37.5°	810.5	921.8	1118.5	1315.2	1455.8	1596.4	1527.0	1457.6	1257.3	1056.9	922.8
40°	730.2	819.6	1002.6	1185.6	1323.4	1461.3	1401.9	1342.6	1163.3	983.9	858.4
42.5°	661.3	738.4	902.7	1067.0	1193.4	1319.8	1280.5	1241.3	1078.8	916.4	800.0
45°	600.6	665.4	810.0	954.7	1071.1	1187.5	1156.4	1125.4	985.3	845.2	738.4
47.5°	546.7	602.4	731.5	860.7	965.2	1069.7	1041.0	1012.2	896.3	780.4	683.2
50°	497.4	544.9	652.6	760.3	854.3	948.3	924.6	900.9	805.0	709.2	625.2
52.5°	450.9	490.1	586.9	683.6	759.4	835.1	816.9	798.6	724.7	650.8	574.6
55°	406.6	442.7	524.4	606.0	670.9	735.7	717.4	699.1	641.6	584.1	517.1
57.5°	366.5	397.9	464.1	530.3	581.9	633.4	624.8	616.1	568.2	520.3	465.0
60°	324.0	352.3	409.4	466.4	507.9	549.5	539.4	529.4	495.2	460.9	413.5
62.5°	286.1	311.2	356.9	402.5	436.3	470.1	462.8	455.4	429.4	403.4	364.2
65°	246.4	271.1	308.0	345.0	371.5	397.9	391.6	385.2	365.5	345.9	314.4
67.5°	210.4	230.9	262.9	294.8	312.6	330.4	326.8	323.1	308.0	293.0	268.3
70°	173.9	191.7	218.1	244.6	256.9	269.3	270.6	272.0	258.3	244.6	226.4
72.5°	137.4	151.5	176.2	200.8	210.4	220.0	219.5	219.1	210.8	202.6	186.2
75°	105.4	115.9	135.1	154.3	162.5	170.7	172.5	174.3	166.6	158.8	149.7
77.5°	75.8	83.1	97.7	112.3	121.4	130.5	131.4	132.3	128.7	125.0	116.4
80°	53.4	55.7	64.8	73.9	83.5	93.1	94.5	95.8	92.2	88.5	83.1
82.5°	37.0	38.3	41.5	44.7	52.5	60.2	62.1	63.9	62.1	60.2	54.3
85°	22.4	22.8	24.2	25.6	29.2	32.9	34.7	36.5	35.6	34.7	31.5
87.5°	10.0	10.0	10.5	11.0	11.9	12.8	15.1	17.3	16.0	14.6	13.2
90°	6.0	5.0	4.1	3.5	2.8	1.9	1.3	0.6	1.3	1.9	2.8
92.5°	48.5	31.8	21.7	16.1	12.9	10.1	6.9	4.7	6.9	10.1	12.9
95°	114.7	67.7	41.0	28.7	20.5	15.1	11.7	10.7	11.7	15.1	20.5
97.5°	127.6	73.1	46.6	33.1	24.9	20.2	17.3	17.0	17.3	20.2	24.9
100°	118.8	72.2	50.1	37.8	30.3	25.8	23.6	23.3	23.6	25.8	30.3
102.5°	111.2	73.4	54.2	43.2	36.6	32.5	30.6	29.9	30.6	32.5	36.6
105°	108.4	75.9	58.9	49.2	43.2	39.4	37.5	36.6	37.5	39.4	43.2
107.5°	107.8	80.0	64.9	55.8	50.1	46.3	44.4	43.5	44.4	46.3	50.1
110°	109.3	85.4	71.2	62.4	57.0	53.6	52.0	51.0	52.0	53.6	57.0

TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	112.5	90.8	77.8	69.3	64.0	60.5	58.9	58.0	58.9	60.5	64.0
115°	116.0	96.7	84.8	76.3	70.9	67.7	65.9	64.6	65.9	67.7	70.9
117.5°	120.4	103.0	91.1	83.2	77.2	74.4	72.8	71.2	72.8	74.4	77.2
120°	125.4	109.0	97.7	89.8	83.8	80.7	79.1	78.1	79.1	80.7	83.8
122.5°	130.1	115.3	104.3	95.8	90.1	86.7	85.1	84.1	85.1	86.7	90.1
125°	135.2	121.3	110.3	101.8	95.8	92.3	90.4	89.8	90.4	92.3	95.8
127.5°	139.3	126.7	116.0	107.5	100.8	97.4	95.2	94.2	95.2	97.4	100.8
130°	143.4	131.4	121.0	112.5	105.9	102.1	99.3	98.3	99.3	102.1	105.9
132.5°	147.2	135.5	125.4	117.2	110.6	105.9	102.7	101.5	102.7	105.9	110.6
135°	150.3	139.6	129.8	121.3	114.7	110.0	106.5	105.2	106.5	110.0	114.7
137.5°	152.8	142.4	133.0	125.1	118.5	113.4	110.0	108.7	110.0	113.4	118.5
140°	154.7	145.3	136.1	128.3	121.9	116.9	113.8	112.2	113.8	116.9	121.9
142.5°	156.6	147.5	138.6	131.4	125.1	120.7	117.2	116.0	117.2	120.7	125.1
145°	157.9	149.4	141.2	133.9	128.6	123.8	121.0	120.1	121.0	123.8	128.6
147.5°	158.8	150.9	143.4	137.1	131.7	127.6	124.8	124.2	124.8	127.6	131.7
150°	159.1	152.5	145.3	139.6	135.2	131.1	128.6	128.3	128.6	131.1	135.2
152.5°	159.8	153.5	147.5	142.1	138.3	134.9	132.3	132.3	132.3	134.9	138.3
155°	159.8	154.7	149.4	145.0	141.5	138.3	136.4	136.4	136.4	138.3	141.5
157.5°	160.1	155.4	150.9	147.5	144.3	141.5	139.9	139.6	139.9	141.5	144.3
160°	160.1	156.3	152.5	149.4	147.2	144.6	143.4	143.4	143.4	144.6	147.2
162.5°	159.8	156.6	153.5	150.9	149.0	147.2	146.2	146.2	146.2	147.2	149.0
165°	159.1	156.9	154.4	152.2	150.9	149.4	148.7	149.0	148.7	149.4	150.9
167.5°	158.8	156.9	155.0	153.5	152.5	151.3	150.9	151.3	150.9	151.3	152.5
170°	157.9	156.6	155.0	154.4	153.8	152.8	152.5	153.1	152.5	152.8	153.8
172.5°	157.6	156.6	155.4	155.0	154.7	154.1	154.1	154.4	154.1	154.1	154.7
175°	156.9	156.3	155.7	155.4	155.4	154.7	155.0	155.4	155.0	154.7	155.4
177.5°	156.6	156.0	155.7	155.7	155.7	155.4	155.7	156.0	155.7	155.4	155.7
180°	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1	2226.1
2.5°	2154.9	2128.9	2102.9	2084.2	2065.5	2042.2	2018.9	2018.0	2017.1	1999.8	1982.4
5°	2027.2	1982.0	1936.8	1892.5	1848.3	1804.0	1759.7	1749.7	1739.6	1724.6	1709.5
7.5°	1914.0	1841.9	1769.8	1713.2	1656.6	1612.3	1568.1	1537.9	1507.8	1484.5	1461.3
10°	1792.6	1703.1	1613.7	1545.2	1476.8	1428.9	1380.9	1346.3	1311.6	1295.2	1278.7
12.5°	1666.6	1569.4	1472.2	1405.1	1338.1	1280.5	1223.0	1191.6	1160.1	1137.3	1114.4
15°	1550.7	1446.2	1341.7	1270.5	1199.3	1145.5	1091.6	1060.1	1028.6	1005.8	983.0
17.5°	1438.5	1333.0	1227.6	1155.5	1083.4	1034.6	985.7	955.2	924.6	910.4	896.3
20°	1336.2	1229.9	1123.6	1055.6	987.6	939.6	891.7	875.3	858.9	845.6	832.4
22.5°	1234.9	1132.7	1030.5	965.2	899.9	865.3	830.6	817.3	804.1	794.1	784.0
25°	1150.0	1048.3	946.5	889.4	832.4	805.5	778.6	769.9	761.2	751.2	741.1
27.5°	1064.2	967.5	870.7	825.1	779.5	757.6	735.7	724.7	713.7	705.5	697.3
30°	988.5	899.0	809.6	771.7	733.8	714.7	695.5	683.6	671.8	664.0	656.2
32.5°	915.5	836.1	756.6	724.2	691.8	673.1	654.4	643.0	631.6	622.5	613.3
35°	847.9	779.0	710.1	680.4	650.8	632.1	613.3	601.9	590.5	581.4	572.3
37.5°	788.6	726.1	663.5	635.7	607.9	591.4	575.0	563.1	551.3	541.7	532.1
40°	732.9	677.7	622.5	595.6	568.6	550.8	533.0	522.5	512.0	503.4	494.7
42.5°	683.6	633.0	582.3	555.8	529.4	512.5	495.6	483.3	471.0	465.9	460.9
45°	631.6	586.9	542.2	516.6	491.0	473.2	455.4	445.0	434.5	429.9	425.3
47.5°	586.0	544.4	502.9	477.8	452.7	436.7	420.8	412.6	404.3	397.9	391.6
50°	541.2	501.1	460.9	436.7	412.6	398.9	385.2	375.1	365.1	360.5	356.0
52.5°	498.3	461.8	425.3	400.7	376.0	362.8	349.6	340.9	332.2	322.6	313.1
55°	450.0	418.0	386.1	364.2	342.3	328.6	314.9	304.8	294.8	284.8	274.7
57.5°	409.8	378.3	346.8	327.2	307.6	294.4	281.1	270.2	259.2	251.0	242.8
60°	366.0	338.6	311.2	292.1	272.9	260.1	247.3	236.9	226.4	222.2	218.1
62.5°	324.9	299.4	273.8	256.9	240.0	227.7	215.4	208.6	201.7	199.0	196.2
65°	282.9	261.0	239.1	223.6	208.1	197.6	187.1	183.9	180.7	178.4	176.2
67.5°	243.7	225.0	206.3	192.6	178.9	171.6	164.3	160.6	157.0	154.3	151.5
70°	208.1	191.7	175.2	163.4	151.5	144.7	137.8	134.6	131.4	126.4	121.4
72.5°	169.8	157.0	144.2	135.1	126.0	120.0	114.1	107.7	101.3	96.7	92.2
75°	140.6	127.8	115.0	106.3	97.7	90.8	84.0	81.7	79.4	78.0	76.7
77.5°	107.7	96.7	85.8	79.0	72.1	68.9	65.7	64.3	63.0	62.5	62.1
80°	77.6	68.5	59.3	55.7	52.0	51.1	50.2	49.3	48.4	47.9	47.5
82.5°	48.4	43.8	39.2	38.3	37.4	37.0	36.5	36.1	35.6	35.1	34.7
85°	28.3	26.5	24.6	24.2	23.7	23.3	22.8	22.8	22.8	22.8	22.8
87.5°	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.9	11.4	11.0
90°	3.5	4.1	5.0	6.0	6.9	7.9	7.6	7.9	8.2	8.5	9.1
92.5°	16.1	21.7	31.8	48.5	64.9	58.6	43.8	31.2	24.3	21.1	18.9
95°	28.7	41.0	67.7	114.7	166.4	186.9	151.6	113.4	76.9	60.2	48.8
97.5°	33.1	46.6	73.1	127.6	214.6	287.4	297.2	260.6	196.6	155.0	119.1
100°	37.8	50.1	72.2	118.8	201.7	298.4	360.5	371.5	346.0	309.1	264.4
102.5°	43.2	54.2	73.4	111.2	182.8	277.9	363.6	408.4	413.7	396.1	371.8
105°	49.2	58.9	75.9	108.4	168.0	253.4	343.8	409.6	441.2	447.1	439.0
107.5°	55.8	64.9	80.0	107.8	157.2	231.6	315.4	390.7	440.2	464.8	473.3
110°	62.4	71.2	85.4	109.3	151.6	213.6	289.0	361.1	419.1	458.8	480.9



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	69.3	77.8	90.8	112.5	148.4	201.7	266.0	331.8	391.4	437.1	467.0
115°	76.3	84.8	96.7	116.0	148.1	193.8	248.3	306.6	361.4	407.8	442.1
117.5°	83.2	91.1	103.0	120.4	148.4	188.4	236.7	287.1	335.6	378.1	413.7
120°	89.8	97.7	109.0	125.4	149.7	185.0	227.8	272.3	314.8	352.6	384.4
122.5°	95.8	104.3	115.3	130.1	151.9	182.8	220.6	260.6	298.1	332.4	361.4
125°	101.8	110.3	121.3	135.2	154.1	180.9	214.6	250.5	284.9	315.1	340.3
127.5°	107.5	116.0	126.7	139.3	156.6	179.9	208.9	241.4	272.6	300.3	323.6
130°	112.5	121.0	131.4	143.4	159.1	179.0	204.5	232.9	261.2	286.8	308.2
132.5°	117.2	125.4	135.5	147.2	161.0	178.7	200.4	225.0	250.5	273.8	294.0
135°	121.3	129.8	139.6	150.3	162.9	178.4	196.9	218.1	240.4	260.9	278.9
137.5°	125.1	133.0	142.4	152.8	164.2	177.7	193.8	211.4	230.3	248.6	264.7
140°	128.3	136.1	145.3	154.7	165.4	177.4	191.0	205.8	221.8	237.0	250.5
142.5°	131.4	138.6	147.5	156.6	166.4	176.8	188.4	200.4	213.6	226.3	237.6
145°	133.9	141.2	149.4	157.9	166.7	176.1	186.2	196.3	206.7	216.8	225.9
147.5°	137.1	143.4	150.9	158.8	166.7	175.2	184.0	192.8	201.4	209.9	216.5
150°	139.6	145.3	152.5	159.1	166.7	173.9	181.8	189.1	196.3	202.9	208.9
152.5°	142.1	147.5	153.5	159.8	165.7	172.4	179.3	185.6	191.6	197.3	202.0
155°	145.0	149.4	154.7	159.8	165.1	170.5	176.8	182.1	187.2	191.9	195.7
157.5°	147.5	150.9	155.4	160.1	164.2	168.9	173.9	178.4	182.8	186.5	189.7
160°	149.4	152.5	156.3	160.1	163.5	167.0	171.1	175.2	178.7	181.8	184.0
162.5°	150.9	153.5	156.6	159.8	162.3	165.1	168.3	171.4	174.3	177.1	179.0
165°	152.2	154.4	156.9	159.1	161.0	163.2	165.7	168.3	170.2	172.4	173.9
167.5°	153.5	155.0	156.9	158.8	159.8	161.3	163.2	165.4	167.0	168.3	169.5
170°	154.4	155.0	156.6	157.9	158.5	159.4	161.0	162.6	163.5	164.8	165.4
172.5°	155.0	155.4	156.6	157.6	157.6	157.9	158.8	160.1	160.7	161.7	162.0
175°	155.4	155.7	156.3	156.9	156.6	156.6	157.2	157.9	158.2	158.8	158.8
177.5°	155.7	155.7	156.0	156.6	156.0	155.7	156.0	156.3	156.6	156.9	156.9
180°	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7	155.7



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
0°	2226.1	2226.1	2226.1	2226.1
2.5°	1977.9	1973.3	1971.5	1969.7
5°	1695.4	1681.2	1678.0	1674.8
7.5°	1455.3	1449.4	1429.8	1410.2
10°	1260.5	1242.2	1234.0	1225.8
12.5°	1097.5	1080.7	1077.9	1075.2
15°	971.1	959.3	955.2	951.1
17.5°	888.1	879.9	874.8	869.8
20°	826.5	820.5	816.9	813.2
22.5°	779.5	774.9	772.2	769.4
25°	734.3	727.4	725.2	722.9
27.5°	691.4	685.5	683.2	680.9
30°	651.2	646.2	643.0	639.8
32.5°	607.4	601.5	599.7	597.8
35°	568.6	565.0	563.1	561.3
37.5°	527.6	523.0	520.3	517.5
40°	492.4	490.1	488.8	487.4
42.5°	456.8	452.7	452.3	451.8
45°	421.2	417.1	416.2	415.3
47.5°	387.9	384.3	383.8	383.3
50°	350.9	345.9	342.3	338.6
52.5°	308.5	303.9	300.7	297.5
55°	269.7	264.7	262.0	259.2
57.5°	240.5	238.2	236.9	235.5
60°	216.8	215.4	214.5	213.6
62.5°	194.9	193.5	193.5	193.5
65°	174.8	173.4	172.0	170.7
67.5°	148.8	146.0	145.6	145.1
70°	117.3	113.2	112.7	112.3
72.5°	91.7	91.3	90.4	89.4
75°	75.8	74.8	74.8	74.8
77.5°	61.2	60.2	60.2	60.2
80°	47.0	46.5	47.0	47.5
82.5°	34.7	34.7	34.2	33.8
85°	22.4	21.9	21.9	21.9
87.5°	11.0	11.0	11.0	11.0
90°	8.8	9.1	9.5	9.1
92.5°	18.3	17.0	17.3	16.7
95°	42.9	40.0	37.8	36.6
97.5°	98.0	86.0	78.5	75.0
100°	232.6	209.6	197.3	197.6
102.5°	348.8	331.8	322.0	312.9
105°	424.5	412.5	402.4	400.8
107.5°	471.4	465.7	461.6	458.2
110°	489.7	492.2	491.6	490.9



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CANDELA DISTRIBUTION (continued):

	165°	170°	175°	180°
112.5°	485.0	494.1	497.2	497.6
115°	465.7	479.6	485.9	487.5
117.5°	438.3	453.8	463.2	465.4
120°	409.3	427.0	434.5	436.4
122.5°	382.9	398.3	406.8	409.3
125°	360.5	374.4	382.2	384.4
127.5°	341.9	353.9	361.1	363.0
130°	324.9	336.2	342.8	345.4
132.5°	309.4	320.8	326.5	328.0
135°	294.3	303.8	309.4	311.6
137.5°	277.9	287.7	292.4	294.3
140°	262.5	271.3	276.4	276.0
142.5°	247.4	254.9	259.3	259.0
145°	233.8	240.4	243.0	243.6
147.5°	222.8	227.5	230.0	230.3
150°	213.6	217.1	219.0	219.0
152.5°	205.5	208.6	209.6	209.6
155°	198.5	201.0	201.7	202.0
157.5°	192.2	194.1	194.7	194.7
160°	186.2	188.1	188.1	187.8
162.5°	180.2	181.8	181.8	181.5
165°	175.2	176.5	176.1	176.1
167.5°	170.2	171.1	170.8	170.8
170°	165.7	166.4	166.1	166.1
172.5°	162.0	162.6	162.0	161.7
175°	158.8	159.1	158.8	158.5
177.5°	156.6	156.9	156.3	156.3
180°	155.7	155.7	155.7	155.7



TEST NUMBER: P832382

CATALOG NUMBER: S123RDIP-S775D365U940-4F0-1E-UDD-G4

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.62	14.62	14.38	15.40	16.33	18.28	19.29	19.04	20.06	20.99
	3H	14.85	15.75	15.62	16.53	17.49	19.79	20.69	20.57	21.48	22.44
	4H	15.24	16.09	16.03	16.88	17.85	20.29	21.14	21.08	21.93	22.90
	6H	15.53	16.31	16.33	17.11	18.10	20.61	21.39	21.41	22.19	23.18
	8H	15.62	16.36	16.44	17.18	18.17	20.70	21.44	21.51	22.25	23.24
	12H	15.68	16.39	16.50	17.20	18.21	20.73	21.44	21.55	22.25	23.26
4H	2H	14.36	15.21	15.16	16.00	16.97	18.30	19.14	19.09	19.93	20.91
	3H	15.75	16.45	16.55	17.27	18.26	19.97	20.67	20.78	21.50	22.49
	4H	16.21	16.84	17.03	17.67	18.69	20.58	21.22	21.40	22.04	23.06
	6H	16.58	17.13	17.42	17.98	19.01	21.03	21.58	21.87	22.43	23.45
	8H	16.71	17.23	17.55	18.07	19.10	21.16	21.68	22.00	22.52	23.55
	12H	16.80	17.26	17.65	18.12	19.16	21.23	21.69	22.09	22.56	23.60
8H	4H	16.53	17.05	17.37	17.89	18.92	20.56	21.07	21.40	21.92	22.95
	6H	17.00	17.43	17.87	18.31	19.35	21.06	21.49	21.93	22.37	23.41
	8H	17.20	17.57	18.08	18.45	19.50	21.25	21.62	22.13	22.51	23.56
	12H	17.34	17.67	18.22	18.54	19.65	21.37	21.70	22.25	22.58	23.68
12H	4H	16.55	17.01	17.41	17.88	18.92	20.52	20.98	21.38	21.84	22.88
	6H	17.06	17.44	17.94	18.32	19.37	21.04	21.41	21.92	22.30	23.35
	8H	17.29	17.62	18.17	18.49	19.60	21.24	21.57	22.12	22.44	23.55