

Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P831272

Luminaire Tested: S123DIP-S1165D585U850-4F0-1E-UDD-G4

Issue Date: 05/03/2024

**Test Information**

Test Method: LM-79-2019  
Report Number: P831272  
REPORT IS SCALED FROM IESNA LM-79-08 TEST DATA (G3-2301-905-1, G3-1807-864-17)  
Test Lab: INNOVATION CENTER  
Issue Date: 05/03/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: S123DIP-S1165D585U850-4F0-1E-UDD-G4  
Description: DEFINE 3 DIRECT-INDIRECT PENDANT LED LUMINAIRE  
DOWNLIGHT 1165 LUMENS PER FOOT, GRAZE OPTIC  
UPLIGHT 585 LUMENS PER FOOT, BATWING OPTIC  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 8257.1 lumens  
Efficiency: N/A  
Efficacy: 143.9 lumens/watt  
Spacing Criteria (0/90/45): 0.65 / 1.19 / 0.89  
Luminous Opening: Rectangular (W 4' x L: 0.25' x H: 0')  
CIE Type: Semi-Direct  
  
Input Watts (W): 57.4  
Input Voltage (V): 120  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

### Luminous Intensity Polar Plot

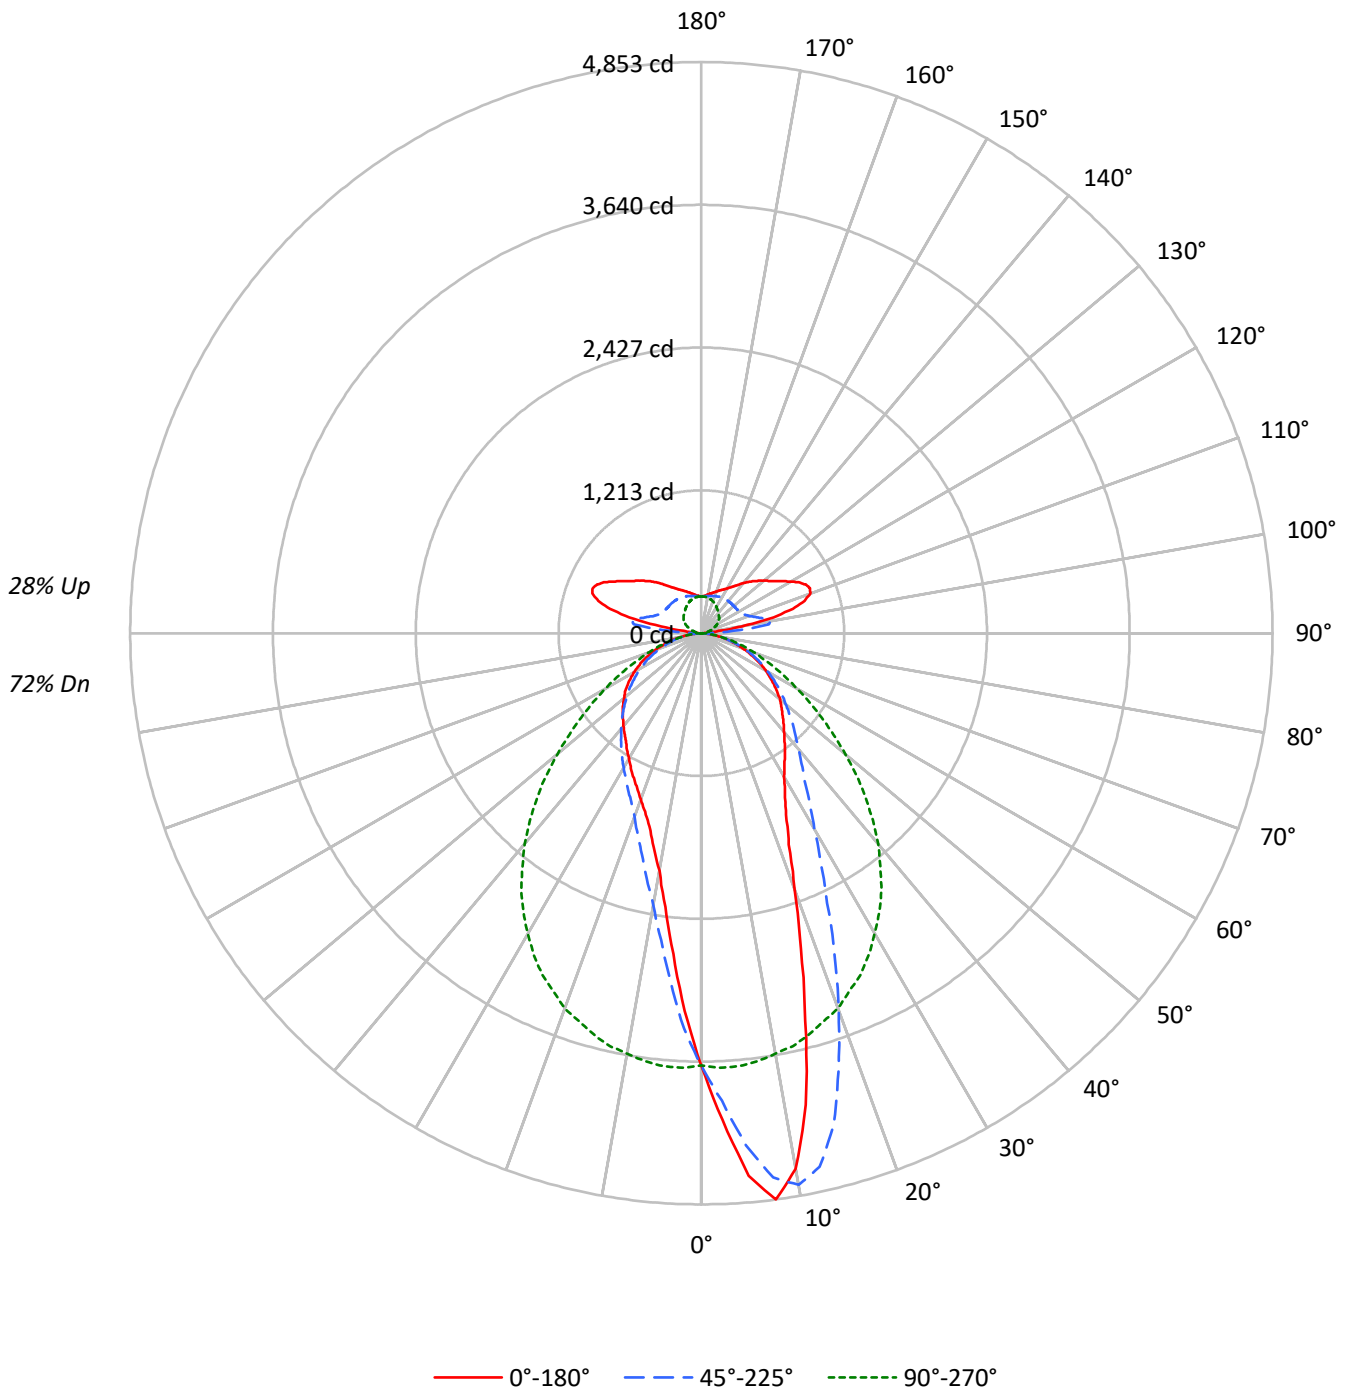



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20	
RC	80					70					50					30					10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	72	
1	103	99	95	92	98	94	91	88	85	82	80	76	74	73	68	67	66	66	66	66	62	
2	95	88	82	77	90	83	78	73	75	71	68	68	65	62	61	59	56	56	56	56	53	
3	87	78	71	65	82	74	68	63	67	62	58	61	57	53	55	52	49	49	49	49	46	
4	80	70	62	56	76	66	59	54	61	55	50	55	50	47	50	46	43	43	43	43	40	
5	74	63	55	49	70	60	53	47	55	49	44	50	45	41	45	42	38	38	38	38	36	
6	69	57	49	43	65	55	47	42	50	44	39	46	41	37	42	38	34	34	34	34	32	
7	64	52	44	39	61	50	43	38	46	40	35	42	37	33	38	34	31	31	31	31	29	
8	60	48	40	35	57	46	39	34	42	36	32	39	34	30	36	32	28	28	28	28	26	
9	56	44	37	32	53	42	35	31	39	33	29	36	31	28	33	29	26	26	26	26	24	
10	53	41	34	29	50	39	33	28	36	31	27	34	29	25	31	27	24	24	24	24	22	

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°	135°	180°
0°	39539	39539	39539	39539	39539
5°	50004	47195	39892	32148	29542
10°	50489	52017	39628	25626	22394
15°	38028	48294	39357	21701	18937
20°	26496	39079	38854	18978	17202
25°	20203	30053	37998	17461	16134
30°	17478	23876	36630	16388	15275
35°	16216	20159	35053	15612	14671
40°	15352	18083	32836	14873	14466
45°	14842	16736	30020	14297	14375
50°	14585	15671	26688	13772	14301
55°	14043	14891	23415	13275	14362
60°	13541	14053	20182	12807	14127
65°	12720	13262	17408	12307	13848
70°	11748	12258	14807	11481	13036
75°	10634	10988	12689	10667	11911
80°	8771	9614	10036	9298	10036
85°	6941	7793	7373	7892	8003

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 80°  
 Vertical Angle: 45°  
 Luminance: 34276 cd/sqm



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	347.3	4.2
10°-20°	863.9	10.5
20°-30°	1022.9	12.4
30°-40°	1028.5	12.5
40°-50°	943.7	11.4
50°-60°	778.9	9.4
60°-70°	551.0	6.7
70°-80°	294.1	3.6
80°-90°	76.4	0.9
90°-100°	169.6	2.1
100°-110°	496.4	6.0
110°-120°	484.8	5.9
120°-130°	386.1	4.7
130°-140°	304.6	3.7
140°-150°	227.2	2.8
150°-160°	158.4	1.9
160°-170°	93.1	1.1
170°-180°	30.3	0.4
0°-30°	2234.1	27.1
0°-40°	3262.7	39.5
0°-60°	4985.2	60.4
0°-90°	5906.6	71.5
90°-120°	1150.8	13.9
90°-150°	2068.7	25.1
90°-180°	2350.0	28.5
0°-180°	8257.1	100.0

**CANDELA DISTRIBUTION:**

	0°	45°	90°	135°	180°	Flux
0°	3673	3673	3673	3673	3673	
5°	4628	4368	3692	2975	2734	441
15°	3412	4334	3532	1947	1699	943
25°	1701	2530	3199	1470	1358	803
35°	1234	1534	2668	1188	1116	775
45°	975	1099	1972	939	944	755
55°	748	794	1248	707	765	670
65°	499	521	684	483	544	496
75°	256	264	305	256	286	269
85°	56	63	60	64	65	63
90°	18	16	1	16	18	13
95°	73	375	22	375	73	119
105°	805	509	73	509	805	803
115°	978	389	130	389	978	954
125°	772	363	180	363	772	698
135°	626	358	211	358	626	485
145°	489	354	241	354	489	311
155°	406	342	274	342	406	189
165°	354	328	299	328	354	101
175°	318	314	312	314	318	31
180°	312	312	312	312	312	



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (FULL):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
0°	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3
2.5°	4140.3	4136.1	4131.8	4110.5	4089.2	4079.0	4068.7	4038.0	4007.4	3973.3	3939.2
5°	4627.8	4639.7	4651.7	4638.0	4624.4	4582.6	4540.9	4485.5	4430.1	4367.9	4305.7
7.5°	4852.8	4859.6	4866.5	4857.9	4849.4	4838.3	4827.2	4777.8	4728.4	4664.5	4600.5
10°	4619.3	4634.6	4650.0	4683.2	4716.5	4754.0	4791.5	4784.6	4777.8	4759.1	4740.3
12.5°	4106.2	4125.0	4143.7	4210.2	4276.7	4361.9	4447.1	4520.4	4593.7	4644.9	4696.0
15°	3412.5	3464.5	3516.5	3577.0	3637.5	3762.8	3888.0	4042.3	4196.6	4333.8	4471.0
17.5°	2810.8	2830.4	2850.0	2914.8	2979.5	3137.2	3294.9	3473.0	3651.1	3878.7	4106.2
20°	2313.1	2331.0	2348.9	2434.1	2519.3	2642.9	2766.5	2966.7	3167.0	3411.6	3656.2
22.5°	1943.2	1971.3	1999.4	2047.1	2094.9	2213.3	2331.8	2509.9	2688.1	2958.2	3228.4
25°	1701.1	1721.6	1742.0	1771.0	1800.0	1894.6	1989.2	2135.8	2282.4	2530.4	2778.4
27.5°	1535.8	1544.3	1552.8	1581.8	1610.8	1672.2	1733.5	1859.6	1985.8	2196.3	2406.8
30°	1406.2	1412.2	1418.2	1443.7	1469.3	1511.1	1552.8	1644.0	1735.2	1921.0	2106.8
32.5°	1315.9	1320.2	1324.4	1344.0	1363.6	1393.5	1423.3	1489.8	1556.2	1709.7	1863.1
35°	1234.1	1236.6	1239.2	1253.7	1268.2	1290.3	1312.5	1362.8	1413.1	1534.1	1655.1
37.5°	1162.5	1165.9	1169.3	1177.8	1186.4	1206.0	1225.6	1265.6	1305.7	1398.6	1491.5
40°	1092.6	1098.6	1104.5	1110.5	1116.5	1132.7	1148.9	1179.5	1210.2	1286.9	1363.6
42.5°	1032.9	1038.9	1044.9	1047.4	1050.0	1059.4	1068.7	1096.9	1125.0	1182.1	1239.2
45°	975.0	977.6	980.1	982.7	985.2	992.9	1000.6	1025.3	1050.0	1099.4	1148.9
47.5°	922.2	922.2	922.2	923.9	925.6	932.4	939.2	957.1	975.0	1013.3	1051.7
50°	871.0	871.0	871.0	868.5	865.9	870.2	874.4	888.1	901.7	935.8	969.9
52.5°	809.7	809.7	809.7	810.5	811.4	811.4	811.4	823.3	835.2	865.9	896.6
55°	748.3	751.7	755.1	752.6	750.0	751.7	753.4	761.1	768.7	793.5	818.2
57.5°	686.9	688.6	690.3	689.5	688.6	689.5	690.3	697.2	704.0	722.7	741.5
60°	629.0	629.0	629.0	627.3	625.6	627.3	629.0	632.4	635.8	652.8	669.9
62.5°	564.2	565.1	565.9	566.8	567.6	565.9	564.2	568.5	572.7	585.5	598.3
65°	499.4	500.3	501.1	503.7	506.2	504.5	502.8	507.1	511.4	520.7	530.1
67.5°	441.5	439.8	438.1	438.9	439.8	442.3	444.9	445.7	446.6	456.8	467.0
70°	373.3	375.0	376.7	375.9	375.0	375.9	376.7	379.3	381.8	389.5	397.2
72.5°	311.9	312.8	313.6	313.6	313.6	315.3	317.0	319.6	322.2	326.4	330.7
75°	255.7	255.7	255.7	257.4	259.1	259.9	260.8	260.8	260.8	264.2	267.6
77.5°	194.3	198.6	202.8	202.0	201.1	202.8	204.5	207.1	209.7	211.4	213.1
80°	141.5	141.5	141.5	142.3	143.2	145.7	148.3	150.0	151.7	155.1	158.5
82.5°	90.3	91.2	92.0	94.6	97.2	98.9	100.6	103.1	105.7	105.7	105.7
85°	56.2	54.5	52.8	54.5	56.2	58.0	59.7	60.5	61.4	63.1	64.8
87.5°	27.3	27.3	27.3	27.3	27.3	28.1	29.0	29.0	29.0	29.0	29.0
90°	18.3	19.0	18.3	17.7	18.3	17.1	16.4	15.8	15.2	15.8	13.9
92.5°	33.5	34.8	34.2	36.7	38.0	42.4	48.7	62.6	87.9	117.7	130.3
95°	73.4	75.9	80.3	86.0	98.0	120.8	154.3	227.7	304.3	375.1	334.0
97.5°	150.5	157.5	172.7	196.7	239.1	311.2	394.7	523.1	596.5	576.9	430.8
100°	396.6	396.0	420.6	466.8	530.7	620.5	694.5	745.8	723.6	599.0	404.8
102.5°	628.1	646.5	666.1	700.2	746.4	795.1	830.5	819.8	730.0	557.9	366.9
105°	804.6	807.8	828.0	852.0	881.1	897.6	885.6	822.3	690.1	508.6	337.1
107.5°	919.7	926.7	934.9	946.3	950.1	933.0	883.7	784.4	633.2	464.9	315.6
110°	985.5	986.8	988.0	983.0	965.3	921.0	841.3	724.9	580.0	428.9	304.3



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°
112.5°	998.8	998.2	991.8	973.5	937.4	877.3	785.6	666.1	533.9	404.8	297.9
115°	978.5	975.4	962.7	934.9	887.5	818.5	725.5	615.5	498.4	389.0	297.3
117.5°	934.3	929.8	910.9	879.9	830.5	759.1	673.7	576.2	475.0	378.3	297.9
120°	876.1	872.3	857.1	821.7	771.7	707.8	631.9	546.5	457.3	371.3	300.5
122.5°	821.7	816.6	799.5	768.5	725.5	667.3	598.4	523.1	442.8	366.9	304.9
125°	771.7	767.3	751.5	723.6	683.1	632.5	571.8	502.9	430.8	363.1	309.3
127.5°	728.7	724.9	710.3	686.3	649.6	602.8	547.2	484.5	419.4	361.2	314.4
130°	693.3	688.2	674.9	652.2	618.6	575.6	524.4	467.5	410.5	359.3	319.4
132.5°	658.5	655.3	643.9	621.2	590.2	549.7	502.9	451.6	402.3	358.7	323.2
135°	625.6	621.2	609.8	590.8	559.8	523.7	482.6	437.7	395.3	358.0	327.0
137.5°	590.8	587.0	577.5	557.9	531.3	499.1	462.4	424.4	389.0	356.8	329.6
140°	554.1	554.7	544.6	526.9	502.9	475.7	445.3	413.1	383.3	356.1	332.1
142.5°	520.0	520.6	511.7	496.5	476.9	454.2	428.9	402.3	378.3	354.9	334.0
145°	489.0	487.7	482.6	469.3	453.5	435.2	414.9	394.1	373.8	353.6	334.6
147.5°	462.4	461.8	456.7	447.2	434.6	421.3	404.2	387.1	369.4	351.7	334.6
150°	439.6	439.6	435.8	428.9	419.4	407.4	394.1	379.5	365.0	349.2	334.6
152.5°	420.6	420.6	418.7	412.4	405.5	396.0	384.6	372.6	359.9	346.0	332.7
155°	405.5	404.8	403.6	398.5	392.8	385.2	375.7	365.6	354.9	342.2	331.5
157.5°	390.9	390.9	389.6	385.9	380.8	374.5	366.9	358.0	349.2	339.0	329.6
160°	377.0	377.6	377.6	373.8	369.4	365.0	358.7	351.7	343.5	335.2	328.3
162.5°	364.3	365.0	365.0	361.8	359.3	355.5	349.8	344.1	337.8	331.5	325.8
165°	353.6	353.6	354.2	351.7	349.2	346.0	341.6	337.8	332.7	327.7	323.2
167.5°	342.8	342.8	343.5	341.6	340.3	337.8	335.2	332.1	327.7	323.9	320.7
170°	333.4	333.4	334.0	332.7	332.1	330.8	328.3	326.4	323.2	320.1	318.2
172.5°	324.5	325.1	326.4	325.1	325.1	324.5	322.6	321.3	318.8	316.9	316.3
175°	318.2	318.8	319.4	318.8	318.8	318.8	317.5	316.9	315.6	314.4	314.4
177.5°	313.7	313.7	315.0	314.4	315.0	315.0	314.4	313.7	313.1	312.5	313.1
180°	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
0°	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3
2.5°	3929.0	3918.7	3881.2	3843.7	3801.1	3758.5	3727.0	3695.4	3648.6	3601.7	3563.3
5°	4257.9	4210.2	4130.9	4051.7	3944.3	3836.9	3764.5	3692.0	3594.9	3497.7	3420.2
7.5°	4518.7	4436.9	4326.1	4215.3	4074.7	3934.1	3801.1	3668.2	3519.9	3371.6	3250.6
10°	4684.9	4629.5	4501.7	4373.8	4185.5	3997.1	3811.3	3625.6	3434.6	3243.7	3083.5
12.5°	4701.1	4706.2	4588.6	4471.0	4257.9	4044.9	3819.0	3593.2	3352.8	3112.5	2925.8
15°	4558.8	4646.6	4581.8	4517.0	4302.3	4087.5	3809.6	3531.8	3254.8	2977.8	2762.2
17.5°	4294.6	4482.9	4492.3	4501.7	4286.9	4072.1	3764.5	3456.8	3143.2	2829.5	2602.8
20°	3934.1	4211.9	4307.4	4402.8	4228.1	4053.4	3722.7	3392.0	3040.9	2689.8	2452.0
22.5°	3565.9	3903.4	4078.1	4252.8	4123.3	3993.7	3641.7	3289.8	2919.0	2548.3	2307.1
25°	3146.6	3514.8	3783.2	4051.7	3972.4	3893.2	3546.3	3199.4	2804.8	2410.2	2163.9
27.5°	2781.0	3155.1	3479.0	3802.8	3785.8	3768.7	3424.4	3080.1	2676.1	2272.1	2034.4
30°	2455.4	2804.0	3166.2	3528.4	3570.2	3611.9	3279.5	2947.1	2542.3	2137.5	1908.2
32.5°	2167.3	2471.6	2860.2	3248.8	3330.7	3412.5	3112.5	2812.5	2411.9	2011.4	1790.6
35°	1931.2	2207.4	2596.0	2984.6	3086.9	3189.2	2928.4	2667.6	2277.3	1886.9	1676.4
37.5°	1722.4	1953.4	2332.7	2711.9	2837.2	2962.5	2729.0	2495.4	2129.8	1764.2	1570.7
40°	1549.4	1735.2	2083.8	2432.4	2577.3	2722.1	2529.5	2336.9	1990.0	1643.2	1465.0
42.5°	1404.5	1569.9	1886.1	2202.3	2341.2	2480.1	2317.3	2154.5	1846.0	1537.5	1374.7
45°	1281.0	1413.1	1700.3	1987.5	2119.6	2251.7	2111.9	1972.1	1700.3	1428.4	1276.7
47.5°	1165.1	1278.4	1523.9	1769.3	1886.9	2004.5	1895.4	1786.4	1556.2	1326.1	1188.9
50°	1061.1	1152.3	1367.0	1581.8	1684.1	1786.4	1690.0	1593.7	1404.5	1215.3	1096.0
52.5°	970.7	1044.9	1224.7	1404.5	1492.3	1580.1	1497.4	1414.8	1264.8	1114.8	1010.8
55°	881.2	944.3	1100.3	1256.2	1315.9	1375.6	1311.6	1247.7	1126.7	1005.7	917.9
57.5°	797.7	854.0	981.8	1109.7	1155.7	1201.7	1143.7	1085.8	994.6	903.4	830.1
60°	715.9	761.9	868.5	975.0	1003.1	1031.2	984.4	937.5	873.6	809.7	744.0
62.5°	640.1	681.8	761.1	840.3	859.1	877.8	842.0	806.2	757.7	709.1	658.0
65°	561.6	593.2	658.0	722.7	734.7	746.6	715.1	683.5	646.9	610.2	572.7
67.5°	489.2	511.4	564.2	617.0	617.9	618.7	593.2	567.6	547.2	526.7	496.9
70°	418.5	439.8	474.7	509.7	510.5	511.4	490.9	470.5	455.1	439.8	417.6
72.5°	346.0	361.4	387.8	414.2	412.5	410.8	398.0	385.2	373.3	361.4	345.2
75°	280.4	293.2	311.1	329.0	323.9	318.7	311.9	305.1	294.9	284.7	274.4
77.5°	220.7	228.4	238.6	248.9	245.5	242.0	236.1	230.1	222.4	214.8	210.5
80°	161.9	165.3	172.2	179.0	177.3	175.6	168.7	161.9	160.2	158.5	152.6
82.5°	109.9	114.2	115.9	117.6	116.8	115.9	110.8	105.7	104.0	102.3	101.4
85°	65.6	66.5	67.3	68.2	65.6	63.1	61.4	59.7	59.7	59.7	58.8
87.5°	29.8	30.7	30.7	30.7	29.8	29.0	27.3	25.6	26.4	27.3	27.3
90°	12.0	10.1	8.2	7.0	5.7	3.8	2.5	1.3	2.5	3.8	5.7
92.5°	97.4	63.9	43.6	32.3	25.9	20.2	13.9	9.5	13.9	20.2	25.9
95°	230.2	136.0	82.2	57.6	41.1	30.4	23.4	21.5	23.4	30.4	41.1
97.5°	256.2	146.8	93.6	66.4	50.0	40.5	34.8	34.2	34.8	40.5	50.0
100°	238.5	144.9	100.6	75.9	60.7	51.9	47.4	46.8	47.4	51.9	60.7
102.5°	223.3	147.4	108.8	86.7	73.4	65.2	61.4	60.1	61.4	65.2	73.4
105°	217.6	152.4	118.3	98.7	86.7	79.1	75.3	73.4	75.3	79.1	86.7
107.5°	216.3	160.7	130.3	112.0	100.6	93.0	89.2	87.3	89.2	93.0	100.6
110°	219.5	171.4	143.0	125.2	114.5	107.5	104.4	102.5	104.4	107.5	114.5





TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	55°	60°	65°	70°	75°	80°	85°	90°	95°	100°	105°
112.5°	225.8	182.2	156.2	139.2	128.4	121.4	118.3	116.4	118.3	121.4	128.4
115°	232.8	194.2	170.2	153.1	142.3	136.0	132.2	129.7	132.2	136.0	142.3
117.5°	241.6	206.8	182.8	167.0	155.0	149.3	146.1	143.0	146.1	149.3	155.0
120°	251.8	218.9	196.1	180.3	168.3	161.9	158.8	156.9	158.8	161.9	168.3
122.5°	261.2	231.5	209.4	192.3	180.9	173.9	170.8	168.9	170.8	173.9	180.9
125°	271.4	243.5	221.4	204.3	192.3	185.3	181.5	180.3	181.5	185.3	192.3
127.5°	279.6	254.3	232.8	215.7	202.4	195.5	191.0	189.1	191.0	195.5	202.4
130°	287.8	263.8	242.9	225.8	212.5	204.9	199.3	197.4	199.3	204.9	212.5
132.5°	295.4	272.0	251.8	235.3	222.0	212.5	206.2	203.7	206.2	212.5	222.0
135°	301.7	280.2	260.6	243.5	230.2	220.8	213.8	211.3	213.8	220.8	230.2
137.5°	306.8	285.9	266.9	251.1	237.8	227.7	220.8	218.2	220.8	227.7	237.8
140°	310.6	291.6	273.3	257.4	244.8	234.7	228.3	225.2	228.3	234.7	244.8
142.5°	314.4	296.0	278.3	263.8	251.1	242.3	235.3	232.8	235.3	242.3	251.1
145°	316.9	299.8	283.4	268.8	258.1	248.6	242.9	241.0	242.9	248.6	258.1
147.5°	318.8	303.0	287.8	275.2	264.4	256.2	250.5	249.2	250.5	256.2	264.4
150°	319.4	306.2	291.6	280.2	271.4	263.1	258.1	257.4	258.1	263.1	271.4
152.5°	320.7	308.0	296.0	285.3	277.7	270.7	265.7	265.7	265.7	270.7	277.7
155°	320.7	310.6	299.8	291.0	284.0	277.7	273.9	273.9	273.9	277.7	284.0
157.5°	321.3	311.8	303.0	296.0	289.7	284.0	280.8	280.2	280.8	284.0	289.7
160°	321.3	313.7	306.2	299.8	295.4	290.3	287.8	287.8	287.8	290.3	295.4
162.5°	320.7	314.4	308.0	303.0	299.2	295.4	293.5	293.5	293.5	295.4	299.2
165°	319.4	315.0	309.9	305.5	303.0	299.8	298.6	299.2	298.6	299.8	303.0
167.5°	318.8	315.0	311.2	308.0	306.2	303.6	303.0	303.6	303.0	303.6	306.2
170°	316.9	314.4	311.2	309.9	308.7	306.8	306.2	307.4	306.2	306.8	308.7
172.5°	316.3	314.4	311.8	311.2	310.6	309.3	309.3	309.9	309.3	309.3	310.6
175°	315.0	313.7	312.5	311.8	311.8	310.6	311.2	311.8	311.2	310.6	311.8
177.5°	314.4	313.1	312.5	312.5	312.5	311.8	312.5	313.1	312.5	311.8	312.5
180°	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
0°	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3	3673.3
2.5°	3525.0	3491.7	3458.5	3432.9	3407.4	3363.9	3320.4	3310.2	3300.0	3285.5	3271.0
5°	3342.6	3260.8	3179.0	3105.7	3032.4	2975.3	2918.2	2880.7	2843.2	2815.9	2788.6
7.5°	3129.5	3006.8	2884.1	2797.1	2710.2	2627.5	2544.9	2518.5	2492.0	2456.2	2420.4
10°	2923.3	2787.8	2652.3	2538.9	2425.6	2344.6	2263.6	2231.2	2198.9	2153.7	2108.5
12.5°	2739.2	2590.9	2442.6	2328.4	2214.2	2135.8	2057.4	2010.5	1963.6	1938.1	1912.5
15°	2546.6	2388.1	2229.5	2123.9	2018.2	1947.4	1876.7	1835.8	1794.9	1770.2	1745.4
17.5°	2376.1	2219.3	2062.5	1961.1	1859.6	1794.9	1730.1	1694.3	1658.5	1639.8	1621.0
20°	2214.2	2060.8	1907.4	1808.5	1709.7	1656.8	1604.0	1581.0	1557.9	1542.6	1527.3
22.5°	2065.9	1915.0	1764.2	1679.8	1595.4	1552.8	1510.2	1494.0	1477.8	1465.0	1452.3
25°	1917.6	1782.9	1648.3	1576.7	1505.1	1470.2	1435.2	1419.0	1402.8	1390.0	1377.3
27.5°	1796.6	1667.9	1539.2	1477.8	1416.5	1389.2	1361.9	1349.1	1336.4	1324.4	1312.5
30°	1679.0	1563.9	1448.9	1396.0	1343.2	1318.5	1293.7	1281.0	1268.2	1257.1	1246.0
32.5°	1569.9	1471.0	1372.2	1323.6	1275.0	1254.5	1234.1	1218.7	1203.4	1194.9	1186.4
35°	1465.9	1377.3	1288.6	1248.6	1208.5	1188.1	1167.6	1154.8	1142.0	1135.2	1128.4
37.5°	1377.3	1298.0	1218.7	1180.4	1142.0	1122.4	1102.8	1091.8	1080.7	1078.1	1075.6
40°	1286.9	1218.7	1150.6	1113.1	1075.6	1058.5	1041.5	1034.7	1027.8	1026.1	1024.4
42.5°	1211.9	1145.4	1079.0	1044.9	1010.8	996.3	981.8	978.4	975.0	977.6	980.1
45°	1125.0	1069.6	1014.2	982.7	951.1	939.2	927.3	924.7	922.2	927.3	932.4
47.5°	1051.7	1000.6	949.4	919.6	889.8	881.2	872.7	871.9	871.0	877.8	884.7
50°	976.7	927.3	877.8	854.0	830.1	822.4	814.8	817.3	819.9	831.0	842.0
52.5°	906.8	860.8	814.8	792.6	770.5	765.3	760.2	766.2	772.2	784.1	796.0
55°	830.1	788.3	746.6	729.5	712.5	707.4	702.3	714.2	726.1	737.2	748.3
57.5°	756.8	720.2	683.5	668.2	652.8	652.0	651.1	662.2	673.3	685.2	697.2
60°	678.4	647.7	617.0	605.1	593.2	594.9	596.6	609.4	622.2	631.5	640.9
62.5°	606.8	581.2	555.7	544.6	533.5	537.8	542.0	554.8	567.6	578.7	589.8
65°	535.2	513.9	492.6	484.9	477.3	483.2	489.2	500.3	511.4	519.0	526.7
67.5°	467.0	449.1	431.2	425.3	419.3	425.3	431.2	442.3	453.4	461.1	468.7
70°	395.5	381.0	366.5	362.2	358.0	364.8	371.6	381.0	390.3	398.0	405.7
72.5°	329.0	317.9	306.8	306.0	305.1	311.1	317.0	326.4	335.8	340.9	346.0
75°	264.2	258.2	252.3	251.4	250.6	256.5	262.5	267.6	272.7	277.0	281.2
77.5°	206.2	201.1	196.0	196.9	197.7	202.0	206.2	211.4	216.5	219.0	221.6
80°	146.6	144.9	143.2	144.9	146.6	150.0	153.4	156.8	160.2	161.9	163.6
82.5°	100.6	98.9	97.2	99.7	102.3	104.8	107.4	109.9	112.5	113.4	114.2
85°	58.0	60.5	63.1	63.1	63.1	63.9	64.8	65.6	66.5	65.6	64.8
87.5°	27.3	28.1	29.0	29.0	29.0	29.8	30.7	30.7	30.7	29.8	29.0
90°	7.0	8.2	10.1	12.0	13.9	15.8	15.2	15.8	16.4	17.1	18.3
92.5°	32.3	43.6	63.9	97.4	130.3	117.7	87.9	62.6	48.7	42.4	38.0
95°	57.6	82.2	136.0	230.2	334.0	375.1	304.3	227.7	154.3	120.8	98.0
97.5°	66.4	93.6	146.8	256.2	430.8	576.9	596.5	523.1	394.7	311.2	239.1
100°	75.9	100.6	144.9	238.5	404.8	599.0	723.6	745.8	694.5	620.5	530.7
102.5°	86.7	108.8	147.4	223.3	366.9	557.9	730.0	819.8	830.5	795.1	746.4
105°	98.7	118.3	152.4	217.6	337.1	508.6	690.1	822.3	885.6	897.6	881.1
107.5°	112.0	130.3	160.7	216.3	315.6	464.9	633.2	784.4	883.7	933.0	950.1
110°	125.2	143.0	171.4	219.5	304.3	428.9	580.0	724.9	841.3	921.0	965.3



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	110°	115°	120°	125°	130°	135°	140°	145°	150°	155°	160°
112.5°	139.2	156.2	182.2	225.8	297.9	404.8	533.9	666.1	785.6	877.3	937.4
115°	153.1	170.2	194.2	232.8	297.3	389.0	498.4	615.5	725.5	818.5	887.5
117.5°	167.0	182.8	206.8	241.6	297.9	378.3	475.0	576.2	673.7	759.1	830.5
120°	180.3	196.1	218.9	251.8	300.5	371.3	457.3	546.5	631.9	707.8	771.7
122.5°	192.3	209.4	231.5	261.2	304.9	366.9	442.8	523.1	598.4	667.3	725.5
125°	204.3	221.4	243.5	271.4	309.3	363.1	430.8	502.9	571.8	632.5	683.1
127.5°	215.7	232.8	254.3	279.6	314.4	361.2	419.4	484.5	547.2	602.8	649.6
130°	225.8	242.9	263.8	287.8	319.4	359.3	410.5	467.5	524.4	575.6	618.6
132.5°	235.3	251.8	272.0	295.4	323.2	358.7	402.3	451.6	502.9	549.7	590.2
135°	243.5	260.6	280.2	301.7	327.0	358.0	395.3	437.7	482.6	523.7	559.8
137.5°	251.1	266.9	285.9	306.8	329.6	356.8	389.0	424.4	462.4	499.1	531.3
140°	257.4	273.3	291.6	310.6	332.1	356.1	383.3	413.1	445.3	475.7	502.9
142.5°	263.8	278.3	296.0	314.4	334.0	354.9	378.3	402.3	428.9	454.2	476.9
145°	268.8	283.4	299.8	316.9	334.6	353.6	373.8	394.1	414.9	435.2	453.5
147.5°	275.2	287.8	303.0	318.8	334.6	351.7	369.4	387.1	404.2	421.3	434.6
150°	280.2	291.6	306.2	319.4	334.6	349.2	365.0	379.5	394.1	407.4	419.4
152.5°	285.3	296.0	308.0	320.7	332.7	346.0	359.9	372.6	384.6	396.0	405.5
155°	291.0	299.8	310.6	320.7	331.5	342.2	354.9	365.6	375.7	385.2	392.8
157.5°	296.0	303.0	311.8	321.3	329.6	339.0	349.2	358.0	366.9	374.5	380.8
160°	299.8	306.2	313.7	321.3	328.3	335.2	343.5	351.7	358.7	365.0	369.4
162.5°	303.0	308.0	314.4	320.7	325.8	331.5	337.8	344.1	349.8	355.5	359.3
165°	305.5	309.9	315.0	319.4	323.2	327.7	332.7	337.8	341.6	346.0	349.2
167.5°	308.0	311.2	315.0	318.8	320.7	323.9	327.7	332.1	335.2	337.8	340.3
170°	309.9	311.2	314.4	316.9	318.2	320.1	323.2	326.4	328.3	330.8	332.1
172.5°	311.2	311.8	314.4	316.3	316.3	316.9	318.8	321.3	322.6	324.5	325.1
175°	311.8	312.5	313.7	315.0	314.4	314.4	315.6	316.9	317.5	318.8	318.8
177.5°	312.5	312.5	313.1	314.4	313.1	312.5	313.1	313.7	314.4	315.0	315.0
180°	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5	312.5



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
0°	3673.3	3673.3	3673.3	3673.3
2.5°	3265.0	3259.1	3235.2	3211.3
5°	2768.2	2747.7	2740.9	2734.1
7.5°	2418.7	2417.0	2381.2	2345.4
10°	2111.1	2113.6	2081.2	2048.9
12.5°	1891.2	1869.9	1867.3	1864.8
15°	1725.8	1706.2	1702.8	1699.4
17.5°	1609.1	1597.2	1593.7	1590.3
20°	1520.4	1513.6	1507.7	1501.7
22.5°	1443.7	1435.2	1430.1	1425.0
25°	1369.6	1361.9	1360.2	1358.5
27.5°	1303.1	1293.7	1293.7	1293.7
30°	1240.1	1234.1	1231.5	1229.0
32.5°	1181.2	1176.1	1176.1	1176.1
35°	1125.8	1123.3	1119.9	1116.5
37.5°	1075.6	1075.6	1073.9	1072.2
40°	1027.0	1029.5	1029.5	1029.5
42.5°	982.7	985.2	985.2	985.2
45°	936.6	940.9	942.6	944.3
47.5°	891.5	898.3	900.0	901.7
50°	847.2	852.3	853.1	854.0
52.5°	802.0	808.0	812.2	816.5
55°	754.3	760.2	762.8	765.3
57.5°	703.1	709.1	709.9	710.8
60°	646.9	652.8	654.5	656.2
62.5°	593.2	596.6	598.3	600.0
65°	531.8	536.9	540.3	543.7
67.5°	473.0	477.3	477.3	477.3
70°	407.4	409.1	411.6	414.2
72.5°	346.9	347.7	347.7	347.7
75°	283.0	284.7	285.5	286.4
77.5°	222.4	223.3	223.3	223.3
80°	162.8	161.9	161.9	161.9
82.5°	111.6	109.1	109.1	109.1
85°	63.9	63.1	63.9	64.8
87.5°	29.0	29.0	29.0	29.0
90°	17.7	18.3	19.0	18.3
92.5°	36.7	34.2	34.8	33.5
95°	86.0	80.3	75.9	73.4
97.5°	196.7	172.7	157.5	150.5
100°	466.8	420.6	396.0	396.6
102.5°	700.2	666.1	646.5	628.1
105°	852.0	828.0	807.8	804.6
107.5°	946.3	934.9	926.7	919.7
110°	983.0	988.0	986.8	985.5



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CANDELA DISTRIBUTION (continued):**

	165°	170°	175°	180°
112.5°	973.5	991.8	998.2	998.8
115°	934.9	962.7	975.4	978.5
117.5°	879.9	910.9	929.8	934.3
120°	821.7	857.1	872.3	876.1
122.5°	768.5	799.5	816.6	821.7
125°	723.6	751.5	767.3	771.7
127.5°	686.3	710.3	724.9	728.7
130°	652.2	674.9	688.2	693.3
132.5°	621.2	643.9	655.3	658.5
135°	590.8	609.8	621.2	625.6
137.5°	557.9	577.5	587.0	590.8
140°	526.9	544.6	554.7	554.1
142.5°	496.5	511.7	520.6	520.0
145°	469.3	482.6	487.7	489.0
147.5°	447.2	456.7	461.8	462.4
150°	428.9	435.8	439.6	439.6
152.5°	412.4	418.7	420.6	420.6
155°	398.5	403.6	404.8	405.5
157.5°	385.9	389.6	390.9	390.9
160°	373.8	377.6	377.6	377.0
162.5°	361.8	365.0	365.0	364.3
165°	351.7	354.2	353.6	353.6
167.5°	341.6	343.5	342.8	342.8
170°	332.7	334.0	333.4	333.4
172.5°	325.1	326.4	325.1	324.5
175°	318.8	319.4	318.8	318.2
177.5°	314.4	315.0	313.7	313.7
180°	312.5	312.5	312.5	312.5



TEST NUMBER: P831272

CATALOG NUMBER: S123DIP-S1165D585U850-4F0-1E-UDD-G4

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	18.16	19.20	18.92	19.97	20.90	20.40	21.43	21.15	22.20	23.13
	3H	19.82	20.75	20.59	21.53	22.49	21.83	22.76	22.60	23.54	24.50
	4H	20.40	21.28	21.19	22.07	23.04	22.29	23.17	23.08	23.96	24.93
	6H	20.78	21.59	21.58	22.39	23.37	22.58	23.38	23.37	24.18	25.17
	8H	20.88	21.65	21.69	22.47	23.46	22.64	23.41	23.45	24.23	25.21
	12H	20.94	21.67	21.75	22.48	23.49	22.67	23.40	23.48	24.21	25.22
4H	2H	18.75	19.63	19.55	20.42	21.39	20.58	21.45	21.37	22.24	23.22
	3H	20.60	21.33	21.40	22.15	23.14	22.21	22.94	23.02	23.77	24.75
	4H	21.30	21.96	22.12	22.79	23.80	22.80	23.46	23.62	24.29	25.31
	6H	21.79	22.36	22.62	23.21	24.23	23.22	23.79	24.05	24.64	25.66
	8H	21.93	22.46	22.76	23.30	24.34	23.33	23.87	24.17	24.71	25.74
	12H	22.00	22.48	22.86	23.35	24.38	23.39	23.86	24.24	24.73	25.77
8H	4H	21.58	22.11	22.42	22.96	23.99	22.92	23.46	23.76	24.30	25.33
	6H	22.18	22.62	23.04	23.50	24.54	23.43	23.87	24.30	24.76	25.79
	8H	22.39	22.78	23.26	23.66	24.71	23.61	24.00	24.49	24.88	25.93
	12H	22.52	22.86	23.39	23.73	24.84	23.72	24.06	24.60	24.94	26.04
12H	4H	21.59	22.07	22.45	22.93	23.97	22.91	23.38	23.76	24.25	25.29
	6H	22.23	22.62	23.10	23.50	24.55	23.45	23.84	24.32	24.72	25.77
	8H	22.47	22.81	23.35	23.69	24.79	23.65	24.00	24.53	24.87	25.98